



(12) **Patent Application Publication**
Tang

(43) **Pub. Date:** **Jan. 15, 2009**


Jul. 13, 2007 (CN) 200710076012.2

(52) U.S. Cl. 349/58; 445/24

(57) **ABSTRACT**

An exemplary liquid crystal display (LCD) device includes a liquid crystal panel, a backlight module parallel to the liquid crystal panel, and a receiving box. The receiving box includes a bezel and a back plate connected to the bezel. The back plate can rotate along a combination portion of the first bezel and the back plate. The bezel accommodates the liquid crystal panel and the backlight module. The back plate and the bezel fasten the liquid crystal panel and the backlight module. A related method for assembly of the LCD device is also provided.

(22) Filed: **Jul. 14, 2008**

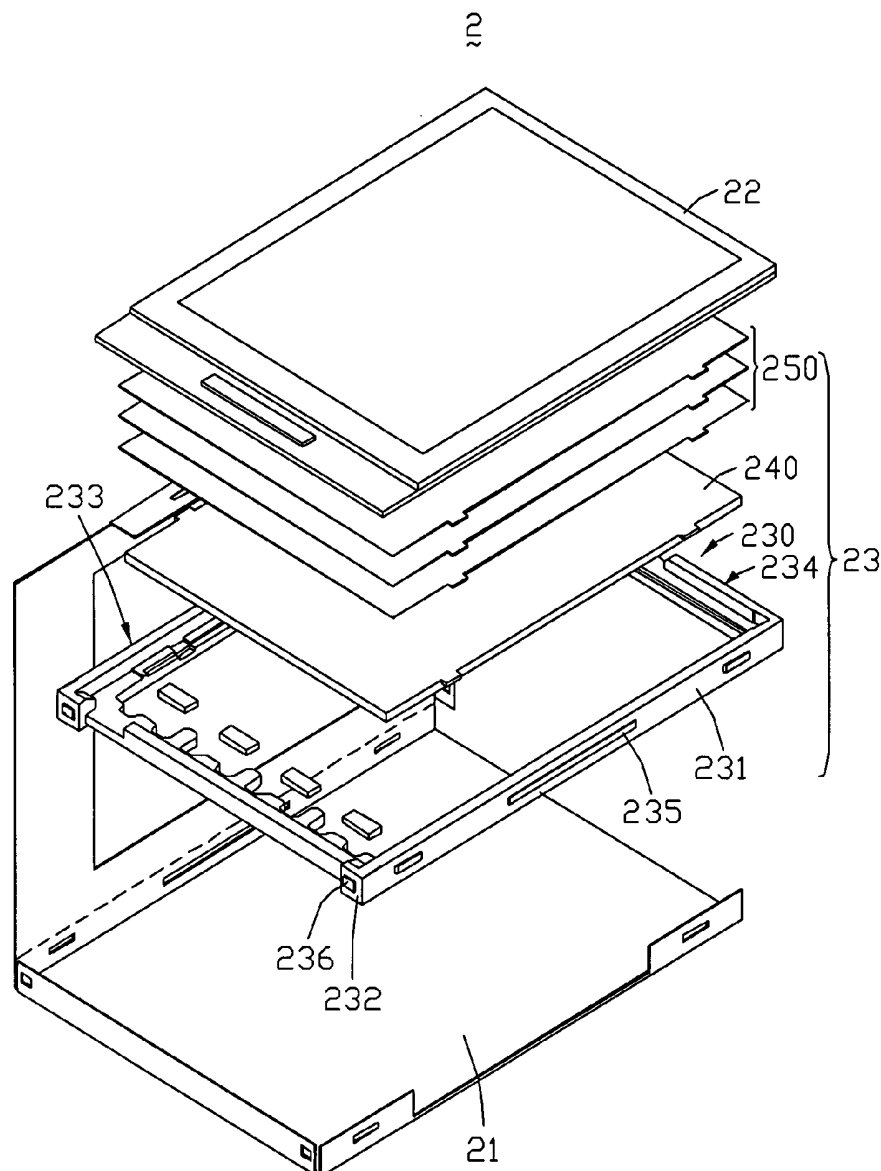

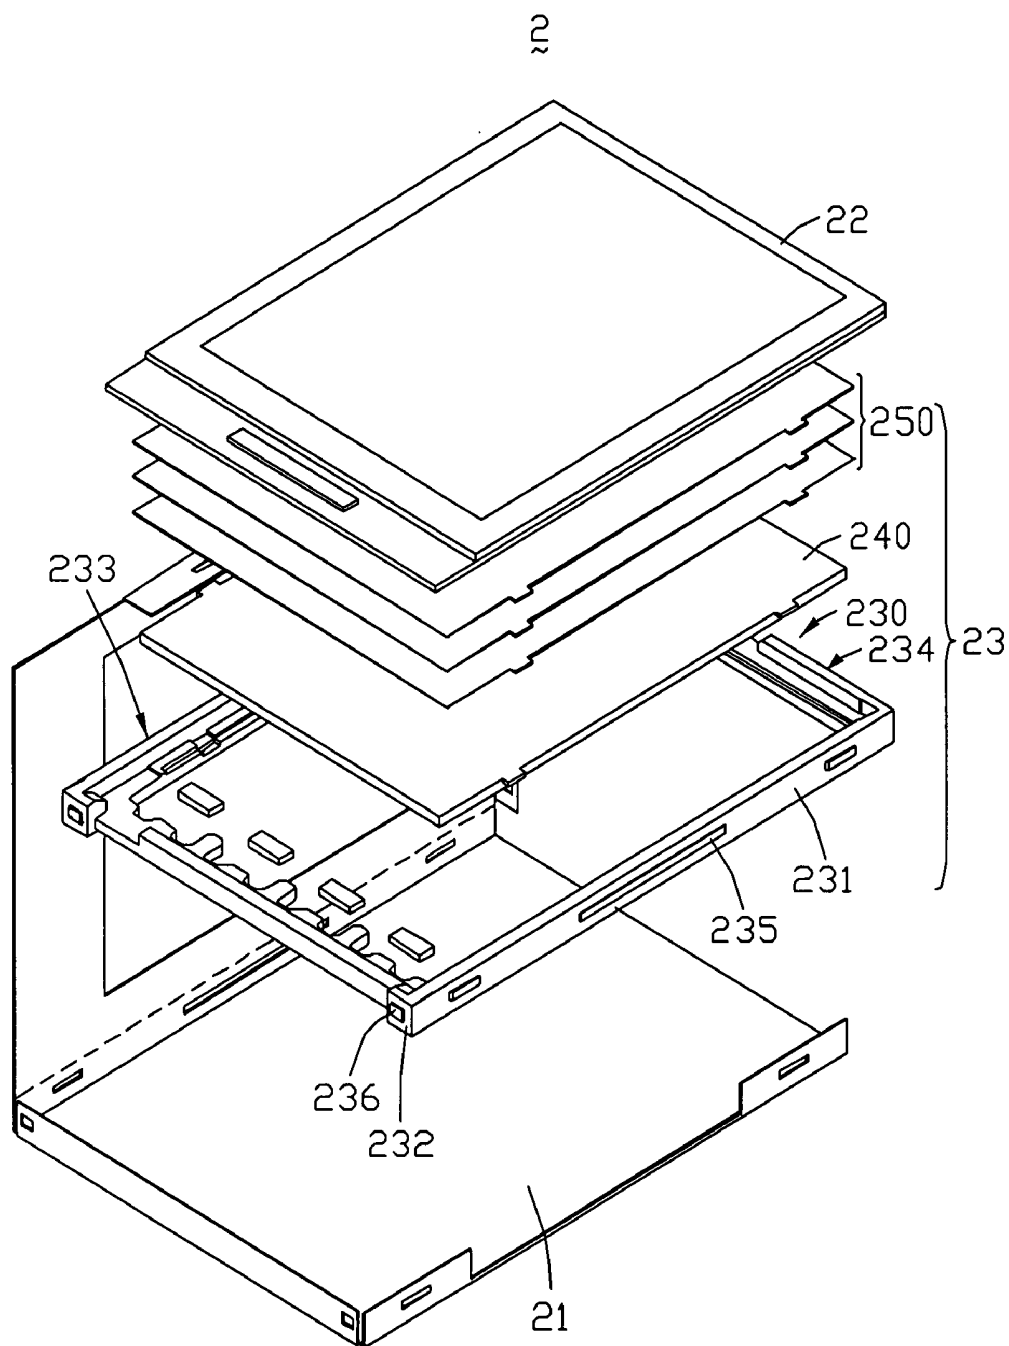


FIG. 1

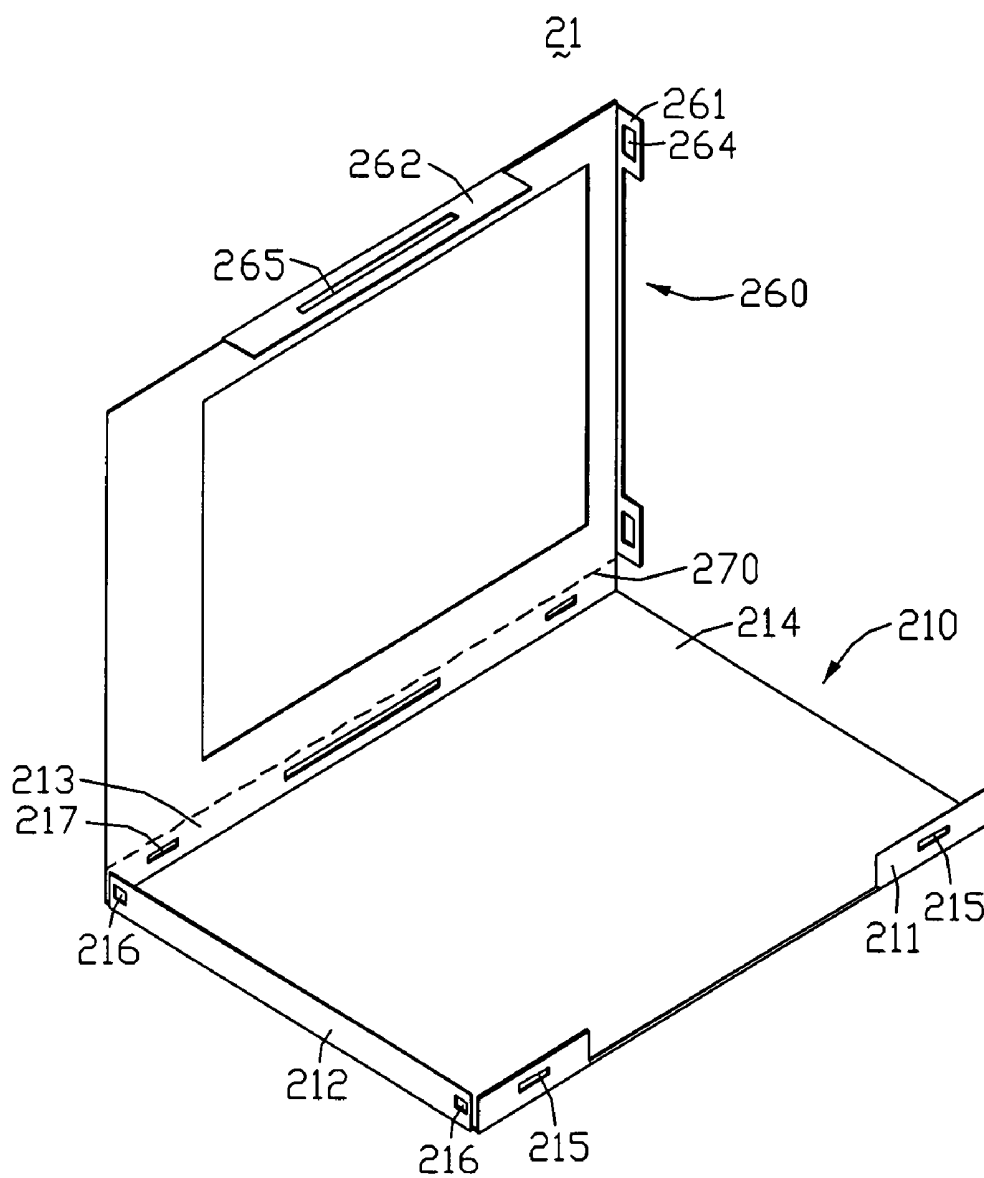


FIG. 2

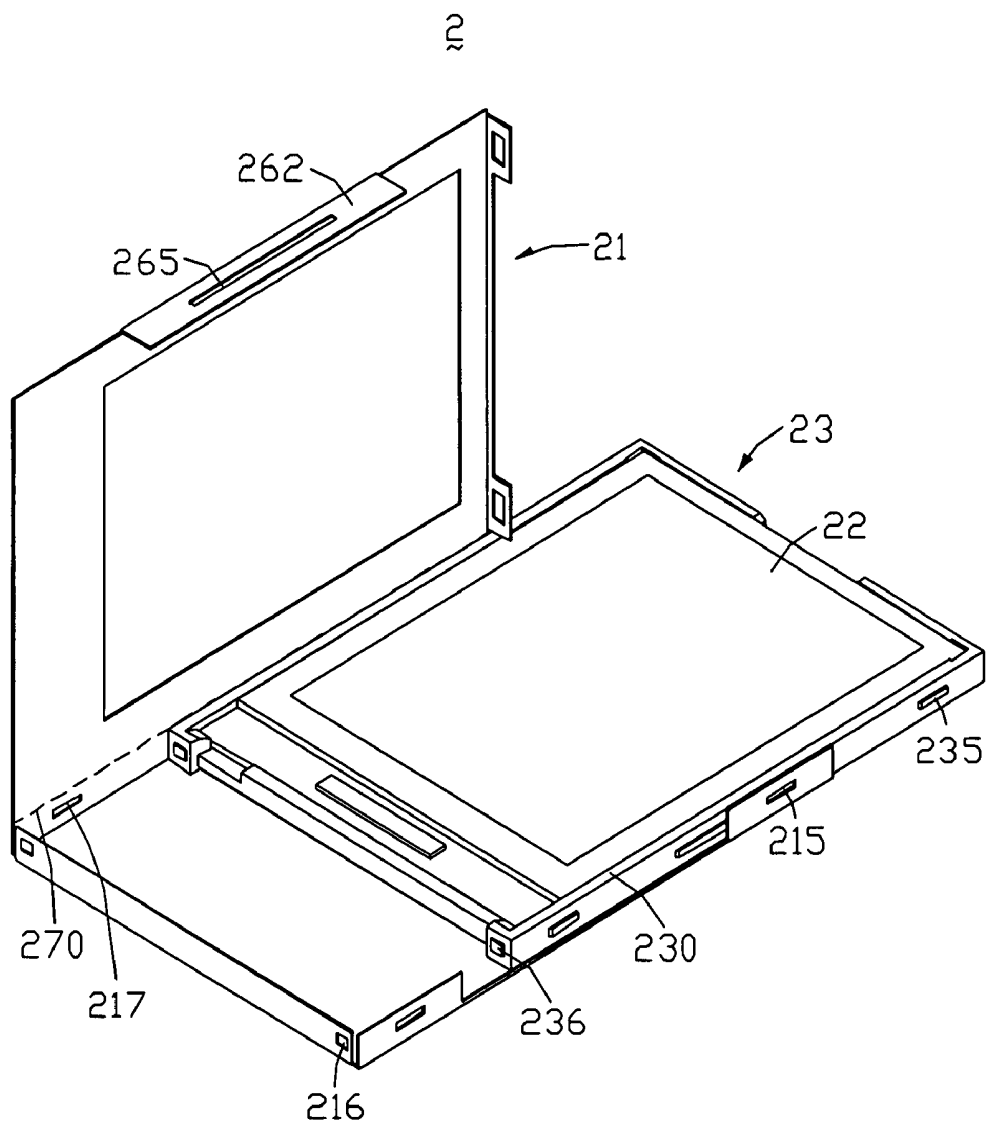


FIG. 3

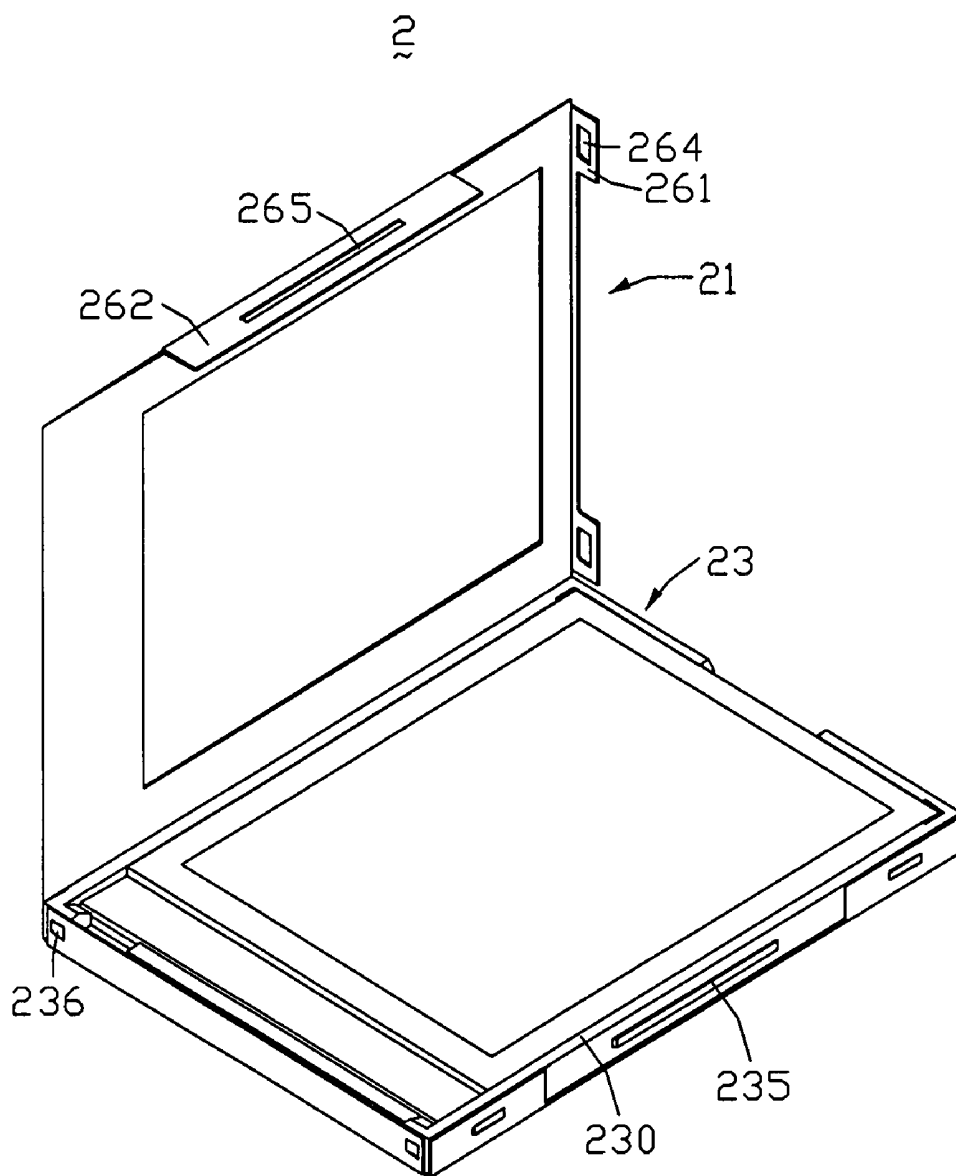


FIG. 4



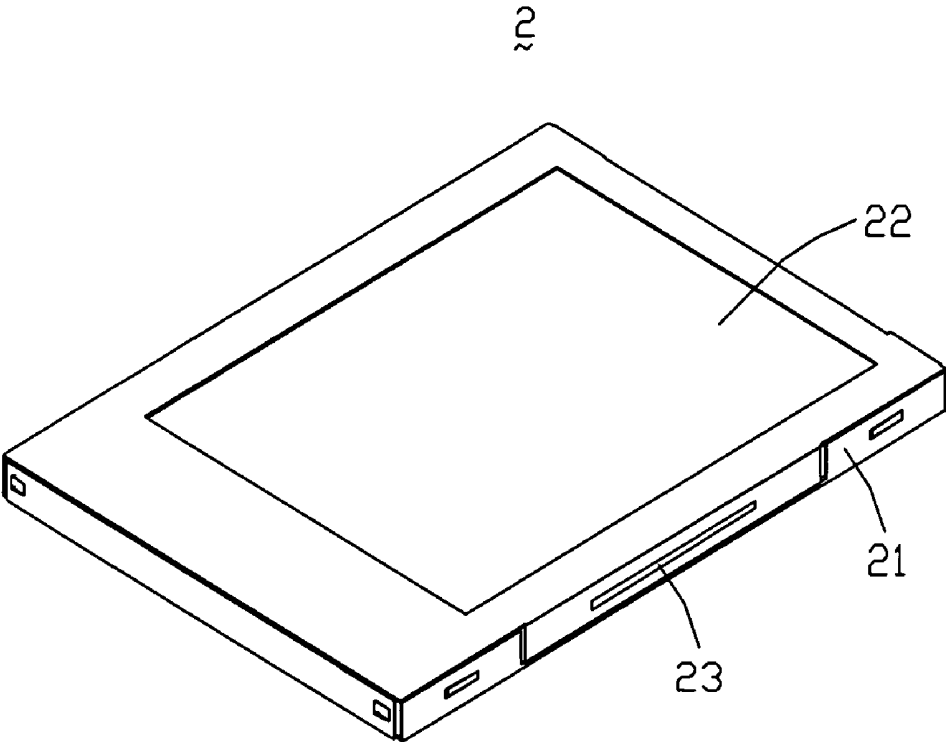


FIG. 5

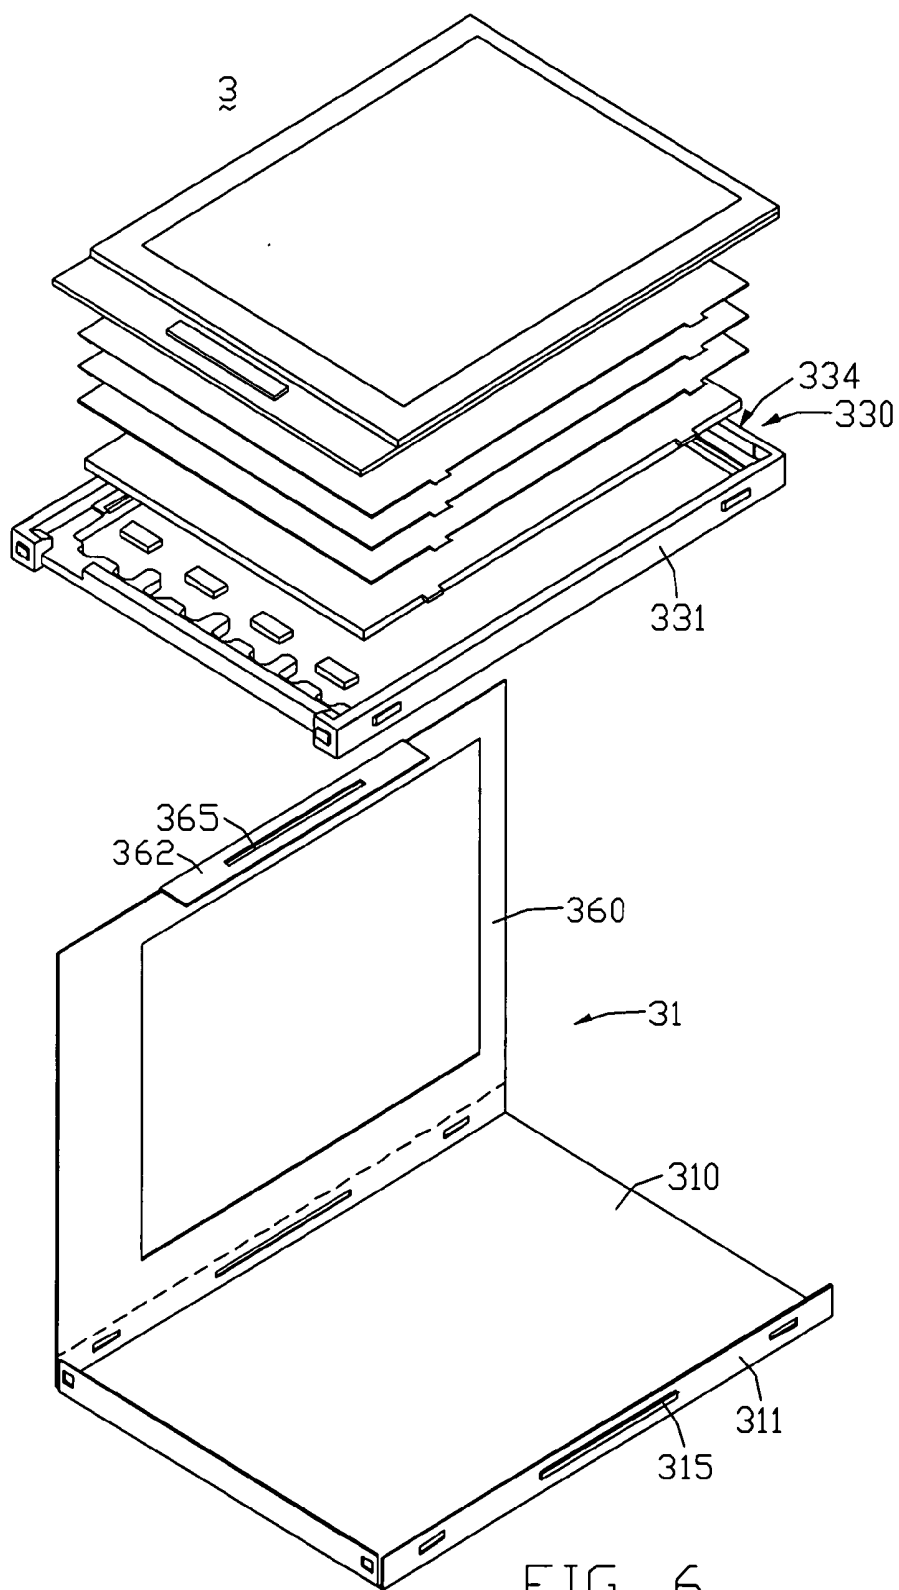

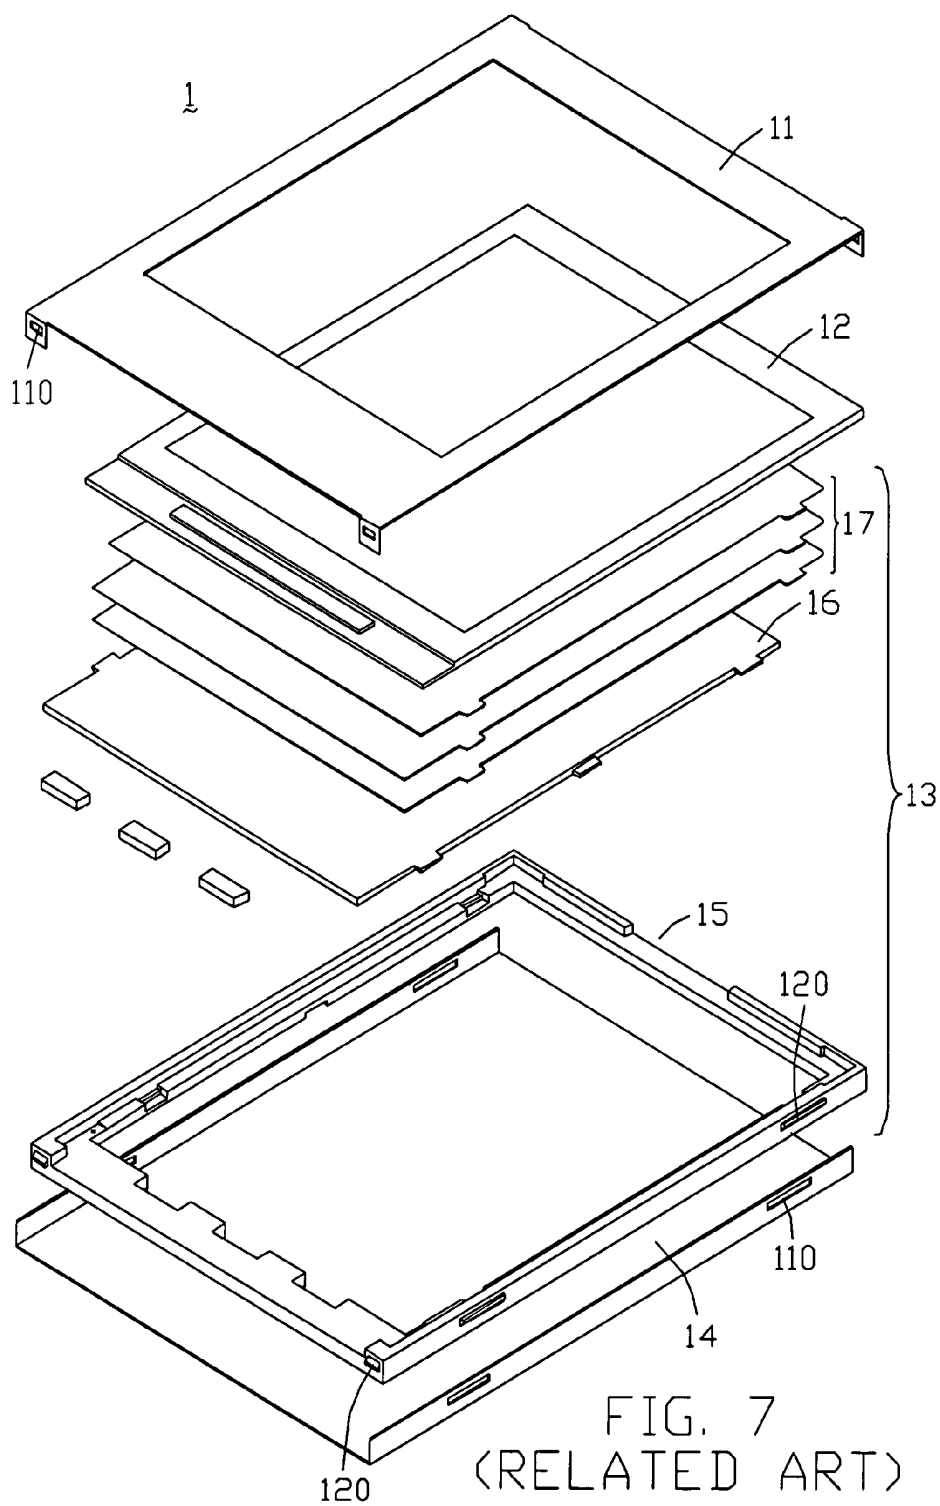

LIQUID CRYSTAL DISPLAY DEVICE HAVING INTEGRAL RECEIVING BOX AND ASSEMBLY METHOD FOR SAME

FIELD OF THE INVENTION

[0001] The present invention relates to liquid crystal display (LCD) devices, and particularly to an LCD device having a receiving box and a method for assembly the LCD device.

GENERAL BACKGROUND

[0002] Because LCD devices have the advantages of portability, low power consumption, and low radiation, they have been widely used in various portable information products such as notebooks, personal digital assistants (PDAs), video cameras, and the like. The LCD device generally includes a liquid crystal panel, a backlight module, a bezel and a back plate. The bezel and the back plate engage to cooperatively contain the liquid crystal panel and the backlight module therebetween.

[0003] Referring to FIG. 7, a typical LCD device 1 includes a bezel 11, a liquid crystal panel 12, a backlight module 13 and a back plate 14. The backlight module 13 is disposed parallel to the liquid crystal panel 12, and provides planar light beams to the liquid crystal panel 12. The bezel 11 and the back plate 14 cooperatively receive and fix the liquid crystal panel 12 and the backlight module 13.

[0004] The backlight module 13 includes a frame 15, a light guide panel 16, and an optical film assembly 17. The frame 15 accommodates the light guide panel 16, the optical film assembly 17, and the liquid crystal panel 12.

[0005] The bezel 11 defines a window in a centre area thereof to expose an effective area (not labeled) of the liquid crystal panel 12 to viewers. A plurality of notches 110 are formed on edges of the bezel 11 and the back plate 14. The frame 15 includes a plurality of protrusions 120 corresponding to the notches 110 of the bezel 11 and the back plate 14 respectively. The protrusions 120 engage the notches 110 cooperatively to fix the bezel 11, the back plate 14, and the frame 15 together.

[0006] In a first step of assembly of the LCD device 1, the frame 15 engages the bezel 11 to fasten the liquid crystal panel 12. In a second step, the frame 15 engages the back plate 14 to fasten the backlight module 13. The engagement is realized by the protrusions 120 entering into the corresponding notches 110 of the bezel 11 and the back plate 14.

[0007] In assembly of the LCD device 1, the protrusions 120 and the notches 110 must be precisely positioned to engage each other. However, the positioning operation is time-consuming, and may result in inconvenience to the assembly process.

[0008] What is needed, therefore, is an LCD device and method for assembly thereof that can overcome the described limitations.

SUMMARY

[0009] In an exemplary embodiment, an LCD device includes a liquid crystal panel, a backlight module opposite to the liquid crystal panel, and a receiving box. The receiving box includes a bezel and a back plate connected to the bezel. The back plate can rotate along a combination portion of the first bezel and the back plate. The bezel accommodates the liquid crystal panel and the backlight module. The back plate

together with the bezel cooperatively fastens the liquid crystal panel and the backlight module.

[0010] Other novel features and advantages of the present LCD device will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings. In the drawings, all the views are schematic.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 is an exploded, isometric view of an LCD device according to a first embodiment of the present invention, the LCD device including a receiving box, a backlight module, and the liquid crystal panel.

[0012] FIG. 2 is an isometric view of the receiving box of FIG. 1, the receiving box including a bezel and a back plate.

[0013] FIGS. 3-4 are isometric views showing an assembly process of the LCD device of FIG. 1, with FIG. 3 showing the backlight module and the liquid crystal panel inserted into the receiving box from one side, and FIG. 4, the backlight module and the liquid crystal panel being fastened to the back plate.

[0014] FIG. 5 is an assembled view of the LCD device of FIG. 1.

[0015] FIG. 6 is similar to FIG. 1, being an isometric view of an LCD device according to a second embodiment of the present invention.

[0016] FIG. 7 is an exploded, isometric view of a conventional LCD device.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0017] Reference will now be made to the drawing figures to describe various embodiments of the present invention in detail.

[0018] Referring to FIG. 1, an LCD device 2 according to a first embodiment of the present invention includes a liquid crystal panel 22, a backlight module 23, and a receiving box 21. The backlight module 23 is disposed opposite and parallel to the liquid crystal panel 22, and is configured for providing uniform light for the liquid crystal panel 22. The backlight module 23 includes a frame 230, a light guide panel 240, and an optical film assembly 250. When the LCD device 2 is assembled, the frame 230 receives the light guide panel 240, the optical film assembly 250, and the liquid crystal panel 22 in that order. The receiving box 21 accommodates the backlight module 23 and the liquid crystal panel 22.

[0019] The frame 230 includes four sidewalls (not labeled) connected end to end. Outside surfaces of the sidewalls are defined as a first outside surface 231, a second outside surface 232, a third outside surface 233 opposite to the first outside surface 231, and a fourth outside surface 234 opposite to the second outside surface 232. The first outside surface 231 and the third outside surface 233 each constitute three first protrusions 235 extending outwardly therefrom. The three first protrusions 235 are substantially colinear. Each first protrusion 235 arranged in a middle portion of the first outside surface 231 and the third outside surface 233 is longer than the first protrusions 235 arranged at two sides of each of the first outside surface 231 and the third outside surface 233. Two second protrusions 236 extend outwardly from each of the second outside surface 232 and the fourth outside surface 234 respectively. The second protrusions 236 are formed at

ends of the second and the fourth outside surfaces **232**, **234**. The first and the second protrusions **235**, **236** are rectangular in profile.

[0020] Referring also to FIG. 2, the receiving box **21** includes a bezel **210** and back plate **260** integrally connected to the bezel **210** to form a one-piece body. The bezel **210** includes a tray **214**, and three sidewalls extending perpendicularly from three edges of the tray **214**. The three sidewalls are defined as a first sidewall **211**, a second sidewall **212**, and a third sidewall **213**. The first sidewall **211** is connected to one end of the second sidewall **212**, and the third sidewall **213** is connected to the other end of the second sidewall **212**. A fourth edge of the tray **214** defines an insertion port (not labeled).

[0021] The first sidewall **211** includes an opening defined in a middle thereof, and two first notches **215** at each side of the first sidewall **211** respectively. The two first notches **215** correspond to the two first protrusions **235** of the first outside surface **231** of the frame **230**. The second sidewall **212** includes two second notches **216** respectively defined at end portions thereof. The two second notches **216** correspond to the two second protrusions **236** of the second outside surface **232** of the frame **230**, respectively. The third sidewall **213** includes three third notches **217**, the three third notches **217** corresponding to the three protrusions **235** of the third outside surface **233** of the frame **230**, respectively.

[0022] The back plate **260** includes a window in a centre area to expose an active area (not labeled) of the liquid crystal panel **22**. One edge of the back plate **260** is connected to the third sidewall **213** of the bezel **210**. The back plate **260** further includes a fourth sidewall **261** and a fifth sidewall **262**. The fourth sidewall **261** has an opening (not labeled) in a middle portion thereof, and a fourth notch **264** at each end thereof. The fourth notches **264** correspond to the two second protrusions **236** of the fourth outside surface **234** of the frame **230**. The fifth sidewall **262** is substantially the same size as the opening of the first sidewall **211** of the bezel **210**. The fifth sidewall **262** has a fifth notch **265** corresponding to the middle first protrusion **235** of the first sidewall **231** of the bezel **210**.

[0023] The receiving box **21** is metal such as iron, aluminum or an alloy. The bezel **210** and the back plate **260** are integrated to form a one-piece body. The back plate **260** can rotate along a combination portion of the first and back plates **210**, **260**.

[0024] Referring also to FIGS. 3-5, an assembly process of the LCD device **2** is illustrated in FIGS. 3-4, and an assembled LCD device **2** is shown in FIG. 5. Detailed steps of the assembly of the LCD device **2** follow. In a first step, the light guide panel **240**, the optical film assembly **250**, and the liquid crystal panel **22** are received in the frame **230**, the liquid crystal panel **22** facing the back plate **260**. In a second step, the second sidewall **232** of the frame **230** faces the opening of the bezel **210** where no sidewall is formed, and the frame **230** is inserted into the bezel **210** until fully accommodated thereby. At this time, the two first protrusions **235** of the two sides of the first outside surface **231**, the second protrusions **236** of the second outside surface **232**, and the three first protrusions **235** of the third outside surface **233** enter into the corresponding two first notches **215** of the first sidewall **211**, two second notches **216** of the second sidewall **212**, and the three third notches **217** of the third sidewall **213** respectively. Thus, the frame **230** engages the bezel **210**. In a third step, the back plate **260** is rotated along the combination line toward the bezel **210** to close the receiving box **21**. At this time, the

second protrusion **236** of the fourth sidewall **234** enters into the fourth notches **264** of the fourth sidewall **261**. The middle first protrusion **235** is inserted into the fifth notch **265** of the sixth sidewall **262**. Thus, the backlight module **23** and the liquid crystal panel **22** are received and fastened in the receiving box **21**.

[0025] Unlike conventional LCD devices, the LCD device **2** includes receiving box **21** which is integrally formed into a one-piece body by the bezel **210** and the back plate **260**, instead of a bezel and a back plate separated from each other. The receiving box **21** includes the bezel **210** and the back plate **260** connected to each other, and the back plate **260** can be rotated along the combination portion **270**. When the receiving box **21** is closed, the backlight module **23** and the liquid crystal panel **22** are received and fastened in the receiving box **21**. The protrusions **235**, **236** are easily engaged with the corresponding notches **215**, **216**, **217**, **264** and **265** without the requirement for precise positioning thereof. Thus, the assembly process of the LCD device **2** is convenient.

[0026] Referring to FIG. 6, an exploded, isometric view of an LCD device according to a second embodiment of the present invention is shown. The LCD device **3** is similar to the LCD device **2**, differing only in that a back plate **360** of a receiving box **31** does not include a fourth sidewall, a first outside surface **331** of a frame **330** does not include a first protrusion in the middle position thereof, and a fourth outside surface **334** does not include second protrusions. A first sidewall **311** of the bezel **310** does not include an opening in the middle portion, rather, the first sidewall **311** includes a sixth protrusion **315** in the middle position thereof. During assembly, the frame **33** engages the bezel **310** firstly. Then, the back plate **360** engages the bezel **310** by inserting the sixth protrusion **315** of the bezel **310** into a fifth notch **365** of a fifth sidewall **362** of the back plate **360**. The LCD device **3** has advantages similar to those of the LCD device **2**.

[0027] Further and/or alternative embodiments are described as follows. An LCD device according to a third embodiment is similar to the LCD device **2**, differing only in that a back plate does not have a window for exposing an active area of a liquid crystal panel. Rather, a tray of the bezel defines the window. during assembly, a frame which receives the liquid crystal panel, an optical film assembly and a light guide panel is inserted into the bezel from one side, the liquid crystal panel facing the window of the tray of the bezel. An LCD device according to a fourth embodiment is similar to the LCD device **2**, differing in that the bezel does not have a second sidewall, the back plate does not have a fourth sidewall, and correspondingly the frame does not have second protrusions. That is, the frame only has first protrusions of a first outside surface and a third outside surface. An LCD device according to a fifth embodiment is similar to the LCD device **2**, differing in that the bezel and back plate can be connected by a hinge so that the back plate can rotate along the hinge forward or backward to the bezel.

[0028] It is to be understood, however, that even though numerous characteristics and advantages of the present embodiments have been set out in the foregoing description, together with details of the structures and functions of the embodiments, the disclosure is illustrative only, and changes may be made in detail, especially in matters of shape, size, and arrangement of parts within the principles of the invention to the full extent indicated by the broad general meaning of the terms in which the appended claims are expressed.

What is claimed is:

1. A liquid crystal display (LCD) device, comprising:
a liquid crystal panel;
a backlight module opposite to the liquid crystal panel; and
a receiving box, the receiving box comprising a bezel and a back plate connected to the bezel, the back plate being operable to rotate along a combination portion of the bezel and the back plate, the bezel accommodating the liquid crystal panel and the backlight module, the back plate together with the bezel cooperatively fastening the liquid crystal panel and the backlight module.
2. The LCD device of claim 1, wherein the bezel comprises a tray, one selected member of the tray and the back plate comprising an opening to expose an active area of the liquid crystal panel.
3. The LCD device of claim 2, wherein the bezel comprises a first sidewall, a second sidewall, and a third sidewall, the first sidewall and the third sidewall being connected to two ends of the second sidewall respectively, and the back plate being connected to the third sidewall.
4. The LCD device of claim 3, wherein an edge of the tray with no sidewall defines an opening into which the backlight module and the liquid crystal panel can be inserted into the bezel.
5. The LCD device of claim 4, wherein the backlight module comprises a frame, the frame receiving an optical film assembly, a light guide panel, and the liquid crystal panel.
6. The LCD device of claim 5, wherein the frame comprises four outside surfaces.
7. The LCD device of claim 6, wherein the three sidewalls of the bezel comprise at least one first notch, the outside surfaces of the frame comprising at least one first protrusion corresponding to the at least one first notch, the at least one first protrusion engaging the at least one first notch to fasten the frame to the bezel.
8. The LCD device of claim 7, wherein the back plate comprises at least one fourth sidewall, the at least one fourth sidewall comprising at least one second notch, the three sidewalls of the bezel or the four outside surfaces of the frame comprising at least one second protrusion corresponding to the at least one second notch, and the at least one second protrusion engaging the at least one second notch to fasten the liquid crystal panel and the backlight module.
9. The LCD device of claim 1, wherein the receiving box is integrally manufactured, the bezel and the back plate comprising a one-piece body.
10. The LCD device of claim 1, wherein the receiving box is iron, aluminum or an alloy thereof.
11. A liquid crystal display device, comprising:
a liquid crystal panel;
a backlight module opposite to the liquid crystal panel; and
a receiving box, the receiving box comprising a bezel and a back plate connected to the bezel to form a one-piece body, the back plate being rotatable along a combination portion of the bezel and back plate so that the back plate is able to engage to the bezel, the receiving box accommodating and fastening the liquid crystal panel and the backlight module therein.
12. A method for assembling the LCD device of claim 1, the method comprising:
fixing the liquid crystal panel and the backlight module into the bezel; and rotating the back plate to engage with the bezel so as to fasten the liquid crystal panel and the backlight module in the receiving box.
13. The method of claim 12, wherein the backlight module comprises a frame, an optical film assembly, and a light guide panel, and the frame receives the optical film assembly, the light guide panel, and the liquid crystal panel.
14. The method of claim 13, wherein the frame comprises four sidewalls, the four sidewalls define four outside surfaces, at least one of the four outside surfaces comprises at least one first protrusion extending therefrom, and the bezel comprises at least one first notch corresponding to the at least one first protrusion.
15. The method of claim 14, wherein the frame receiving the optical film assembly, the light guide panel, and the liquid crystal panel is inserted into the bezel, and the frame engages the bezel.
16. The method of claim 15, wherein the back plate comprises at least one second notch, and the frame or the bezel comprises at least one second protrusion corresponding to the at least second notch.
17. The method of claim 16, wherein the back plate is rotated toward the bezel such that the at least one second protrusion engages the at least one second notch, so as to fasten the liquid crystal panel and the backlight module in the receiving box.

* * * * *

专利名称(译)	具有整体接收盒的液晶显示装置及其组装方法		
公开(公告)号	US20090015749A1	公开(公告)日	2009-01-15
申请号	US12/218363	申请日	2008-07-14
[标]申请(专利权)人(译)	群创光电股份有限公司		
申请(专利权)人(译)	群创光电股份有限公司.		
当前申请(专利权)人(译)	群创光电		
[标]发明人	TANG CHIN SHUN		
发明人	TANG, CHIN-SHUN		
IPC分类号	G02F1/1333		
CPC分类号	G02F1/133308 G02F2001/133317 G02F2001/133314		
优先权	200710076012.2 2007-07-13 CN		
其他公开文献	US7808574		
外部链接	Espacenet USPTO		

摘要(译)

示例性液晶显示 (LCD) 装置包括液晶面板，与液晶面板平行的背光模块和接收盒。接收盒包括边框和连接到边框的后板。后板可以沿第一前挡板和后板的组合部分旋转。边框容纳液晶面板和背光模块。背板和挡板固定液晶面板和背光模块。还提供了用于组装LCD装置的相关方法。

