



US 20060227274A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2006/0227274 A1**
(43) **Pub. Date: Oct. 12, 2006**(54) **DISPLAY PANEL AND LIQUID CRYSTAL
DISPLAY APPARATUS INCLUDING THE
SAME**(22) Filed: **Apr. 5, 2006**(30) **Foreign Application Priority Data**(75) Inventors: **Hee-Wook Do**, Suwon-si (KR);
Yeon-Ju Kim, Suwon-si (KR);
Yoon-Sung Um, Yongin-si (KR);
Hak-Sun Chang, Yongin-si (KR);
Seung-Hoo Yoo, Seongnam-si (KR);
Hyun-Wuk Kim, Yongin-si (KR);
Jae-Jin Lyu, Gwangju-si (KR);
Chang-Hun Lee, Yongin-si (KR)Apr. 6, 2005 (KR)..... 10-2005-0028590
Aug. 18, 2005 (KR)..... 10-2005-0075768**Publication Classification**(51) **Int. Cl.**
G02F 1/1343 (2006.01)
(52) **U.S. Cl.** **349/139**(57) **ABSTRACT**

A display panel is provided. The display panel includes a substrate and a pixel electrode disposed on the substrate and having a pair of first primary edges facing each other and a pair of second primary edges connected to the first primary edges and facing each other, wherein the second primary edges include a plurality of protrusions of the pixel electrode having the shape of sawteeth.

Correspondence Address:

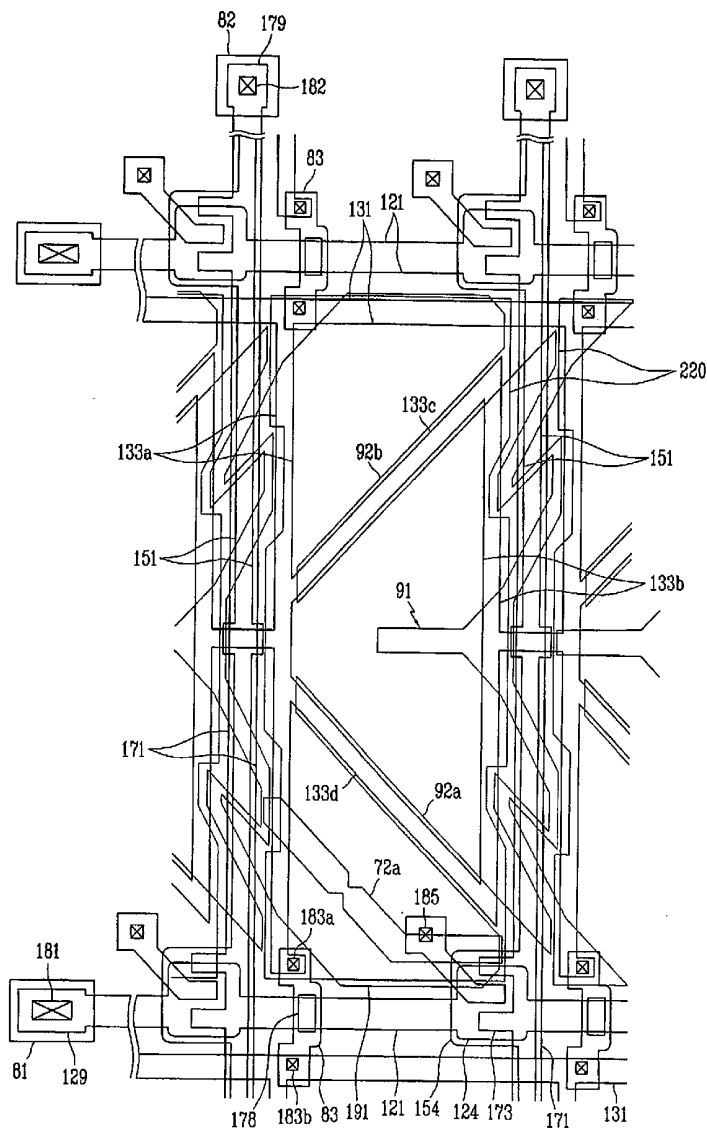
F. CHAU & ASSOCIATES, LLC
130 WOODBURY ROAD
WOODBURY, NY 11797 (US)(73) Assignee: **Samsung Electronics Co., Ltd.**(21) Appl. No.: **11/398,242**

FIG. 1

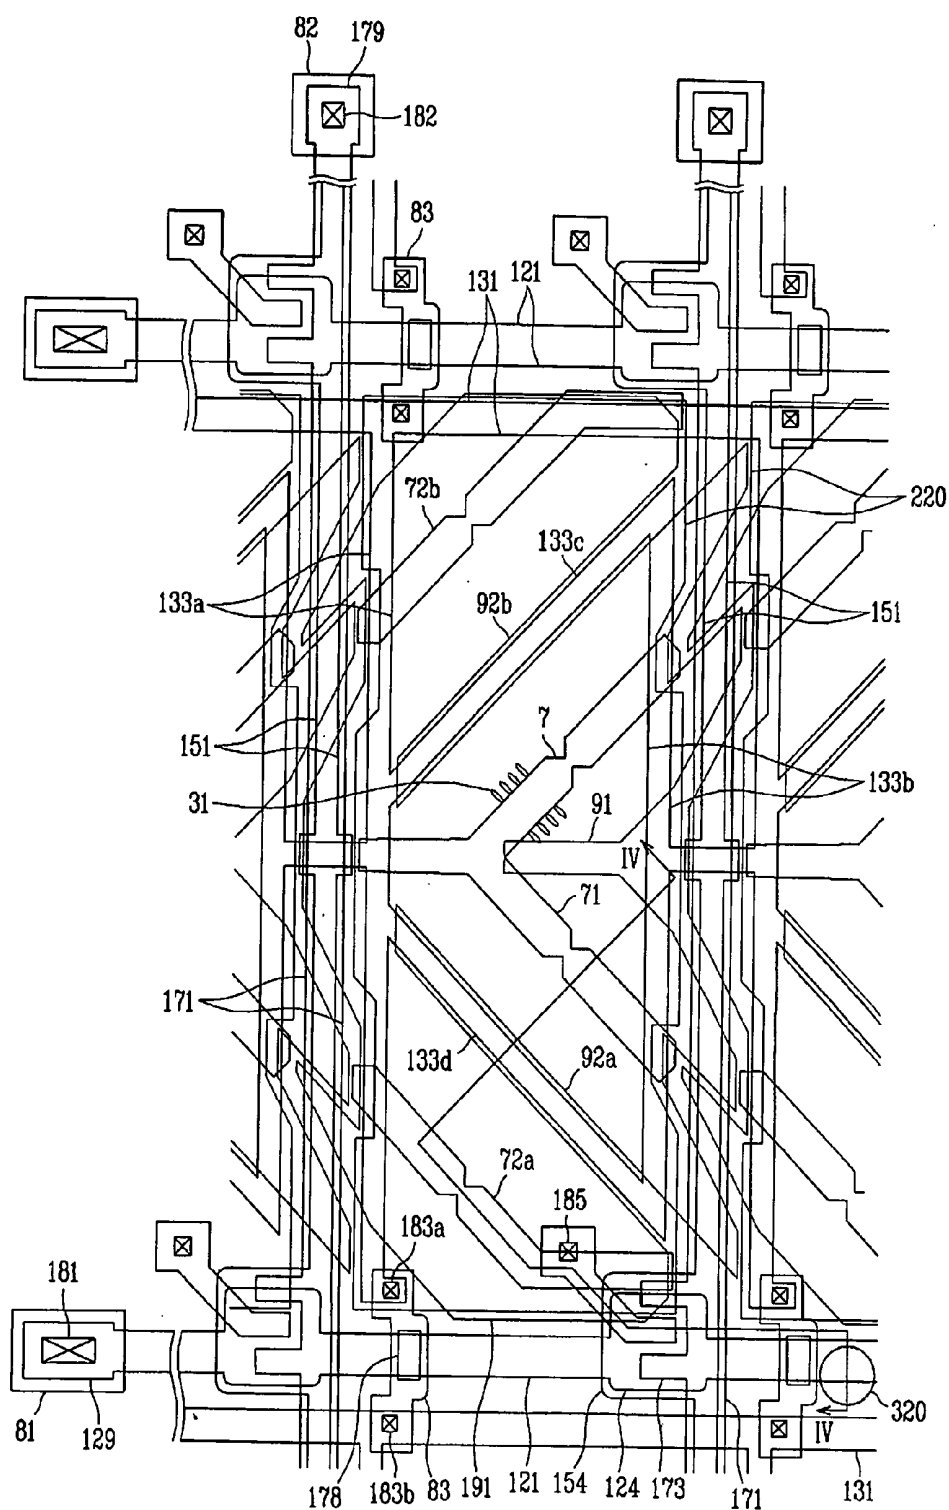


FIG. 2

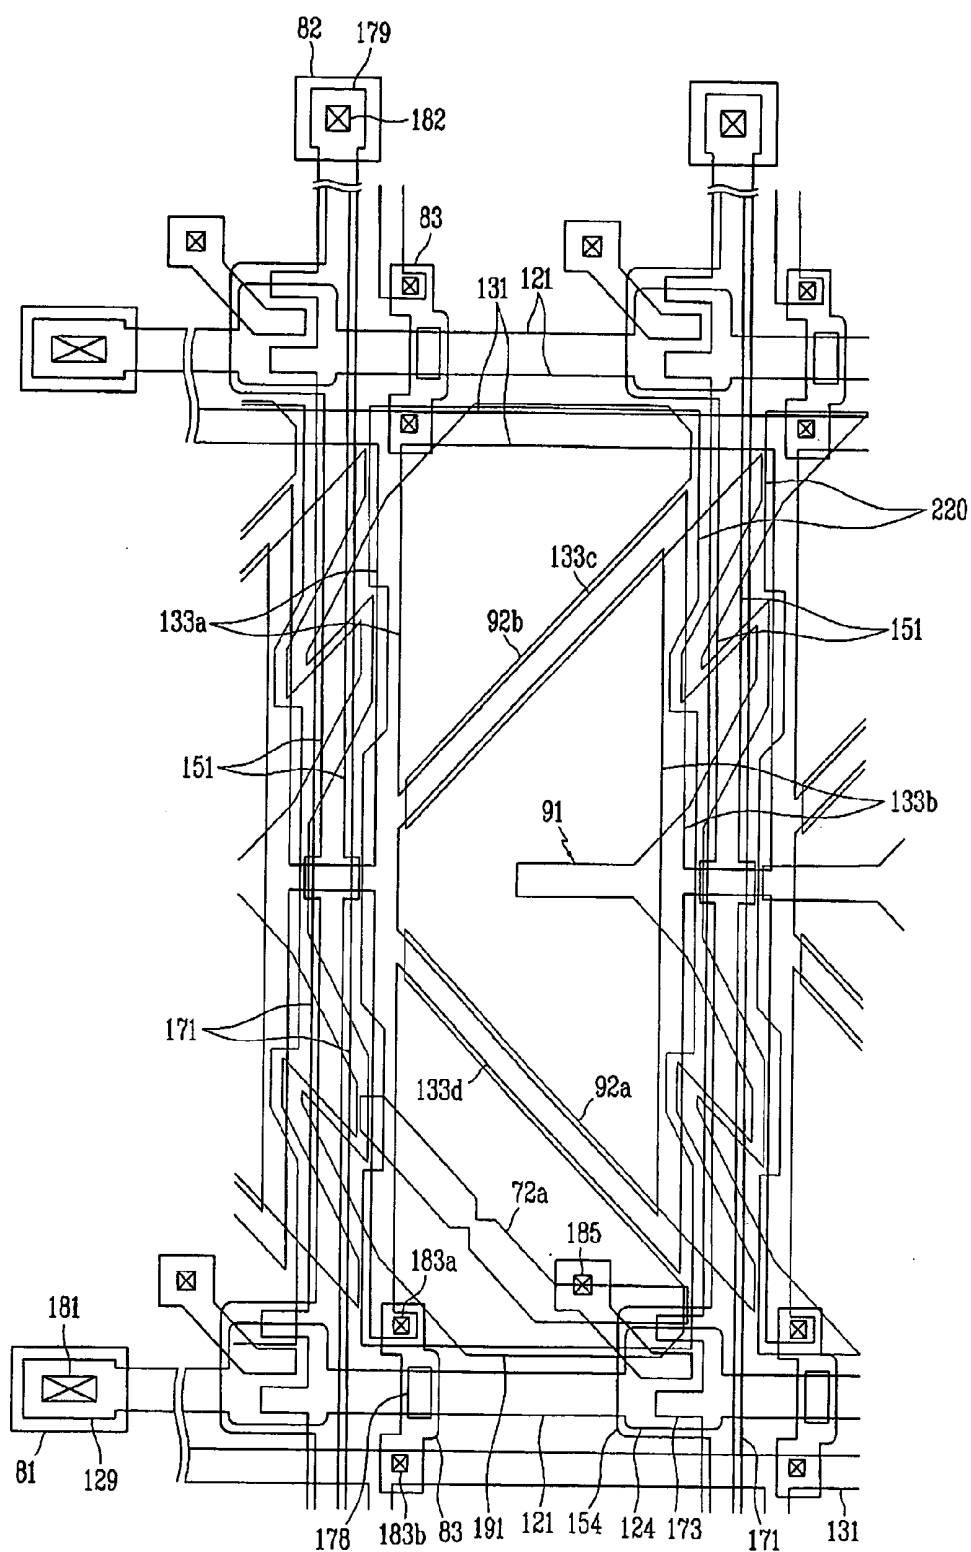


FIG. 3

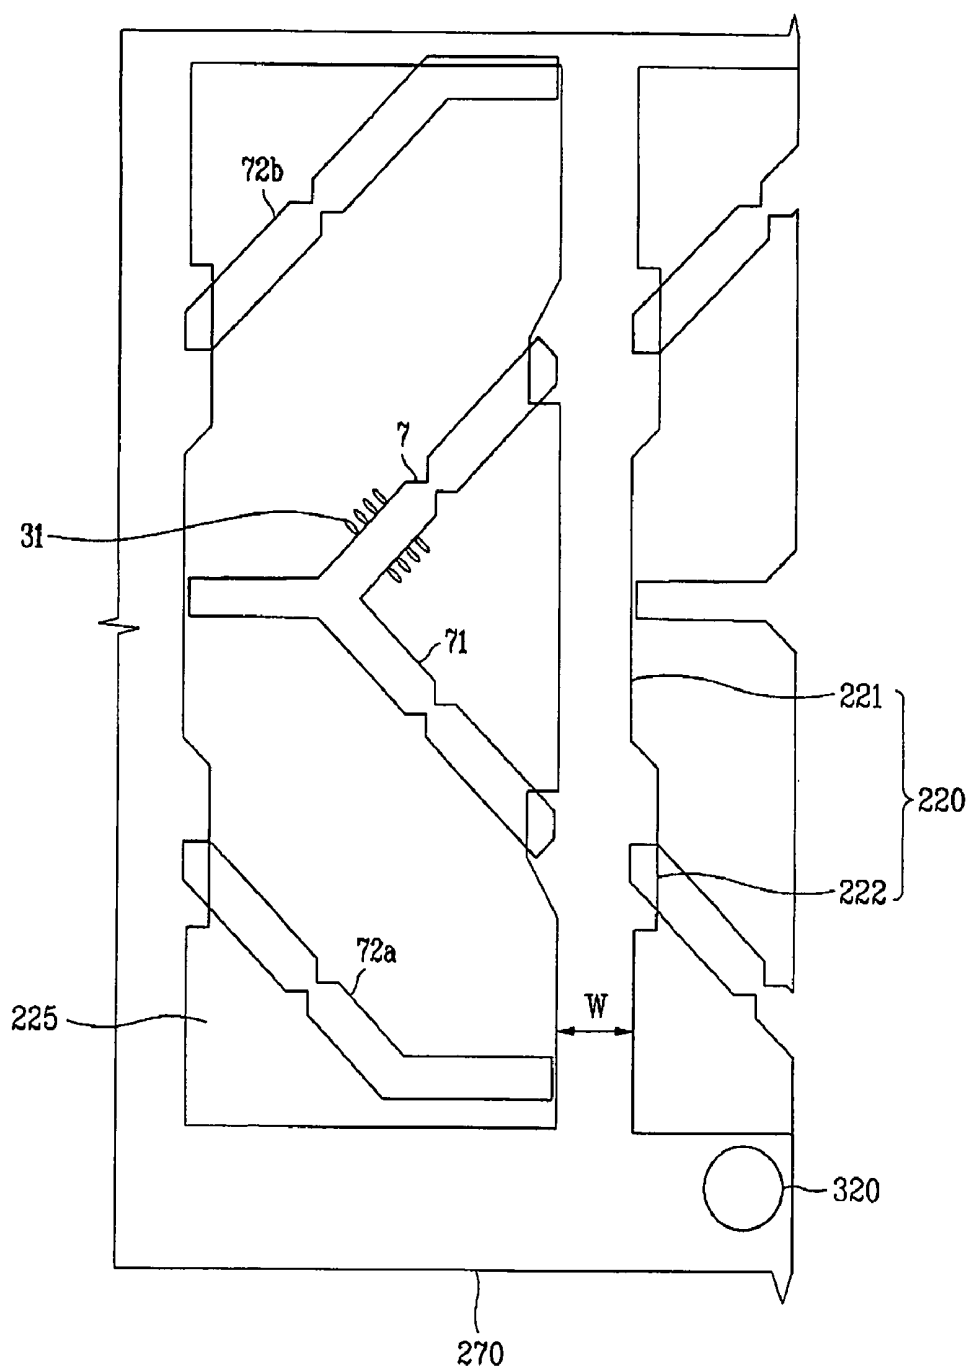


FIG. 4

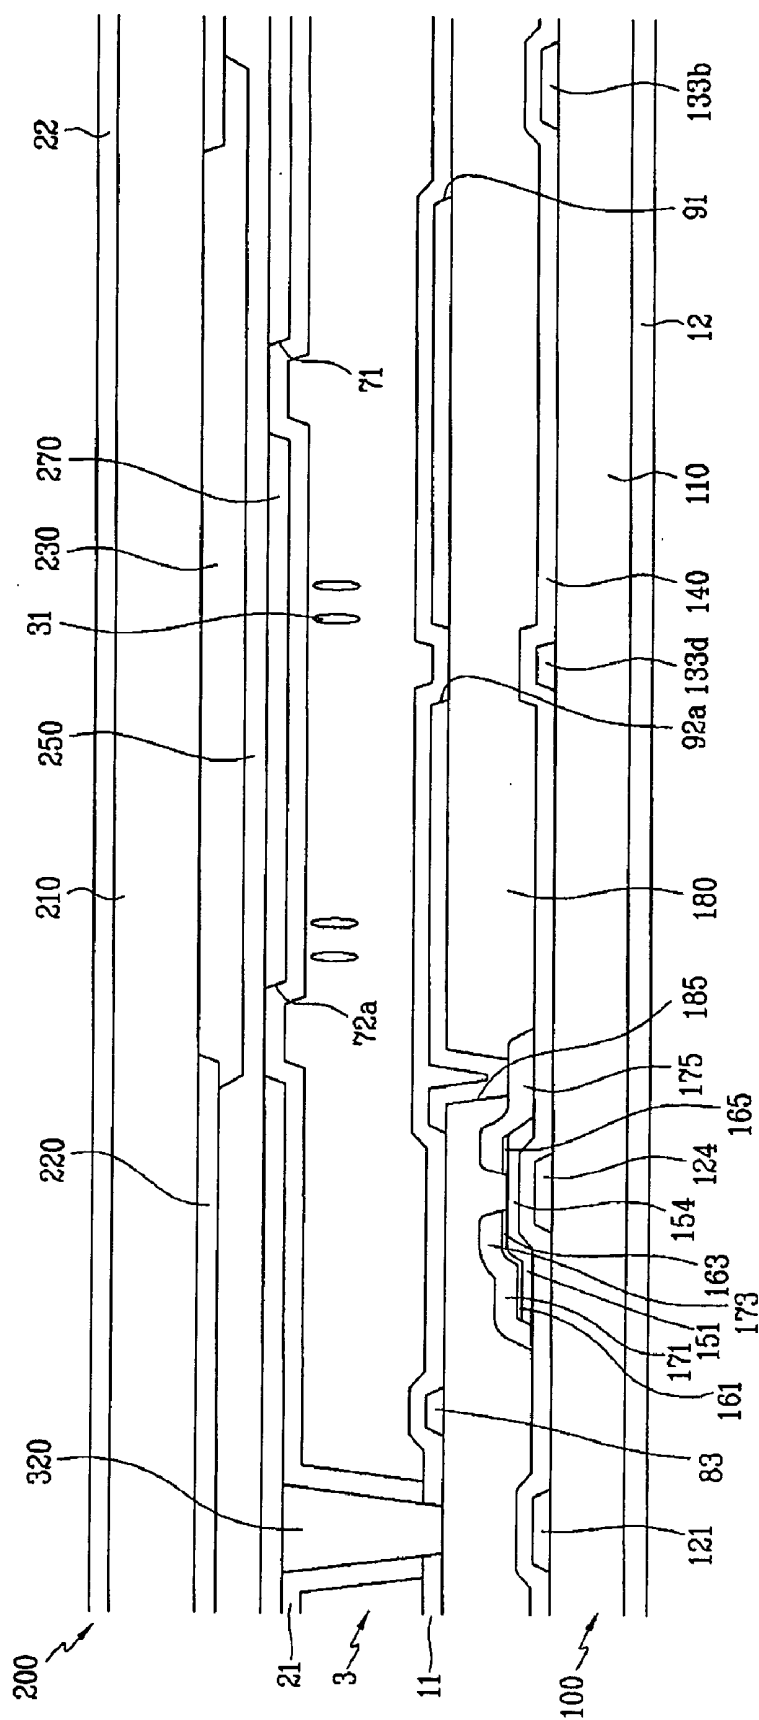


FIG. 5

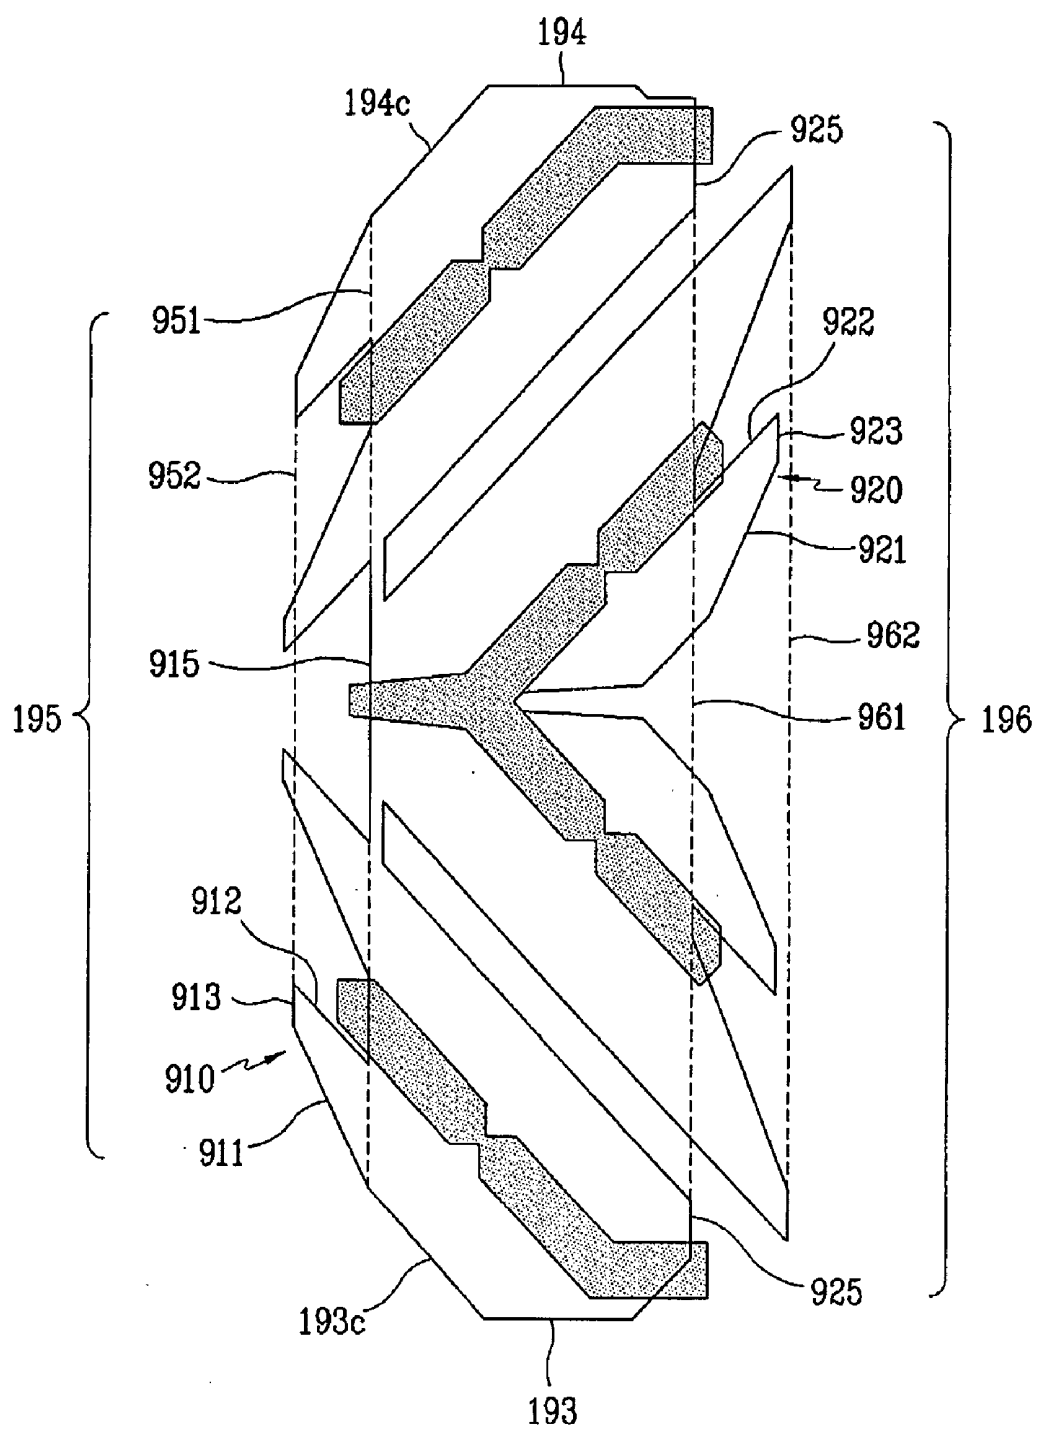


FIG. 6

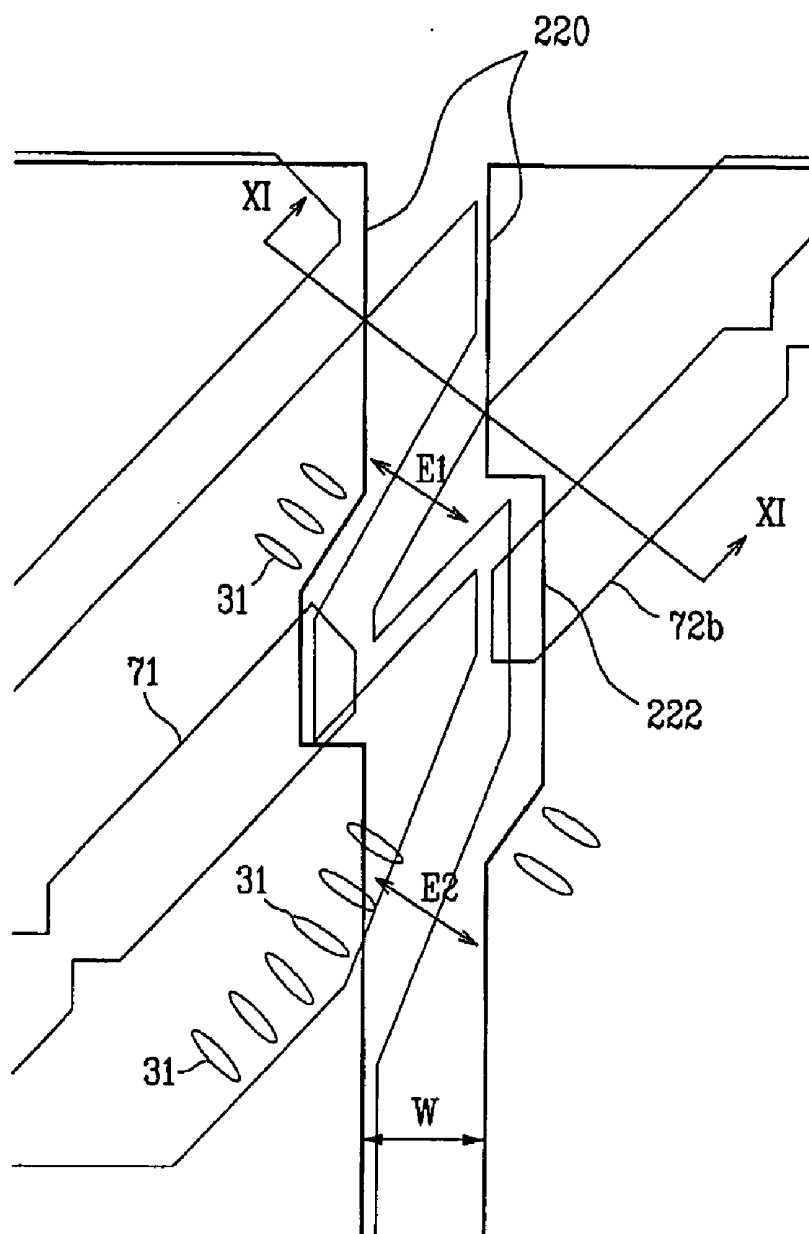


FIG. 7

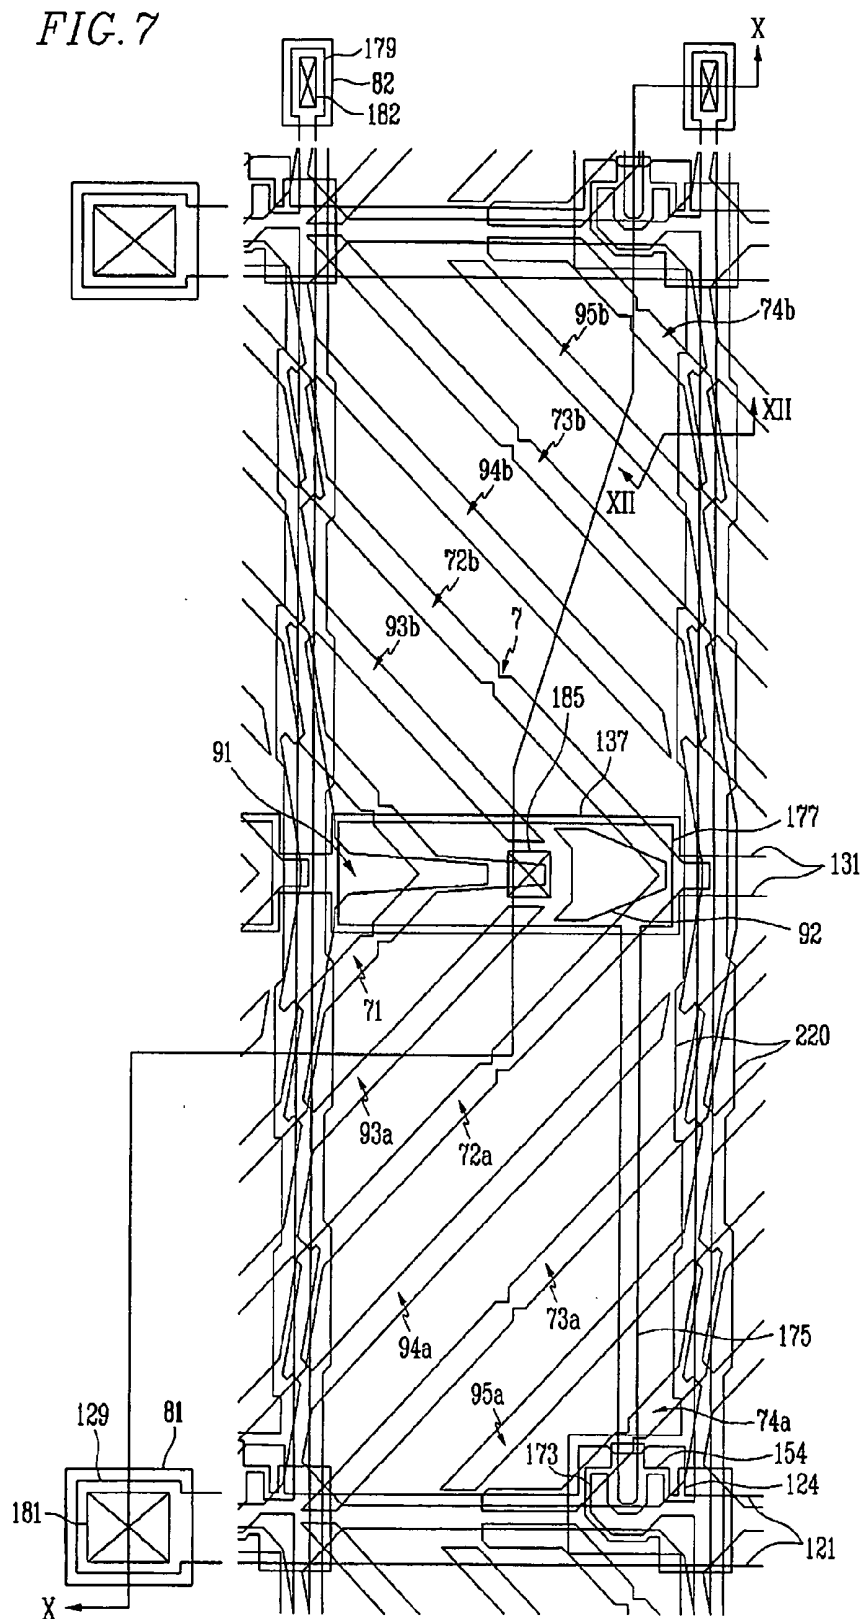


FIG. 8

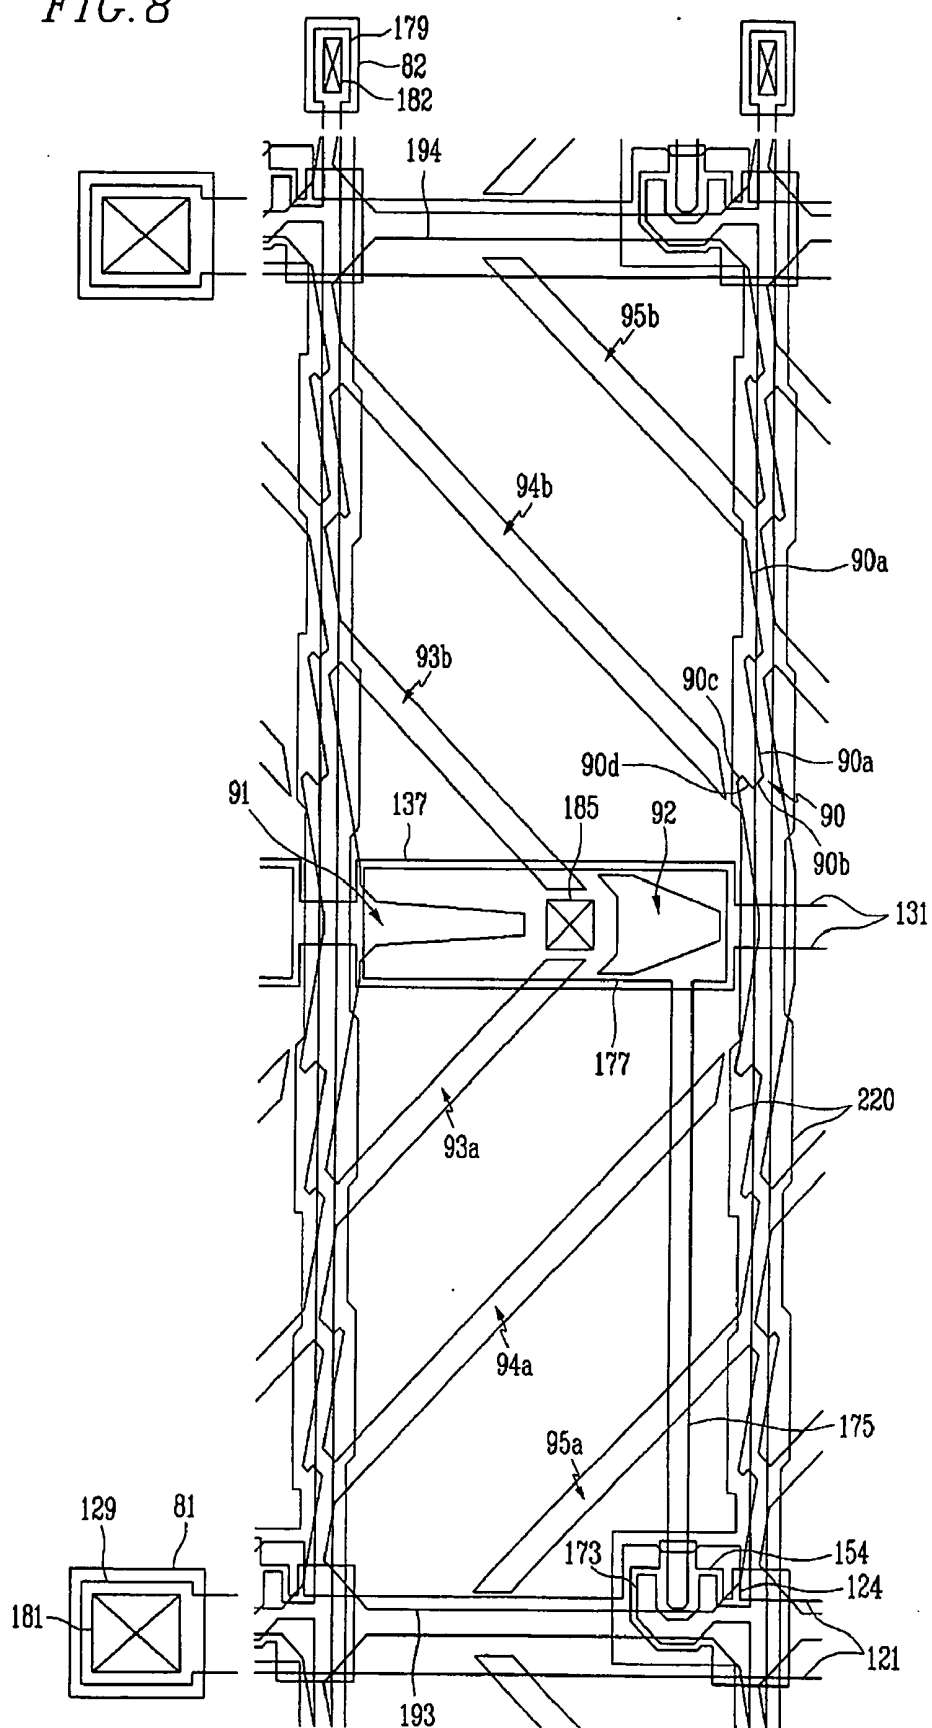


FIG. 9

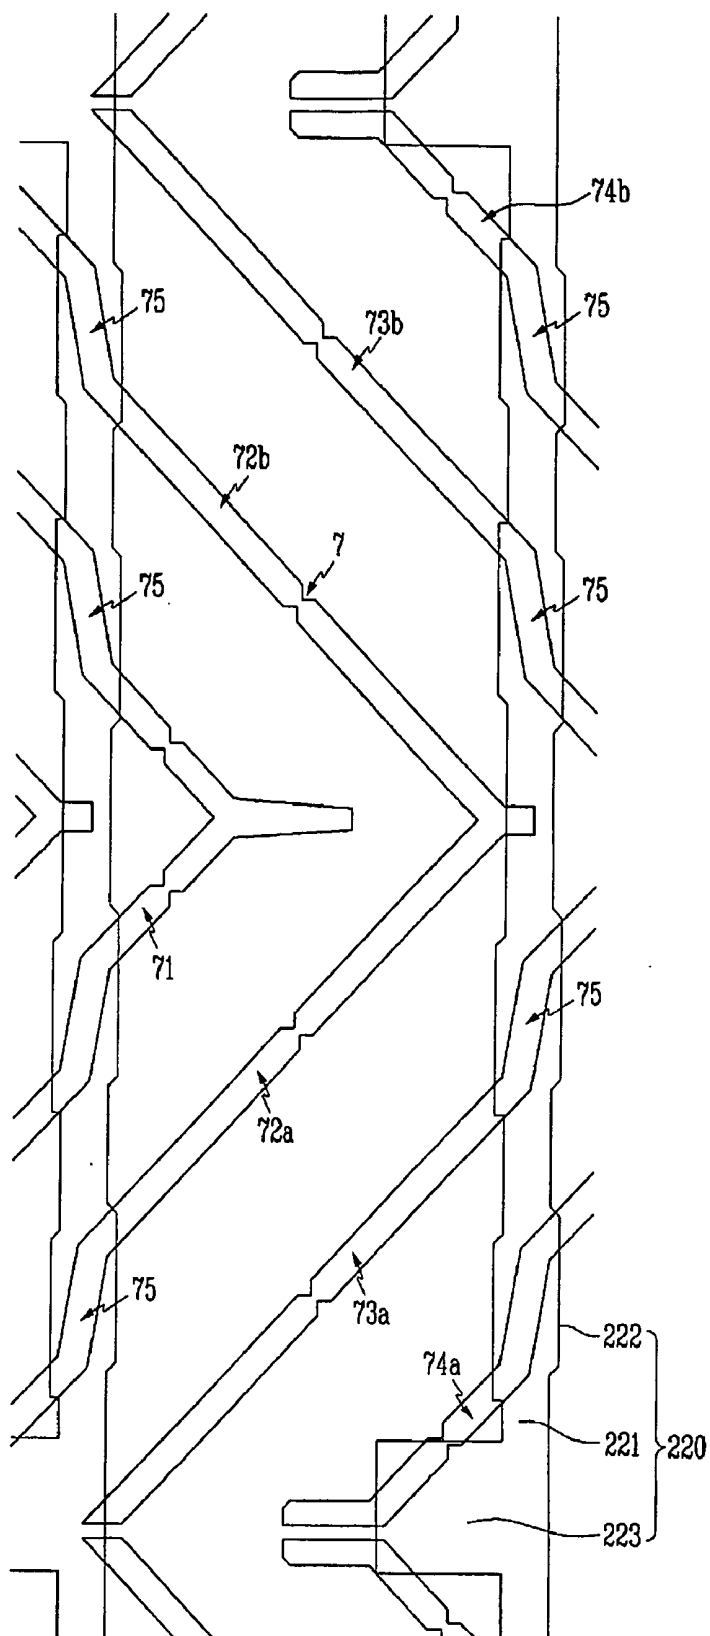


FIG. 10

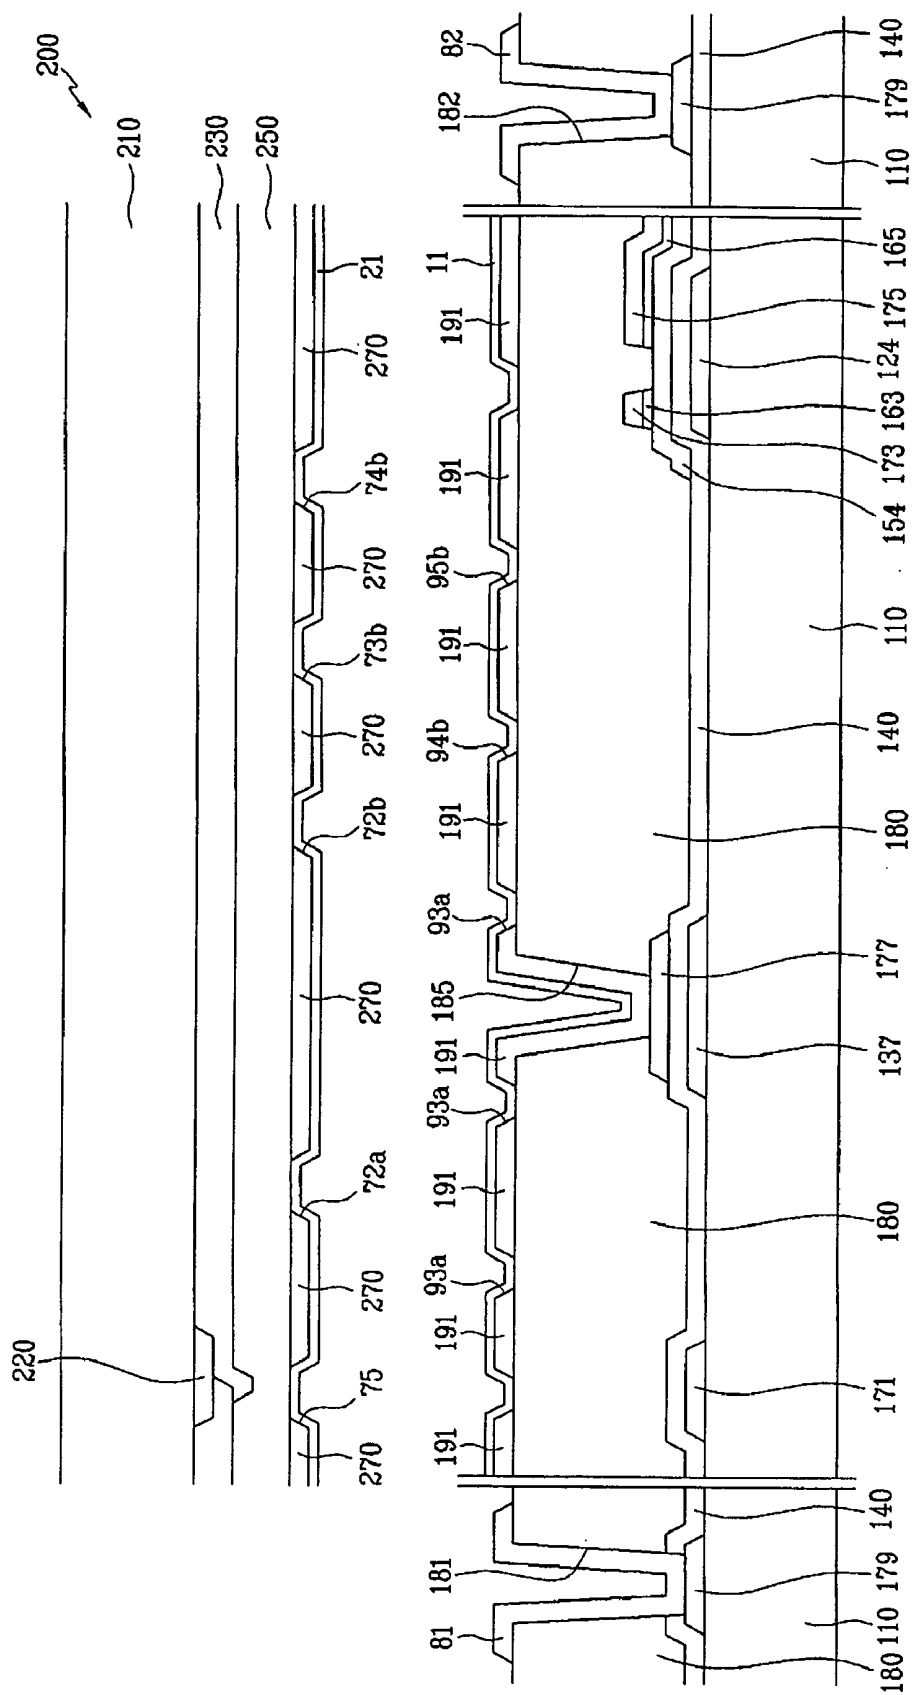


FIG. 11

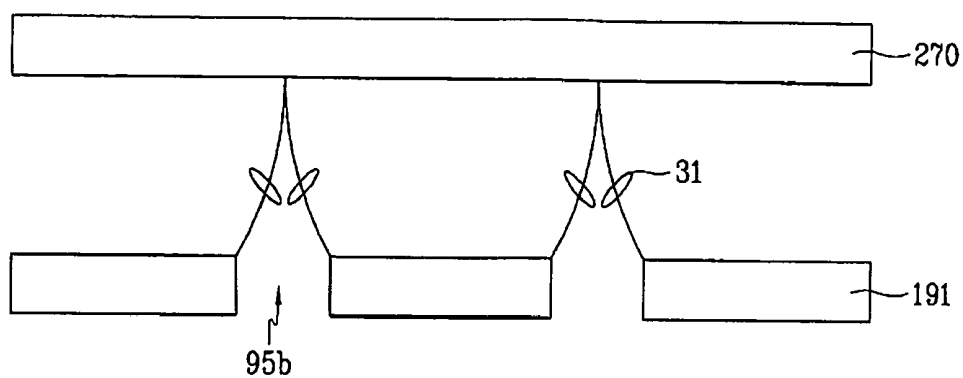


FIG. 12

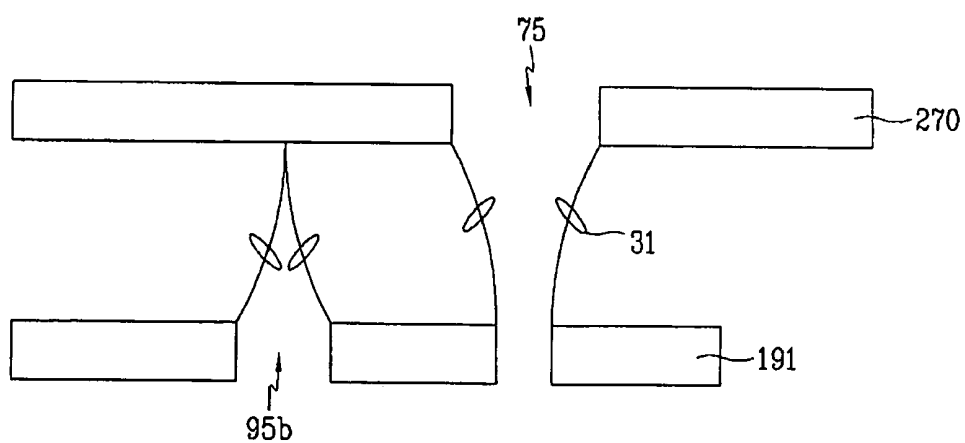


FIG. 13

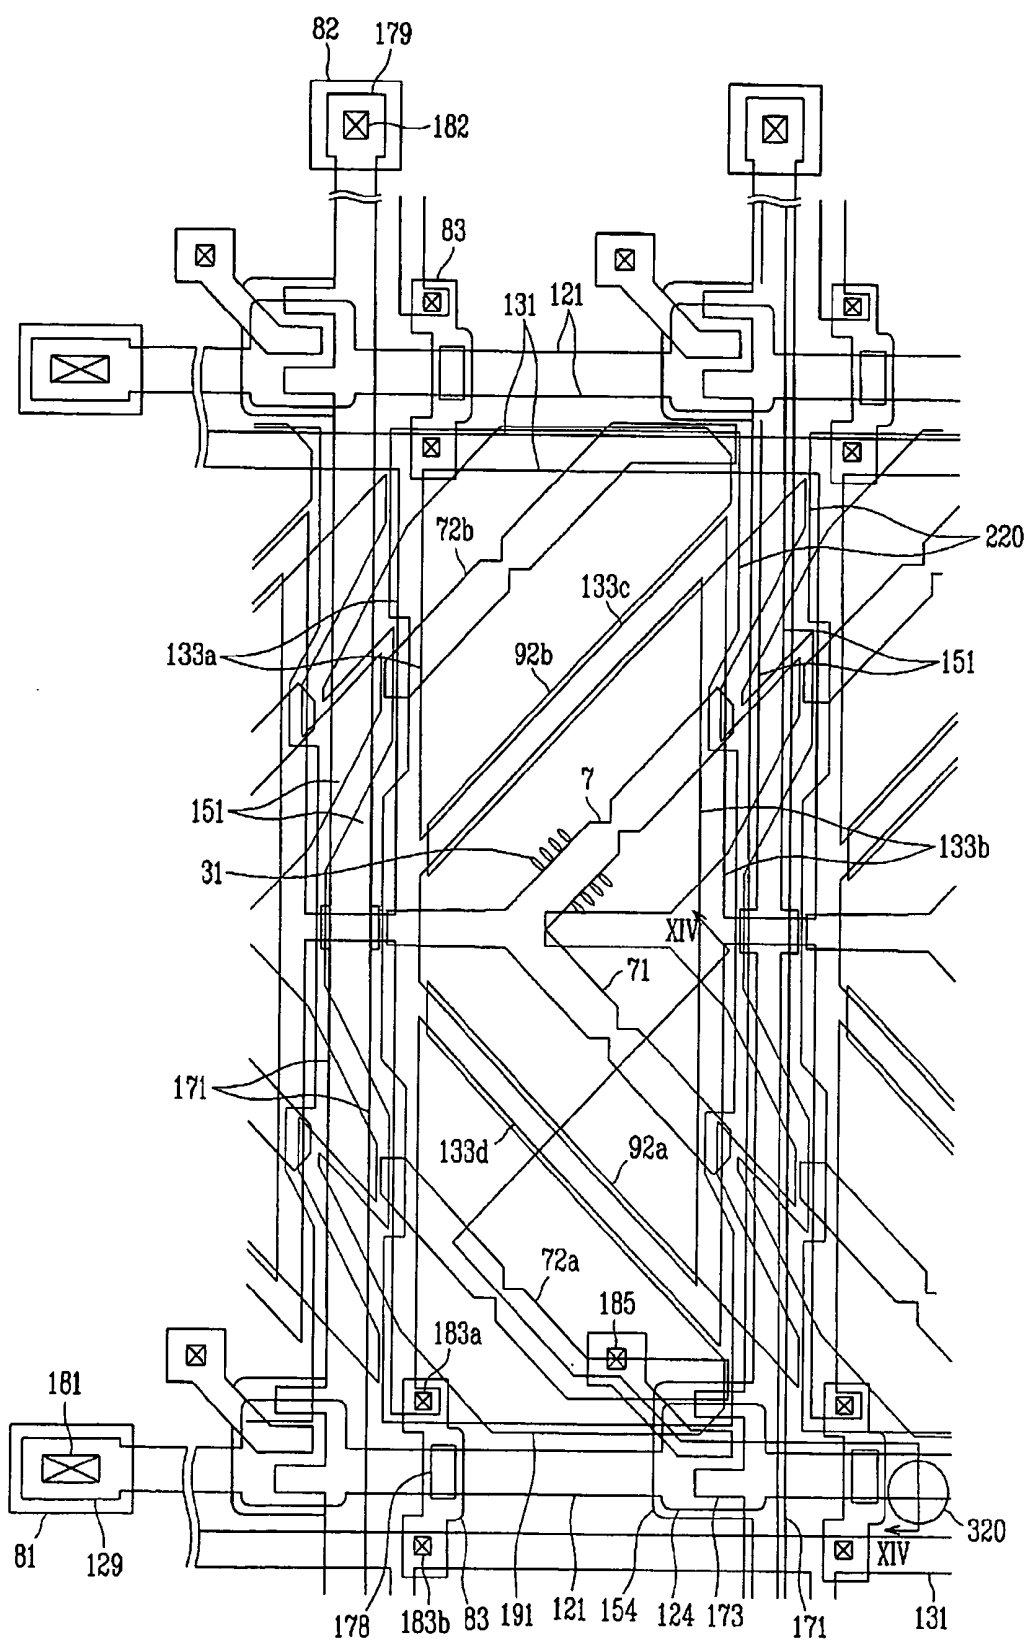


FIG. 17

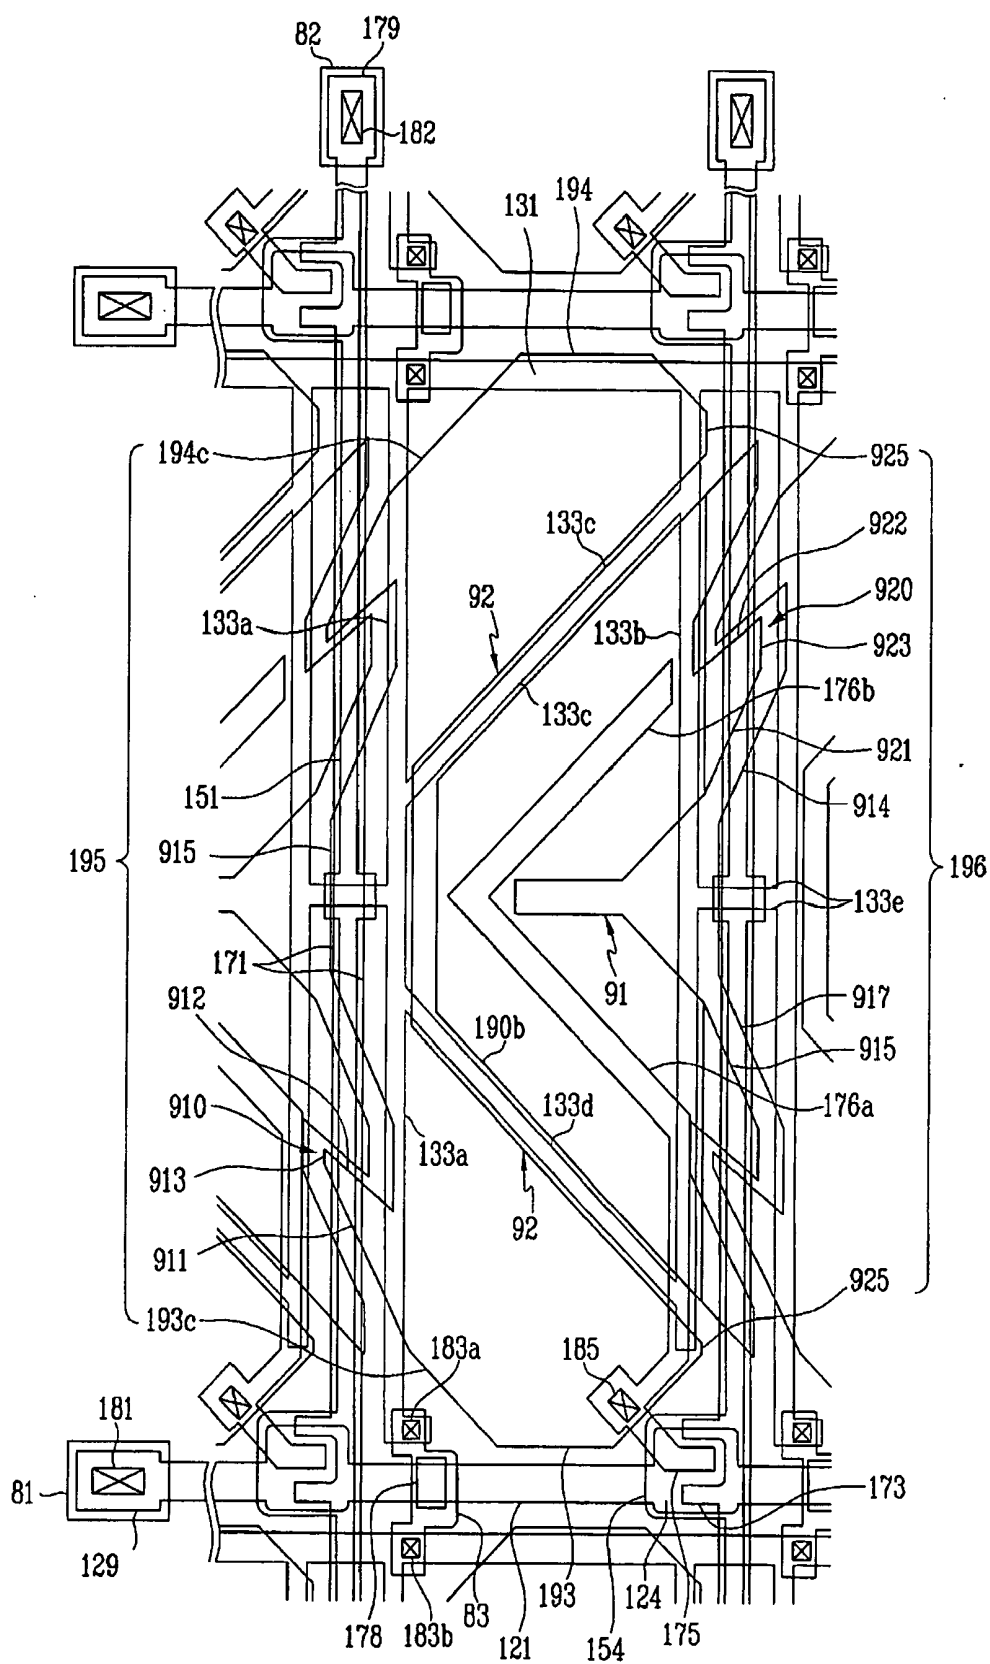


FIG. 18

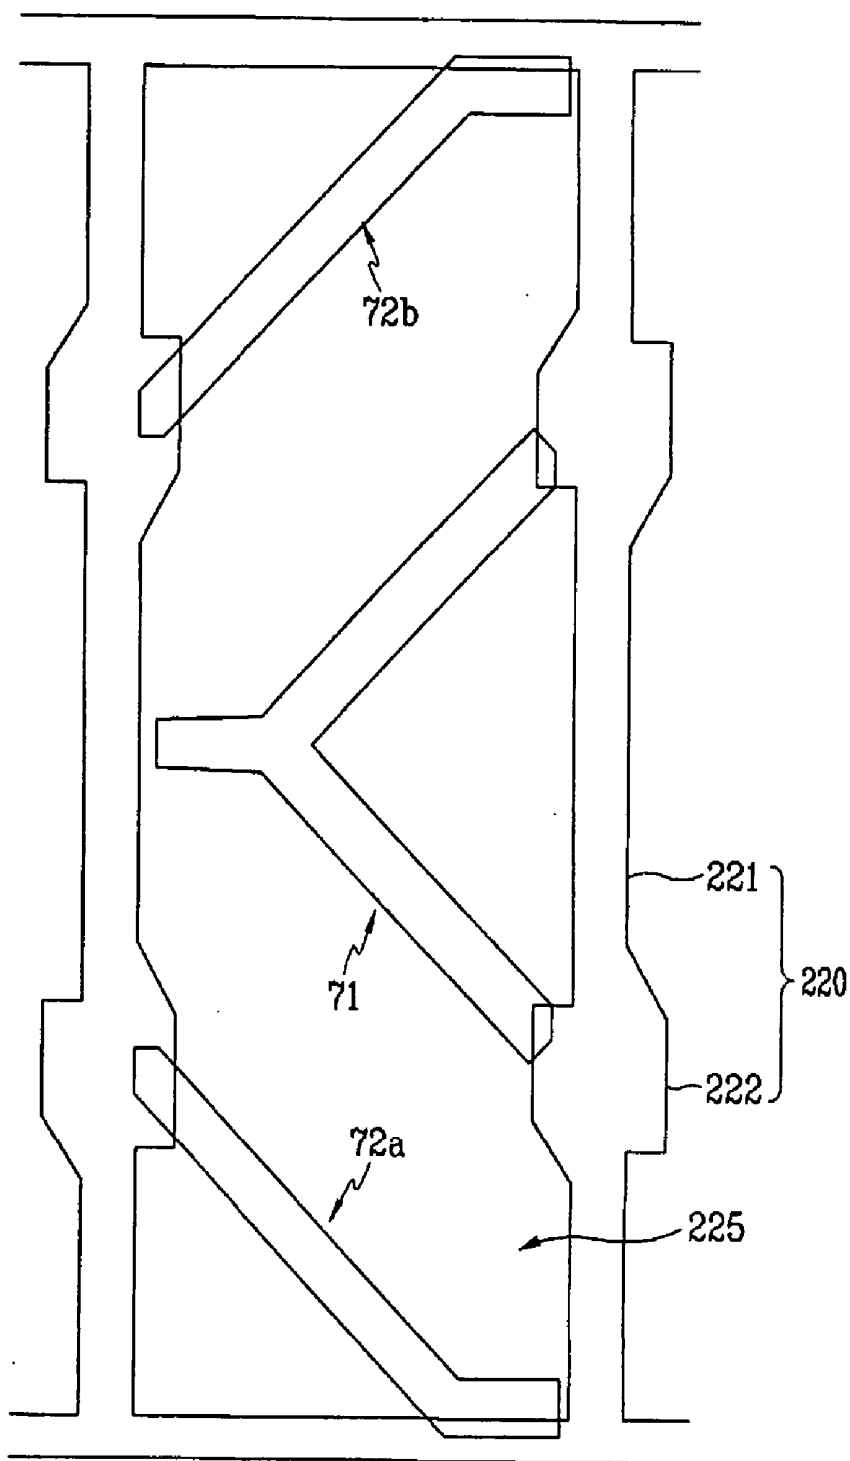


FIG. 19

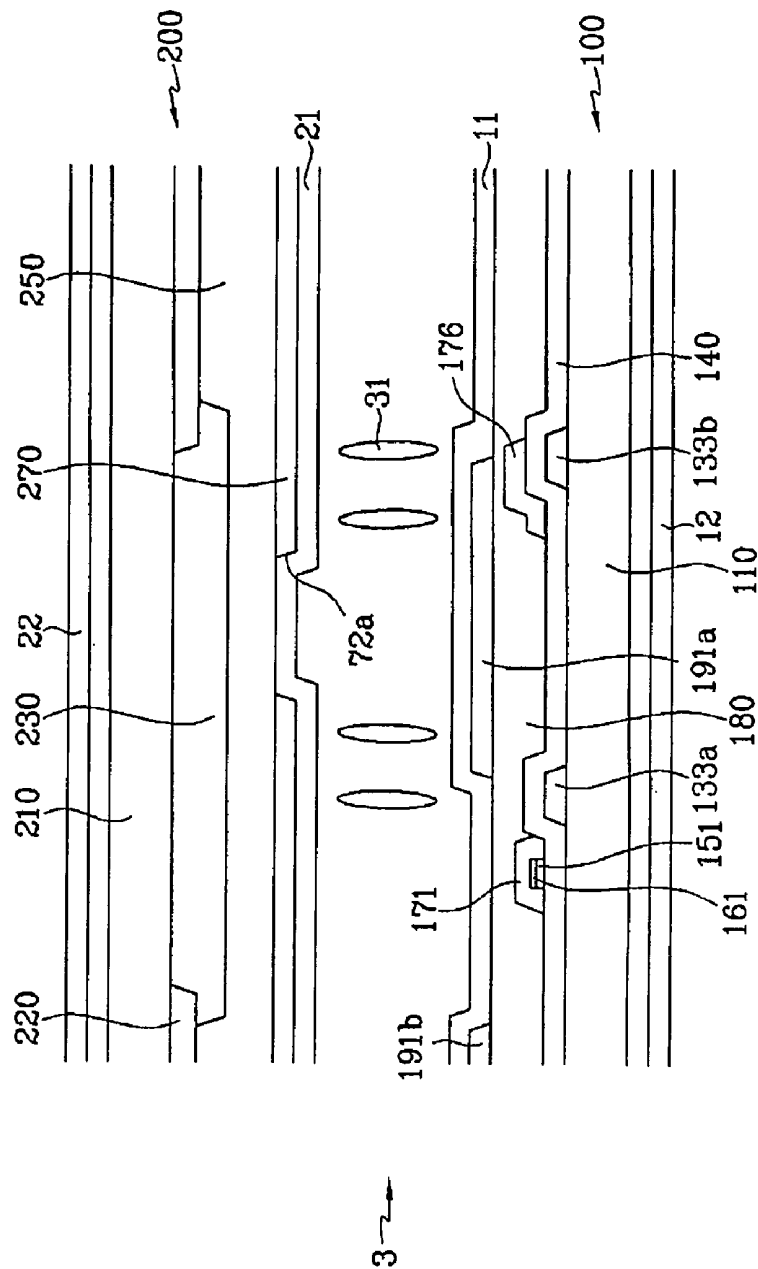


FIG. 21

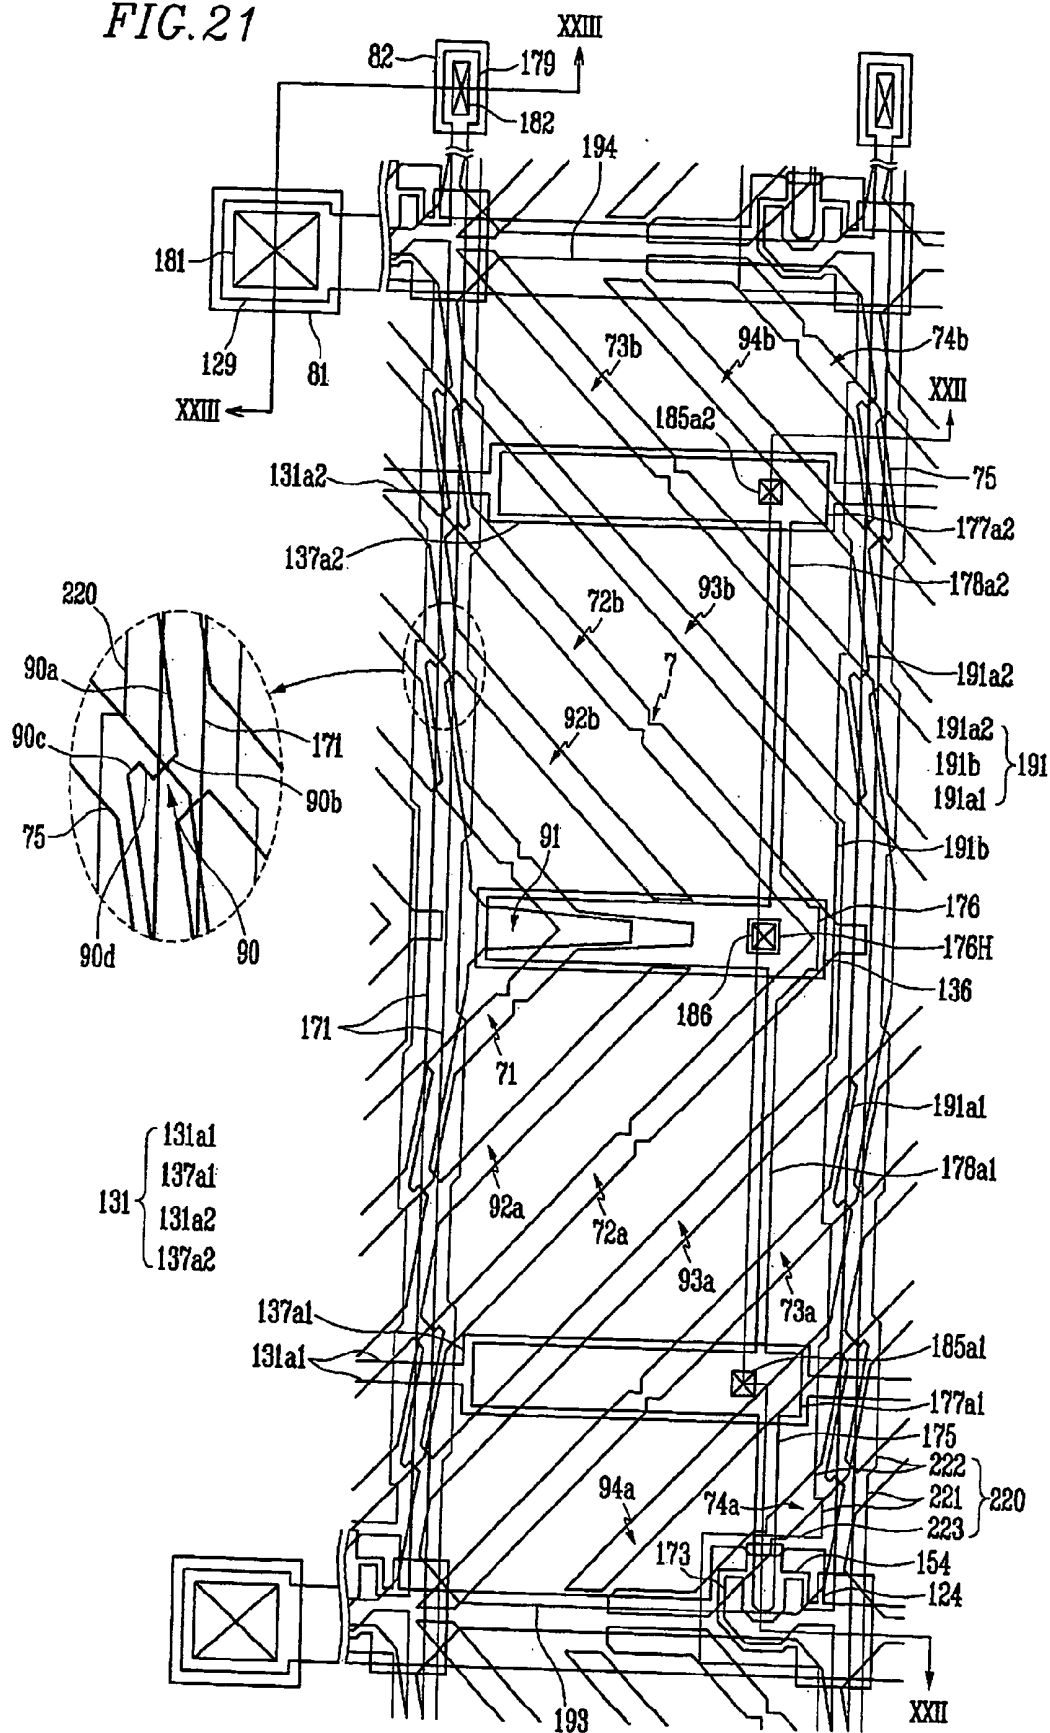


FIG. 22

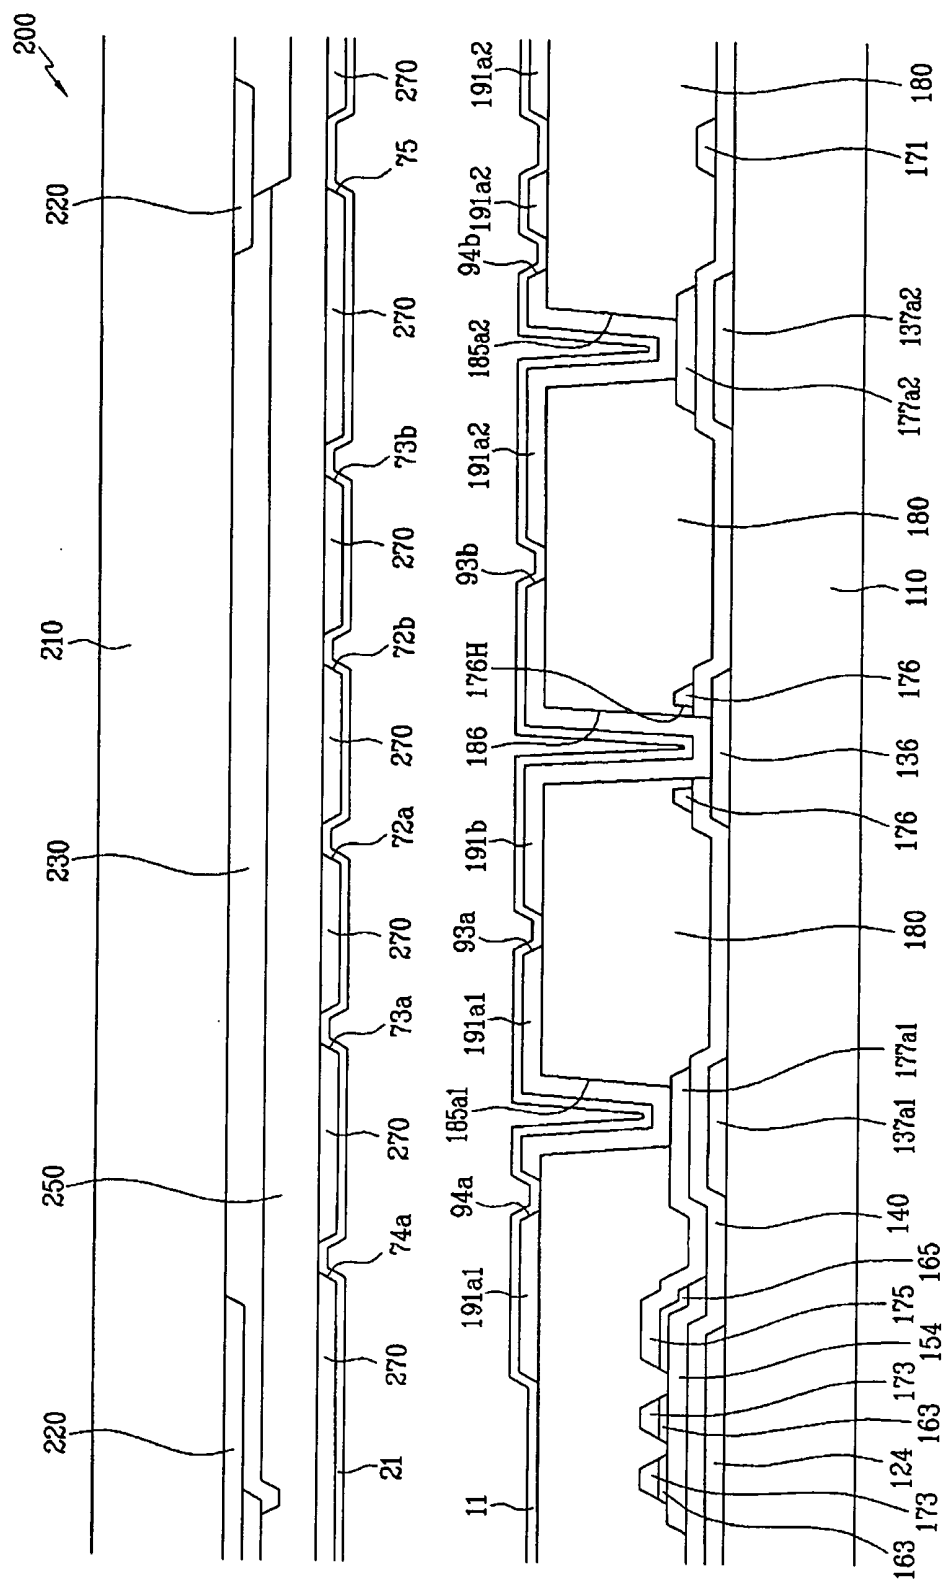


FIG. 23

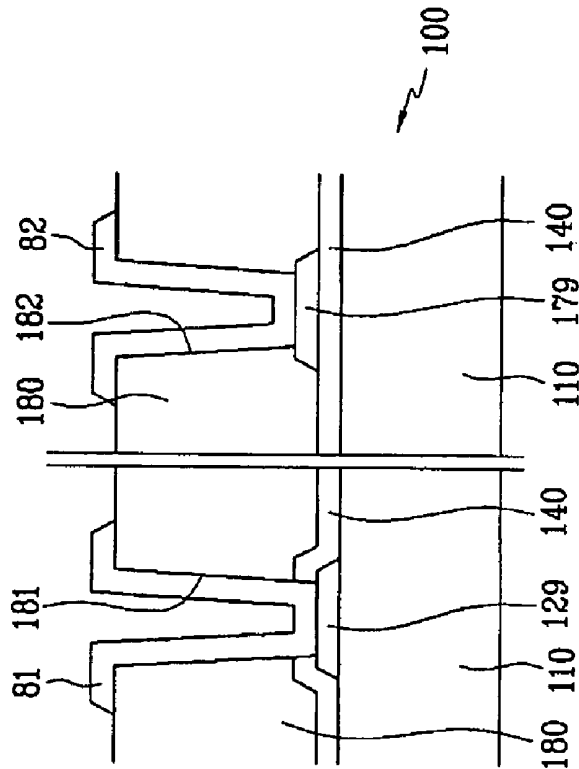


FIG. 24

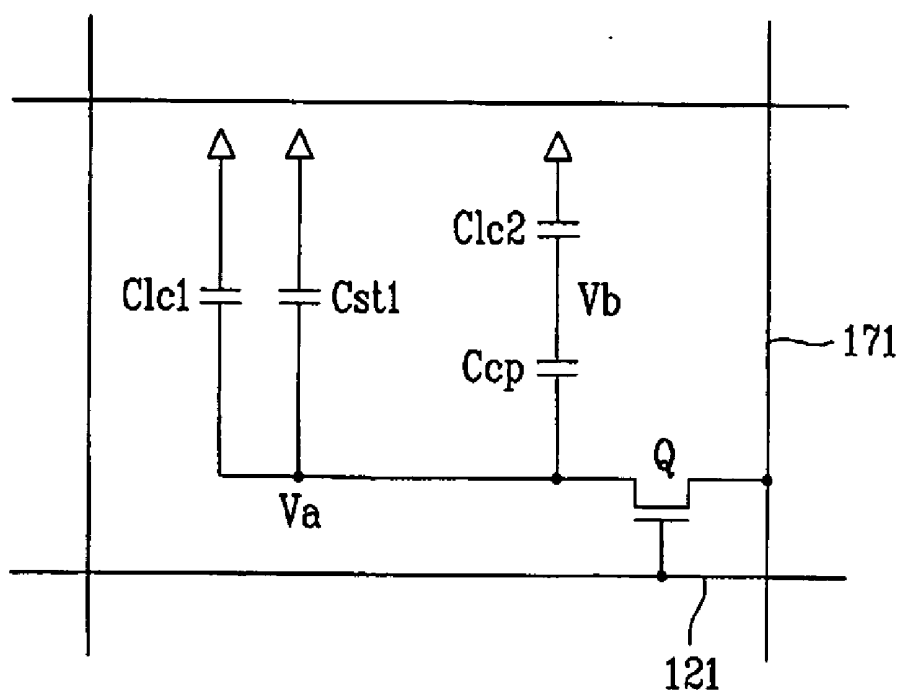


FIG. 26

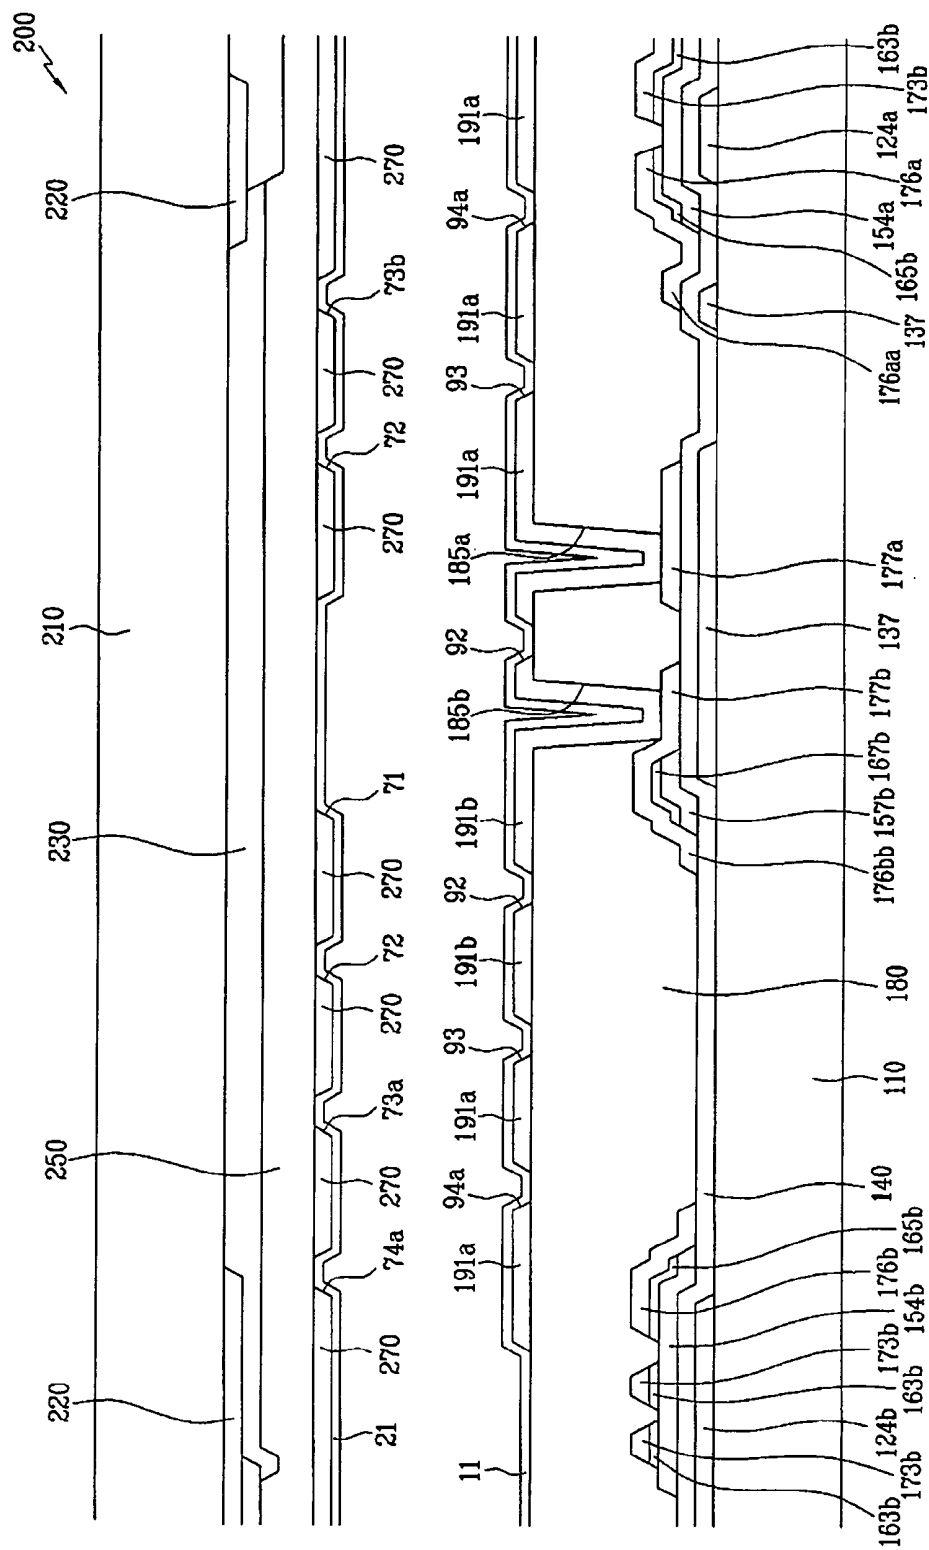


FIG. 27

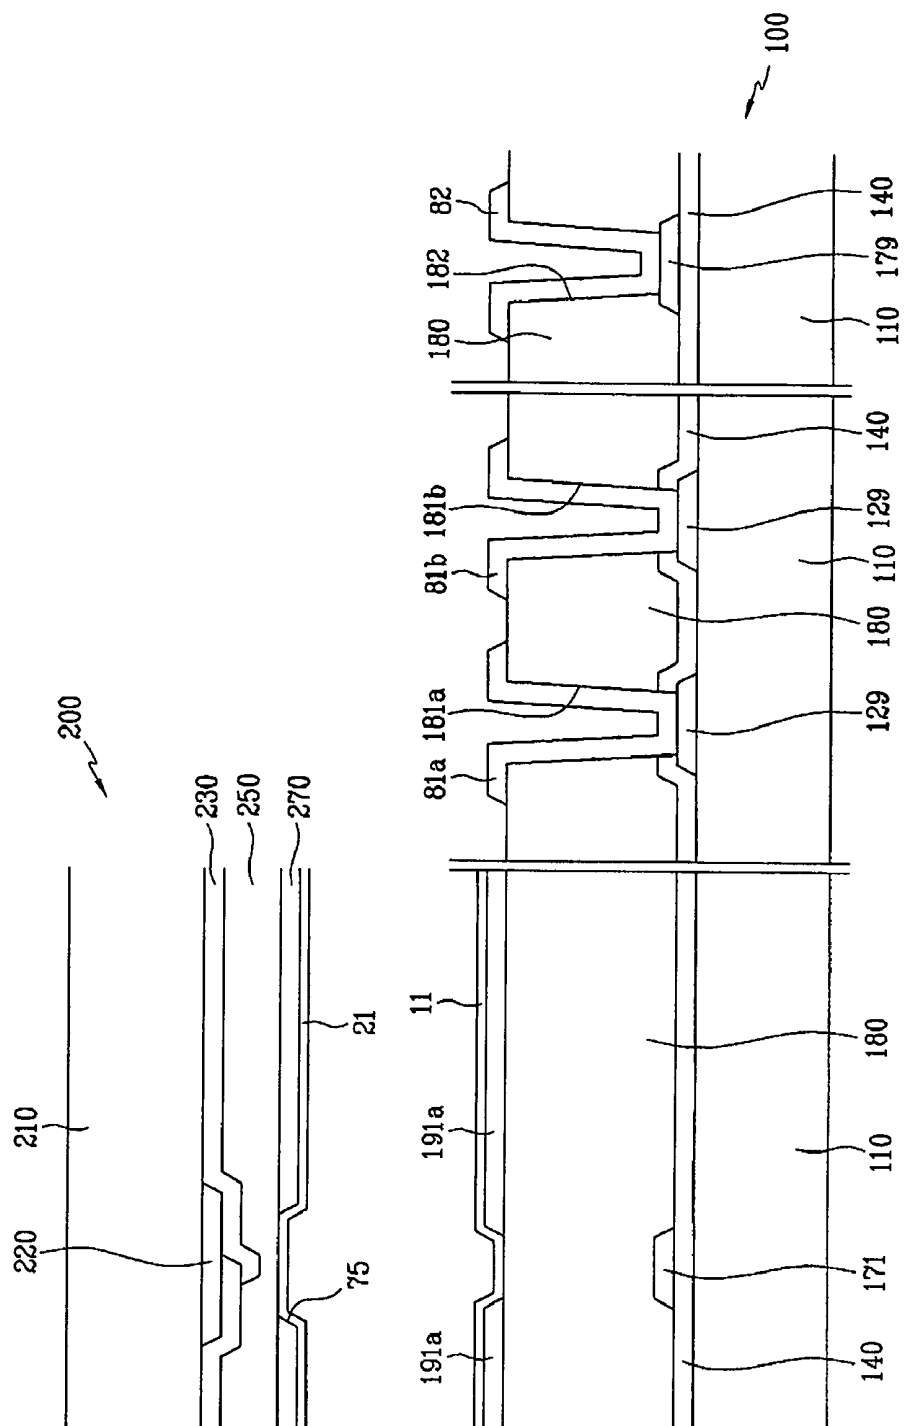


FIG. 28

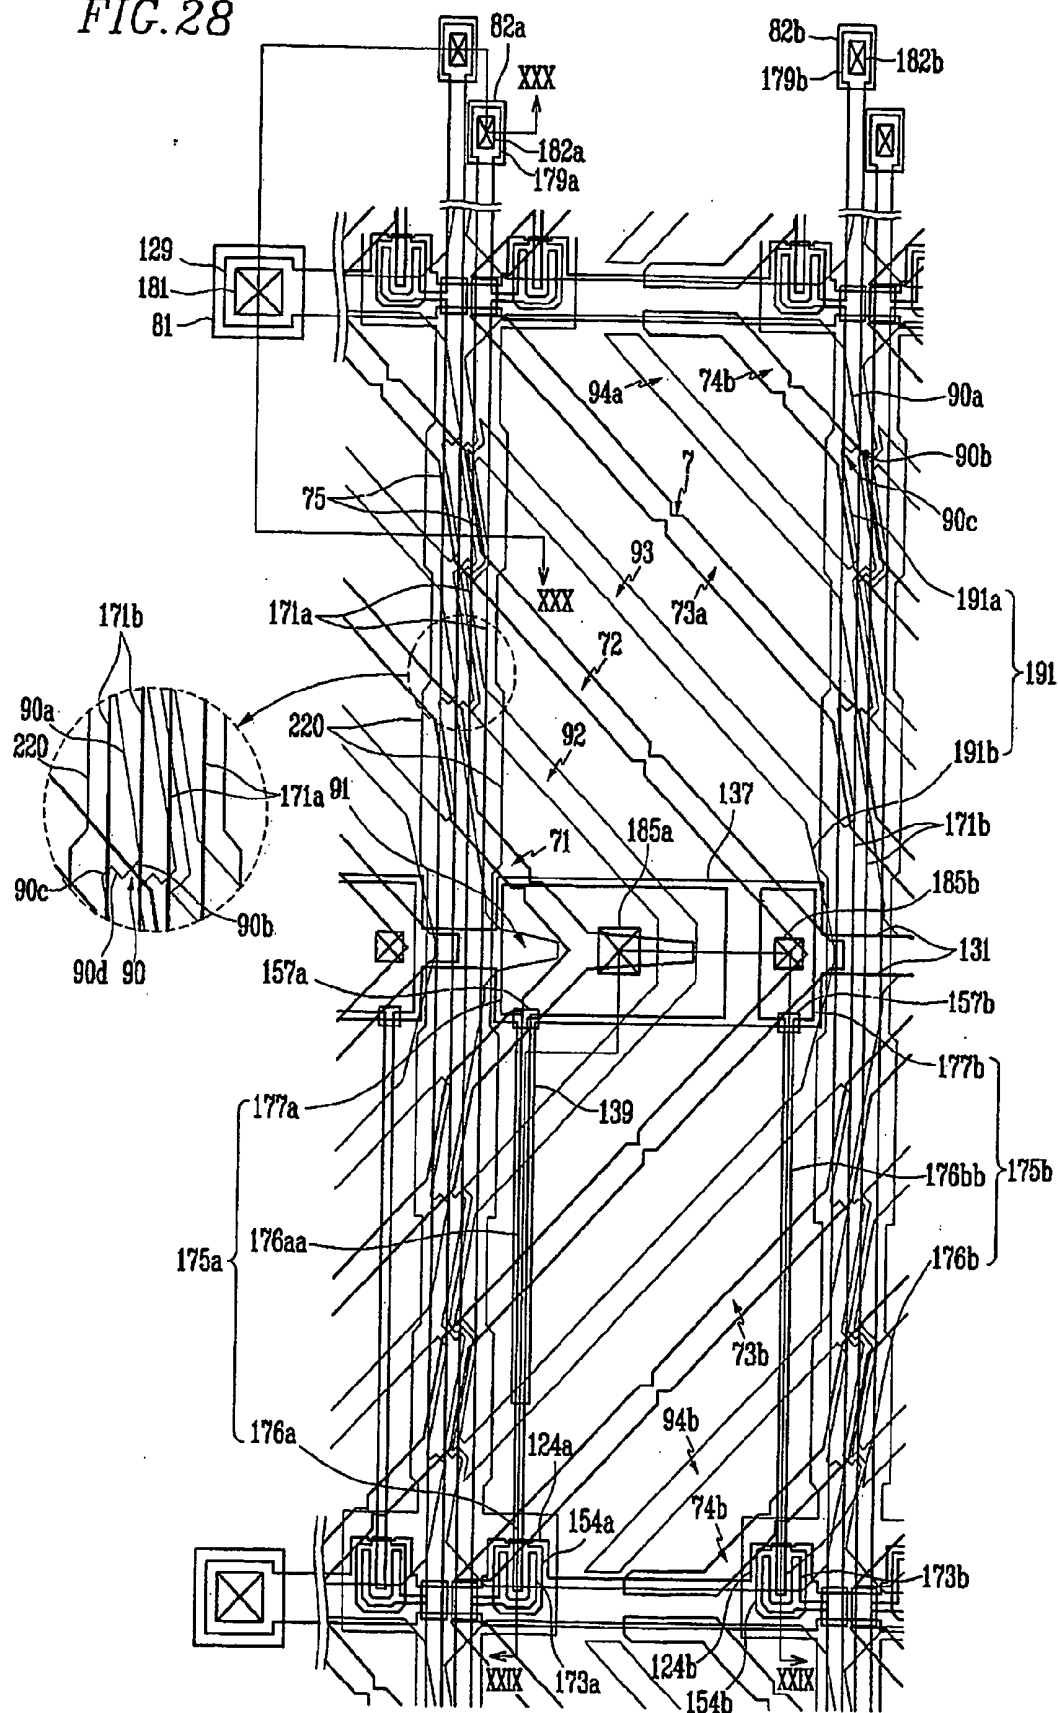


FIG. 29


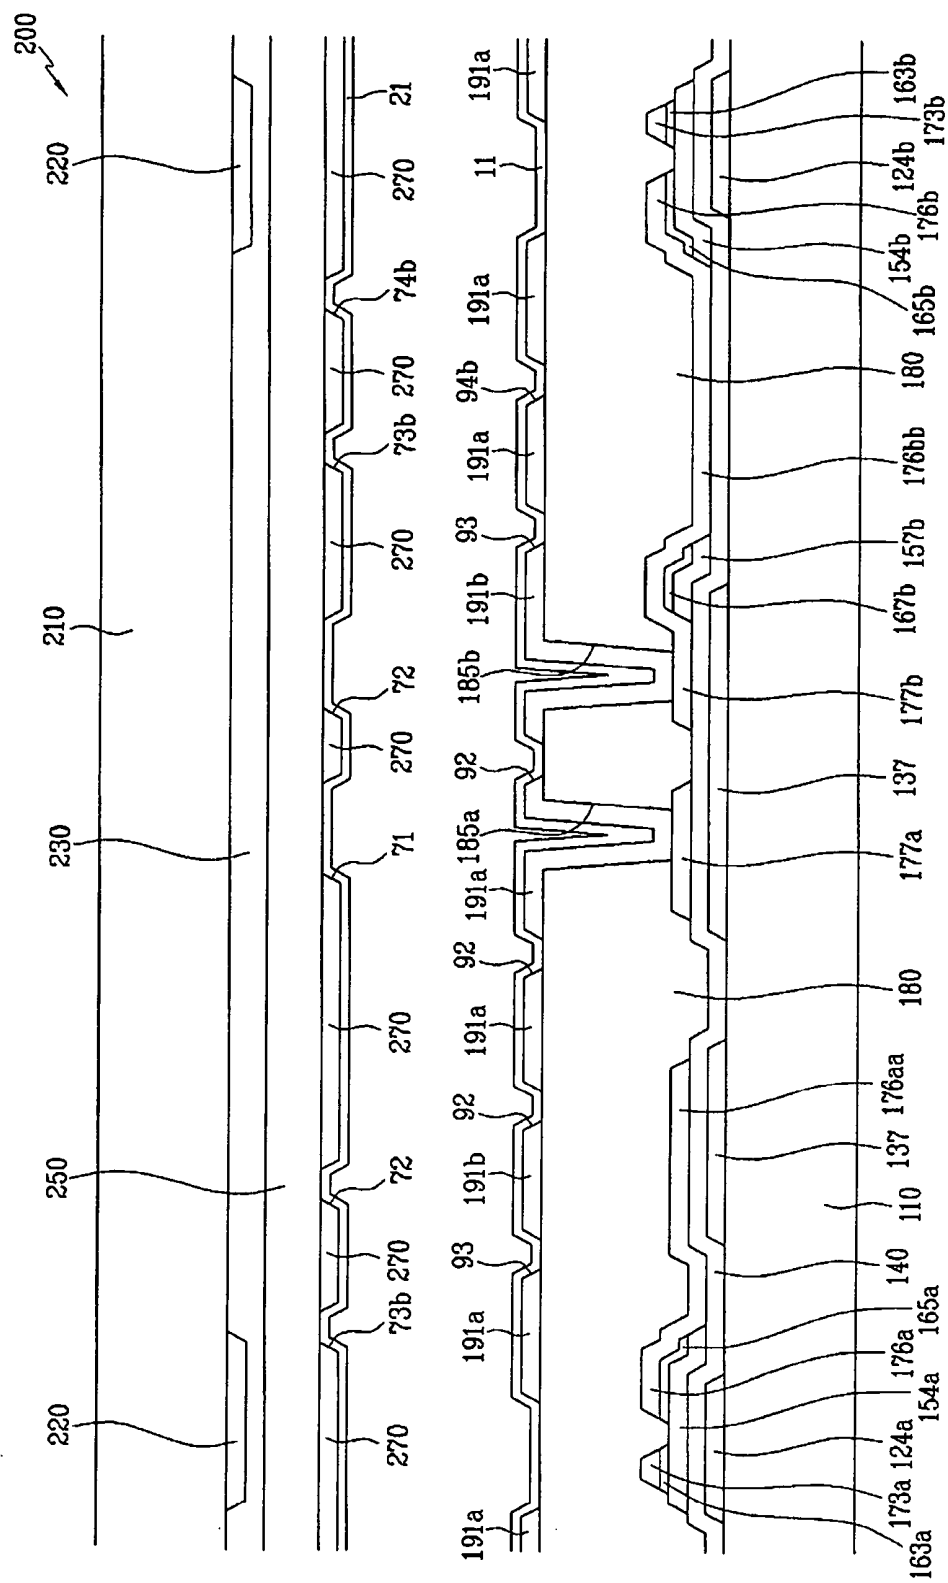


FIG. 30

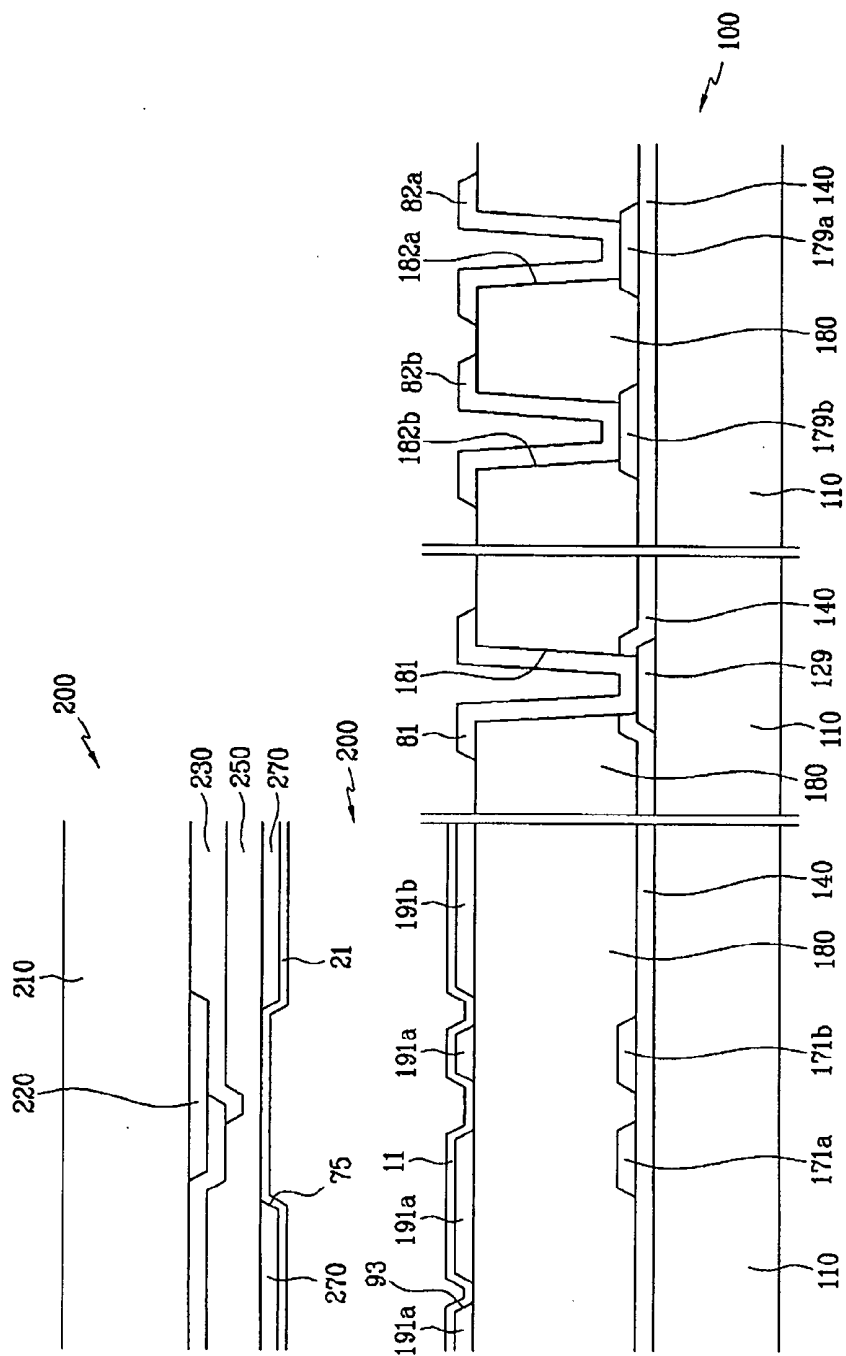

DISPLAY PANEL AND LIQUID CRYSTAL DISPLAY APPARATUS INCLUDING THE SAME

[0001] This application claims priority to Korean Patent Applications No. 2005-0028590, filed on Apr. 6, 2005 and No. 2005-75768, filed on Aug. 18, 2005, the disclosures of which are hereby incorporated by reference herein in their entireties.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display apparatus.

[0004] 2. Description of the Related Art

[0005] A liquid crystal display (LCD) is one of the more widely used flat panel display apparatuses. An LCD includes e.g., two panels having electric field generating electrodes such as pixel electrodes and a common electrode, a liquid crystal layer interposed between the two panels, and polarizers disposed on outer surfaces of the panels. The liquid crystal display apparatus displays an image by applying a voltage to the electric field generating electrodes to generate an electric field in the liquid crystal layer which in turn controls the alignment of liquid crystal molecules in the liquid crystal layer to control polarization of incident light.

[0006] An example of a type of a liquid crystal display apparatus is the vertically aligned mode liquid crystal display apparatus in which liquid crystal molecules are arranged such that major axes of the liquid crystal molecules are perpendicular to the panels in the state that no electric field is generated. The vertically aligned mode liquid crystal display apparatus has a high contrast ratio and it can readily provide a wide reference viewing angle.

[0007] To implement the wide viewing angle in the vertically aligned mode liquid crystal display apparatus, a method of forming cutout portions in electric field generating electrodes and a method for forming protrusions on the electric field generating electrodes has been proposed. Since the cutout portions and the protrusions can control the tilted directions of liquid crystal molecules, the tilted directions of the liquid crystal molecules can be distributed into various directions by varying the cutout portions and the protrusions, to thereby obtain a wide reference viewing angle.

[0008] Moreover, for the purposes of light efficiency, it is desirable that the tilted direction of the liquid crystal molecules have an angle of 45° with respect to the polarization direction of the polarizers. In addition with the vertically aligned mode liquid crystal display apparatus, the polarizers are attached so that the polarization directions of the polarizers are parallel or perpendicular to the gate lines or the data lines. Therefore, the cutout portions or the protrusions are disposed to extend in a direction with an angle of 45° with respect to the gate lines or the data lines.

[0009] However, in the situation where the pixel electrodes of the vertically aligned mode liquid display apparatus have the shape of a rectangle and are parallel to the gate lines and the data lines, the alignment of the liquid crystal molecules is disturbed due to an electric field generated between the adjacent pixel electrodes, so that a phenomenon known as texture may occur. Consequently, as a result of the

above mentioned texture, the transmittance of the liquid crystal display apparatus may be reduced.

[0010] In an attempt to reduce texture, a method of overlapping a portion of a cutout portion of the common electrode with a side of the pixel electrode has been proposed. However, even with above proposed method, the aperture ratio of the liquid crystal display apparatus may still be reduced.

[0011] Thus, there is a need for a display panel which is capable of increasing the aperture ratio and the transmittance of a liquid crystal display apparatus and for a liquid crystal display apparatus including the display panel.

SUMMARY OF THE INVENTION

[0012] According to an exemplary embodiment of the present invention, a display panel is provided. The display panel comprises a substrate and a pixel electrode. The pixel electrode is disposed on the substrate and has a pair of first primary edges facing each other and a pair of second primary edges connected to the first primary edges and which face each other. Moreover, the second primary edges include a plurality of protrusions of the pixel electrode having the shape of sawteeth.

[0013] According to another exemplary embodiment of the present invention, a display panel is provided. The display panel comprises a substrate, a plurality of gate lines disposed on the substrate, a plurality of data lines perpendicular to the gate lines, a plurality of thin film transistors connected to the gate lines and the data lines. The display panel further includes a plurality of pixel electrodes connected to the thin film transistors. Each of the pixel electrodes comprises: a pair of first primary edges parallel to the gate line and facing each other, and a pair of second primary edges connected to the first primary edges and which face each other and include protrusions having a shape of sawteeth.

[0014] In the above exemplary embodiments of the present invention, the pixel electrode may include a plurality of cutout portions which have a slanted angle with respect to the first primary edges.

[0015] In addition, the protrusion may include a first edge which has an angle of about 135° or more or about 45° or less with respect to the cutout portions.

[0016] In addition, the protrusion may further include a second edge which is parallel to the cutout portions.

[0017] In addition, the second edge may be located on an extension line of an edge of the cutout portion.

[0018] In addition, an envelope of the protrusions and the first primary edges may constitute a rectangle.

[0019] In addition, at least one of corners of the rectangle may be a chamfered slanted edge.

[0020] In addition, the chamfered slanted edge of the rectangle may have an angle of about 45° with respect to the first primary edges.

[0021] In addition, the protrusions may overlap the data lines.

[0022] In addition, the protrusions of the adjacent second primary edges of the adjacent pixel electrodes may be disposed to be engaged with each other.

[0023] In addition, the facing edges of the protrusions which are disposed to be engaged with each other may be parallel to each other.

[0024] According to another exemplary embodiment of the present invention, a liquid crystal display apparatus is provided. The liquid crystal display apparatus comprises: a plurality of pixel electrodes, a common electrode facing the pixel electrodes, and a liquid crystal layer interposed between the pixel electrodes and the common electrode. The liquid crystal display apparatus further comprises a first and a second partition member dividing each of the pixel electrodes into a plurality of sub areas, wherein each of the sub areas includes a pair of primary edges and a plurality of secondary edges connected thereto. In addition, the primary edges of the two sub areas included in the pixel electrodes are disposed to deviate from each other.

[0025] In the above exemplary embodiments of the present invention, the primary edges have a slanted angle with respect to the first and second partition members.

[0026] In addition, at least one of the secondary edges of each of the sub areas may have an angle of about 135° or more with respect to the primary edges.

[0027] In addition, the primary edges of each of the sub areas may include a first primary edge and a second primary edge which is shorter than the first primary edge, and the first primary edge may be constructed by combining an edge of the first or second partition members with a portion of a side of the pixel electrode.

[0028] In addition, the second primary edge of each of the sub areas may be constructed with an edge of the second partition member or with a corner of the pixel electrode.

[0029] In addition, the first partition member may be disposed in each of the pixel electrodes, and the second partition member may be disposed in the common electrode.

[0030] In addition, a portion of sides of the pixel electrode may constitute the secondary edge of each of the sub areas, and the second partition member may be disposed not to overlap a portion of the sides of the pixel electrode which constitute the secondary edge of each of the sub areas.

[0031] In addition, the first and second partition members may include cutout portions.

[0032] In addition, the common electrode may include connection cutout portions which face gaps between adjacent pixel electrodes. In addition, the connection cutout portions may connect adjacent second partition members.

[0033] In addition, the connection cutout portions may have an obtuse angle with respect to the second partition members. In addition, widths of the connection cutout portions may be larger than those of the gaps.

[0034] In addition, the first and second partition members may be parallel to each other.

[0035] In addition, the connection cutout portions may be parallel to the secondary edges of the sub areas.

[0036] In addition, the width of the connection cutout portions may be larger by about 8 μm than those of the gaps.

[0037] In addition, the liquid crystal display apparatus may further comprise data lines which overlap the secondary

edges of the sub areas. In addition, the connection cutout portions may face the data lines.

[0038] In addition, the liquid crystal display apparatus may further comprise a light blocking member which faces the data lines.

[0039] In addition, a width of the light blocking member may be equal to that of each of the data lines.

[0040] In addition, a portion of the secondary edges of the sub areas may be disposed not to overlap the data lines, and the light blocking member may further include an expansion portion which covers the portion of the secondary edges of the sub areas which is disposed not to overlap the data lines.

[0041] In addition, each of the pixel electrodes may include at least two sub pixel electrodes which are physically separated from each other by a portion of the second partition members.

[0042] In addition, voltages of at least the two sub pixel electrodes may be different from each other.

[0043] In addition, at least the two sub pixel electrodes may be capacitively coupled.

[0044] In addition, the sub pixel electrodes may be connected to thin film transistors.

[0045] In addition, the sub pixel electrodes of one pixel electrode may be connected to different data lines, and the sub pixel electrodes of one pixel electrode may be connected to the same gate line.

[0046] In addition, the sub pixel electrodes of one pixel electrode may be connected to different gate lines, and the sub pixel electrodes of one pixel electrode may be connected to the same data line.

[0047] According to another exemplary embodiment of the present invention, a liquid crystal display apparatus is provided. The liquid crystal display apparatus comprises a first and a second substrate facing each other, a plurality of pixel electrodes disposed on the first substrate and a common electrode disposed on the second substrate. The liquid crystal display apparatus further includes a liquid crystal layer interposed between the first and second substrates. The common electrode includes first cutout portions facing gaps between the adjacent pixel electrodes.

[0048] In addition, the common electrode may include second cutout portions facing the pixel electrodes. In addition, the first cutout portions may connect the adjacent second cutout portions.

[0049] In addition, the first cutout portions may have an obtuse angle with respect to the second cutout portions. In addition, widths of the first cutout portions may be larger than those of the gaps.

[0050] In addition, the widths of the first cutout portions may be larger by about 8 μm than those of the gaps.

[0051] In addition, the pixel electrode may include third cutout portion which are disposed with the first cutout portions. In addition, the first and third cutout portions may be parallel to each other.

[0052] In addition, a portion of a boundary line of the pixel electrode may be parallel to a boundary line of the first cutout portion.

[0053] In addition, the first substrate may comprise: gate and data lines which are insulated from the first substrate and interest each other, thin film transistors which are connected to the gate and data lines, and pixel electrodes which are connected to the thin film transistors.

[0054] In addition, the gate lines may have an angle of about 45° with respect to the first cutout portions. In addition, the boundary line of the pixel electrode may overlap a portion of the data line.

[0055] In addition, the first cutout portions may face the data lines. In addition, one end of the second cutout portion may be formed to open.

BRIEF DESCRIPTION OF THE DRAWINGS

[0056] The above and other features and advantages of the present invention will become more apparent by describing in detail exemplary embodiments thereof with reference to the attached drawings in which:

[0057] **FIG. 1** is a view showing a layout of a liquid crystal display apparatus according to an exemplary embodiment of the present invention;

[0058] **FIG. 2** is a view showing a layout of a thin film transistor panel for the liquid crystal display apparatus of **FIG. 1**;

[0059] **FIG. 3** is a view showing a layout of a common electrode panel for the liquid crystal display apparatus of **FIG. 1**;

[0060] **FIG. 4** is a cross sectional view showing the liquid crystal display apparatus taken along line IV-IV of **FIG. 1**;

[0061] **FIG. 5** is a view showing a layout of a common electrode and a pixel electrode of **FIG. 1**;

[0062] **FIG. 6** is an enlarged view showing a portion between adjacent pixel electrodes of **FIG. 1**;

[0063] **FIG. 7** is a view showing a layout of a liquid crystal display apparatus according to an exemplary embodiment of the present invention;

[0064] **FIG. 8** is a view showing a layout of a thin film transistor panel for the liquid crystal display apparatus of **FIG. 7**;

[0065] **FIG. 9** is a view showing a layout of a common electrode panel for the liquid crystal display apparatus of **FIG. 7**;

[0066] **FIG. 10** is a cross sectional view showing the liquid crystal display apparatus taken along line X-X of **FIG. 7**;

[0067] **FIG. 11** is a cross sectional view taken along line XI-XI of **FIG. 6**;

[0068] **FIG. 12** is a cross sectional view taken along line XII-XII of **FIG. 7**;

[0069] **FIG. 13** is a view showing a layout of a liquid crystal display apparatus according to an exemplary embodiment of the present invention;

[0070] **FIG. 14** is a cross sectional view showing the liquid crystal display apparatus taken along line XIV-XIV of **FIG. 13**;

[0071] **FIG. 15** is a cross sectional view showing a liquid crystal display apparatus according to an exemplary embodiment of the present invention, which is taken along line IV-IV of **FIG. 1**;

[0072] **FIG. 16** is a view showing a layout of a liquid crystal display apparatus according to an exemplary embodiment of the present invention;

[0073] **FIG. 17** is a view showing a layout of a thin film transistor panel for the liquid crystal display apparatus of **FIG. 16**;

[0074] **FIG. 18** is a view showing a layout of a common electrode panel for the liquid crystal display apparatus of **FIG. 16**;

[0075] **FIG. 19** is a cross sectional view showing the liquid crystal display apparatus taken along line XIX-XIX of **FIG. 16**;

[0076] **FIG. 20** is a cross sectional view showing the liquid crystal display apparatus taken along line XX-XX of **FIG. 16**;

[0077] **FIG. 21** is a view showing a layout of a liquid crystal display apparatus according to an exemplary embodiment of the present invention;

[0078] **FIG. 22** is a cross sectional view showing the liquid crystal display apparatus taken along line XXII-XXII of **FIG. 21**;

[0079] **FIG. 23** is a cross sectional view showing the liquid crystal display apparatus taken along line XXIII-XXIII of **FIG. 21**;

[0080] **FIG. 24** is a schematic equivalent circuit diagram of a pixel of the liquid crystal display apparatus shown in **FIG. 21**.

[0081] **FIG. 25** is a view showing a layout of a liquid crystal display apparatus according to an exemplary embodiment of the present invention.

[0082] **FIG. 26** is a cross sectional view showing the liquid crystal display apparatus taken along line XXVI-XXVI of **FIG. 25**.

[0083] **FIG. 27** is a cross sectional view showing the liquid crystal display apparatus taken along line XXVII-XXVII of **FIG. 25**;

[0084] **FIG. 28** is a view showing a layout of a liquid crystal display apparatus according to an exemplary embodiment of the present invention;

[0085] **FIG. 29** is a cross sectional view showing the liquid crystal display apparatus taken along line XXIX-XXIX of **FIG. 28**; and

[0086] **FIG. 30** is a cross sectional view showing the liquid crystal display apparatus taken along line XXI-XXX of **FIG. 28**.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

[0087] Hereinafter, exemplary embodiments of the present invention will be described in detail with reference to the attached drawings such that the present invention can be easily put into practice by those skilled in the art. However,

the present invention may be implemented in various aspects. The present invention is not limited to the exemplary embodiments described hereinafter.

[0088] Now, a liquid crystal display apparatus according to an exemplary embodiment of the present invention will be described in detail with reference to FIGS. 1 to 6.

[0089] **FIG. 1** is a view showing a layout of a liquid crystal display apparatus according to an exemplary embodiment of the present invention. **FIG. 2** is a view showing a layout of a thin film transistor panel for the liquid crystal display apparatus of **FIG. 1**. **FIG. 3** is a view showing a layout of a common electrode panel for the liquid crystal display apparatus of **FIG. 1**. **FIG. 4** is a cross sectional view showing the liquid crystal display apparatus taken along line IV-IV of **FIG. 1**. **FIG. 5** is a view showing a layout of a common electrode and a pixel electrode of **FIG. 1**. **FIG. 6** is an enlarged view showing a portion between adjacent pixel electrodes of **FIG. 1**.

[0090] The liquid crystal display apparatus includes a thin film transistor panel **100** and a common electrode panel **200** which face each other and a liquid crystal layer **300** interposed between the panels **100** and **200**.

[0091] Firstly, the thin film transistor panel **100** will be described in detail with reference to **FIGS. 1, 2, and 4**.

[0092] A plurality of gate lines **121** and a plurality of storage electrode lines **131** are disposed on an insulating substrate **110** made of a transparent glass or a plastic material.

[0093] The gate lines **121** transmitting gate signals mainly extend in the transverse direction. The gate lines **121** include a plurality of gate electrodes **124** which protrude upwardly and downwardly and end portions **129** which have wide areas for connection to other layers or external driver circuits. A gate driver circuit which generates the gate signals may be mounted on a flexible printed circuit film attached on the substrate **110**. Alternatively, the gate driver circuit may be directly mounted on the substrate **110**. Otherwise, the gate driver circuit may be integrated in the substrate **110**. In the case where the gate driver circuit is integrated in the substrate **110**, the gate lines **121** are extended to be directly connected to the gate driver circuit.

[0094] The storage electrode lines **131** which are applied with predetermined voltages include stem lines which extend substantially in parallel to the gate lines **121**, a plurality of storage electrode sets of first, second, third, and fourth storage electrodes **133a**, **133b**, **133c**, and **133d**, and a plurality of connection portions **133e**. Each of the storage electrode lines **131** is disposed between adjacent two gate lines **121**, and the stem line thereof is closer to the upper one of the two gate lines **121**.

[0095] The first and second storage electrodes **133a** and **133b** extend in the longitudinal direction to face each other. The first storage electrode **133a** includes a fixed end connected to the stem line and a free end opposite to the fixed end, and the free end includes a protrusion. The third and fourth storage electrodes **133c** and **133d** extend in slanted directions from substantially about the central portion of the first storage electrode **133a** to the upper and lower ends of the second storage electrode **133b**, respectively. The connection portions **133e** are connected between adjacent stor-

age electrode sets **133a-133d**. However, various shapes and arrangement may be used for the storage electrode lines **131**.

[0096] The gate lines **121** and the storage electrode lines **131** may be made of an aluminum-based metal such as for example, aluminum (Al) and an aluminum alloy, a silver-based metal such as silver (Ag) and a silver alloy, a copper-based metal such as copper (Cu) and a copper alloy, a molybdenum-based metal such as molybdenum (Mo) and a molybdenum alloy, chromium (Cr), tantalum (Ta) or titanium (Ti). However, the gate lines **121** and the storage electrode lines **131** may have a multi-layered structure including two conductive layers having different physical properties. One of the two conductive layers is made of a metal having a low resistivity, for example, an aluminum based metal, a silver based metal, and a copper based metal, to reduce signal delay or voltage drop of the gate lines **121** and the storage electrode lines **131**. The other conductive layers are made of a material having a good contactness to other materials, particularly, ITO (indium tin oxide) and IZO (indium zinc oxide) such as, for example, a molybdenum based metal, chromium, titanium, and tantalum. An example of a combination in accordance with the exemplary embodiments is a combination of a lower chromium layer and an upper aluminum layer and a combination of a lower aluminum layer and an upper molybdenum layer. However, the gate lines **121** and the storage electrode lines **131** may be made of various metals and conductive materials.

[0097] Side surfaces of the gate lines **121** and the storage electrode lines **131** are slanted with respect to a surface of the substrate **110**, and the slanted angle is in a range of about 30° to about 80°.

[0098] A gate insulating layer **140** made of a silicon nitride SiN_x or the like is formed on the gate lines **121** and the storage electrode lines **131**.

[0099] A plurality of semiconductor stripes **151** made of a hydrogenated amorphous silicon (abbreviated to a-Si) or polysilicon are formed on the gate insulating film **140**. The semiconductor stripes **151** mainly extend in the longitudinal direction and include a plurality of protrusions **154** which extend toward the gate electrodes **124**. In addition, widths of the semiconductor stripes **151** are enlarged at regions near the gate lines **121** and the storage electrode lines **131** to cover wide areas thereof.

[0100] A plurality of line-shaped and island-shaped ohmic contacts **161** and **165** are formed on semiconductor stripes **151**. The ohmic contacts **161** and **165** may be made of made of silicide or an n+ hydrogenated amorphous silicon which is heavily doped with n-type impurities such as phosphorus (P). The line-shaped ohmic contacts **161** include a plurality of the protrusions **163**. Each pair of the protrusion **163** and the island-shaped ohmic contact **165** is disposed on the protrusion **154** of the semiconductor stripe **151**.

[0101] Side surfaces of the semiconductor stripes **151** and the ohmic contacts **161** and **165** are also slanted with respect to the surface of the substrate **100**, and the slanted angle is in a range of about 30° to about 80°.

[0102] A plurality of data lines **171**, a plurality of drain electrodes **175**, and a plurality of isolated metal pieces **178** are formed on the ohmic contacts **161** and **165** and the gate insulating film **140**.

[0103] The data lines 171 transmitting data signals mainly extend in the longitudinal direction to intersect the gate lines 121 and the stem lines and the connection portions 133e of the storage electrode lines 131. The data lines 171 include a plurality of C-shaped source electrodes 173 which protrude toward the gate electrodes 124 and end portions 179 which have wide areas for connection to other layers or external driver circuits. A data driver circuit which generates the data signals may be mounted on a flexible printed circuit film attached on the substrate 110. Alternatively, the data driver circuit may be directly mounted on the substrate 110. Otherwise, the data driver circuit may be integrated in the substrate 110. In the case where the data driver circuit is integrated in the substrate 110, the data lines 171 are extended to be directly connected to the data driver circuit.

[0104] The drain electrode 175 is separated from the data line 171 and faces a source electrode 173 with the gate electrode 124 interposed therebetween. Each of the drain electrodes 175 has a wide end portion and a bar-shaped end portion. The bar-shaped end portion is surrounded by the source electrode 173.

[0105] One gate electrode 124, one source electrode, and one drain electrode 175 together with one protrusion 154 of one semiconductor stripe constitute one thin film transistor Q1. The channel of the thin film transistor is formed in the protrusion 154 between the source electrode 173 and the drain electrode 175.

[0106] The isolated metal piece 178 is disposed on the gate line 121 at a region near the first storage electrode 133a.

[0107] Also, the data lines 171 and the drain electrodes 175 may be made of, for example, molybdenum (Mo), a refractory metal such as chromium (Cr), tantalum (Ta), and titanium (Ti), or an alloy thereof. The data lines 171 and the drain electrodes 175 may have a multi-layered structure including a refractory metal layer and a low-resistivity conductive layer. An example of the multi-layered structure is a two-layered structure of a lower chromium or molybdenum (alloy) layer and an upper aluminum (alloy) layer and a three-layered structure of a lower molybdenum (alloy) layer/an intermediate aluminum (alloy) layer/an upper molybdenum (alloy) layer. However, instead of the aforementioned materials, the data lines 171, the drain electrodes 175, and the metal pieces 178 may also be made of various other metals or conductive materials.

[0108] The side surfaces of the data lines 171, the drain electrodes 175, and the metal pieces 178 are also slanted with respect to the surface of the substrate 110 at an angle ranging from about 30° to about 80°.

[0109] The ohmic contacts 161 and 165 are interposed only between the underlying semiconductor stripes 151 and the overlying data lines 171 and the drain electrodes 175 and reduce contact resistance therebetween. Although the widths of the semiconductor stripes 151 are smaller than those of the data lines 171 in most regions, the widths of the portions where the gate lines 121 and the storage electrode lines 121 intersect each other are enlarged as described above. Therefore, the profile of surfaces at the intersections is smoothed, so that the disconnection of the data lines 171 can be prevented. The semiconductor stripes 151 have exposed portions uncovered by the data lines 171 and the drain electrodes 175 such as portions disposed between the source electrodes 173 and the drain electrodes 175.

[0110] A protective layer (passivation layer) 180 is formed on the data line 171, the drain electrode 175, the metal pieces 178, and the exposed portions of the semiconductor stripes 151. The protective layer 180 is made of an inorganic insulating material or an organic insulating material, and a surface thereof may be planarized. Examples of the inorganic insulating material are silicon nitride and silicon oxide. The organic insulating material may be photosensitive, and a dielectric constant thereof is preferably about 4.0 or less. Alternatively, the protective layer 180 may have a double-layer structure of a lower inorganic layer and an upper organic layer to maintain desired insulating properties for the organic layer and protect the exposed portions of the semiconductor stripes 151.

[0111] A plurality of contact holes 182 and 185 which expose end portions of the data lines 171 and the drain electrodes 175, respectively, are formed on the protective layer 180. A plurality of contact holes 181 which expose end portions of the gate lines 121, a plurality of contact holes 183a which expose the protrusions of the free ends of the first storage electrodes 133a, and a plurality of contact holes 183b which expose portions of the storage electrode lines at regions near the fixed ends of the first storage electrodes 133a are formed on the protective layer 180 and the gate insulating layer 140.

[0112] A plurality of pixel electrodes 191, a plurality of overpasses 83, and a plurality of contact assistants 81 and 82 are formed on the protective layer 180. The components may be made of, for example, a transparent conductive material such as ITO and IZO or a reflective metal such as aluminum (Al), silver (Ag), chromium (Cr), and an alloy thereof.

[0113] The pixel electrode 191 is physically and electrically connected to the drain electrode 175 through the contact hole 185 and receives a data voltage applied by the drain electrode 175. The pixel electrode 191 applied with the data voltage together with a common electrode 270 which is disposed in the common electrode panel 200 and applied with a common voltage generates an electric field. The electric field determines alignment of liquid crystal molecules 31 in the liquid crystal layer 31 between the two electrodes 191 and 270.

[0114] According to the determined alignment of the liquid crystal molecules 31, polarization of the light passing through the liquid crystal layer 31 changes. The pixel electrode 191 and the common electrode 270 constitutes a capacitor (hereinafter, referred to as a liquid crystal capacitor) which sustains the applied voltage after the thin film transistor turns off.

[0115] The pixel electrodes 191 overlap the storage electrodes 133a to 133d and the storage electrode lines 131. The capacitors constructed by overlapping the pixel electrodes 191 and the drain electrodes electrically connected thereto with the storage electrode lines 131 are called storage capacitors. The storage capacitors increase the voltage storage capacity of the liquid crystal capacitors.

[0116] A central cutout portion 91, a lower cutout portion 92a, and an upper cutout portion 92b are formed on the pixel electrode 191. Therefore, the pixel electrode 191 is divided into a plurality of partitions by the cutout portions 91, 91a, and 91b. The cutout portions 91, 92a, and 92b have an inversion symmetry with respect to a virtual transverse central line bisecting the pixel electrode 191.

[0117] The lower and upper cutout portions **92a** and **92b** extend substantially in the slanted directions from the right side to the left side of the pixel electrode **191** and overlap the fourth and third storage electrodes **133d** and **133c**, respectively. The lower and upper cutout portions **92a** and **92b** are disposed in lower and upper half regions of the pixel electrode **191** with respect to a transverse central line thereof. The lower and upper cutout portions **92a** and **92b** extend in perpendicular to each other with slanted angles of about 45° with respect to the gate line **121**.

[0118] The central cutout portion **91** extends along the transverse central line of the pixel electrode **191** and has an inlet at the right side of the pixel electrode. The inlet of the central cutout portion **91** has a pair of upper and lower slanted edges which are substantially parallel to the lower and upper cutout portions **92a** and **92b**, respectively.

[0119] Therefore, the lower half region of the pixel electrode **191** is divided into two partitions by the lower cutout portion **92a**, and the upper half region of the pixel electrode **191** is divided into two partitions by the upper cutout portion **92b**.

[0120] Referring to FIG. 5, the pixel electrode **191** has a pair of first primary edges **193** and **194** facing each other and a pair of second primary edges **195** and **196** connected to the first primary edges **193** and **194**. The first primary edges **193** and **194** are substantially parallel to the gate line **121**, and the second primary edges **195** and **196** have inner and outer envelopes **951**, **961**, **952**, and **962**. The inner and outer envelopes **951**, **961**, **952**, and **962** of the second primary edges **195** and **196** are substantially perpendicular to the first primary edges **193** and **194**. Left corners of the pixel electrode **191** is constructed with chamfered slanted edges **193c** and **194c**, and the chamfered slanted edges **193c** and **194c** have a slanted angle of about 45° with respect to the gate line **121**.

[0121] The second primary edges **195** and **196** of the pixel electrode **191** have a plurality of sawteeth **910** and **920** which protrude from a plurality of longitudinal lines **915** and **916** on the inner envelopes **951** and **961** outwardly. The sawteeth **910** and **920** are symmetrical with respect to the transverse central line of the pixel electrode **191**.

[0122] Each of the sawteeth **910** (**920**) has a first slanted edge **911** (**921**), a second slanted edge **912** (**922**), and a top edge **913** (**923**) which is disposed on the outer envelop **952** (**962**) to connect the first and second slanted edges. The first slanted edge **911** (**921**) has an obtuse angle of about 135° or more with respect to the longitudinal line **915** (**925**), and the second edge **912** (**922**) has an angle of about 45° with respect to the longitudinal line **915** (**925**). The extension lines of the first and second slanted edges **911** (**921**) and **912** (**922**) intersect each other with an acute angle of about 45° or less. In addition, the second edges **912** and **922** are substantially parallel to the lower and upper cutout portions **92a** and **92b** and located on the extension lines of the cutout portions **92a** and **92b**, respectively. The first edges **911** and **921** have an angle of about 45° or less or about 135° or more with respect to the lower and upper cutout portions **92a** and **92b**.

[0123] The upper portions of the sawteeth **910** and **920**, that is, portions near the top edges **913** and **923** thereof overlap the data line **171**. The sawteeth **920** of the right edge

196 of the pixel electrode **191** which are located at the left of the data line **171** are engaged with the sawteeth **910** of the pixel electrode **191** which are located at the left of the data line **171**. In addition, the facing edges of the engaged sawteeth **910** and **920** are parallel to each other.

[0124] The number of the sawteeth **910** and **920** are in close relation to the number of the partitions of the pixel electrode **191** divided by the cutout portions **91**, **92a**, and **92b** or the number of the cutout portions **91**, **92a**, and **92b**. The number of the partitions of the pixel electrode **191** and the number of the sawteeth **910** and **920** may vary according to design factors such as a size of the pixel electrode **191**, the ratio of lengths of the transverse and longitudinal sides of the pixel electrode **191**, and the types or characteristics of the liquid crystal layer **3**.

[0125] The overpass **83** is disposed across the gate line **121** and connected to the exposed portion of the storage electrode line **131** and the exposed end portion of the free end of the first storage electrode **133a** through the contact holes **183b** and **18b** which are located at the opposite positions with respect to the gate line **121**, respectively. The storage electrodes **133a** and **133b** and the storage electrode line **131** together with the overpasses **83** may be used to repair defects of the gate lines **121**, the data lines **171**, and the thin film transistors.

[0126] The contact assistants **81** and **82** are connected to the end portion **129** of the gate line **121** and the end portion **179** of the data line **171** through the contact holes **181** and **182**, respectively. The contact assistants **81** and **82** compensate for the adhesiveness of the end portions **129** of the gate line **121** and the end portions **179** of the data lines **171** to external apparatuses and also protect these portions.

[0127] Now, the common electrode panel **200** will be described with respect to FIGS. 1, 3, and 4.

[0128] A light blocking member **220** is formed on the insulating substrate **210** made of a transparent glass or a plastic material. The light blocking member **220** is called a black matrix and prevents light leakage between the pixel electrodes **191**. The light-blocking member **220** includes a plurality of opening portions **225** which face the pixel electrodes **191** and have a shape of a substantial rectangle. A width **W** of portions **221** of the light blocking member **220** corresponding to the data lines **171** is substantially the same as that of the data lines **171**. However, the widths may be defined by taking into consideration alignment error of the panels **100** and **200**. The light blocking member **220** includes enlarged portions **222** which block spaces between the engaged sawteeth **910** and **920** which protrude outwardly from the data lines **171**. The light blocking member **220** may include portions corresponding to the thin film transistors.

[0129] A plurality of color filters **230** are formed on the substrate **210**. Most portions of the color filters **230** are disposed in regions surrounded by the light-blocking member **220**. Moreover, the color filters **230** extend along rows of the pixel electrodes **191** in the longitudinal direction. Each of the color filters **230** can display one of primary colors such as red, green, and blue.

[0130] A cover film **250** is formed on the color filters **230** and the light-blocking member **220**. The cover film **250** may be made of an (organic) insulating material. The cover film

250 prevents the color filters **230** from being exposed and provides a planarized surface. The cover film **250** may be omitted.

[0131] A common electrode **270** is formed on the cover film **250**. The common electrode **270** is made of a transparent conductive material such as ITO and IZO. A plurality of cutout portion sets of cutout portions **71**, **72a**, and **72b** are formed on the common electrode **270**.

[0132] One cutout portion set **71-72b** faces one pixel electrode **191** and includes a central cutout portion **71**, a lower cutout portion **72a**, and an upper cutout portion **72b**. The cutout portions **71**, **72a**, and **72b** are disposed between the adjacent cutout portions **91**, **92a**, and **92b** of the pixel electrode **191** or between the cutout portions **92a** and **92b** and the chamfered edge of the pixel electrode **191**.

[0133] In addition, each of the cutout portions **71**, **72a**, and **72b** extends substantially in parallel to the lower or upper cutout portion **92a** or **92b** of the pixel electrode **191** and include at least one slanted portion. Each of the slanted portions includes at least one recessed notch **7**. The cutout portions **71**, **72a**, and **72b** have an inversion type of symmetry with respect to the transverse central line of the pixel electrode **191**.

[0134] Each of the lower and upper cutout portions **72a** and **72b** includes a slanted portion and a transverse portion. The slanted portion extends substantially from the upper or lower side to the left side of the pixel electrode **191** to overlap the longitudinal side of the pixel electrode **191**. A long side facing the slanted portion intersects the first and second slanted edges **911**, **912**, **921**, and **922** of the protrusions of the pixel electrode **191** or extension lines thereof or is located on the extension lines. The transverse portion extends from the end of the slanted portion along the transverse side of the pixel electrode **191** with an obtuse angle with respect to the slanted portion and overlaps the transverse side.

[0135] The central cutout portion **71** includes a central transverse portion and a pair of slanted portions. The central transverse portion extends substantially from the left side of the pixel electrode **191** along the transverse central line of the pixel electrode **191** in the right direction. A pair of the slanted portions extend substantially in parallel to the lower and upper cutout portions **72a** and **72b** from the end of the central transverse portion to the right side of the pixel electrode **191** with an obtuse angle with respect to the central transverse portion, respectively.

[0136] The number of the cutout portions **71**, **72a**, and **72b** may vary according to the design factors, and the light-blocking member **220** overlaps the cutout portions **71**, **72a**, and **72b** to prevent the light leakage in the vicinity of the cutout portions **71**, **72a**, and **72b**. Spacers **320** made of an insulating material are disposed on the common electrode panel **200** to maintain a constant interval between the panels **100** and **200**.

[0137] Alignment films **11** and **21** are coated on inner surfaces of the panels **100** and **200**, respectively. The alignment films **11** and **21** may be a vertically-aligned film. Polarizers **12** and **22** are disposed on outer surfaces of the panels **100** and **200**, respectively. The transmission axes of the polarizers **12** and **22** are perpendicular to each other and, have an angle, for example of about 45° with respect to the

slanted cutout portions **92a** and **92b** and the slanted portions of the cutout portions **71**, **72a**, and **72b**. In the case of a reflective liquid crystal display apparatus, one of the two polarizers **12** and **22** may be omitted.

[0138] The liquid crystal display apparatus according to the present exemplary embodiment may further include a phase retardation film for compensating for the retardation of the liquid crystal layer **3**. In addition, the liquid crystal display apparatus may include a backlight unit for supplying light to the polarizers **12** and **22**, the phase retardation film, the panels **100** and **200**, and the liquid crystal layer **3**.

[0139] The liquid crystal layer **3** has a negative anisotropic permittivity, and the liquid crystal molecules **31** of the liquid crystal layer **3** are aligned so that the major axes thereof are perpendicular to the surfaces of the two panels **100** and **200** when no electric field is applied to the liquid crystal molecules. Consequently, incident light cannot pass through the perpendicular polarizers **12** and **22** so as to be blocked.

[0140] When the common voltage and the data voltage are applied to the common electrode **270** and the pixel electrode **191**, respectively, a primary electric field is generated in a direction substantially perpendicular to the surfaces of the panels **100** and **200**. Hereinafter, the pixel electrode **191** and the common electrodes **270** may be collectively referred to as electric field generating electrodes. In response to the electric field, the liquid crystal molecules **31** have a tendency to change the major axis direction to be perpendicular to the direction of the electric field.

[0141] Referring to FIGS. 1 and 5, one cutout portion set **71-72b**, **91-92b** divides the pixel electrode **191** into a plurality of sub areas. Each of the sub areas has two primary edges which are slanted with respect to the first primary edges **193** and **194** of the pixel electrode **191** and secondary edges which are some portions of the edges **193** to **196** of the pixel electrode **191**. One of the primary edges of each sub area is constructed by combining one edge of the cutout portions **91**, **92a**, and **92b** of the pixel electrode **191** with the secondary edges **912** and **922** of the sawteeth **910** and **920** or constructed with the chamfered slanted edges **193c** and **194c**. The other of the primary edges is constructed with a single edge of the slanted portion of the cutout portions **71**, **72a**, and **72b** of the common electrode **270** or constructed by combining the slanted portions of the cutout portions **71**, **72a**, and **72b** with the slanted edges **912** and **922** of the sawteeth **910** and **920**. Therefore, the lengths of the primary edges of the sub areas are different from each other, and the adjacent primary edges of the adjacent sub areas are disposed to deviate from each other. One of the secondary edges of the sub areas is the first slanted edge **911** (**921**) of each of the sawteeth **910** (**920**) of the pixel electrode **191** and has an angle of about 135° or more with respect to the primary edges. The primary edges have an angle of about 45° with respect to the polarization axes of the polarizers **12** and **22** to maximize light efficiency.

[0142] The primary edges are longer than the secondary edges, and at least one of the secondary edges has an angle of about 135° or more with respect to the primary edges. Therefore, in the primary electric field on the sub areas, the horizontal component thereof perpendicular to the primary edges is much larger than the horizontal component thereof parallel to the primary edges. As a result, most of the liquid crystal molecules **31** on the sub areas are tilted in the directions perpendicular to the primary edges.

[0143] Since most of the liquid crystal molecules **31** on the sub areas are tilted in the directions perpendicular to the primary edges, the tilted directions may roughly include four directions. Moreover, since the liquid crystal molecules **31** can be adjusted to have various tilted angles, it is possible to increase the reference viewing angle of the liquid crystal display apparatus.

[0144] As shown in FIG. 6, secondary electric fields (lateral fields) E1 and E2 are additionally generated from the difference between voltages of the pixel electrodes **191**. Directions of the secondary electric fields E1 and E2 are mainly perpendicular to one of the secondary edges of the sub areas, that is, the first slanted edge **911** (**921**) of the sawteeth **910** (**920**). Therefore, the directions of the secondary electric fields E1 and E2 have an angle of about 5° or less with respect to the direction of the horizontal component of the primary electric field. As a result, the secondary electric fields E1 and E2 between the pixel electrodes **191** have a tendency to fix the tilted directions of the liquid crystal molecules **31**.

[0145] By providing the sawteeth **910** and **920** having the slanted edges **911** and **922** having an angle of about 135° or more with respect to the cutout portions **91**, **92a**, **92b**, **71**, **72a**, and **72b** to the transverse sides of the pixel electrode **191**, the direction of the horizontal component of the primary electric field and the secondary electric field in the vicinities of the longitudinal sides **195** and **196** of the pixel electrode **191** are allowed to be substantially equal to the direction of the horizontal component of the primary electric field in the vicinities of the sub areas. Also, by shortening the distance between the pixel electrodes **191**, the strength of the secondary electric field is allowed to increase. As a result, the tilted direction of the liquid crystal molecules **31** located in the vicinities of the sawteeth **910** and **920** of the pixel electrode **191** are allowed to be substantially equal to the tilted direction of the liquid crystal molecules **31** located at the centers of the sub areas, so that the vicinities of the sawteeth **910** and **920** can be used as an effective display region.

[0146] The addition of the sawteeth **910** and **920**, in the exemplary embodiments of the present invention provides increased transmittance for the liquid crystal display apparatus. In addition, since with the exemplary embodiments of the present invention it is not necessary to provide the portions overlapping the longitudinal sides of the pixel electrode **191** to the cutout portions **71**, **72a**, and **72b** of the common electrode **270**, the aperture ratio of the liquid crystal display apparatus can thereby also be increased.

[0147] Further, with the exemplary embodiment of the present invention, the third and fourth storage electrodes **133c** and **133d** extending in the slanted directions serve as control electrodes for controlling the liquid crystal molecules located at the aforementioned portions, so that texture which may occur at the central portions of the slanted cutout portions **92a** and **92b** can be reduced.

[0148] The widths of the cutout portions **71**, **72a**, **72b**, **91**, **92a**, and **92b** may be in a range of, for example, from about 9 μm to about 12 μm.

[0149] The notches of the cutout portions **71**, **72a**, and **72b** of the common electrode **270** control the tilted direction of the liquid crystal molecules **31** located above the cutout

portions **71**, **72a**, and **72b**. Such notches **7** may be formed in the cutout portions **91**, **92a**, and **92b** of the pixel electrode **191**.

[0150] The shapes and arrangements of the cutout portions **71**, **72a**, **72b**, **91**, **92a**, and **92b** and the notches thereof may be modified in various manners.

[0151] At least one of the cutout portions **71**, **72a**, **72b**, **91**, **92a**, and **92b** may be replaced with a protrusion or a depression. The protrusions may be made of an organic or inorganic material and disposed above or under the electric field generating electrodes **191** and **270**.

[0152] Now, a liquid crystal display apparatus according to another exemplary embodiment of the present invention will be described in detail with reference to FIGS. 7 to 10.

[0153] FIG. 7 is a view showing a layout of a liquid crystal display apparatus according to another exemplary embodiment of the present invention. FIG. 8 is a view showing a layout of a thin film transistor panel for the liquid crystal display apparatus of FIG. 7. FIG. 9 is a view showing a layout of a common electrode panel for the liquid crystal display apparatus of FIG. 7. FIG. 10 is a cross sectional view showing the liquid crystal display apparatus taken along line X-X of FIG. 7.

[0154] Referring to FIGS. 7 to 10, the liquid crystal display apparatus includes a thin film transistor panel **100** and a common electrode panel **200** which face each other and a liquid crystal layer **300** interposed between the panels **100** and **200**.

[0155] Firstly, the thin film transistor panel **100** will be described in detail with reference to FIGS. 7, 8, and 10.

[0156] A plurality of gate lines **121** and a plurality of storage electrode lines **131** are disposed on an insulating substrate **110** made of a transparent glass or a plastic material.

[0157] The gate lines **121** transmitting gate signals mainly extend in the transverse direction. The gate lines **121** include a plurality of gate electrodes **124** which protrude upwardly and end portions **129** which have wide areas for connection to other layers or external driver circuits. The storage electrode lines **131** which are applied with predetermined voltages extend substantially parallel to the gate lines **121**. Each of the storage electrode lines **131** is disposed between adjacent two gate lines **121** and separated by substantially the same distance from the two gate lines **121**. The storage electrode lines **131** include storage electrodes **137** which are enlarged upwardly and downwardly. However, various shapes and arrangement may be used for the storage electrode lines **131**.

[0158] Side surfaces of the gate lines **121** and the storage electrode lines **131** are slanted with respect to a surface of the substrate **110**, at an angle in the range of about 30° to about 80°.

[0159] A gate insulating layer **140** made of a silicon nitride SiN_x or the like is formed on the gate lines **121** and the storage electrode lines **131**.

[0160] A plurality of island-shaped semiconductor members **154** made of a hydrogenated amorphous silicon or polysilicon are formed on the gate insulating film **140**. The semiconductor members **154** are disposed on the gate elec-

trodes 124 and include expansion portions covering boundaries of the gate lines 121. A plurality of island-shaped ohmic contacts 163 and 165 are formed on semiconductor members 154. The ohmic contacts 163 and 165 may be made of made of silicide or an n+ hydrogenated amorphous silicon which is heavily doped with n-type impurities such as phosphorus (P). A pair of the ohmic contacts 163 and 165 are disposed on the semiconductor member 154.

[0161] Side surfaces of the semiconductor members 154 and the ohmic contacts 163 and 165 are also slanted with respect to the surface of the substrate 100, and the slanted angle is in a range of about 30° to about 80°.

[0162] A plurality of data lines 171 and a plurality of drain electrodes 175 are formed on the ohmic contacts 163 and 165 and the gate insulating film 140.

[0163] The data lines 171 transmitting data signals mainly extend in the longitudinal direction to intersect the gate lines 121 and the storage electrode lines 131. The data lines 171 include a plurality of source electrodes 173 which protrude toward the gate electrodes 124 and end portions 179 which have wide areas for connection to other layers or external driver circuits. The drain electrode 175 is separated from the data line 171 and faces a source electrode 173 with respect to the gate electrode 124 interposed therebetween. Each of the drain electrodes 175 has a wide end portion and a bar-shaped end portion. The bar-shaped end portion is partially surrounded by the U-shaped source electrode 173.

[0164] For example, side surfaces of the data lines 171 and the drain electrodes 175 may also be slanted with respect to the surface of the substrate 110 at an angle ranging from about 30° to about 80°.

[0165] The ohmic contacts 163 and 165 are interposed only between the underlying semiconductor members 154 and the overlying data lines 171 and the drain electrodes 175 and reduce contact resistance therebetween.

[0166] A protective layer (passivation layer) 180 is formed on the data line 171, the drain electrode 175, and the exposed portions of the semiconductor members 154. The protective layer 180 is made of an inorganic insulating material or an organic insulating material, and a surface thereof may be planarized.

[0167] A plurality of contact holes 182 and 185 which expose end portions of the data lines 171 and the drain electrodes 175, respectively, are formed on the protective layer 180. A plurality of contact holes 181 which expose end portions 129 of the gate lines 121 are formed on the protective layer 180 and the gate insulating layer 140.

[0168] A plurality of pixel electrodes 191 and a plurality of contact assistants 81 and 82 are formed on the protective layer 180. The components may be made of a transparent conductive material such as, for example, ITO and IZO or a reflective metal such as, for example, aluminum (Al), silver (Ag), chromium (Cr), and an alloy thereof.

[0169] The pixel electrode 191 is physically and electrically connected to the drain electrode 175 through the contact hole 185 and receives a data voltage applied by the drain electrode 175. The pixel electrodes 191 overlap the storage electrodes 137 and the storage electrode lines 131.

[0170] The pixel electrode 191 has a pair of first primary edges 193 and 194 facing each other and second primary

edges which are connected to the first primary edges 193 and 194 and include a plurality of sawteeth 90 and lower edges 90c connecting the sawteeth 90. Each of the sawteeth 90 includes first and second slanted edges 90a and 90d which are slanted with respect to the first primary edges 193 and 194 and an upper edge 90b. The first primary edges 193 and 194 are parallel to the gate lines 121. The first primary edges 193 and 194 and the second primary edges constitute an approximate rectangle. The pixel electrode 191 has the four chamfered corners which has an angle of about 45° with respect to the gate lines 121.

[0171] The first slanted edge 90a partially overlaps the data line 171. The first slanted edges 90a of the adjacent two pixel electrodes 191 are disposed to face each other in parallel to each other.

[0172] First and second central cutout portions 91 and 92, lower slanted cutout portions 93a, 94a, and 95a, and upper slanted cutout portions 93b, 94b, and 95b are formed on the pixel electrode 191. Therefore, the pixel electrode 191 is divided into a plurality of sub areas by the cutout portions 91 to 95b. The cutout portions 91 to 95b have an inversion symmetry with respect to the storage electrode line 131. The lower slanted cutout portions 93a, 94a, and 95a and the upper slanted cutout portions 93b, 94b, and 95b extend substantially in the slanted directions from the right side to the left, upper, or lower side of the pixel electrode 191. The lower slanted cutout portions 93a, 94a, and 95a and the upper slanted cutout portions 93b, 94b, and 95b are disposed in lower and upper half regions of the pixel electrode 191 with respect to the storage electrode line 131. The lower slanted cutout portions 93a, 94a, and 95a and the upper slanted cutout portions 93b, 94b, and 95b extend in perpendicular to each other with slanted angles of about 45° with respect to the gate line 121. Each of the lower slanted cutout portions 93a, 94a, and 95a and the upper slanted cutout portions 93b, 94b, and 95b has an inlet at the right or left side of the pixel electrode 191. The inlets may be connected to the concave portions 90c.

[0173] The first slanted edges 90a of the sawteeth 90 of the second primary edges have an obtuse angle with respect to the slanted cutout portions 93a to 95a and 93b to 95b, and the second slanted edges 90d thereof are substantially parallel to the slanted cutout portions 93a to 95a and 93b to 95b.

[0174] The first central cutout portion 91 extends along the storage electrode line 131 and has an inlet toward the left side of the pixel electrode 191. The second central cutout portion 92 has a shape of polygon of which upper and lower corners protrude toward the left sides of the pixel electrode 191.

[0175] As a result, the lower half region of the pixel electrode 191 is divided into four partitions by the lower slanted cutout portions 93a, 94a, and 95a, and the upper half region thereof is also divided into four partitions by the upper slanted cutout portions 93b, 94b, and 95b.

[0176] The number of the partitions and the number of the cutout portions may vary according to design factors such as a size of the pixel electrode 191, a ratio of lengths of the transverse and longitudinal sides of the pixel electrode 191, and types or characteristics of the liquid crystal layer 3.

[0177] The contact assistants **81** and **82** are connected to the end portion **129** of the gate line **121** and the end portion **179** of the data line **171** through the contact holes **181** and **182**, respectively.

[0178] Now, the common electrode panel **200** will be described with respect to **FIGS. 7, 9, and 10**.

[0179] A light blocking member **220** is formed on the insulating substrate **210** made of a transparent glass or a plastic material. The light blocking member **220** include line-shaped portions **221** corresponding to the data lines **171**, enlarged portions **222** formed by enlarging some portions of the light blocking member **220**, and plane-shaped portions **223** corresponding to the thin film transistors. The light blocking member **220** prevents light leakage between the pixel electrodes **191** and defining opening regions facing the pixel electrodes. However, the light blocking member **220** may further include a plurality of opening portions facing the pixel electrodes **191** and having substantially the same shape as the pixel electrodes **191**.

[0180] A plurality of color filters **230** are formed on the substrate **210**. Most portions of the color filters **230** are disposed in regions surrounded by the light-blocking member **220**. In addition, the color filters **230** extend along rows of the pixel electrodes **191** in the longitudinal direction. Each of the color filters **230** can display one of primary colors such as red, green, and blue.

[0181] A cover film **250** is formed on the color filters **230** and the light-blocking member **220**. The cover film **250** may be made of an (organic) insulating material. The cover film **250** prevents the color filters **230** from being exposed and provides a planarized surface. The cover film **250** may be omitted.

[0182] A common electrode **270** is formed on the cover film **250**. The common electrode **270** is made of a transparent conductive material such as ITO and IZO.

[0183] A plurality of cutout portions **71, 72a, 72b, 73a, 73b, 74a, 74b, and 75** are formed on the common electrode **270**.

[0184] One cutout portion set **71-75** faces one pixel electrode **191** and includes a central cutout portion **71**, first to third lower slanted cutout portions **72a, 73a, and 74a**, first to third upper slanted cutout portions **72b, 73b, and 74b**, and a connection portions **75**. The cutout portions **71, 72a, 72b, 73a, 73b, 74a, and 74b** are disposed between the adjacent cutout portions **91, 92, 93a, 93b, 94a, 94b, 95a, and 95b** of the pixel electrode **191** or between the cutout portions **91, 92, 93a, 93b, 94a, 94b, 95a, and 95** and the chamfered edge of the pixel electrode **191**. In addition, each of the cutout portions **71, 72a, 72b, 73a, 73b, 74a, and 74b** extends substantially in parallel to the lower cutout portions **93a, 94a, and 95a** or upper cutout portions **93b, 94b, and 95b** of the pixel electrode **191** and include at least one slanted portion.

[0185] The first lower and upper slanted cutout portions **72a** and **72b** extend substantially from the right side to the left side of the pixel electrode **191**. The second lower and upper slanted cutout portions **73a** and **73b** extend substantially from the right side to the upper and lower left corners of the pixel electrode **191**, respectively. The third lower and upper slanted cutout portions **74a** and **74b** extend substan-

tially from the right side to the lower and upper sides of the pixel electrode **191**, respectively. The third lower and upper slanted cutout portions **74a** and **74b** include terminated transverse portions which extend from the ends of the third lower and upper slanted cutout portions **74a** and **74b** to overlap the lower and upper sides of the pixel electrode **191**. The terminated transverse portions have an obtuse angle with respect to the slanted cutout portions **74a** and **74b**.

[0186] The central cutout portion **71** includes a central transverse portion and a pair of slanted portions. The central transverse portion extends substantially from the right side of the pixel electrode **191** along the storage electrode line **131** in the left direction. A pair of the slanted portions extend substantially in parallel to the lower and upper cutout portions **72a, 72b, 73a, 73b, 74a, and 74b** from the end of the central transverse portion to the left side of the pixel electrode **191**.

[0187] One end of the one slanted portion of the central cutout portion **71** and one end of the second lower cutout portion **73a** of the adjacent pixel electrode are connected with one of the connection portions **75**. Additionally, one end of the other slanted portion of the central cutout portion **71** and one end of the second upper cutout portion **73b** of the adjacent pixel electrode are connected with one of the connection portions **75**. Also, one end of the first lower slanted cutout portion **72a** and one end of the third lower slanted cutout portion **74a** of the adjacent pixel electrode are connected with one of the connection portions **75**. Moreover, one end of the first upper slanted cutout portion **72b** and one end of the third upper slanted cutout portion **74b** of the adjacent pixel electrode are connected with one of the connection portions **75**. The connection portions **75** are parallel to the first slanted edges **90a** of the pixel electrode **191** and located at portions corresponding to the data line **171**. A width of the connection portions **75** is larger by about $8\ \mu\text{m}$ than an interval between the adjacent pixels **191**. The enlarged portions **222** of the light blocking member **220** may have a width larger than the other portions corresponding to the connection portions **75**.

[0188] Thus, by providing the sawteeth to the side of the pixel electrode **191** adjacent to the data line **171**, as described above in the exemplary embodiment shown in **FIGS. 1 to 4**, the secondary electric field generated between the adjacent pixel electrodes **191** can control the alignment of the liquid crystal molecules **31** in the sub areas. In addition, by providing the connection portions **75** at the positions corresponding to the regions where the first slanted edges **90a** of the adjacent two pixel electrodes **191** face each other, the alignment of the liquid crystal molecules **31** in the sub areas can be controlled as well.

[0189] Such effects will be described with reference to **FIGS. 11 and 12**.

[0190] **FIG. 11** is a cross sectional view taken along line XI-XI of **FIG. 6**. **FIG. 12** is a cross sectional view taken along line XII-XII of **FIG. 7**.

[0191] Referring to **FIG. 11**, the electric field generated between the pixel electrodes **191** and the common electrode **270** includes the secondary electric field having a field direction for interfering with the uniform alignment of the liquid crystal molecule in the sub areas at the boundaries of the adjacent pixel electrodes **191**. Therefore, in the sub

areas, the liquid crystal molecules collide with each other, so that the alignment of the liquid crystal molecules may be disturbed.

[0192] However, according to the exemplary embodiment of the present invention, since the connection portions 75 are provided at the positions corresponding to the regions where the first slanted edges 90a of the adjacent two pixel electrodes 191 face each other, the direction of the electric field generated between the common electrode 280 and the pixel electrodes 191 changes due to the connection portions of the common electrode 270 as shown in FIG. 12. As a result, the secondary electric field is generated in such a direction that the uniform alignment of the liquid crystal molecules 31 in the sub areas can be controlled. Accordingly, unlike FIG. 11, the liquid crystal molecules cannot collide with each other, so that texture can be reduced.

[0193] Furthermore, according to the exemplary embodiment of the present invention, a plurality of convex notches 7 which are periodically disposed with a predetermined interval may be provided in the cutout portions 71 to 74b.

[0194] The number and directions of the cutout portion 71 to 75 may vary according to design factors.

[0195] Alignment films 11 and 21 are coated on inner surfaces of the panels 100 and 200, respectively. The alignment films 11 and 21 may be a vertically-aligned film. Polarizers are disposed on outer surfaces of the panels 100 and 200, respectively. The transmission axes of the polarizers are perpendicular to each other, and one of the transmission axes is preferably parallel to the gate lines 121. In the case of a reflective liquid crystal display apparatus, one of the two polarizers may be omitted.

[0196] The liquid crystal display apparatus may include a backlight unit for supplying light to the polarizers, the panels 100 and 200, and the liquid crystal layer 3.

[0197] The liquid crystal layer 3 has a negative anisotropic permittivity, and the liquid crystal molecules 31 of the liquid crystal layer 3 are aligned so that major axes thereof are perpendicular to the surfaces of the two panels 100 and 200 when no electric field is applied to the liquid crystal molecules. Therefore, incident light cannot pass through the perpendicular polarizers so as to be blocked.

[0198] The above-described exemplary embodiments may be applied to the later-described exemplary embodiments.

[0199] Now, a liquid crystal display apparatus according to another exemplary embodiment of the present invention will be described in detail with reference to FIGS. 13 and 14.

[0200] FIG. 13 is a view showing a layout of a liquid crystal display apparatus according to another exemplary embodiment of the present invention. FIG. 14 is a cross sectional view showing the liquid crystal display apparatus taken along line XIV-XIV of FIG. 13.

[0201] As shown in FIGS. 13 and 14, the liquid crystal display apparatus includes a thin film transistor panel 100 and a common electrode panel 200 which face each other, a liquid crystal layer 300 interposed between the panels 100 and 200, and a pair of polarizers 12 and 22 disposed on outer surfaces of the panels 100 and 200.

[0202] The layered structures of the panels 100 and 200 according to the present exemplary embodiment are substantially the same as the layered structures of FIGS. 1 to 4.

[0203] In the thin film transistor panel 100, a plurality of gate lines 121 and a plurality of storage electrode lines 131 are disposed on a substrate 110. The gate lines 121 include a plurality of gate electrodes 124 and end portions 129. The storage electrode lines 131 include a plurality of storage electrodes 133a to 133d and a plurality of connection portions 133e. A gate insulating layer 140, a plurality of semiconductor stripes 151 including protrusions 154, a plurality of line-shaped ohmic contacts 161 including protrusions 163, and a plurality of island-shaped ohmic contacts 165 are sequentially formed on the gate lines 121 and the storage electrode lines 131.

[0204] A plurality of data lines 171 including source electrodes 173 and end portions 179, a plurality of drain electrodes 175, and a plurality of isolated metal pieces 178 are formed on the ohmic contacts 161 and 165, and a protective layer 180 is formed thereon. A plurality of contact holes 181, 182, 183a, 183b, and 185 are formed on the protective layer 180 and the gate insulating layer 140. A plurality of pixel electrodes 191 including cutout portions 91 to 92b, a plurality of overpasses 83, and a plurality of contact assistants 81 and 82 are formed on the protective layer 180, and an alignment layer 11 is formed thereon.

[0205] In the common electrode panel 200, a light blocking member 220, a plurality of color filters 230, a cover film 250, a common electrode including cutout portions 71 to 72b, and an alignment layer 21 are formed on an insulating substrate 210.

[0206] Unlike the liquid crystal display apparatus shown in FIGS. 1 to 4, the semiconductor stripes 151 have planar shapes which are substantially equal to shapes of the data lines 171, the drain electrodes 175, and the underlying ohmic contacts 161 and 165. The semiconductor stripes 151 have exposed portions which do not cover regions between the source electrodes 173 and the drain electrodes 175, the data line 171, and the drain electrodes 175.

[0207] In addition, ohmic contacts having planar shapes which are substantially equal to those of the isolated metal pieces 178 and island-shaped semiconductor members are formed under the isolated metal pieces 178.

[0208] In the fabrication of the thin film transistor panel 100, the data lines 171, the drain electrodes 175, the metal pieces 178, the semiconductor stripes 151, and the ohmic contacts 161 and 165 are formed by performing a photo etch process at one time.

[0209] A semiconductor layer, an ohmic contact layer, and a data metal layer are sequentially deposited on the gate insulating layer 140, and a photosensitive film having different thickness according to positions thereof are formed. After that, by using the photosensitive film as an etch mask, the semiconductor layer, the ohmic contact layer, and the data metal layer are etched, so that the thin film transistor panel is fabricated. Here, the photosensitive film having different thickness according to positions includes first and second portions, wherein the thickness of the second portion is smaller than that of the first portion. The first portion is located in a wire region where the data lines 171, the drain

electrodes **171**, and the metal pieces **1718** are provided. The second portion is located in a channel region of the thin film transistor.

[0210] As an example of a method of providing the photosensitive films of which thicknesses vary according to positions thereof, there is a method of providing a translucent area in addition to a light transmitting area and a light blocking area to a photo mask. In the translucent area, a slit pattern, a lattice pattern, or a thin film of which transmittance or thickness is of an intermediate value is provided. In the case where the slit pattern is used, it is preferable that a width of each of the slits or an interval between the slits is smaller than a resolution of an exposing apparatus used for the photo process. As another example, there is a method of using a reflow-able photosensitive film. Namely, by using a general exposure mask having only the light transmitting area and the light blocking area, the reflow-able photosensitive film is formed, and after that, a reflow process is performed to allow the photosensitive material to flow into a region where the photosensitive film is not provided, so that a thin photosensitive film can be formed in the region.

[0211] By using the photosensitive film as an etch mask, a data metal layer, an ohmic contact layer, and a semiconductor layer are sequentially etched to form a shape of data wire lines roughly. Next, an ashing process is performed on the photosensitive film to remove a second portion, and by using a remaining first portion as an etch mask, the exposed data metal layer and the exposed ohmic contact layer are etched, so that a channel portion of the thin film transistor is formed.

[0212] By doing so, the duration of the photo process can be reduced, so that it is possible to simplify the production method.

[0213] The liquid crystal display apparatus shown in **FIGS. 13 and 14** may employ the features of the liquid crystal display apparatuses shown in **FIGS. 1 to 12**.

[0214] Now, a liquid crystal display apparatus according to another exemplary embodiment of the present invention will be described in detail with reference to **FIG. 15**.

[0215] **FIG. 15** is a cross sectional view showing the liquid crystal display apparatus according to another exemplary embodiment of the present invention taken along line IV-IV of **FIG. 1**.

[0216] As shown in **FIG. 15**, the liquid crystal display apparatus includes a thin film transistor panel **100** and a common electrode panel **200** which face each other, a liquid crystal layer **300** interposed between the panels **100** and **200**, and a pair of polarizers **12** and **22** disposed on outer surfaces of the panels **100** and **200**.

[0217] The layered structures of the panels **100** and **200** according to the present exemplary embodiment are substantially the same as the layered structures of **FIGS. 1 to 4**.

[0218] In the thin film transistor panel **100**, a plurality of gate lines **121** and a plurality of storage electrode lines **131** are disposed on a substrate **110**. The gate lines **121** include a plurality of gate electrodes **124** and end portions **129**. The storage electrode lines **131** include a plurality of storage electrodes **133a** to **133d** and a plurality of connection portions **133e**. A gate insulating layer **140**, a plurality of semiconductor stripes **151** including protrusions **154**, a

plurality of line-shaped ohmic contacts **161** including protrusions **163**, and a plurality of island-shaped ohmic contacts **165** are sequentially formed on the gate lines **121** and the storage electrode lines **131**. A plurality of data lines **171** including source electrodes **173** and end portions **179**, a plurality of drain electrodes **175**, and a plurality of isolated metal pieces **178** are formed on the ohmic contacts **161** and **165** and a gate insulating layer **140**, and a protective layer **180** is formed thereon. A plurality of contact holes **181**, **182**, **183a**, **183b**, and **185** are formed on the protective layer **180** and the gate insulating layer **140**. A plurality of pixel electrodes **191** including cutout portions **91** to **92b**, a plurality of overpasses **83**, and a plurality of contact assistants **81** and **82** are formed on the protective layer **180**, and an alignment layer **11** is formed thereon.

[0219] In the common electrode panel **200**, a light blocking member **220**, a cover film **250**, a common electrode including cutout portions **71** to **72b**, and an alignment layer **21** are formed on an insulating substrate **210**.

[0220] Unlike the liquid crystal display apparatus shown in **FIGS. 1 to 4**, color filters are not provided to the common electrode panel **200**. Rather, a plurality of color filters **230** are formed under the protective layer **180** of the thin film transistor panel **100**.

[0221] The color filters **230** extend along rows of the pixel electrodes **191** in a shape of stripe in the longitudinal direction. The boundary between the two color filters **230** matches with the data line **171**. However, the color filters **230** may be separated from each other or overlap each other to prevent light leakage between the pixel electrodes **191**, similar to a light blocking member. Thus, in the case wherein the color filters **230** overlap each other, the light blocking member **220** on the common electrode panel **200** may be omitted.

[0222] Through holes **235** through which the contact holes **185** pass are formed on the color filters **230**, and diameters of the through holes **235** are larger than those of the contact holes **185**. The color filters **230** are not provided to peripheral regions where the end portions **129** of the gate lines **121** and the end portions **179** of the data lines **171** are disposed.

[0223] The liquid crystal display apparatus shown in **FIG. 15** may employ the features of the liquid crystal display apparatuses shown in **FIGS. 1 to 14**.

[0224] For example, the features of the liquid crystal display apparatus according to the present exemplary embodiment may be employed by a liquid crystal display apparatus having a structure where different voltages are applied to two sub pixel electrodes divided from one pixel electrode.

[0225] Now, a liquid crystal display apparatus according to another exemplary embodiment of the present invention will be described in detail with reference to **FIGS. 16 to 20**.

[0226] **FIG. 16** is a view showing a layout of a liquid crystal display apparatus according to another exemplary embodiment of the present invention. **FIG. 17** is a view showing a layout of a thin film transistor panel for the liquid crystal display apparatus of **FIG. 16**. **FIG. 18** is a view showing a layout of a common electrode panel for the liquid crystal display apparatus of **FIG. 16**. **FIG. 19** is a cross sectional view showing the liquid crystal display apparatus

taken along line XIX-XIX of FIG. 16. FIG. 20 is a cross sectional view showing the liquid crystal display apparatus taken along line XX-XX of FIG. 16.

[0227] The liquid crystal display apparatus includes a thin film transistor panel 100 and a common electrode panel 200 which face each other and a liquid crystal layer 300 interposed between the panels 100 and 200.

[0228] Firstly, the thin film transistor panel 100 will be described in detail with reference to FIGS. 16, 17, and 19.

[0229] A plurality of gate lines 121 and a plurality of storage electrode lines 131 are disposed on an insulating substrate 110 made of a transparent glass or a plastic material.

[0230] The gate lines 121 transmitting gate signals mainly extend in the transverse direction. The gate lines 121 include a plurality of gate electrodes 124 which protrude upwardly and downwardly and end portions 129 which have wide areas for connection to other layers or external driver circuits. The storage electrode lines 131 which are applied with predetermined voltages include stem lines which extend substantially in parallel to the gate lines 121, a plurality of storage electrode sets of first, second, third, and fourth storage electrodes 133a, 133b, 133c, and 133d, and a plurality of connection portions 133e. Each of the storage electrode lines 131 is disposed between two adjacent gate lines 121, and the stem line thereof is closer to the upper one of the two gate lines 121.

[0231] The first and second storage electrodes 133a and 133b extend in the longitudinal direction to face each other. The first storage electrode 133a includes a fixed end connected to the stem line and a free end opposite to the fixed end, and the free end includes a protrusion. The third and fourth storage electrodes 133c and 133d extend in the slanted directions from the substantially central portion of the first storage electrode 133a to the upper and lower ends of the second storage electrode 133b, respectively. The connection portions 133e are connected between adjacent storage electrode sets 133a-133d. However, various shapes and arrangement may be used for the storage electrode lines 131.

[0232] Side surfaces of the gate lines 121 and the storage electrode lines 131 are slanted with respect to a surface of the substrate 110, at an angle in a range of about 30° to about 80°.

[0233] A gate insulating layer 140 made of a silicon nitride SiN_x or the like is formed on the gate lines 121 and the storage electrode lines 131.

[0234] A plurality of semiconductor stripes 151 made of a hydrogenated amorphous silicon or polysilicon are formed on the gate insulating film 140. The semiconductor stripes 151 mainly extend in the longitudinal direction and include a plurality of protrusions 154 which extend toward the gate electrodes 124. In addition, widths of the semiconductor stripes 151 are enlarged at regions near the gate lines 121 and the storage electrode lines 131 to cover wide areas thereof.

[0235] A plurality of line-shaped and island-shaped ohmic contacts 161 and 165 are formed on semiconductor stripes 151. The ohmic contacts 161 and 165 may be made of made of silicide or an n+ hydrogenated amorphous silicon which

is heavily doped with n-type impurities such as phosphorus (P). The line-shaped ohmic contacts 161 include a plurality of the protrusions 163. Each pair of the protrusion 163 and the island-shaped ohmic contact 165 is disposed on the protrusion 154 of the semiconductor stripe 151.

[0236] Side surfaces of the semiconductor stripes 151 and the ohmic contacts 161 and 165 are also slanted with respect to the surface of the substrate 100, at an angle in a range of about 30° to about 80°.

[0237] A plurality of data lines 171, a plurality of drain electrodes 175, and a plurality of isolated metal pieces 178 are formed on the ohmic contacts 161 and 165 and the gate insulating film 140.

[0238] The data lines 171 transmitting data signals mainly extend in the longitudinal direction to intersect the gate lines 121 and the stem lines and the connection portions 133e of the storage electrode lines 131. The data lines 171 include a plurality of C-shaped source electrodes 173 which protrude toward the gate electrodes 124 and end portions 179 which have wide areas for connection to other layers or external driver circuits.

[0239] The drain electrodes 175 are separated from the data lines 171. The drain electrodes 175 include bar-shaped portions which face the source electrodes 173 with respect to the gate electrodes 124 and capacitive coupling electrodes 176 which extend from the bar-shaped portions. The bar-shaped portions of the drain electrodes 175 are partially surrounded by the source electrodes 173. The capacitive coupling electrodes 176 are connected to each other. Each of the capacitive coupling electrodes 176 has two slanted portions 176a and 176b which are parallel to the third and fourth storage electrodes 133c and 133d, respectively.

[0240] The metal pieces 178 are disposed on the gate lines 121 near the first storage electrodes 133a.

[0241] Side surfaces of the data lines 171, the drain electrodes 175, and the metal pieces 178 may also be slanted with respect to the surface of the substrate 110 at an angle ranging from about 30° to about 80°.

[0242] The ohmic contacts 161 and 165 are interposed only between the underlying semiconductor stripes 151 and the overlying data lines 171 and the drain electrodes 175 and have a function of reducing contact resistance therebetween. Although the widths of the semiconductor stripes 151 are smaller than those of the data lines 171 in most regions, the widths of the portions where the gate lines 121 and the storage electrode lines 121 intersect each other are enlarged as described above. Therefore, the profile of surfaces at the intersections is smoothed, so that the disconnection of the data lines 171 can be prevented. The semiconductor stripes 151 have exposed portions uncovered by the data lines 171 and the drain electrodes 175 in addition to portions disposed between the source electrodes 173 and the drain electrodes 175.

[0243] A protective layer 180 is formed on the data line 171, the drain electrode 175, the metal pieces 178, and the exposed portions of the semiconductor stripes 151. The protective layer 180 is made of an inorganic insulating material or an organic insulating material, and a surface thereof may be planarized. A plurality of contact holes 182 and 185 which expose end portions 179 of the data lines 171

and the drain electrodes 175, respectively, are formed on the protective layer 180. A plurality of contact holes 181 which expose end portions 129 of the gate lines 121, a plurality of contact holes 183a which expose the protrusions of the free ends of the first storage electrodes 133a, and a plurality of contact holes 183b which expose portions of the storage electrode lines 131 at regions near the fixed ends of the first storage electrodes 133a are formed on the protective layer 180 and the gate insulating layer 140. The contact holes 181, 182, 183a, 183b, and 185 may be formed in various shapes such as polygon and circle. Side walls of the contact holes 181, 182, 183a, 183b, and 185 may be slanted at an angle of about 30° to about 85° or have a step shape.

[0244] A plurality of pixel electrodes 191 including first and second sub pixel electrodes 191a and 191b, a plurality of overpasses 83, and a plurality of contact assistants 81 and 82 are formed on the protective layer 180. The components may be made of, for example, a transparent conductive material such as ITO and IZO or a reflective metal such as, for example, aluminum (Al), silver (Ag), chromium (Cr), and an alloy thereof.

[0245] The first sub pixel electrode 191a is physically and electrically connected to the drain electrode 175 through the contact hole 185 and receives a data voltage applied by the drain electrode 175.

[0246] The first and second sub pixel electrodes 191a and 191b are separated from each other with respect to a gap 92 interposed therebetween. The gap 92 includes a slanted portion which extends from the left side to the right side thereof and a longitudinal portion which connects the slanted portions. The slanted portions have an angle of about 45° with respect to the gate lines 121.

[0247] The first sub pixel electrode 191a of the sub pixel electrodes 191a and 191b divided by the gap 92 is disposed above and under the second sub pixel electrode 191b to surround the second sub pixel electrode 191b, so that second sub pixel electrode 191b is interposed between two portions of the first sub pixel electrode 191a. The first and second sub pixel electrodes 191a and 191b face each other and have edges which are slanted with an angle of about 45° with respect to the gate line 121. As a result, the first and second sub pixel electrodes 191a and 191b have an inversion symmetry with respect to a virtual transverse central line bisecting the pixel electrode 191.

[0248] The second sub pixel electrode 191b has a central cutout portion 91. The central cutout portion 91 extends along the transverse central line and has an inlet at the right side. The inlet of the central cutout portion 91 has a pair of slanted edges which are parallel to the gap 92.

[0249] Here, the first sub pixel electrodes 191a are connected to the drain electrodes 175 through the contact holes 185 to be directly applied with the data voltages. The second sub pixel electrodes 91b overlap the capacitive coupling electrodes 176 which are connected to the first sub pixel electrodes 191a. As a result, the second sub pixel electrodes 191b are electromagnetically (e.g., capacitively) coupled to the first sub pixel electrodes 191a.

[0250] The pixel electrode 191 is divided into four partitions by the gap 92 and the central cutout portion 91.

[0251] Referring to FIGS. 5 and 16, the pixel electrode 191 has a pair of first primary edges 193 and 194 facing each

other and a pair of second primary edges 195 and 196 connected to the first primary edges 193 and 194. The first primary edges 193 and 194 are substantially parallel to the gate line 121, and the second primary edges 195 and 196 have inner and outer envelopes. The inner and outer envelopes of the second primary edges 195 and 196 are substantially perpendicular to the first primary edges 193 and 194. Left corners of the pixel electrode 191 is constructed with chamfered slanted edges 193c and 194c, and the chamfered slanted edges 193c and 194c have a slanted angle of about 45° with respect to the gate line 121.

[0252] The second primary edges 195 and 196 of the pixel electrode 191 have a plurality of sawteeth 910 and 920 which protrude from a plurality of longitudinal lines 915 and 916 on the inner envelopes 951 and 961 outwardly. The sawteeth 910 and 920 are symmetric with respect to the transverse central line of the pixel electrode 191.

[0253] Each of the sawteeth 910 (920) has a first slanted edge 911 (921), a second slanted edge 912 (922), and a top edge 913 (923) which is disposed on the outer envelop 952 (962) to connect the first and second slanted edges. The extension lines of the first and second slanted edges 911 (912) and 912 (922) intersect each other with an acute angle of about 45° or less. The first slanted edge 911 (912) has an obtuse angle of about 135° or more with respect to the longitudinal line 915 (925), and the second edge 912 (922) has an angle of about 45° with respect to the longitudinal line 915 (925). The extension lines of the first and second slanted edges 911 (912) and 912 (922) intersect each other with an acute angle of about 45° or less. In addition, the second slanted edge 912 (922) is substantially parallel to the gap 92 and located on an extension line of the gap 92. The first slanted edge 911 (921) has an angle of about 45° or less or 135° or more with respect to the gap 92.

[0254] The upper portions of the sawteeth 910 and 920, that is, portions near the top edges 913 and 923 thereof overlap the data line 171. The sawteeth 920 of the right edge 196 of the pixel electrode 191 which are located at the left of the data line 171 are engaged with the sawteeth 910 of the pixel electrode 191 which are located at the left of the data line 171. In addition, the facing edges of the engaged sawteeth 910 and 920 are parallel to each other.

[0255] The number of the sawteeth 910 and 920 are in close relation to the number of the partitions of the pixel electrode 191 divided by the cutout portions and the gaps 91 and 92 or the number of the cutout portions. The number of the partitions of the pixel electrode 191 and the number of the sawteeth 910 and 920 may vary according to design factors such as, for example, the size of the pixel electrode 191, the ratio of lengths of the transverse and longitudinal sides of the pixel electrode 191, and types or characteristics of the liquid crystal layer 3.

[0256] The pixel electrodes 191 overlap the adjacent gate lines 121 or the adjacent data lines 171, so that it is possible to increase the aperture ratio of the liquid crystal display apparatus.

[0257] The overpass 83 is disposed across the gate line 121 and connected to the exposed portion of the storage electrode line 131 and the exposed end portion of the free end of the first storage electrode 133a through the contact holes 183b and 18b which are located at the opposite

positions with respect to the gate line **121**, respectively. The storage electrodes **133a** and **133b** and the storage electrode line **131** together with the overpasses **83** may be used to repair defects of the gate lines **121**, the data lines **171**, and the thin film transistors.

[0258] The contact assistants **81** and **82** are connected to the end portion **129** of the gate line **121** and the end portion **179** of the data line **171** through the contact holes **181** and **182**, respectively.

[0259] Now, the common electrode panel **200** will be described with respect to FIGS. 16, 18, and 20.

[0260] A light blocking member **220** is formed on the insulating substrate **210** made of a transparent glass or a plastic material. The light-blocking member **220** includes a plurality of opening portions **225** which face the pixel electrodes **191** and have a shape of a substantial rectangle. A width of portions **221** of the light blocking member **220** corresponding to the data lines **171** is substantially the same as that of the data lines **171**. However, the widths may be defined by taking into consideration alignment error of the panels **100** and **200**. The light blocking member **220** includes enlarged portions **222** which block spaces between the engaged sawteeth **910** and **920** which protrude outwardly from the data lines **171**. The light blocking member **220** may include portions corresponding to the thin film transistors.

[0261] A plurality of color filters **230** are formed on the substrate **210**. Most portions of the color filters **230** are disposed in regions surrounded by the light-blocking member **220**, and the color filters **230** extend along rows of the pixel electrodes **191** in the longitudinal direction. Each of the color filters **230** can display one of primary colors such as red, green, and blue.

[0262] A cover film **250** is formed on the color filters **230** and the light-blocking member **220**. The cover film **250** may be made of an (organic) insulating material. The cover film **250** prevents the color filters **230** from being exposed and provides a planarized surface. The cover film **250** may be omitted.

[0263] A common electrode **270** is formed on the cover film **250**. The common electrode **270** is made of a transparent conductive material such as, for example, ITO and IZO. A plurality of cutout portion sets of cutout portions **71**, **72a**, and **72b** are formed on the common electrode **270**.

[0264] The common electrode panel **270** includes a plurality of cutout portion sets **71-72b**.

[0265] One cutout portion set **71-72b** faces one pixel electrode **191** and includes a central cutout portion **71**, a lower cutout portion **72a**, and an upper cutout portion **72b**. The cutout portions **71**, **72a**, and **72b** are disposed between the adjacent cutout portions **91**, **92a**, and **92b** of the pixel electrode **191** or between the cutout portions **92a** and **92b** and the chamfered edge of the pixel electrode **191**.

[0266] In addition, each of the cutout portions **71**, **72a**, and **72b** extends substantially in parallel to the lower or upper cutout portion **92a** or **92b** of the pixel electrode **191** and include at least one slanted portion. The cutout portions **71**, **72a**, and **72b** have an inversion symmetry with respect to the transverse central line of the pixel electrode **191**.

[0267] Each of the lower and upper cutout portions **72a** and **72b** includes a slanted portion and a transverse portion.

The slanted portion extends substantially from the upper or lower side to the left side of the pixel electrode **191** to overlap the longitudinal side of the pixel electrode **191**. A long side facing the slanted portion intersects the first and second slanted edges **911**, **912**, **921**, and **922** of the sawteeth of the pixel electrode **191** or extension lines thereof or is located on the extension lines. The transverse portion extends from the end of the slanted portion along the transverse side of the pixel electrode **191** with an obtuse angle with respect to the slanted portion and overlaps the transverse side.

[0268] The central cutout portion **71** includes a central transverse portion and a pair of slanted portions. The central transverse portion extends substantially from the left side of the pixel electrode **191** along the transverse central line of the pixel electrode **191** in the right direction. A pair of the slanted portions extend substantially in parallel to the lower and upper cutout portions **72a** and **72b** from the end of the central transverse portion to the right side of the pixel electrode **191** with an obtuse angle with respect to the central transverse portion, respectively.

[0269] The number of the cutout portions **71**, **72a**, and **72b** may vary according to the design factors, and the light-blocking member **220** overlaps the cutout portions **71**, **72a**, and **72b** to prevent the light leakage in a vicinity of the cutout portions **71**, **72a**, and **72b**.

[0270] Spacers made of an insulating material are disposed on the common electrode panel **200** to maintain a constant interval between the panels **100** and **200**.

[0271] The light blocking member **220** overlaps the cutout portions **71**, **72a**, and **72b** to prevent the light leakage in a vicinity of the cutout portions **71**, **72a**, and **72b**. In addition, in this embodiment, the slanted portions **176a** and **176b** of the capacitive coupling electrodes **176** overlaps the cutout portions **71**, **72a**, and **72b** to prevent the light leakage in a vicinity of the cutout portions **71**, **72a**, and **72b**.

[0272] Here, the slanted angles of the sawteeth **910** and **920** of the pixel electrode **191** may be formed to be larger by about 1° or about 15° than the angles of the slanted portions of the central cutout portions **71** of the common electrode **270**.

[0273] Alignment films **11** and **21** are coated on inner surfaces of the panels **100** and **200**, respectively. The alignment films **11** and **21** may be a vertically-aligned film. Polarizers **12** and **22** are disposed on outer surfaces of the panels **100** and **200**, respectively.

[0274] When the common voltage and the data voltage are applied to the common electrode **270** and the pixel electrode **191**, respectively, a primary electric field is generated in a direction substantially perpendicular to the surfaces of the panels **100** and **200**. In response to the electric field, the liquid crystal molecules **31** have a tendency to change the major axis direction to be perpendicular to the direction of the electric field. On the other hand, the cutout portions **71**, **72a**, **72b**, **91**, **92a**, and **92b** of the common electrode **270** and the pixel electrode **191** and the slanted edges of the sub pixel electrode **191a** distort the electric field to generate a horizontal component of the electric field for determining the tilted direction of the liquid crystal molecules. The horizontal component of the electric field is perpendicular to the edges of the cutout portions **71**, **72a**, **72b**, **91**, **92a**, and **92b**.

and the slanted edges of the pixel electrode **191**. In the horizontal component of the primary electric field at the facing two edges of the cutout portions **71**, **72a**, **72b**, **91**, **92a**, and **92b** are opposite to each other.

[0275] Due to such electric fields, the cutout portions **71**, **72a**, **72b**, **91**, **92a**, and **92b** can control the tilted direction of the liquid crystal molecules of the liquid crystal layer **3**. As a result, the liquid crystal molecules in domains defined by the adjacent cutout portions **71**, **72a**, **72b**, **91**, **92a**, and **92b** or in domains defined by the right and left slanted edges of the sub pixel electrodes **191a** and **191b** are tilted in the direction perpendicular to the longitudinal directions of the cutout portions **71**, **72a**, **72b**, **91**, **92a**, and **92b**. The long edges of each of the domains are substantially parallel to each other and have an angle of about 45° with respect to the gate line **121**. Most of the liquid crystal molecules in the domain are slanted in four directions, so that a wide viewing angle can be obtained.

[0276] Therefore, by providing the sawteeth to the sides of the sub pixel electrodes **191a** and **191b** adjacent to the data line **171**, as described above in the embodiment shown in FIGS. **1** to **4**, the secondary electric field generated between the adjacent pixel electrodes **191** can control the alignment of the liquid crystal molecules **31** in the sub areas.

[0277] The widths of the cutout portions **71**, **72a**, **72b**, **91**, **92a**, and **92b** may be in the range of, for example, from about $9\ \mu\text{m}$ to about $12\ \mu\text{m}$.

[0278] At least one of the cutout portions **71**, **72a**, **72b**, **91**, **92a**, and **92b** may be replaced with a protrusion or a depression. The protrusions may be made of an organic or inorganic material and disposed above or under the electric field generating electrodes **191a**, **191b**, and **270**. In addition, the widths of the protrusions may be in the range of, for example, from about $5\ \mu\text{m}$ to about $10\ \mu\text{m}$.

[0279] On the other hand, when the tilted direction of the liquid crystal molecules **31** has an angle of about 45° with respect to the transmission axes of the polarizers **12** and **22**, the highest brightness can be obtained. In this embodiment, in all the domains, the tilted direction of the liquid crystal molecules **31** has an angle of about 45° with respect to the gate lines **121**, and the gate lines **121** are parallel to or perpendicular to the peripheral lines of the panels **100** and **200**. Accordingly, in this embodiment, the polarizers **12** and **22** are disposed on the panels **100** and **200** such that the transmission axes thereof are parallel to or perpendicular to the peripheral lines of the panels **100** and **200**, to thereby obtain the highest brightness and reduce production cost of the polarizers **21** and **22**.

[0280] In the liquid crystal display apparatus according to the embodiment, as described above, the second sub pixel electrodes **191b** are electromagnetically (capacitively) coupled to the first sub pixel electrodes **191a**. While the first sub pixel electrodes **191a** are directly connected to the thin film transistor Q through the drain electrode **175** thereof to be applied with an image signal voltage which is transmitted through the thin film transistor from the data line **171**, the voltage of the second sub pixel electrode **191b** becomes a capacitively coupled voltage to the first sub pixel electrode **191a**.

[0281] Therefore, in this embodiment, the absolute value of the voltage of the second sub pixel electrode **191b** is always lower than that of the first sub pixel electrode **191a**.

[0282] The capacitively coupled structure may have the following structures.

[0283] Now, a liquid crystal display apparatus according to another exemplary embodiment of the present invention will be described in detail with reference to FIGS. **21** to **24**.

[0284] FIG. **21** is a view showing a layout of a liquid crystal display apparatus according to another exemplary embodiment of the present invention. FIG. **22** is a cross sectional view showing the liquid crystal display apparatus taken along line XXII-XXII of FIG. **21**. FIG. **23** is a cross sectional view showing the liquid crystal display apparatus taken along line XXIII-XXIII of FIG. **21**. FIG. **24** is a schematic equivalent circuit diagram of a pixel of the liquid crystal display apparatus shown in FIG. **21**.

[0285] Referring to FIGS. **21** to **24**, the liquid crystal display apparatus includes a thin film transistor panel **100** and a common electrode panel **200** which face each other and a liquid crystal layer **300** interposed between the panels **100** and **200**.

[0286] Firstly, the thin film transistor panel **100** will be described in detail.

[0287] A plurality of gate conductors including a plurality of gate lines **121**, a plurality of storage electrode lines **131**, and a plurality of capacitive electrodes **136** are disposed on an insulating substrate **110** made of a transparent glass or a plastic material.

[0288] The gate lines **121** transmitting gate signals mainly extend in the transverse direction. The gate lines **121** include a plurality of gate electrodes **124** which protrude upwardly and end portions **129** which have wide areas for connection to other layers or external driver circuits.

[0289] The storage electrode lines **131** which are applied with predetermined voltages include lower and upper stem lines **131a1** and **131a2** which extend substantially in parallel to the gate lines **121**. Each of the storage electrode lines **131** is disposed between adjacent two gate lines **121**. The lower stem line **131a1** is closer to the lower one of the two gate lines **121**.

[0290] The upper stem line **131a2** is closer to upper one of the two gate lines **121**.

[0291] The lower and upper stem lines **131a1** and **131a2** include lower and upper storage electrodes **1371a** and **1371b** which are enlarged downwardly and upwardly.

[0292] The capacitive electrode **136** has a shape of a rectangle which is elongated in the transverse direction. The capacitive electrode **136** is separated from the gate line **121** and the storage electrode line **131**. The capacitive electrode **136** is disposed between a pair of the lower and upper storage electrodes **1371a** and **1371b** and separated by substantially the same distance from the lower and upper storage electrodes **1371a** and **1371b**. In addition, the capacitive electrode **136** is also separated by the same distance from the adjacent two gate lines **121**. However, various shapes and arrangement may be used for the storage electrode lines **131**.

[0293] Side surfaces of the gate conductors **121**, **131**, and **136** are slanted with respect to a surface of the substrate **110**, at an angle in a range of about 30° to about 80° .

[0294] A gate insulating layer **140** made of a silicon nitride SiN_x or the like is formed on the gate conductors **121**, **131**, and **136**.

[0295] A plurality of island-shaped semiconductor members **154** made of a hydrogenated amorphous silicon (abbreviated to a-Si) or polysilicon are formed on the gate insulating film **140**. The semiconductor members **154** are disposed on the gate electrodes **124** and include expansion portions covering boundaries of the gate lines **121**. In addition, island-shaped semiconductor members may be separately formed to cover boundaries of the storage electrode lines **131**.

[0296] A plurality of island-shaped ohmic contacts **163** and **165** are formed on semiconductor members **154**. The ohmic contacts **163** and **165** may be made of made of silicide or an n+hydrogenated amorphous silicon which is heavily doped with n-type impurities such as phosphorus (P). A pair of the ohmic contacts **163** and **165** are disposed on the semiconductor member **154**.

[0297] Side surfaces of the semiconductor members **154** and the ohmic contacts **163** and **165** are also slanted with respect to the surface of the substrate **100** at an angle in a range of about 30° to about 80°.

[0298] A plurality of data conductors including a plurality of data lines **171** and a plurality of drain electrodes **175** are formed on the ohmic contacts **163** and **165** and the gate insulating film **140**.

[0299] The data lines **171** transmitting data signals mainly extend in the longitudinal direction to intersect the gate lines **121** and the storage electrode lines **131**. The data lines **171** include a plurality of source electrodes **173** which protrude toward the gate electrodes **124** and end portions **179** which have wide areas for connection to other layers or external driver circuits.

[0300] The drain electrode **175** is separated from the data line **171**. The drain electrodes **175** include a bar-shaped end portion which faces a source electrode **173** with respect to the gate electrode **124** interposed therebetween. The bar-shaped end portion is partially surrounded by the U-shaped source electrode **173**.

[0301] The drain electrode **175** includes lower, upper, and central expansion portions **177a1**, **177a2**, and **176** and a pair of connection portions **178a1** and **178a2** which connects the expansion portions. The expansion portions **177a1**, **177a2**, and **176** have a shape of a rectangle which is elongated in the transverse direction. The connection portions **178a1** and **178a2** connects the expansion portions **177a1**, **177a2**, and **176** at both sides thereof and are substantially parallel to the data lines **171**.

[0302] The lower and upper expansion portions **177a1** and **177a2** overlap the lower and upper storage electrodes **137a1** and **137a2**.

[0303] The central expansion portion **176** overlaps the capacitive electrode **136**. Hereinafter, the central expansion portion **176** is referred to as a coupling electrode.

[0304] A contact hole **176H** is formed at the right end portion of the coupling electrode **176**. The shape of the coupling electrode **176** is formed to be substantially the same as that of the capacitive electrode **136**.

[0305] For example, side surfaces of the data conductors **171**, **175**, and **176** are also slanted with respect to the surface of the substrate **110** at an angle ranging from about 30° to about 80°.

[0306] The ohmic contacts **163** and **165** are interposed only between the underlying semiconductor members **154** and the overlying data conductors **171** and **175** and reduce contact resistance therebetween. The extension portions of the semiconductor members disposed on the gate lines **121** allows the profile of surfaces to be smoothed, so that the disconnection of the data lines **171** can be prevented. The semiconductor members **154** have planar shapes which are substantially equal to shapes of the data lines **171**, the drain electrodes **175**, and the underlying ohmic contacts **161** and **165**. The semiconductor members **154** have exposed portions uncovered by the data conductors **171** and **175** in addition to portions disposed between the source electrodes **173** and the drain electrodes **175**.

[0307] A protective layer **180** is formed on the data conductors **171** and **175** and the exposed portions of the semiconductor members **154**. The protective layer **180** is made of an inorganic insulating material or an organic insulating material, and a surface thereof may be planarized. A plurality of contact holes **182** which expose end portions **179** of the data lines **171** and a plurality of contact holes **185a1** and **185a2** which expose lower and upper expansion portions **177a1** and **177a2** of the drain electrodes **175**, respectively, are formed on the protective layer **180**. In addition, a plurality of contact holes **181** which expose end portions **129** of the gate lines **121** and a plurality of contact holes **186** which expose the capacitive electrodes **136** through contact holes **176H** of coupling electrodes **176** are formed on the protective layer **180** and the gate insulating layer **140**.

[0308] A plurality of pixel electrodes **191** and a plurality of contact assistants **81** and **82** are formed on the protective layer **180**. The components may be made of a transparent conductive material such as, for example, ITO and IZO or a reflective metal such as, for example, aluminum (Al), silver (Ag), chromium (Cr), and an alloy thereof.

[0309] The pixel electrode **191** has a pair of first primary edges **193** and **194** facing each other and second primary edges which are connected to the first primary edges **193** and **194** and include a plurality of sawteeth **90** and lower edges **90c** connecting the sawteeth **90**. Each of the sawteeth **90** includes first and second slanted edges **90a** and **90d** which are slanted with respect to the first primary edges **193** and **194** and an upper edge **90b**. The first primary edges **193** and **194** are parallel to the gate lines **121**. The first primary edges **193** and **194** and the second primary edges constitute an approximate rectangle. The pixel electrode **191** has the four chamfered corners which has an angle of about 45° with respect to the gate lines **121**.

[0310] The first slanted edge **90a** partially overlaps the data line **171**. The first slanted edges **90a** of the adjacent two pixel electrodes **191** are disposed to face each other in parallel to each other.

[0311] Each of the pixel electrodes **191** includes lower and upper sub pixel electrodes **191a1** and **191a2** and a central sub pixel electrode **191b** which are divided by the lower and upper gaps **93a** and **93b**. The lower and upper gaps **93a** and

93b extend substantially in the slanted directions from the left side to the right side of the pixel electrode **191**. Accordingly, the central sub pixel electrode **191b** has a shape of isosceles trapezoid, and the lower and upper sub pixel electrodes **191a1** and **191a2** have a shape of rectangular trapezoid. The lower and upper gaps **93a** and **93b** are perpendicular to each other with slanted angles of about 45° with respect to the gate line **121**.

[0312] The lower and upper sub pixel electrodes **191a1** and **191a2** are connected to the lower and upper expansion portions **177a1** and **177a2** of the drain electrode **175** through the contact holes **185a1** and **185a2**.

[0313] The central sub pixel electrode **191b** is connected to the capacitive electrode **136** through the contact hole **186** and overlaps a coupling electrode **176**. The central sub pixel electrode **191b** and the capacitive electrode **136** together with the coupling electrode **176** constitute a coupling capacitor.

[0314] A central cutout portion **91** and first upper and lower slanted cutout portions **92a** and **92b** are formed in the central sub pixel electrode **191b**. A second lower slanted cutout portion **94a** is formed in the lower sub pixel electrode **191a1**. A second upper slanted cutout portions **94b** is formed in the upper sub pixel electrode **191a2**. The cutout portions **91**, **92a**, **92b**, **94a**, and **94b** divide the sub pixel electrodes **191b**, **191a1**, and **191a2** into a plurality of sub areas. The pixel electrode **1991** including the cutout portions **91**, **92a**, **92b**, **94a**, and **94b** and the gaps **93a** and **93b** (hereinafter, referred as cutout portions) have an inversion symmetry with respect to the capacitive electrode **136**.

[0315] The lower and upper slanted cutout portions **92a** to **94b** extend substantially in the slanted directions from the right corners, the lower side, or the upper side to the right side of the pixel electrode **191**. The lower and upper slanted cutout portions **92a** to **94b** extend in perpendicular to each other with slanted angles of about 45° with respect to the gate line **121**. Each of the lower and upper slanted cutout portions **92a**, **92b**, **94a**, and **94b** has an inlet at the right or left side of the pixel electrode **191**. The inlets may be connected to the concave portions **90c**.

[0316] The first slanted edges **90a** of the sawteeth **90** of the second primary edges have an obtuse angle with respect to the slanted cutout portions **92a** to **94a**, and the second slanted edges **90d** thereof are substantially parallel to the slanted cutout portions **92b** to **94b**.

[0317] The central cutout portion **91** extends along the storage electrode line **131** and has an inlet toward the left side of the pixel electrode **191**. The inlet of the central cutout portion **91** has a pair of slanted edges which are substantially parallel to the lower cutout portions **92a** to **94a** and the upper cutout portions **92b**–**94b**, respectively.

[0318] The number of the cutout portions and the number of the partitions may vary according to design factors such as, for example, the size of the pixel electrodes **191a1**, **191a2**, and the **191b**, the ratio of lengths of the transverse and longitudinal sides of the pixel electrodes **191a1**, **191a2**, and the **191b**, and the types or characteristics of the liquid crystal layer **3**.

[0319] The contact assistants **81** and **82** are connected to the end portion **129** of the gate line **121** and the end portion **179** of the data line **171** through the contact holes **181** and **182**, respectively.

[0320] Now, the common electrode panel **200** will be described in detail.

[0321] A light blocking member **220** is formed on the insulating substrate **210** made of a transparent glass or a plastic material. The light blocking member **220** includes line-shaped portions **211** corresponding to the data lines **171**, enlarged portions **222** formed by enlarging some portions of the light blocking member **220**, and plane-shaped portions **223** corresponding to the thin film transistors. The light blocking member **220** prevents light leakage between the pixel electrodes **191** and defining opening regions facing the pixel electrodes. However, the light blocking member **220** may further include a plurality of opening portions facing the pixel electrodes **191** and which have substantially the same shape as the pixel electrodes **191**.

[0322] A plurality of color filters **230** are formed on the substrate **210**. Most portions of the color filters **230** are disposed in regions surrounded by the light-blocking member **220**. In addition, the color filters **230** extend along rows of the pixel electrodes **191** in the longitudinal direction. Each of the color filters **230** can display one of primary colors such as red, green, and blue.

[0323] A cover film **250** is formed on the color filters **230** and the light-blocking member **220**. The cover film **250** may be made of an (organic) insulating material. The cover film **250** prevents the color filters **230** from being exposed and provides a planarized surface. The cover film **250** may be omitted.

[0324] A common electrode **270** is formed on the cover film **250**.

[0325] A plurality of cutout portions **71**, **72a**, **72b**, **73a**, **73b**, **74a**, **74b**, and **75** are formed on the common electrode **270**.

[0326] One cutout portion set **71**–**75** faces one pixel electrode **191** and includes a central cutout portion **71**, first to third lower slanted cutout portions **72a**, **73a**, and **74a**, first to third upper slanted cutout portions **72b**, **73b**, and **74b**, and a connection portions **75**. The cutout portions **71**, **72a**, **72b**, **73a**, **73b**, **74a**, and **74b** are disposed between the adjacent cutout portions **91**, **92**, **93a**, **93b**, **94a**, **94b**, **95a**, and **95b** of the pixel electrode **191** or between the cutout portions **91**, **92**, **93a**, **93b**, **94a**, **94b**, **95a**, and **95b** and the chamfered edge of the pixel electrode **191**. In addition, each of the cutout portions **71**, **72a**, **72b**, **73a**, **73b**, **74a**, and **74b** extends substantially in parallel to the lower cutout portions **93a**, **94a**, and **95a** or upper cutout portions **93b**, **94b**, and **95b** of the pixel electrode **191** and include at least one slanted portion.

[0327] The first lower and upper slanted cutout portions **72a** and **72b** extend substantially from the right side to the left side of the pixel electrode **191**. The second lower and upper slanted cutout portions **73a** and **73b** extend substantially from the right side to the upper and lower left corners of the pixel electrode **191**, respectively. The third lower and upper slanted cutout portions **74a** and **74b** extend substantially from the right side to the lower and upper sides of the pixel electrode **191**, respectively. The third lower and upper slanted cutout portions **74a** and **74b** include terminated transverse portions which extend from the ends of the third lower and upper slanted cutout portions **74a** and **74b** to overlap the lower and upper sides of the pixel electrode **191**.

The terminated transverse portion has an obtuse angle with respect to the slanted cutout portions **74a** and **74b**.

[0328] The central cutout portion **71** includes a central transverse portion and a pair of slanted portions. The central transverse portion extends substantially from the right side of the pixel electrode **191** along the storage electrode line **131** in the left direction. A pair of the slanted portions extend substantially in parallel to the lower and upper cutout portions **72a**, **72b**, **73a**, **73b**, **74a**, and **74b** from the end of the central transverse portion to the left side of the pixel electrode **191**.

[0329] The one end of the one slanted portion of the central cutout portion **71** and the one end of the second lower cutout portion **73a** of the adjacent pixel electrode are connected with one of the connection portions **75**. The one end of the other slanted portion of the central cutout portion **71** and the one end of the second upper cutout portion **73b** of the adjacent pixel electrode are connected with one of the connection portions **75**. The one end of the first lower slanted cutout portion **72a** and the one end of the third lower slanted cutout portion **74a** of the adjacent pixel electrode are connected with one of the connection portions **75**. The one end of the first upper slanted cutout portion **72b** and the one end of the third upper slanted cutout portion **74b** of the adjacent pixel electrode are connected with one of the connection portions **75**. The connection portions **75** are parallel to the first slanted edges **90a** of the pixel electrode **191** and located at portions corresponding to the data line **171**. The width of the connection portions **75** in this embodiment is larger by about $8\ \mu\text{m}$ than the interval between the adjacent pixels **191**. The enlarged portions **222** of the light blocking member **220** may have a width larger than the other portions corresponding to the connection portions **75**.

[0330] On the other hand, according to this embodiment of the present invention, a plurality of convex notches **7** which are periodically disposed with a predetermined interval may be provided in the cutout portions **71** to **74b**.

[0331] Alignment films **11** and **21** are coated on inner surfaces of the panels **100** and **200**, respectively. The alignment films **11** and **21** may be a vertically-aligned film. Polarizers are disposed on outer surfaces of the panels **100** and **200**, respectively. The transmission axes of the two polarizers are perpendicular to each other, and one of the transmission axes is preferably parallel to the gate lines **121**. In the case of a reflective liquid crystal display apparatus, one of the two polarizers may be omitted.

[0332] The liquid crystal display apparatus according to the present embodiment may further include a phase retardation film for compensating for retardation of the liquid crystal layer **3**. The phase retardation films have birefringence and have a function of inversely compensating for the birefringence of the liquid crystal layer **3**.

[0333] The liquid crystal display apparatus may include a backlight unit for supplying light to the polarizers, the phase retardation film, the panels **100** and **200**, and the liquid crystal layer **3**.

[0334] The liquid crystal layer **3** has a negative anisotropic permittivity, and the liquid crystal molecules **31** of the liquid crystal layer **3** are aligned so that the major axes thereof are perpendicular to the surfaces of the two panels **100** and **200** when no electric field is applied to the liquid crystal mol-

ecules. As a result, incident light cannot pass through the perpendicular polarizers and is thus blocked.

[0335] In the liquid crystal display apparatus shown in FIGS. **21** to **25**, opaque members such as the storage electrode lines **131**, the capacitive electrodes **136**, the expansion portions **177a1**, **177a2**, and **176** of the drain electrodes **175**, and the connection portions **178a1** and **178a2** and transparent members such as the pixel electrodes **191** and the common electrode **270** including the cutout portions **91** to **94b** and **71** to **75** are symmetrically disposed with respect to the capacitive electrodes **136** which are separated by the same distance from the adjacent two gate lines **121**.

[0336] Now, the liquid crystal display apparatus will be described more in detail with respect to FIG. **24**.

[0337] Referring to FIG. **24**, one pixel of the liquid crystal display apparatus includes a thin film transistor **Q**, a first sub pixel electrode including a first liquid crystal capacitor C_{LCa} and a storage capacitor C_{ST} , a second sub pixel electrode including a second liquid crystal capacitor C_{LCb} , and a coupling capacitor C_{cp} .

[0338] The first liquid crystal capacitor C_{LCa} includes the upper and lower sub pixel electrodes **191a1** and **191a2** as the one port thereof, the common electrode **270** as the other port thereof, and the liquid crystal layer **3** interposed between the two ports as the dielectric member. Similarly, the second liquid crystal capacitor C_{LCb} includes the central sub pixel electrode **191b** as the one port thereof, a corresponding portion of the common electrode **270** as the other port thereof, and the liquid crystal layer **3** interposed between the two ports as the dielectric member.

[0339] The storage capacitor C_{ST} includes the lower and upper expansion portions **177a1** and **177a2** of the drain electrode **175** as the one port thereof, the lower and upper storage electrodes **137a1** and **137a2** as the other port thereof, and a corresponding portion of the gate insulating layer **140** interposed between the two ports as the dielectric member. The coupling capacitor C_{cp} includes the central sub pixel electrode **191b** and the capacitive electrode **136** as the one port thereof, the coupling electrode **176** as the other port thereof, and corresponding portions of the proactive layer **180** and the gate insulating layer **140** interposed between the two ports as the dielectric member.

[0340] The first liquid crystal capacitor C_{LCa} and the storage capacitor C_{ST} are connected to the drain electrode of the thin film transistor **Q**. The coupling capacitor C_{cp} is connected between the thin film transistor **Q** and the second liquid crystal capacitor C_{LCb} . The common electrode **270** is applied with a common voltage V_{com} . The storage electrode line **131** may also be applied with the common voltage V_{com} .

[0341] The thin film transistor **Q** applies a data voltage from the data line **171** to the first liquid crystal capacitor C_{LCa} and the coupling capacitor C_{cp} according to a gate signal from the gate line **121**. The coupling capacitor C_{cp} changes a size of the voltage and transmits the voltage to the second liquid crystal capacitor C_{LCb} .

[0342] If the storage electrode line **131** is applied with the common voltage V_{com} , and if the electrostatic capacitances of the capacitors C_{LCa} , C_{ST} , C_{LCb} , and C_{cp} are denoted by C_{LCa} , C_{ST} , C_{LCb} , and C_{cp} , a voltage V_a charged in the first

liquid crystal capacitor C_{LCa} and a voltage V_b charged in the second liquid crystal capacitor C_{LCb} have a relation as follows.

$$V_b = V_a [C_{cp} / (C_{cp} + C_{LCb})]$$

[0343] Since a value of $C_{cp} / (C_{cp} + C_{LCb})$ is less than 1, the voltage V_b charged in the second liquid crystal capacitor C_{LCb} is always smaller than the voltage V_a charged in the first liquid crystal capacitor C_{LCa} . Even in a case where the voltage of the storage electrode line 131 is not the common voltage V_{com} , the relation is satisfied.

[0344] When the voltage difference between the two ports of the first or second liquid crystal capacitor C_{LCa} or C_{LCb} is generated, an electric field is generated in the liquid crystal layer 3 in a direction substantially perpendicular to the panels 100 and 200. In response to the electric field, the liquid crystal molecules have a tendency to change the major axis direction to be perpendicular to the direction of the electric field. According to the degree of the tilted angle of the liquid crystal molecules, polarization of the light passing through the liquid crystal layer 3 changes. The change in the polarization results in a change in transmittance of the light due to the polarizers 12 and 22, so that an image is display on the liquid crystal display apparatus.

[0345] The tilted angle of the liquid crystal molecules varies according to the strength of the electric field. Since the voltage V_a charged in the first liquid crystal capacitor C_{LCa} is different from the voltage V_b charged in the second liquid crystal capacitor C_{LCb} , the tilted angles of the liquid crystal molecules in the first and second sub pixels are different from each other. As a result, the brightnesses of the two sub pixel electrodes are different from each other. Accordingly, by adjusting the voltage V_a charged in the first liquid crystal capacitor C_{LCa} and the voltage V_b charged in the second liquid crystal capacitor C_{LCb} , the brightness of the image seen from a side of the liquid crystal display apparatus can be closest to the brightness of the image seen from a front of the liquid crystal display apparatus, thereby improving the side viewing angle.

[0346] The ratio of the voltage V_a charged in the first liquid crystal capacitor C_{LCa} and the voltage V_b charged in the second liquid crystal capacitor C_{LCb} can be adjusted by changing the electrostatic capacitance of the coupling capacitor C_{cp} . The electrostatic capacitance of the coupling capacitor C_{cp} can be changed by adjusting the overlapping area and distance between the second sub pixel electrode 191b, the capacitive electrode 136, and the coupling electrode 176. For example, by removing the capacitive electrode 136 and disposing the coupling electrode 176 at the position where the capacitive electrode 136 is removed, the distance between the coupling electrode 176 and the second sub pixel electrode 191b can increase. For example, the voltage V_b charged in the second liquid crystal capacitor C_{LCb} may be about 0.6 to about 0.8 times larger than the voltage V_a charged in the first liquid crystal capacitor C_{LCa} .

[0347] In contrast, the voltage V_b charged in the second liquid crystal capacitor C_{LCb} may be designed to larger than the voltage V_a charged in the first liquid crystal capacitor C_{LCa} by precharging the second liquid crystal capacitor C_{LCb} with a predetermined voltage such as the common voltage V_{com} .

[0348] Preferably, the ratio of areas of the lower and upper sub pixel electrodes 191a1 and 191a2 and an area of the

central sub pixel electrode 191b is in a range of from about 1:0.85 to about 1:1.15. The number of the sub pixel electrode of each of the sub pixel may vary.

[0349] In addition, by providing the sawteeth to the side of the pixel electrode 191 adjacent to the data line 171, the secondary electric field generated between the adjacent pixel electrodes 191 can control the alignment of the liquid crystal molecules 31 in the sub areas. In addition, by providing the connection portions 75 at the positions corresponding to the regions where the first slanted edges 90a of the adjacent two pixel electrodes 191 face each other, the alignment of the liquid crystal molecules 31 in the sub areas can be controlled.

[0350] Now, a liquid crystal display apparatus according to another exemplary embodiment of the present invention will be described in detail with reference to FIGS. 25 to 29.

[0351] FIG. 25 is a view showing a layout of a liquid crystal display apparatus according to another exemplary embodiment of the present invention. FIG. 26 is a cross sectional view showing the liquid crystal display apparatus taken along line XXVI-XXVI of FIG. 25. FIG. 27 is a cross sectional view showing the liquid crystal display apparatus taken along line XXVII-XXVII of FIG. 25.

[0352] Referring to FIGS. 25 to 27, the liquid crystal display apparatus includes a thin film transistor panel 100 and a common electrode panel 200 which face each other and a liquid crystal layer 300 interposed between the panels 100 and 200.

[0353] Firstly, the thin film transistor panel 100 will be described in detail.

[0354] A plurality of gate conductors including a plurality of pairs of first and second gate lines 121a and 121b and a plurality of storage electrode lines 131 are disposed on an insulating substrate 110 made of a transparent glass or a plastic material.

[0355] The first and second gate lines 121a and 121b transmitting gate signals mainly extend in the transverse direction and are located above and under the storage electrode line 131, respectively.

[0356] The first gate line 121a include a first gate electrode 124a which protrudes downwardly and an end portion 129a which is disposed in the left side and has an wide area for connection to other layers or external driver circuits.

[0357] The second gate line 121b include a second gate electrode 124b which protrudes upwardly and an end portion 129b which is disposed in the left side and has an wide area for connection to other layers or external driver circuits. Alternatively, the end portions 129a and 129b may be disposed at the right side. Otherwise, the end portions 129a and 129b may be disposed at the different sides.

[0358] The storage electrode lines 131 which are applied with predetermined voltages extend substantially in parallel to the gate lines 121. Each of the storage electrode lines 131 is disposed between the adjacent first and second gate lines 121a and 121b. The storage electrode line 131 is slightly closer to the first gate line 121a than the second gate line 121b and separated by substantially the same distance from the adjacent two second gate lines 121b. Each of the storage electrode lines 131 includes a storage electrode 137 which is

enlarged upwardly and downwardly. The storage electrode 137 has a shape of an approximate rectangle and is symmetrical with respect to the storage electrode line 131. However, various shapes and arrangement may be used for the storage electrode lines 131 and the storage electrodes 137.

[0359] Side surfaces of the gate conductors 121a, 121b, and 131 are slanted with respect to a surface of the substrate 110, at an angle in a range of about 30° to about 80°.

[0360] A gate insulating layer 140 made of a silicon nitride SiN_x or the like is formed on the gate conductors 121a, 121b, and 131.

[0361] A plurality of island-shaped semiconductor members 154a, 154b, 156, 157a, and 157b made of a hydrogenated amorphous silicon (abbreviated to a-Si) or polysilicon are formed on the gate insulating film 140. The semiconductor members 154a and 154b are disposed on the gate electrodes 124a and 124b. The semiconductor members 156 cover boundaries of the gate lines 121. The semiconductor members 157a and 157b partially overlap the boundary lines of the storage electrode 137.

[0362] A plurality of island-shaped ohmic contacts 163a, 163b, 165a, 165b, and 167b are formed on semiconductor members 154a, 154b, and 157b. A plurality of island-shaped ohmic contacts are formed on semiconductor members 156 and 157a. The ohmic contacts 163a, 163b, 165a, 165b, and 167b may be made of made of silicide or an n+hydrogenated amorphous silicon which is heavily doped with n-type impurities such as phosphorus (P). Pairs of the ohmic contacts 163a and 165b and the ohmic contacts 163b and 165b are disposed on the semiconductor members 154a and 154b, respectively.

[0363] Side surfaces of the semiconductor members 154a, 154b, 156, 157a, and 157b and the ohmic contacts 163a, 163b, 165a, 165b, and 167b are also slanted with respect to the surface of the substrate 100 at an angle in a range of about 30° to about 80°.

[0364] A plurality of data conductors including a plurality of data lines 171 and a plurality of pairs of first and second drain electrodes 175a and 175b are formed on the ohmic contacts 163a, 163b, 165a, 165b, and 167b and the gate insulating film 140.

[0365] The data lines 171 transmitting data signals mainly extend in the longitudinal direction to intersect the gate lines 121a and 121b and the storage electrode lines 131. The data lines 171 include a plurality of first and second source electrodes 173a and 173b which protrude toward the first and second gate electrodes 124a and 124b and end portions 179 which have wide areas for connection to other layers or external driver circuits.

[0366] The first and second drain electrodes 175a and 175b are separated from each other. In addition the first and second drain electrodes are also separated from the data line 171.

[0367] The first drain electrode 175a includes a bar-shaped end portion 176a which faces the first source electrode 173a with respect to the gate electrode 124a interposed therebetween, an expansion portion 177a which has a shape of a wide rectangle at the one end thereof opposite to the bar-shaped end portion 176a, and a line-shaped connection

portion 176aa which connects the expansion portion 177a and the end portion 176a. The extension portion 177a overlaps the storage electrode 137. The bar-shaped end portion 176a overlaps the first gate electrode 124a and is partially surrounded by the U-shaped first source electrode 173a. The connection portion 176aa of the first drain electrode 175a is mostly located on the extension portion 139. The connection portion 176aa extends along the extension portion 139 and is located within a longitudinal boundary line of the extension portion 139.

[0368] Similarly, the second drain electrode 175b includes a bar-shaped end portion 176b which faces the second source electrode 173b with respect to the gate electrode 124b interposed therebetween, an expansion portion 177b which has a shape of a wide rectangle at the one end thereof opposite to the bar-shaped end portion 176b, and a line-shaped connection portion 176ab which connects the expansion portion 177b and the end portion 176b. The extension portion 177b overlaps the storage electrode 137. The bar-shaped end portion 176b overlaps the second gate electrode 124b and is partially surrounded by the U-shaped second source electrode 173b. The area of the expansion portion 177b of the second drain electrode 175b is smaller than that of the expansion portion 177a of the first drain electrode 175a.

[0369] The storage capacitance can be increased by providing the extension portion 139 under the connection portion 176aa of the first drain electrode 175a. Accordingly, the area of the storage electrode 137 can be reduced, to thereby increase the aperture ratio of the liquid crystal display apparatus.

[0370] The first/second gate electrode 124a (124b), the first/second source electrode 173a (173b), and the first/second drain electrode 175a (175b) together with the first and second semiconductor members 154a (154b) constitute first/second thin film transistor Qa (Qb). The channel of the first/second thin film transistor Qa (Qb) is formed in the first/second semiconductor member 154a (154b) between the first/second source electrode 173a (173b) and the first/second drain electrode 175a (175b).

[0371] For instance, side surfaces of the data conductors 171, 175a, and 175b may also be slanted with respect to the surface of the substrate 110 at an angle ranging from about 30° to about 80°.

[0372] The ohmic contacts 163a, 163b, 165a, 165b, and 167b are interposed only between the underlying semiconductor members 154a, 154b, and 157b and the overlying data conductors 171, 175a, and 175b and reduce contact resistance therebetween. The semiconductor members 156, 157a, 157b disposed on the gate lines 121a and 121b and the storage electrode lines 131 allows the profile of surfaces to be smoothed, so that the disconnection of the data lines 171 and the drain electrodes 175a and 175b can be prevented. The island-shaped semiconductor members 154a and 154b have exposed portions which do not cover regions between the source electrodes 173a and 173b and the drain electrodes 175a and 175b and the data conductors 171, 175a, and 165b.

[0373] A protective layer 180 is formed on the data conductors 171, 175a, and 175b and the exposed portions of the semiconductor members 154a and 154b. The protective layer 180 is made of an inorganic insulating material or an

organic insulating material, and a surface thereof may be planarized. A plurality of contact holes **182**, **185a**, and **185b** which expose the end portions **179** of the data lines **171** and the expansion portions **177a** and **177b** of the drain electrodes **175a** and **175b**, respectively, are formed on the protective layer **180**. A plurality of contact holes **181a** and **181b** which expose end portions **129a** and **129b** of the gate lines **121a** and **121b** are formed on the protective layer **180** and the gate insulating layer **140**.

[0374] A plurality of pixel electrodes **191** including first and second sub pixel electrodes **191a** and **191b** and a plurality of contact assistants **81a**, **81b**, and **82** are formed on the protective layer **180**. The components may be made of a transparent conductive material such as, for example, ITO and IZO or a reflective metal such as, for example, aluminum (Al), silver (Ag), chromium (Cr), and an alloy thereof.

[0375] The pixel electrode **191** has a shape of an approximate rectangle having four chamfered corners which has an angle of about 45° with respect to the gate lines **121a** and **121b**.

[0376] A pair of the first and second sub pixel electrodes **191a** and **191b** constituting the pixel electrode **191** are engaged with each other with gaps **92** and **93** interposed therebetween. The second sub pixel electrode **191b** has a shape of isosceles trapezoid of which base is recessed in a shape of trapezoid. Moreover, most portions of the second sub pixel electrode **191b** are surrounded by the first sub pixel electrode **191a**. The first sub pixel electrode **191a** includes upper, lower, and central trapezoids which are connected to each other at the left side.

[0377] The pixel electrode **191** has a pair of first primary edges **193** and **194** facing each other and second primary edges which are connected to the first primary edges **193** and **194** and include a plurality of sawteeth **90** and lower edges **90c** connecting the sawteeth **90**. Each of the sawteeth **90** includes first and second slanted edges **90a** and **90d** which are slanted with respect to the first primary edges **193** and **194** and an upper edge **90b**. The first primary edges **193** and **194** are parallel to the gate lines **121**. The first primary edges **193** and **194** and the second primary edges constitute an approximate rectangle. The pixel electrode **191** has the four chamfered corners which has an angle of about 45° with respect to the gate lines **121**. The first slanted edge **90a** partially overlaps the data line **171**. The first slanted edges **90a** of the adjacent two pixel electrodes **191** are disposed to face each other in parallel to each other.

[0378] The first sub pixel electrode **191a** includes cutout portions **94a** and **94b** which extend from an upper side of an upper trapezoid and a lower side of a lower trapezoid toward the right side thereof, respectively. A central trapezoid of the first sub pixel electrode **191a** is inserted into a recessed lower side of the second sub pixel electrode **191b**. In addition, the first sub pixel electrode **191a** includes a central cutout portion **91** which has a transverse portion and a pair of slanted portions connected thereto. The transverse portion extends shortly along a transverse central line of the first sub pixel electrode **191a**. A pair of the slanted portions extend from the transverse portion toward the left side of the first sub pixel electrode **191a** with an angle of 45° with respect to the storage electrode line **131**. The gaps **92** and **93** between the first and second sub pixel electrodes **191a** and **191b** include two pairs of upper and lower slanted portions

and a longitudinal portion which have an angle of about 45° with respect to the gate lines **121a** and **121b**. Hereinafter, for the convenience of description, the gaps **92** and **93** are referred to as a cutout portion. The cutout portions **91** to **94b** have an inversion type of symmetry with respect to the storage electrode line **131**. The cutout portions **91** to **94b** extend in perpendicular to each other with slanted angles of about 45° with respect to the gate lines **121a** and **121b**. The pixel electrode **191** is divided into a plurality of partitions by the cutout portions **91** to **94b**.

[0379] Accordingly, the upper and lower half regions with respect to the storage electrode line **131** bisecting the pixel electrode **191** in the transverse direction are divided into four partitions by the cutout portions **91** to **94b**.

[0380] The number of the partitions and the number of the cutout portions may vary according to design factors such as, for example, the size of the pixel electrode **191**, the ratio of lengths of the transverse and longitudinal sides of the pixel electrode **191**, and the types or characteristics of the liquid crystal layer **3**.

[0381] The first and second sub pixel electrodes **191a** and **191b** are connected to the first and second drain electrodes **175a** and **175b** through the contact holes **185a** and **185b** and applied have data voltages applied thereto from the first and second drain electrodes **175a** and **175b**. A pair of the sub pixel electrodes **191a** and **191b** have different predetermined data voltages for one input image signal applied thereto. The sizes of the data voltages may be determined according to the areas and shapes of the sub pixel electrodes **191a** and **191b**. In addition, the areas of the sub pixel electrodes **191a** and **191b** may be different from each other. As an example, the second sub pixel electrode **191b** may have a higher voltage applied thereto than applied to the first sub pixel electrode **191a**, and the area of the second sub pixel electrode **191b** may be smaller than that of the first sub pixel electrode **191a**.

[0382] The sub pixel electrodes **191a** and **191b** which have the data voltages applied thereto and the common electrode **270** which have the common voltage applied thereto constitute first and second liquid crystal capacitors which sustain the applied voltages after the thin film transistor turns off. Each of the liquid crystal capacitors includes a corresponding portion of the liquid crystal layer **3** as the dielectric member.

[0383] The first and second sub pixel electrodes **191a** and **191b** and the expansion portions **177a** and **177b** of the drain electrodes **173a** and **173b** electrically connected thereto overlap the storage electrode **137**, the extension portion **139**, and the storage electrode line **131** so as to constitute a storage capacitor for strengthening a voltage storage capacity of the liquid crystal capacitor.

[0384] The contact assistants **81a**, **81b**, and **82** are connected to the end portions **129a** and **129b** of the gate lines **121a** and **121b** and the end portion **179** of the data line **171** through the contact holes **181a**, **181b**, and **182**, respectively.

[0385] Now, the common electrode panel **200** will be described in detail.

[0386] A light blocking member **220** is formed on the insulating substrate **210** made of a transparent glass or a plastic material. The light blocking member **220** include

line-shaped portions corresponding to the data lines 171, enlarged portions formed by enlarging some portions of the light blocking member 220, and plane-shaped portions corresponding to the thin film transistors. The light blocking member 220 prevents light leakage between the pixel electrodes 191 and defining opening regions facing the pixel electrodes. However, the light blocking member 220 may further include a plurality of opening portions facing the pixel electrodes 191 and having substantially the same shape as the pixel electrodes 191.

[0387] A plurality of color filters 230 are formed on the substrate 210. Most portions of the color filters 230 are disposed in regions surrounded by the light-blocking member 220. In addition, the color filters 230 extend along rows of the pixel electrodes 191 in the longitudinal direction. Each of the color filters 230 can display one of primary colors such as red, green, and blue.

[0388] A cover film 250 is formed on the color filters 230 and the light-blocking member 220. The cover film 250 may be made of an (e.g., organic) insulating material. The cover film 250 prevents the color filters 230 from being exposed and provides a planarized surface. The cover film 250 may be omitted.

[0389] A common electrode 270 is formed on the cover film 250. The common electrode 270 is made of a transparent conductive material such as, for example, ITO and IZO.

[0390] A plurality of cutout portions 71, 72, 73a, 73b, 74a, 74b, and 75 are formed on the common electrode 270.

[0391] One cutout portion set 71-75 faces one pixel electrode 191 and includes a central cutout portion 71, first to third lower slanted cutout portions 72, 73a, and 74a, first to third upper slanted cutout portions 72, 73b, and 74b, and a connection portions 75. The cutout portions 71, 72, 73a, 73b, 74a, and 74b are disposed between the adjacent cutout portions 91, 92, 93a, 93b, 94a, and 94b of the pixel electrode 191 or between the cutout portions 91, 92, 93a, 93b, 94a, and 94b and the chamfered edge of the pixel electrode 191. In addition, each of the cutout portions 71, 72, 73a, 73b, 74a, and 74b extends substantially in parallel to the lower cutout portions 93a and 94a or upper cutout portions 93b and 94b of the pixel electrode 191 and include at least one slanted portion.

[0392] The first lower and upper slanted cutout portions 72 extend substantially from the right side to the left side of the pixel electrode 191. The second lower and upper slanted cutout portions 73a and 73b extend substantially from the right side to the upper and lower left corners of the pixel electrode 191, respectively. The third lower and upper slanted cutout portions 74a and 74b extend substantially from the right side to the lower and upper sides of the pixel electrode 191, respectively. The third lower and upper slanted cutout portions 74a and 74b include terminated transverse portions which extend from the ends of the third lower and upper slanted cutout portions 74a and 74b to overlap the lower and upper sides of the pixel electrode 191.

[0393] The terminated transverse portion has an obtuse angle with respect to the slanted cutout portions 74a and 74b.

[0394] The central cutout portion 71 includes a central transverse portion and a pair of slanted portions. The central

transverse portion extends substantially from the right side of the pixel electrode 191 along the storage electrode line 131 in the left direction. A pair of the slanted portions extend substantially in parallel to the lower and upper cutout portions 72, 73a, 73b, 74a, and 74b from the end of the central transverse portion to the left side of the pixel electrode 191.

[0395] One end of the one slanted portion of the central cutout portion 71 and one end of the second lower cutout portion 73a of the adjacent pixel electrode are connected with one of the connection portions 75. Also, one end of the other slanted portion of the central cutout portion 71 and one end of the second upper cutout portion 73b of the adjacent pixel electrode are connected with one of the connection portions 75. Additionally, one end of the first lower slanted cutout portion 72 and one end of the third lower slanted cutout portion 74a of the adjacent pixel electrode are connected with one of the connection portions 75. Moreover, one end of the first upper slanted cutout portion 72 and one end of the third upper slanted cutout portion 74b of the adjacent pixel electrode are connected with one of the connection portions 75. The connection portions 75 are parallel to the first slanted edges 90a of the pixel electrode 191 and located at portions corresponding to the data line 171. The width of the connection portions 75 is larger by about 8 μm than the interval between the adjacent pixels 191. The enlarged portions 222 of the light blocking member 220 may have a width larger than the other portions corresponding to the connection portions 75.

[0396] Triangular-shaped notches 7 are formed in the slanted portions of the cutout portions 71 to 74b. Alternatively, the notches may have various shapes such as, for example, rectangular, trapezoidal and semicircular shapes. In addition, the notches may be formed in a shape of convex or concave. Such notches control the alignment of the liquid crystal molecules 3 located in boundary regions corresponding to the cutout portions 71 to 74b.

[0397] The number and directions of the cutout portion 71 to 75 may vary according to design factors, and the light-blocking member 220 overlaps the cutout portions 71 to 75 to prevent the light leakage in the vicinity of the cutout portions 71 to 75.

[0398] Alignment films 11 and 21 are coated on inner surfaces of the panels 100 and 200, respectively. The alignment films 11 and 21 may be a vertically-aligned film.

[0399] Polarizers are disposed on outer surfaces of the panels 100 and 200, respectively. The transmission axes of the two polarizers are perpendicular to each other, and one of the transmission axes may, for example, be parallel to the gate lines 121a and 121b. In the case of a reflective liquid crystal display apparatus, one of the two polarizers may be omitted.

[0400] The liquid crystal display apparatus according to the present embodiment may further include a phase retardation film for compensating for retardation of the liquid crystal layer 3. The phase retardation films have birefringence and have a function of inversely compensating for the birefringence of the liquid crystal layer 3.

[0401] The liquid crystal layer 3 has a negative anisotropic permittivity, and the liquid crystal molecules 31 of the liquid crystal layer 3 are aligned so that the major axes thereof are

perpendicular to the surfaces of the two panels **100** and **200** when no electric field is applied to the liquid crystal molecules. Therefore, incident light cannot pass through the perpendicular polarizers and is thus blocked.

[0402] When a voltage difference between the two ports of the first or second liquid crystal capacitor is generated by applying the common voltage to the common electrode **270** and the data voltage to the pixel electrode **191**, an electric field is generated in the liquid crystal layer **3** in a direction substantially perpendicular to the panels **100** and **200**. In response to the electric field, the liquid crystal molecules have a tendency to change the major axis direction to be perpendicular to the direction of the electric field. According to the degree of the tilted angle of the liquid crystal molecules, polarization of the light passing through the liquid crystal layer **3** changes. The change in the polarization results in a change in transmittance of the light due to the polarizers, so that an image is displayed on the liquid crystal display apparatus.

[0403] The tilted angle of the liquid crystal molecules varies according to the strength of the electric field. If low and high voltages are applied to the first and second sub pixel electrodes, respectively, the voltage V_a of the first liquid crystal capacitor is higher than the voltage V_b of the second liquid crystal capacitor. Therefore, the tilted angles of the liquid crystal molecules in the first and second sub pixels are different from each other. As a result, the brightnesses of the two sub pixel electrodes are different from each other. Accordingly, by adjusting the voltage V_a of the first liquid crystal capacitor and the voltage V_b of the second liquid crystal capacitor, the brightness of the image seen from a side of the liquid crystal display apparatus can be closest to the brightness of the image seen from a front of the liquid crystal display apparatus, thereby improving the side viewing angle.

[0404] The tilted angle for the liquid crystal molecules is determined by a horizontal component of the electric field generated from distortion of the electric field by the cutout portion **71** to **74b** and **91** to **94b** of the electric field generating electrodes **191** and **279** and slanted edges of the pixel electrode **191**. The horizontal component of the electric field is perpendicular to the edges of the cutout portions **71** to **74b** and **91** to **94b** and the slanted edges of the pixel electrode **191**.

[0405] Referring to **FIG. 26**, one cutout portion set of the cutout portions **71** to **74b** and **91** to **94b** divide one pixel electrode **191** into a plurality of sub areas having two slanted primary edges. Since the tilted directions of the liquid crystal molecules in the sub areas are determined by the horizontal component of the electric field, the tilted directions of the liquid crystal molecules include roughly four directions.

[0406] Further, as the liquid crystal molecules **31** can be adjusted to have various tilted angles, the reference viewing angle of the liquid crystal display apparatus can be increased.

[0407] In addition, by providing the sawteeth to the side of the pixel electrode **191** adjacent to the data line **171**, the secondary electric field generated between the adjacent pixel electrodes **191** can control the alignment of the liquid crystal molecules **31** in the sub areas. In addition, by providing the connection portions **75** at the positions corresponding to the

regions where the first slanted edges **90a** of the adjacent two pixel electrodes **191** face each other, the alignment of the liquid crystal molecules **31** in the sub areas can be determined.

[0408] The shapes and arrangements of the cutout portions **71** to **74b** and **91** to **94b** for determining the tilted directions of the liquid crystal molecules may be modified in various manners. At least one of the cutout portions **71** to **74b** and **91** to **94b** may be replaced with a protrusion or a depression. The protrusions may be made of an organic or inorganic material and disposed above or under the electric field generating electrodes **191** and **270**.

[0409] In addition, if the area of the second sub pixel electrode **191b** applied with a high voltage is designed to be smaller than that of the first sub pixel electrode **191a**, distortion in a side viewing gamma curve can be reduced. For example, if the area ratio of the first and second sub pixel electrodes **191a** and **191b** is about 2:1, the side viewing gamma curve is closer than the front viewing gamma curve, so that side visibility can be improved.

[0410] Now, a liquid crystal display apparatus according to another exemplary embodiment of the present invention will be described in detail with reference to **FIGS. 28** to **30**.

[0411] **FIG. 28** is a view showing a layout of a liquid crystal display apparatus according to another exemplary embodiment of the present invention. **FIG. 29** is a cross sectional view showing the liquid crystal display apparatus taken along line XXIX-XXIX of **FIG. 28**.

[0412] **FIG. 30** is a cross sectional view showing the liquid crystal display apparatus taken along line XXI-XXX of **FIG. 28**.

[0413] Referring to **FIGS. 28** to **30**, the liquid crystal display apparatus includes a thin film transistor panel **100** and a common electrode panel **200** which face each other and a liquid crystal layer **300** interposed between the panels **100** and **200**.

[0414] Firstly, the thin film transistor panel **100** will be described in detail.

[0415] A plurality of gate conductors including a plurality of gate lines **121** and a plurality of storage electrode lines **131** are disposed on an insulating substrate **110** made of a transparent glass or a plastic material.

[0416] The gate lines **121** transmitting gate signals mainly extend in the transverse direction. The gate lines **121** include first and second gate electrodes **124a** and **124b** which protrude upwardly and end portions **129** which have wide areas for connection to other layers or external driver circuits.

[0417] The storage electrode lines **131** which are applied with predetermined voltages extend substantially in parallel to the gate lines **121**. Each of the storage electrode lines **131** is disposed between adjacent two gate lines **121** and separated by substantially the same distance from the two gate lines **121**. The storage electrode lines **131** include storage electrodes **137** which are enlarged upwardly and downwardly and bar-shaped extension portions **139** which extend from the storage electrodes **137** downwardly. The storage electrode **137** has the shape of a rectangle and is symmetrically disposed with respect to the storage electrode line **131**.

The extension portion **139** extends to a portion near the first gate electrode **124a**. However, various shapes and arrangement may be used for the storage electrode lines **131** and the storage electrodes **137**.

[**0418**] A gate insulating layer **140** made of a silicon nitride SiN_x or the like is formed on the gate conductors **121** and **131**.

[**0419**] A plurality of island-shaped semiconductor members **154a**, **154b**, **157a**, and **157b** made of a hydrogenated amorphous silicon or polysilicon are formed on the gate insulating film **140**. The semiconductor members **154a** and **154b** are disposed on the gate electrodes **124a** and **124b**.

[**0420**] A plurality of island-shaped ohmic contacts **163a**, **163b**, **165a**, **165b**, **167a**, and **167b** formed on semiconductor members **154a**, **154b**, **157a**, and **157b**. The ohmic contacts **163a**, **163b**, **165a**, **165b**, **167a**, and **167b** may be made of made of silicide or an n-hydrogenated amorphous silicon which is heavily doped with n-type impurities such as phosphorus (P). A pair of the ohmic contacts **163a** and **163b** and a pair of the ohmic contacts **165a** and **165b** are disposed on the semiconductor members **154a** and **154b**, respectively. A pair of the ohmic contacts **167a** and **167b** are disposed on the semiconductor members **157a** and **157b**, respectively.

[**0421**] A plurality of data conductors including a plurality of data lines **171a** and **171b** and a plurality of pairs of first and second drain electrodes **175a** and **175b** are formed on the ohmic contacts **163a**, **163b**, **165a**, **165b**, **167a**, and **167b** and the gate insulating film **140**.

[**0422**] The data lines **171a** and **171b** transmitting data signals mainly extend in the longitudinal direction to intersect the gate lines **121** and the storage electrode lines **131**. The data lines **171a** and **171b** include a plurality of first and second source electrodes **173a** and **173b** which protrude toward the first and second gate electrodes **124a** and **124b** and end portions **179a** and **179b** which have wide areas for connection to other layers or external driver circuits.

[**0423**] The first and second drain electrodes **175a** and **175b** are separated from each other and from the data lines **171a** and **171b**. The first and second drain electrodes **175a** and **175b** face the source electrodes **173a** and **173b** with respect to the gate electrodes **124a** and **124b** interposed therebetween. The first and second drain electrodes **175a** and **175b** include expansion portions **177a** and **177b** which have a shape of a wide rectangle at the one end thereof, bar-shaped end portions **176a** and **176b** at the other ends thereof, and connection portions **176aa** and **176bb** connecting the expansion portions **177a** and **177b** and the end portions **176a** and **176b**. The expansion portions **177a** and **177b** overlap the storage electrode **137**. The bar-shaped end portions **176a** and **176b** overlap the gate electrodes **124a** and **124b** and are partially surrounded by the U-shaped source electrodes **173a** and **173b**.

[**0424**] The connection portion **176aa** of the first drain electrode **175a** is mostly located on the extension portion **139**. For example, the connection portion **176aa** extends along the extension portion **139** and is located within an longitudinal boundary line of the extension portion **139**. The area of the expansion portion **177b** of the second drain electrode **175b** is smaller than that of the expansion portion **177a** of the first drain electrode **175a**.

[**0425**] The first/second gate electrode **124a** (**124b**), the first/second source electrode **173a** (**173b**), and the first/second drain electrode **175a** (**175b**) together with the first and second semiconductor members **154a** (**154b**) constitute first/second thin film transistor Qa (Qb). The channel of the first/second thin film transistor Qa (Qb) is formed in the first/second semiconductor member **154a** (**154b**) between the first/second source electrode **173a** (**173b**) and the first/second drain electrode **175a** (**175b**).

[**0426**] The ohmic contacts **163a**, **163b**, **165a**, **165b**, **167a**, and **167b** are interposed only between the underlying semiconductor members **154a**, **154b**, **157a**, and **157b** and the overlying data lines **171a** and **171b** and the drain electrodes **175a** and **175b** and have a function of reducing contact resistance therebetween. The island-shaped semiconductor members **154a** and **154b** have exposed portions which do not cover regions between the source electrodes **173a** and **173b** and the drain electrodes **175a** and **175b**, the data lines **171a** and **171b**, and the drain electrodes **175a** and **175b**.

[**0427**] A protective layer (e.g., passivation layer) **180** is formed on the data lines **171a** and **171b**, the drain electrodes **175a** and **175b**, and the exposed portions of the semiconductor members **154a** and **154b**.

[**0428**] A plurality of contact holes **185a**, **185b**, **182a**, and **182b** which expose the expansion portions **177a** and **177b** of the drain electrodes **175a** and **175b** and the end portions **179a** and **179b** of the data lines **171a** and **171b**, respectively, are formed on the protective layer **180**. A plurality of contact holes **181** which expose end portions **129** of the gate lines **121** are formed on the protective layer **180** and the gate insulating layer **140**.

[**0429**] A plurality of pixel electrodes **191** including first and second sub pixel electrodes **191a** and **191b** and a plurality of contact assistants **81**, **82a**, and **82b** are formed on the protective layer **180**. The components may be made of a transparent conductive material such as, for example, ITO and IZO or a reflective metal such as, for example, aluminum (Al), silver (Ag), chromium (Cr), and an alloy thereof.

[**0430**] The pixel electrode **191** has the shape of a rectangle having four chamfered corners which has an angle of about 45° with respect to the gate lines **121**.

[**0431**] A pair of the first and second sub pixel electrodes **191a** and **191b** constituting the pixel electrode **191** are engaged with each other with gaps **92** and **93** interposed therebetween. The second sub pixel electrode **191b** has the shape of an isosceles trapezoid of which the base is recessed in the shape of a trapezoid. Also, most portions of the second sub pixel electrode **191b** are surrounded by the first sub pixel electrode **191a**. The first sub pixel electrode **191a** includes upper, lower, and central trapezoids which are connected to each other at the left side.

[**0432**] The pixel electrode **191** has a pair of first primary edges **193** and **194** facing each other and second primary edges which are connected to the first primary edges **193** and **194** and include a plurality of sawteeth **90** and lower edges **90c** connecting the sawteeth **90**. Each of the sawteeth **90** includes first and second slanted edges **90a** and **90d** which are slanted with respect to the first primary edges **193** and **194** and an upper edge **90b**. The first primary edges **193** and **194** are parallel to the gate lines **121**. The first primary edges **193** and **194** and the second primary edges constitute an

approximate rectangle. The pixel electrode **191** has the four chamfered corners which has an angle of about 45° with respect to the gate lines **121**. The first slanted edge **90a** partially overlaps the data line **171**. The first slanted edges **90a** of the adjacent two pixel electrodes **191** are disposed to face each other in parallel to each other.

[0433] The first sub pixel electrode **191a** includes cutout portions **94a** and **94b** which extend from an upper side of an upper trapezoid and a lower side of a lower trapezoid toward the right side thereof, respectively. A central trapezoid of the first sub pixel electrode **191a** is inserted into a receded lower side of the second sub pixel electrode **191b**. In addition, the first sub pixel electrode **191a** includes a central cutout portion **91** which has a transverse portion and a pair of slanted portions connected thereto. The transverse portion extends shortly along a transverse central line of the first sub pixel electrode **191a**. A pair of the slanted portions extend from the transverse portion toward the left side of the first sub pixel electrode **191a** with an angle of about 45° with respect to the storage electrode line **131**. The gaps **92** and **93** between the first and second sub pixel electrodes **191a** and **191b** include two pairs of upper and lower slanted portions and a longitudinal portion which have an angle of about 45° with respect to the gate lines **121**.

[0434] The cutout portions **91** to **94b** have an inversion symmetry with respect to the storage electrode line **131**. The cutout portions **91** to **94b** extend in perpendicular to each other with slanted angles of about 45° with respect to the gate lines **121**. The pixel electrode **191** is divided into a plurality of partitions by the cutout portions **91** to **94b**.

[0435] Accordingly, the upper and lower half regions with respect to the storage electrode line **131** bisecting the pixel electrode **191** in the transverse direction are divided into four partitions by the cutout portions **91** to **94b**.

[0436] The number of the partitions and the number of the cutout portions may vary according to design factors such as, for example, the size of the pixel electrode **191**, the ratio of lengths of the transverse and longitudinal sides of the pixel electrode **191**, and the types or characteristics of the liquid crystal layer **3**.

[0437] The first and second sub pixel electrodes **191a** and **191b** are connected to the first and second drain electrodes **175a** and **175b** through the contact holes **185a** and **185b** and applied with data voltages from the first and second drain electrodes **175a** and **175b**. A pair of the sub pixel electrodes **191a** and **191b** are applied with different predetermined data voltages for one input image signal. The sizes of the data voltages may be determined according to the areas and shapes of the sub pixel electrodes **191a** and **191b**. In addition, the areas of the sub pixel electrodes **191a** and **191b** may be different from each other. For example, the second sub pixel electrode **191b** has a higher voltage applied thereto than applied to the first sub pixel electrode **191a**, and the area of the second sub pixel electrode **191b** may be smaller than that of the first sub pixel electrode **191a**.

[0438] The first/second sub pixel electrodes **191a** (**191b**) is physically and electrically connected to the first/second drain electrodes **175a** (**175b**) through the contact holes **185a** (**185b**) and has data voltages applied thereto from the first and second drain electrodes **175a** (**175b**). A pair of the sub pixel electrodes **191a** and **191b** have different predetermined

data voltages for one input image signal applied thereto. The sizes of the data voltages may be determined according to, for example, the areas and shapes of the sub pixel electrodes **191a** and **191b**. In addition, the areas of the sub pixel electrodes **191a** and **191b** may be different from each other. For example, the second sub pixel electrode **191b** may have a higher voltage applied thereto than applied to the first sub pixel electrode **191a**, and the area of the second sub pixel electrode **191b** may be smaller than that of the first sub pixel electrode **191a**.

[0439] The sub pixel electrodes **191a** and **191b** having data voltages applied thereto and the common electrode **270** having the common voltage applied thereto constitutes first and second liquid crystal capacitors which sustain the applied voltages after the thin film transistor turns off.

[0440] Each of the liquid crystal capacitors includes a corresponding portion of the liquid crystal layer **3** as the dielectric member.

[0441] The first and second sub pixel electrodes **191a** and **191b** and the expansion portions **177a** and **177b** of the drain electrodes **173a** and **173b** electrically connected thereto overlap the storage electrode **137**, the extension portion **139**, and the storage electrode line **131** with the gate insulating layer **140** interposed therebetween so as to constitute a storage capacitor for strengthening a voltage storage capacity of the liquid crystal capacitor.

[0442] The contact assistants **81**, **82a**, and **82b** are connected to the end portions **129** of the gate lines **121** and the end portion **179** of the data line **171** through the contact holes **181**, **182a**, and **182b**, respectively.

[0443] Now, the common electrode panel **200** will be described in detail.

[0444] A light blocking member **220** is formed on the insulating substrate **210** made of a transparent glass or a plastic material. The light blocking member **220** include line-shaped portions corresponding to the data lines **171**, enlarged portions formed by enlarging some portions of the light blocking member **220**, and plane-shaped portions corresponding to the thin film transistors. The light blocking member **220** prevents light leakage between the pixel electrodes **191** and defining opening regions facing the pixel electrodes. However, the light blocking member **220** may further include a plurality of opening portions facing the pixel electrodes **191** and having substantially the same shape as the pixel electrodes **191**.

[0445] A plurality of color filters **230** are formed on the substrate **210**. Most portions of the color filters **230** are disposed in regions surrounded by the light-blocking member **220**. Also, the color filters **230** extend along rows of the pixel electrodes **191** in the longitudinal direction. Each of the color filters **230** can display one of primary colors such as red, green, and blue.

[0446] A cover film **250** is formed on the color filters **230** and the light-blocking member **220**. The cover film **250** may be made of an (e.g., organic) insulating material. The cover film **250** prevents the color filters **230** from being exposed and provides a planarized surface. The cover film **250** may be omitted.

[0447] A common electrode **270** is formed on the cover film **250**. The common electrode **270** is made of a transparent conductive material such as, for example, ITO and IZO.

[0448] A plurality of cutout portions 71, 72, 73a, 73b, 74a, 74b, and 75 are formed on the common electrode 270.

[0449] One cutout portion set 71-75 faces one pixel electrode 191 and includes a central cutout portion 71, first to third lower slanted cutout portions 72, 73a, and 74a, first to third upper slanted cutout portions 72, 73b, and 74b, and a connection portions 75. The cutout portions 71, 72, 73a, 73b, 74a, and 74b are disposed between the adjacent cutout portions 91, 92, 93a, 93b, 94a, and 94b of the pixel electrode 191 or between the cutout portions 91, 92, 93a, 93b, 94a, an 94b and the chamfered edge of the pixel electrode 191. In addition, each of the cutout portions 71, 72, 73a, 73b, 74a, and 74b extends substantially in parallel to the lower cutout portions 92, 93a, and 94a or upper cutout portions 92, 93b, and 94b of the pixel electrode 191 and include at least one slanted portion.

[0450] The first lower and upper slanted cutout portions 72 extend substantially from the right side to the left side of the pixel electrode 191. The second lower and upper slanted cutout portions 73a and 73b extend substantially from the right side to the upper and lower left corners of the pixel electrode 191, respectively. The third lower and upper slanted cutout portions 74a and 74b extend substantially from the right side to the lower and upper sides of the pixel electrode 191, respectively. The third lower and upper slanted cutout portions 74a and 74b include terminated transverse portions which extend from the ends of the third lower and upper slanted cutout portions 74a and 74b to overlap the lower and upper sides of the pixel electrode 191. The terminated transverse portions have an obtuse angle with respect to the the slanted cutout portions 74a and 74b.

[0451] The central cutout portion 71 includes a central transverse portion and a pair of slanted portions. The central transverse portion extends substantially from the right side of the pixel electrode 191 along the storage electrode line 131 in the left direction. A pair of the slanted portions extend substantially in parallel to the lower and upper cutout portions 72, 73a, 73b, 74a, and 74b from the end of the central transverse portion to the left side of the pixel electrode 191.

[0452] One end of the one slanted portion of the central cutout portion 71 and one end of the second lower cutout portion 73a of the adjacent pixel electrode are connected with one of the connection portions 75. Moreover, one end of the other slanted portion of the central cutout portion 71 and one end of the second upper cutout portion 73b of the adjacent pixel electrode are connected with one of the connection portions 75. In addition, one end of the first lower slanted cutout portion 72 and one end of the third lower slanted cutout portion 74a of the adjacent pixel electrode are connected with one of the connection portions 75. Also, one end of the first upper slanted cutout portion 72 and one end of the third upper slanted cutout portion 74b of the adjacent pixel electrode are connected with one of the connection portions 75. The connection portions 75 are parallel to the first slanted edges 90a of the pixel electrode 191 and located at portions corresponding to the data line 171. The width of the connection portions 75 is larger by about 8 μm than the interval between the adjacent pixels 191. The enlarged portions 222 of the light blocking member 220 may have a width larger than the other portions corresponding to the connection portions 75.

[0453] Triangular-shaped notches 7 are formed in the slanted portions of the cutout portions 71 to 74b. Alternatively, the notches may have various shapes such as, for example, rectangular, trapezoidal and semicircular shapes. In addition, the notches may be formed in a shape of convex or concave. Such notches control the alignment of the liquid crystal molecules 3 located in boundary regions corresponding to the cutout portions 71 to 74b.

[0454] The number and directions of the cutout portion 71 to 75 may vary according to design factors, and the light-blocking member 220 overlaps the cutout portions 71 to 75 to prevent the light leakage in the vicinity of the cutout portions 71 to 75.

[0455] In addition, by providing the sawteeth to the side of the pixel electrode 191 adjacent to the data line 171, the secondary electric field generated between the adjacent pixel electrodes 191 can control the alignment of the liquid crystal molecules 31 in the sub areas. In addition, by providing the connection portions 75 at the positions corresponding to the regions where the first slanted edges 90a of the adjacent two pixel electrodes 191 face each other, the alignment of the liquid crystal molecules 31 in the sub areas can also be controlled.

[0456] Alignment films 11 and 21 are coated on inner surfaces of the panels 100 and 200, respectively. The alignment films 11 and 21 may be a vertically-aligned film. Polarizers are disposed on outer surfaces of the panels 100 and 200, respectively.

[0457] According to a liquid crystal display apparatus of the exemplary embodiments of the present invention, longitudinal cutout portions among cutout portions of a common electrode are removed, so that the removed areas can be used as a light transmitting area. In addition, since connection portions corresponding to gaps between the pixel electrodes are provided to the common electrode, alignment of liquid crystal molecules in sub pixel areas can be controlled due to secondary electric fields, thereby reducing texture and improving aperture ratio and transmittance of the liquid crystal display apparatus.

[0458] Having described the exemplary embodiments of the present invention, it is further noted that it is readily apparent to those of reasonable skill in the art that various modifications may be made without departing from the spirit and scope of the invention which is defined by the metes and bounds of the appended claims.

What is claimed is:

1. A display panel comprising:

a substrate; and

a pixel electrode disposed on the substrate and having a pair of first primary edges facing each other and a pair of second primary edges connected to the first primary edges and facing each other,

wherein the second primary edges comprises a plurality of protrusions of the pixel electrode having a sawteeth shape.

2. A display panel comprising:

a substrate;

a plurality of gate lines disposed on the substrate;

- a plurality of data lines perpendicular to the gate lines;
 - a plurality of thin film transistors connected to the gate lines and the data lines; and
 - a plurality of pixel electrodes connected to the thin film transistors,
- wherein each of the pixel electrodes comprises:
- a pair of first primary edges parallel to the gate line and facing each other; and
 - a pair of second primary edges connected to the first primary edges and facing each other and comprises a plurality of protrusions having a sawteeth shape.
3. The display panel of claim 1, wherein the pixel electrode comprises a plurality of cutout portions which have a slanted angle with respect to the first primary edges.
 4. The display panel of claim 3, wherein each of the protrusions comprises a first edge which has an angle comprising one of about 135° or more or about 45° or less with respect to the cutout portions.
 5. The display panel of claim 4, wherein each of the protrusions further comprises a second edge which is parallel to the cutout portions.
 6. The display panel of claim 1, wherein an envelope of the protrusions and the first primary edges constitute a rectangle.
 7. The display panel of claim 6, wherein at least one of corners of the rectangle is a chamfered slanted edge.
 8. The display panel of claim 7, wherein the chamfered slanted edge of the rectangle has an angle of about 45° with respect to the first primary edges.
 9. The display panel of claim 2, wherein the protrusions overlap the data lines.
 10. The display panel of claim 2, wherein the protrusions of the adjacent second primary edges of the adjacent pixel electrodes are engaged with each other.
 11. A liquid crystal display apparatus comprising:
 - a plurality of pixel electrodes;
 - a common electrode facing the pixel electrodes;
 - a liquid crystal layer interposed between the pixel electrodes and the common electrode; and
 - a first and a second partition member dividing each of the pixel electrodes into a plurality of sub areas,

wherein each of the sub areas comprises a pair of primary edges and a plurality of secondary edges connected thereto, and

wherein the primary edges of the two sub areas included in the pixel electrodes are disposed to deviate from each other.
 12. The liquid crystal display apparatus of claim 11, wherein the primary edges have a slanted angle with respect to the first and second partition members.
 13. The liquid crystal display apparatus of claim 11, wherein at least one of the secondary edges of each of the sub areas has an angle of about 135° or more with respect to the primary edges.
 14. The liquid crystal display apparatus of claim 11,
 - wherein the primary edges of each of the sub areas comprise a first primary edge and a second primary edge which is shorter than the first primary edge.
 15. The liquid crystal display apparatus of claim 11,
 - wherein the first partition member is disposed in each of the pixel electrodes, and
 - wherein the second partition member is disposed in the common electrode.
 16. The liquid crystal display apparatus of claim 15,
 - wherein a portion of sides of the pixel electrode constitute the secondary edge of each of the sub areas, and
 - wherein the second partition member is disposed not to overlap a portion of the sides of the pixel electrodes which constitute the secondary edge of each of the sub areas.
 17. The liquid crystal display apparatus of claim 15, wherein the first and second partition members comprise cutout portions.
 18. The liquid crystal display apparatus of claim 15, wherein the common electrode comprises connection cutout portions which face gaps between the pixel electrodes.
 19. The liquid crystal display apparatus of claim 18, wherein the connection cutout portions connect adjacent second partition members.
 20. The liquid crystal display apparatus of claim 19, wherein the connection cutout portions have an obtuse angle with respect to the second partition members.
 21. The liquid crystal display apparatus of claim 18, wherein widths of the connection cutout portions are larger than those of the gaps.
 22. The liquid crystal display apparatus of one of claim 11, further comprising data lines which overlap the secondary edges of the sub areas.
 23. The liquid crystal display apparatus of claim 22, wherein the connection cutout portions face the data lines.
 24. The liquid crystal display apparatus of claim 22, further comprising a light blocking member which faces the data lines.
 25. The liquid crystal display apparatus of claim 31,
 - wherein a portion of the secondary edges of the sub areas is disposed not to overlap the data lines, and
 - wherein the light blocking member further comprises an expansion portion which covers the portion of the secondary edges of the sub areas which is disposed not to overlap the data lines.
 26. The liquid crystal display apparatus of one of claim 11, wherein each of the pixel electrodes includes at least two sub pixel electrodes which are physically separated from each other by a portion of the second partition members.
 27. The liquid crystal display apparatus of claim 26,
 - wherein the sub pixel electrodes of one pixel electrode are connected to different data lines, and
 - wherein the sub pixel electrodes of one pixel electrode are connected to the same gate line.
 28. The liquid crystal display apparatus of claim 26,
 - wherein the sub pixel electrodes of one pixel electrode are connected to different gate lines, and
 - wherein the sub pixel electrodes of one pixel electrode are connected to the same data line.

- 29.** A liquid crystal display apparatus, comprising:
- a first and a second substrate facing each other;
 - a plurality of pixel electrodes disposed on the first substrate;
 - a common electrode disposed on the second substrate; and
 - a liquid crystal layer interposed between the first and the second substrate,
- wherein the common electrode comprises first cutout portions facing gaps located between the adjacent pixel electrodes.
- 30.** The liquid crystal display apparatus of claim 29, wherein the common electrode comprises second cutout portions facing the pixel electrodes.
- 31.** The liquid crystal display apparatus of claim 30, wherein the first cutout portions connect the adjacent second cutout portions.
- 32.** The liquid crystal display apparatus of claim 30, wherein the first cutout portions have an obtuse angle with respect to the second cutout portions.
- 33.** The liquid crystal display apparatus of claim 29, wherein widths of the first cutout portions are larger than those of the gaps.
- 34.** The liquid crystal display apparatus of claim 29, wherein the pixel electrode includes third cutout portion which are disposed with the first cutout portions.
- 35.** The liquid crystal display apparatus of claim 29, wherein the first substrate comprises:
- a plurality of gate lines and a plurality of data lines which are insulated from the first substrate and which intersect each other;
 - a plurality of thin film transistors which are connected to the gate and the data lines; and
 - a plurality of pixel electrodes which are connected to the thin film transistors.
- 36.** The liquid crystal display apparatus of claim 35, wherein the gate lines have an angle of 45° with respect to the first cutout portions.
- 37.** The liquid crystal display apparatus of claim 36, wherein the boundary line of the pixel electrode overlaps a portion of the data line.
- 38.** The liquid crystal display apparatus of claim 35, wherein the first cutout portions face the data lines.

* * * * *

专利名称(译)	显示面板和包括其的液晶显示装置		
公开(公告)号	US20060227274A1	公开(公告)日	2006-10-12
申请号	US11/398242	申请日	2006-04-05
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	DO HEE WOOK KIM YEON JU UM YOON SUNG CHANG HAK SUN YOO SEUNG HOO KIM HYUN WUK LYU JAE JIN LEE CHANG HUN		
发明人	DO, HEE-WOOK KIM, YEON-JU UM, YOON-SUNG CHANG, HAK-SUN YOO, SEUNG-HOO KIM, HYUN-WUK LYU, JAE-JIN LEE, CHANG-HUN		
IPC分类号	G02F1/1343		
CPC分类号	G02F1/133707 G02F1/1393 G02F1/134309 G02F1/133753		
优先权	1020050075768 2005-08-18 KR 1020050028590 2005-04-06 KR		
其他公开文献	US7639333		
外部链接	Espacenet USPTO		

摘要(译)

提供显示面板。所述显示面板包括基板和像素电极，所述像素电极设置在所述基板上并且具有彼此面对的一对第一主边缘和连接到所述第一主边缘并且彼此面对的一对第二主边缘，其中所述第二主边缘包括：多个具有锯齿形状的像素电极的突起。

