



US009025096B2

(12) **United States Patent**  
**Tae et al.**

(10) **Patent No.:** **US 9,025,096 B2**  
(45) **Date of Patent:** **May 5, 2015**

(54) **LIQUID CRYSTAL DISPLAY DEVICE AND  
METHOD OF FABRICATION FOR THE SAME**

(56) **References Cited**

U.S. PATENT DOCUMENTS

- (75) Inventors: **Seung-Gyu Tae**, Yongin (KR);  
**Deok-Hoi Kim**, Yongin (KR); **Chung  
Yi**, Yongin (KR)
- (73) Assignee: **Samsung Display Co., Ltd.** (KR)
- (\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 302 days.

|              |      |         |                 |         |
|--------------|------|---------|-----------------|---------|
| 5,737,049    | A *  | 4/1998  | Shin et al.     | 349/122 |
| 5,859,683    | A *  | 1/1999  | Tagusa et al.   | 349/138 |
| 5,905,548    | A *  | 5/1999  | Shimada         | 349/38  |
| 5,923,390    | A    | 7/1999  | Jung Mok et al. |         |
| 6,128,060    | A    | 10/2000 | Shimada et al.  |         |
| 6,597,415    | B2 * | 7/2003  | Rho et al.      | 349/42  |
| 6,676,857    | B2 * | 1/2004  | Heeney et al.   | 252/500 |
| 2001/0007779 | A1   | 7/2001  | Lee et al.      |         |
| 2001/0019374 | A1 * | 9/2001  | Izumi et al.    | 349/43  |
| 2003/0007107 | A1 * | 1/2003  | Chae et al.     | 349/43  |
| 2003/0038241 | A1   | 2/2003  | Choo et al.     |         |
| 2005/0190312 | A1   | 9/2005  | Yang            |         |
| 2005/0263769 | A1   | 12/2005 | Chul Ahn        |         |

(Continued)

(21) Appl. No.: **12/833,807**

(22) Filed: **Jul. 9, 2010**

FOREIGN PATENT DOCUMENTS

(65) **Prior Publication Data**  
US 2011/0122330 A1 May 26, 2011

JP 05-273592 10/1993  
JP 2001-312222 11/2001

(Continued)

OTHER PUBLICATIONS

(30) **Foreign Application Priority Data**

Nov. 23, 2009 (KR) ..... 10-2009-0113587  
Nov. 23, 2009 (KR) ..... 10-2009-0113589  
Mar. 30, 2010 (KR) ..... 10-2010-0028545

Korean Office Action dated Jun. 27, 2011 in Korean Priority Appli-  
cation No. 10-2010-0028545.

(Continued)

(51) **Int. Cl.**  
**G02F 1/1343** (2006.01)  
**G02F 1/1362** (2006.01)  
**G02F 1/1337** (2006.01)  
**G02F 1/139** (2006.01)

Primary Examiner — Hoan C Nguyen

(74) *Attorney, Agent, or Firm* — Knobbe Martens Olson &  
Bear LLP


(52) **U.S. Cl.**  
CPC .... **G02F 1/136213** (2013.01); **G02F 1/133703**  
(2013.01); **G02F 1/1393** (2013.01); **G02F**  
**2001/133792** (2013.01)

(57) **ABSTRACT**

A liquid crystal display device is disclosed. The device includes: a first substrate, a thin film transistor formed in a first, non-transmissive region on the first substrate, including a gate electrode, a source electrode and a drain electrode, and a storage capacitor formed in a second, transmissive region on the first substrate, where a first electrode and a second electrode of the storage capacitor are made of a transparent conductive material.

(58) **Field of Classification Search**  
USPC ..... 349/38–39  
See application file for complete search history.

**13 Claims, 10 Drawing Sheets**

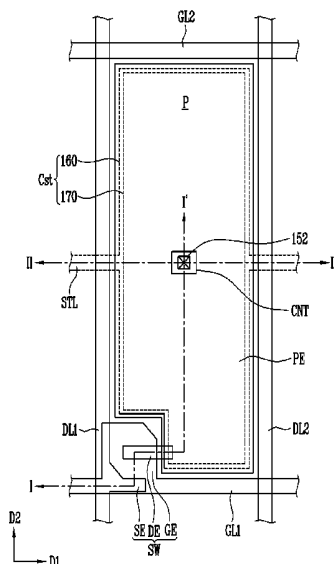

(56)

**References Cited**

## U.S. PATENT DOCUMENTS

2009/0109392 A1 4/2009 Hsieh et al.  
 2009/0256980 A1 10/2009 Takeda et al.  
 2009/0262270 A1 10/2009 Kim et al.  
 2009/0284700 A1 11/2009 Kim et al.  
 2010/0283952 A1 11/2010 Hashimoto et al.  
 2011/0024753 A1\* 2/2011 Liou ..... 257/59

## FOREIGN PATENT DOCUMENTS

JP 10-333178 1/2002  
 JP 2005-338855 12/2005  
 KR 10-0124976 1/1997  
 KR 1999-003712 1/1999  
 KR 2001-0063293 7/2001  
 KR 20010063293 7/2001  
 KR 2001-0085344 9/2001  
 KR 10-2002-0072457 9/2002  
 KR 20020072457 9/2002  
 KR 10-2009-0119059 11/2009

KR 20090119059 11/2009  
 WO 2005/121884 12/2005  
 WO 2009/037835 3/2009

## OTHER PUBLICATIONS

Search Report dated Dec. 20, 2010 in corresponding European Application No. 10251593.9.  
 Office Action dated Feb. 28, 2012 in Korean Priority Patent Application No. 10-2010-0028545.  
 Office Action dated Sep. 28, 2012 in Korean Priority Patent Application No. 10-2010-0028545.  
 Office Action dated Jul. 24, 2012 in corresponding Japanese Patent Application No. 2010-141711.  
 Office Action dated Jun. 20, 2013 in Korean Priority Application No. 10-2010-0028545.  
 Office Action dated Jan. 22, 2013 in corresponding Japanese Patent Application No. 2010-141711.  
 Office Action dated Dec. 23, 2014 in corresponding European Patent Application No. 10251593.9 claiming priority to Korean Patent Application No. 10-2009-0113589, 10-2009-0113587 and 10-2010-0028545.

\* cited by examiner

FIG. 1

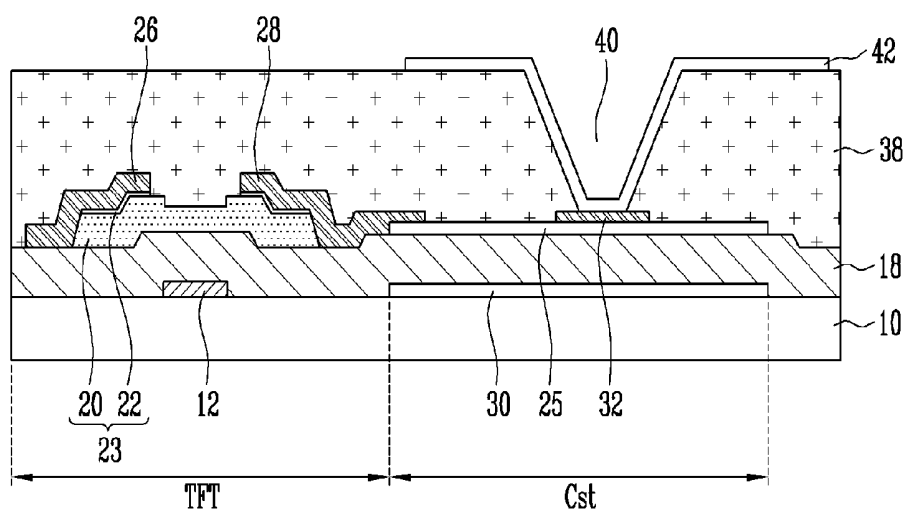
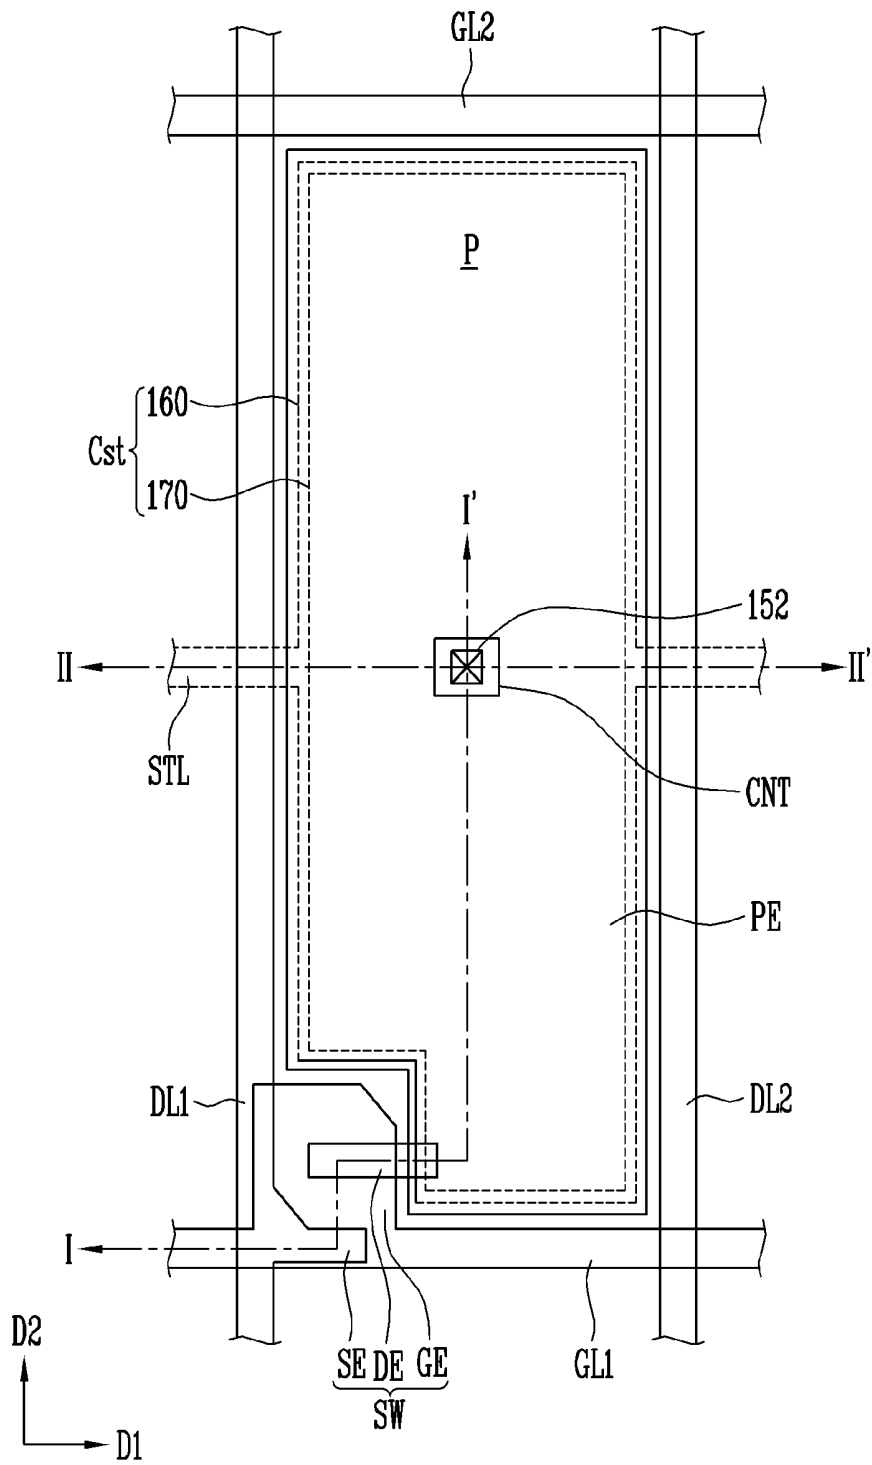


FIG. 2



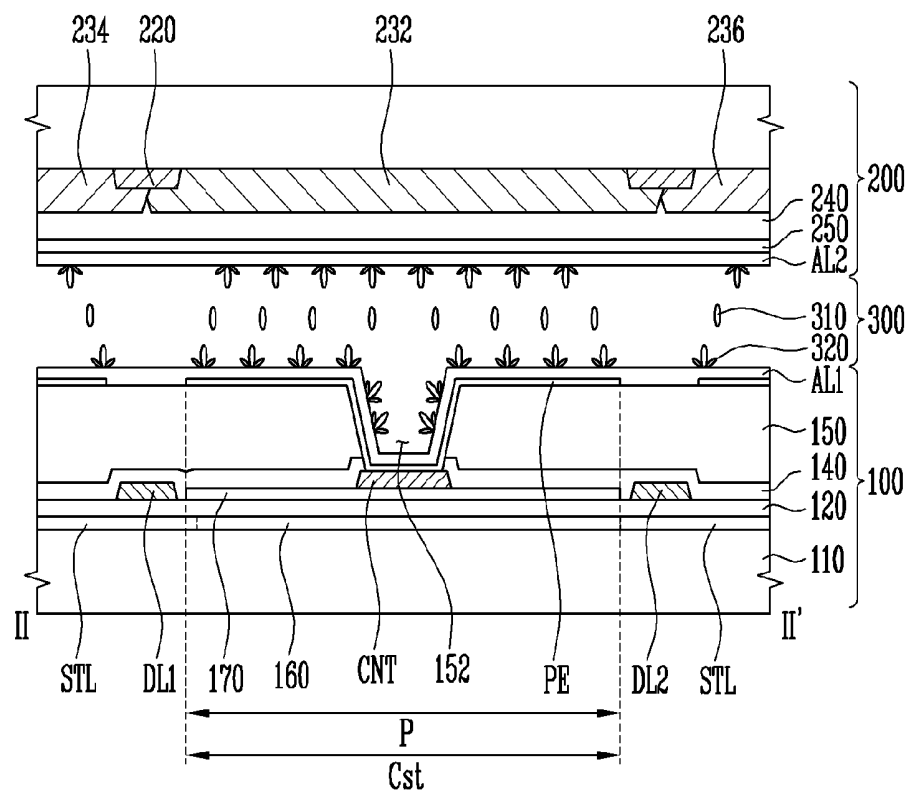


FIG. 3C

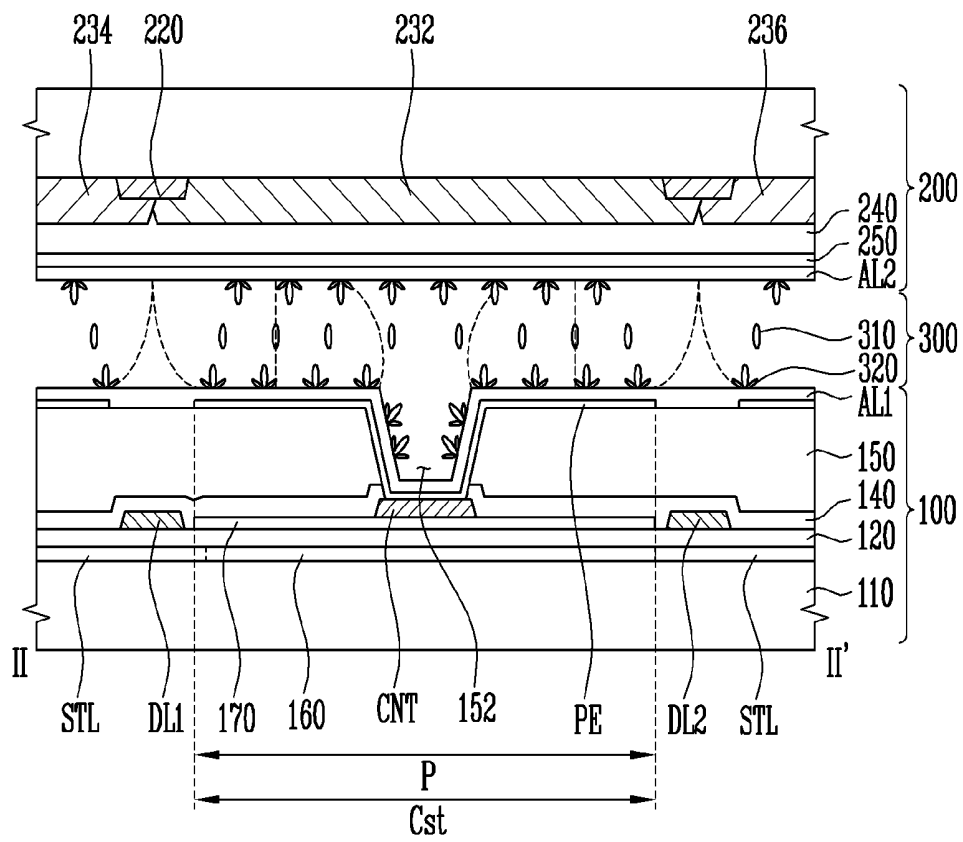


FIG. 4A

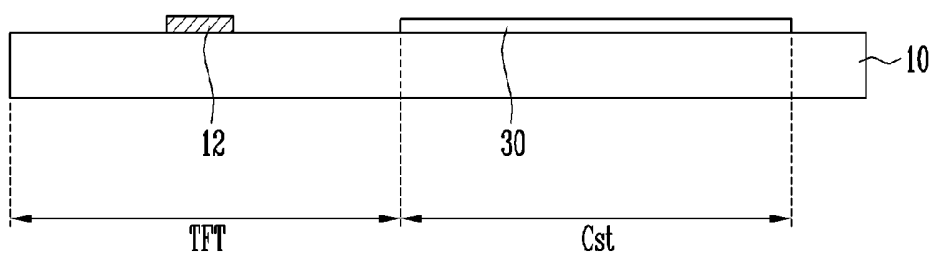


FIG. 4B

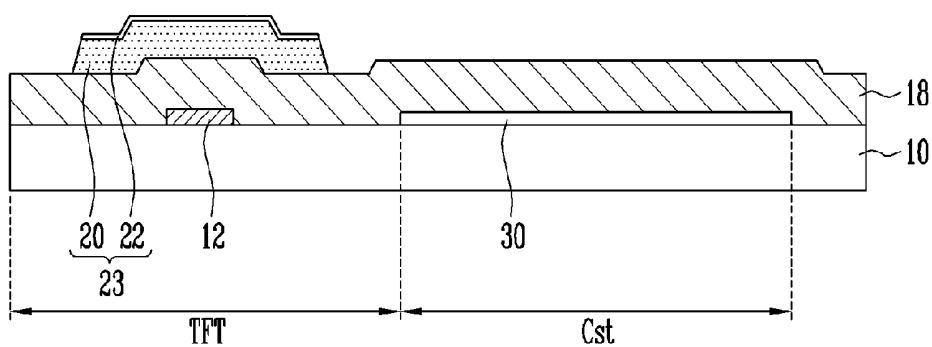


FIG. 4C

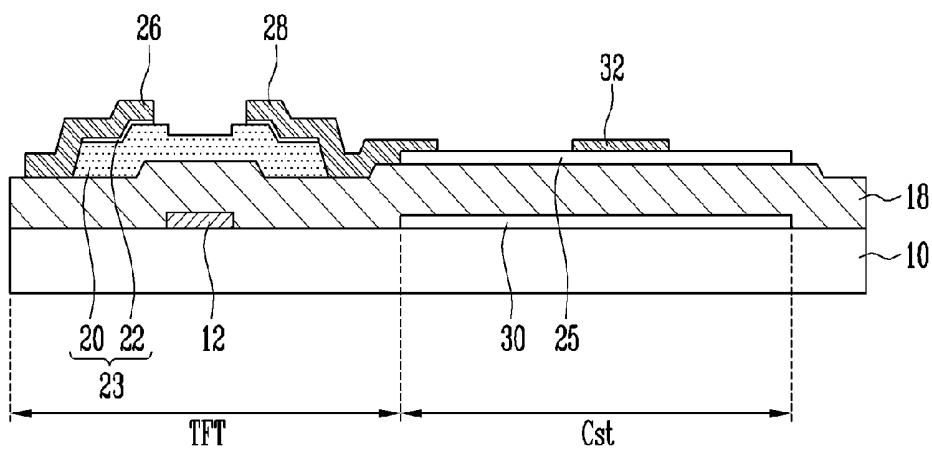


FIG. 4D

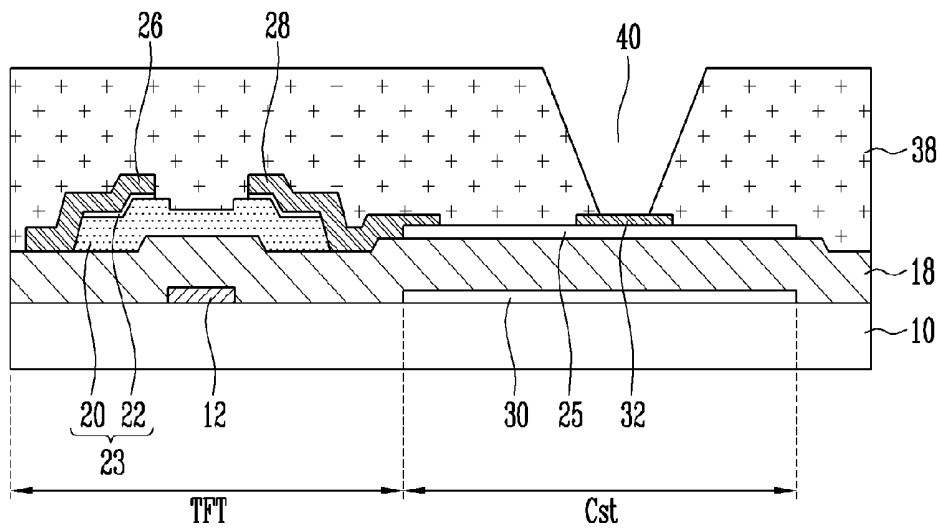


FIG. 4E

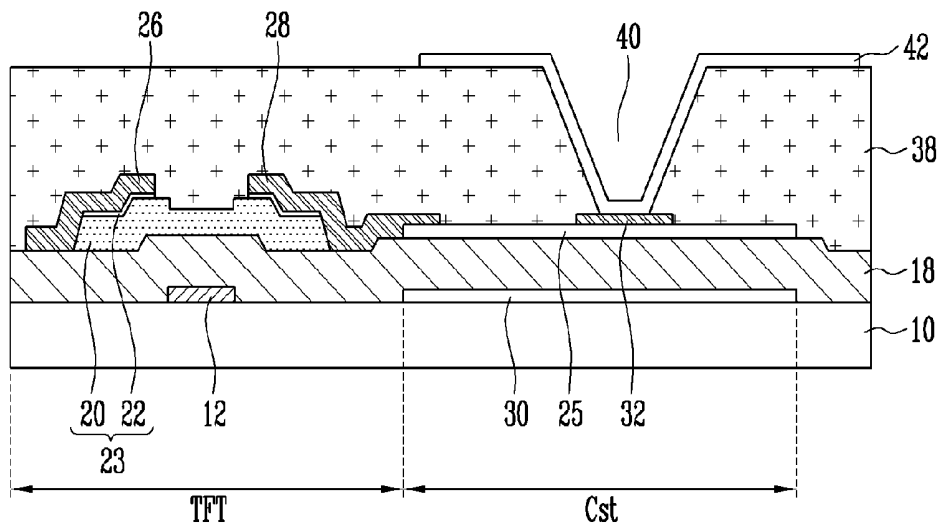






FIG. 5D

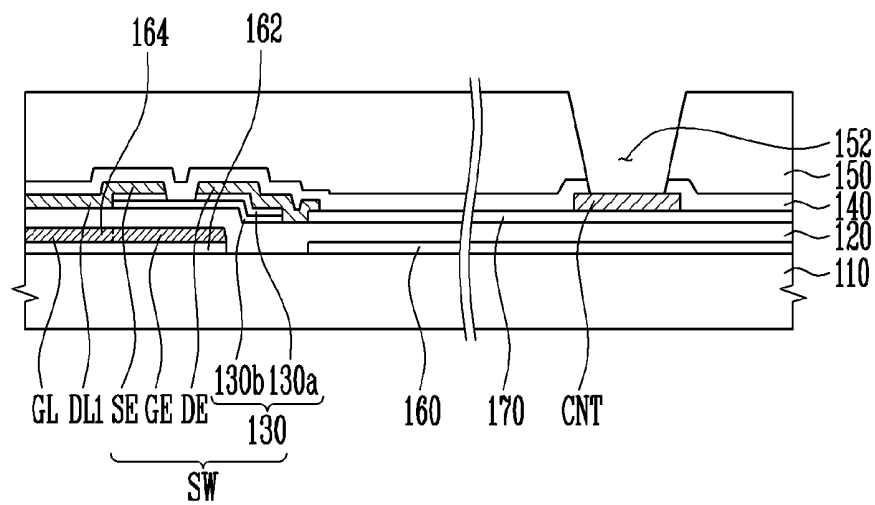


FIG. 5E

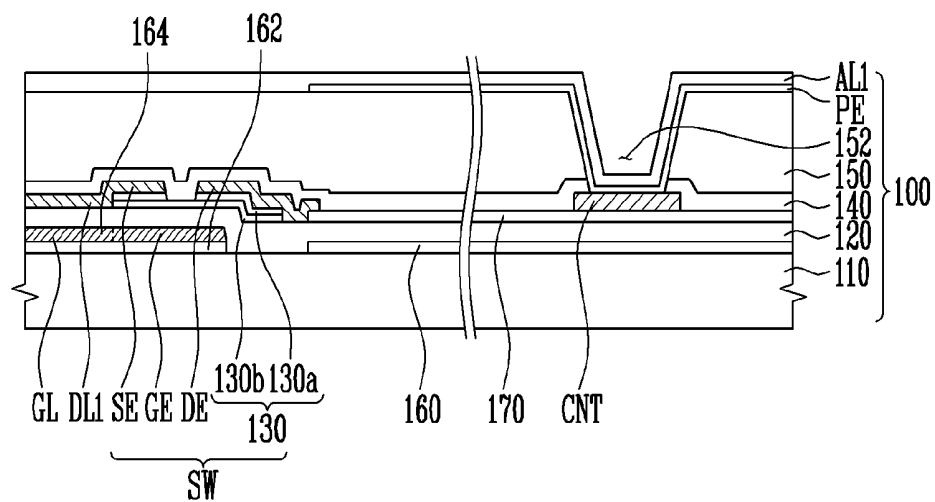


FIG. 6A

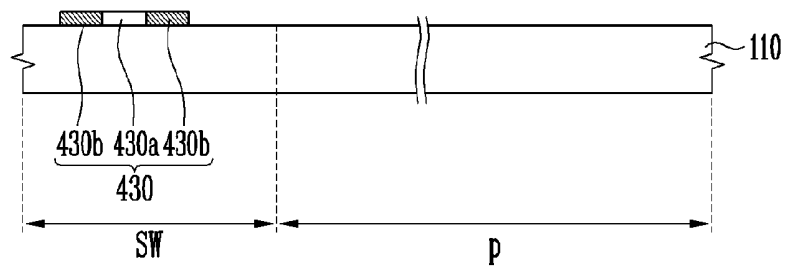


FIG. 6B

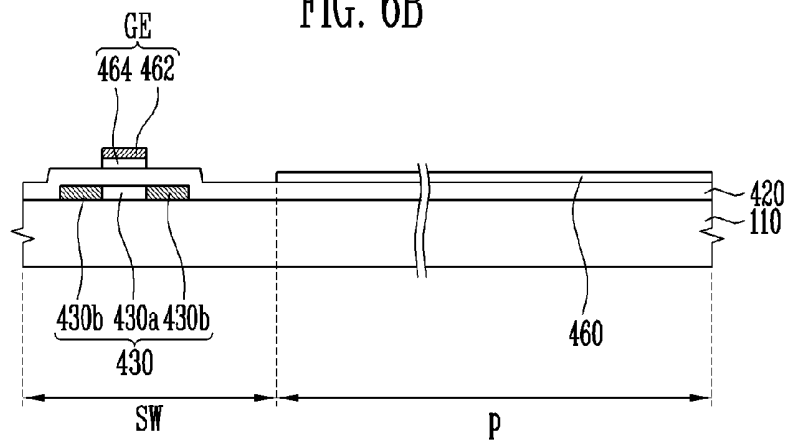


FIG. 6C

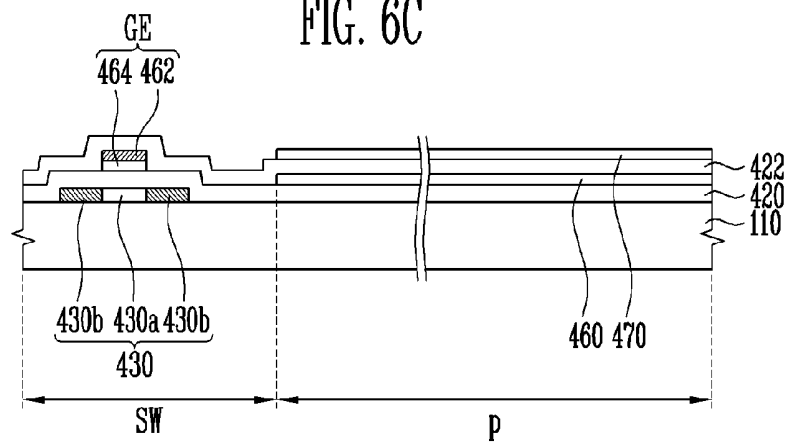


FIG. 6D

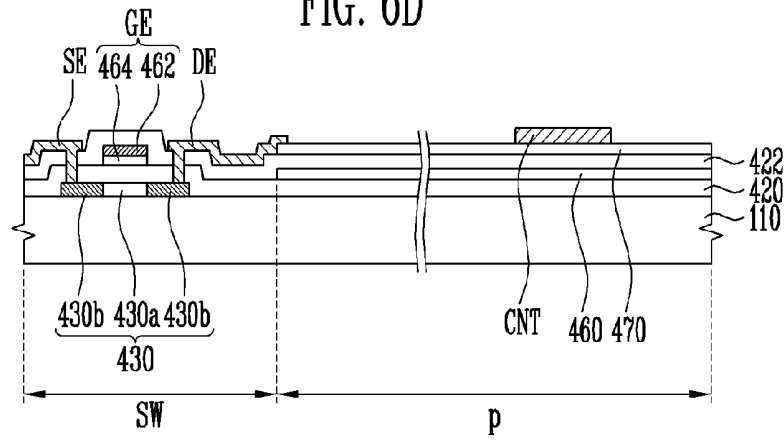


FIG. 6E


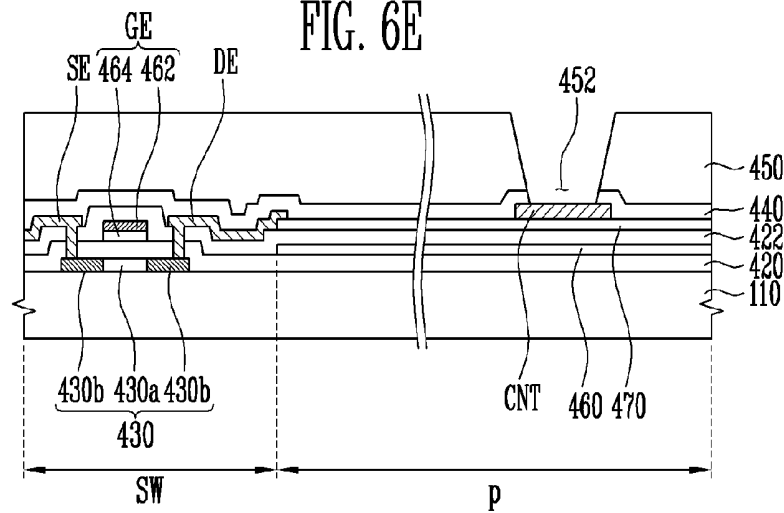


FIG. 6F

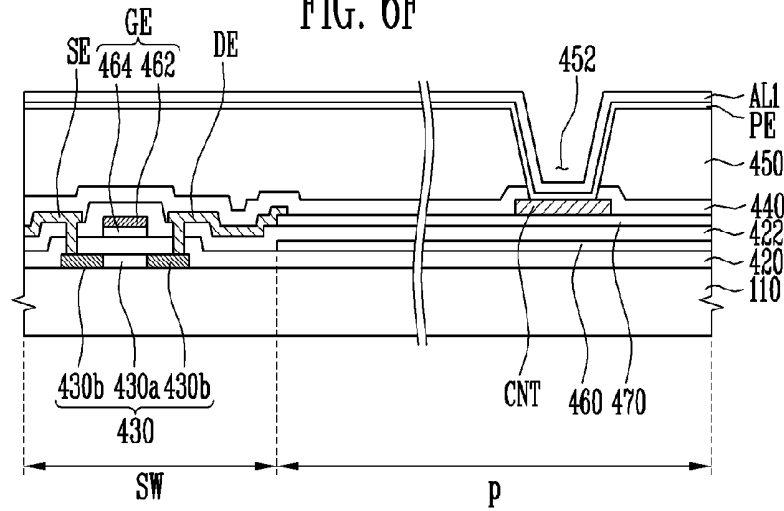

# LIQUID CRYSTAL DISPLAY DEVICE AND METHOD OF FABRICATION FOR THE SAME

## CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority to and the benefit of Korean Patent Application No. 10-2009-0113587, filed on Nov. 23, 2009, Korean Patent Application No. 10-2009-0113589, filed on Nov. 23, 2009, and Korean Patent Application No. 10-2010-0028545, filed on Mar. 30, 2010, in the Korean Intellectual Property Office, and the entire content of each of these applications is incorporated herein by reference.

## BACKGROUND

### 1. Field

Embodiments of the present invention relate to a liquid crystal display device and a fabrication method of the same, and more specifically, embodiments of the present invention relate to a medium and small-sized liquid crystal display device to display images, having a size smaller than a typical laptop computer, and a fabrication method of the medium and small-sized liquid crystal display device.

### 2. Description of the Related Technology

A liquid crystal display device controls light transmittance of a liquid crystal by using an electric field, thereby displaying images. The liquid crystal display device controls a field between a pixel electrode and a common electrode, which are disposed facing each other, one on a lower substrate on which a thin film transistor is formed and the other on an upper substrate on which a color filter is formed, thereby driving the liquid crystal.

In general, a liquid crystal display device includes a lower substrate and an upper substrate, which are bonded to one another, and face each other, a spacer to uniformly maintain a cell gap between the lower substrate and the upper substrate, and a liquid crystal filled in the cell gap.

The upper substrate is generally configured to include a color filter to implement colors, a black matrix to prevent light leakage, a common electrode to control an electric field, and an alignment layer coated to align the liquid crystal. The lower substrate is generally configured to include a plurality of signal wires and a thin film transistor, a pixel electrode connected to the thin film transistor, and an alignment layer coated to align the liquid crystal. In addition, the lower substrate includes a storage capacitor to stably maintain a pixel voltage in the pixel electrode.

The storage capacitor is typically formed by forming a lower electrode and an upper electrode, and an insulating layer therebetween. The storage capacitor is generally required to have a large capacitance, in order to be applied to a high resolution display while maintaining the pixel voltage signal stable. However, in order to increase the capacitance of the storage capacitor, the area of overlap between the upper and lower electrodes of the storage capacitor generally needs to be widened. The area occupied by the upper and lower electrodes contributes to degrading the aperture ratio.

Among the operation modes of liquid crystal display devices, the PVA (Patterned Vertical Alignment) mode can improve the viewing angle of the liquid crystal display devices by arranging the liquid crystal particles in different directions to form a liquid crystal domain, using a patterned transparent electrode. This necessitates a process for forming the patterned transparent electrode to manufacture a liquid crystal display device operable in the PVA mode.

Another way to implement the PVA mode is by forming protrusions on an opposite substrate, and a common electrode on the substrate with the protrusions, to form a liquid crystal domain. In such devices an independent process of forming the protrusions is necessitated.

The process of patterning the transparent electrode and/or the process of forming protrusions while forming the liquid crystal domain of a liquid crystal display device increase the number of manufacturing processes. Further, misalignment between the display substrate and the opposite substrate during assembly contributes to misalignment of the patterns of the pixel electrodes of the display substrate and the common electrodes of the opposite substrate, thereby complicating the formation of the liquid crystal domain. Patterning the transparent electrode and forming the protrusions also decrease the aperture ratio of the liquid crystal display device.

## SUMMARY OF CERTAIN INVENTIVE ASPECTS

Embodiments of the invention help to provide a medium and small sized liquid crystal display device with improved aperture ratio and electrostatic capacity.

One aspect is a liquid crystal display device, including: a first substrate, a thin film transistor formed in a first, non-transmissive region on the first substrate, including a gate electrode, a source electrode and a drain electrode, and a storage capacitor formed in a second, transmissive region on the first substrate, where a first electrode and a second electrode of the storage capacitor are made of a transparent conductive material.

Another aspect is a method of fabrication of a liquid crystal display device, the method including: forming a gate electrode of a thin film transistor and a first electrode of a storage capacitor on a first substrate, where the gate electrode includes a transparent conductive material, and a low-resistance metal, stacked together, forming a second electrode of the storage capacitor on a first insulating layer overlapping the first electrode, forming a second insulating layer including a depressed pattern exposing a portion of the second electrode, forming a domain forming layer, and forming a pixel electrode on the domain forming layer overlapping the second electrode, where the first electrode and the second electrode of the storage capacitor include a transparent conductive material.

Another aspect is a liquid crystal display device, including: a first substrate including: a storage capacitor including a thin film transistor disposed in a non-transmissive region, a transparent first electrode, a dielectric film, and a transparent second electrode which are sequentially formed in a transmissive region, and a pixel electrode, a second substrate facing the first substrate and having a common electrode, and a liquid crystal layer disposed between the first substrate and the second substrate, where the transmissive region is the region where the pixel electrode overlaps the common electrode.

## BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, together with the disclosure, illustrate certain exemplary embodiments of the present invention.

FIG. 1 is a cross-sectional view of an embodiment of a liquid crystal display device;

FIG. 2 is a plan view of another embodiment of a liquid crystal display device;

FIG. 3A is a cross-sectional view taken along line I-I' of FIG. 2;

FIG. 3B is a cross-sectional view taken along line II-II' of FIG. 2;

FIG. 3C is a cross-sectional view illustrating application of voltage to the embodiment of the display device shown in FIG. 3B;

FIGS. 4A to 4E are cross-sectional views illustrating an embodiment of a manufacturing process of the embodiment of a liquid crystal display device shown in FIG. 1;

FIGS. 5A to 5E are cross-sectional views illustrating an embodiment of a manufacturing process of a portion of an embodiment of a liquid crystal display device shown in FIGS. 2 and 3; and

FIGS. 6A to 6F are cross-sectional views illustrating another embodiment of a manufacturing process of a portion of the embodiment of a liquid crystal display device shown in FIGS. 2 and 3.

#### DETAILED DESCRIPTION OF CERTAIN INVENTIVE EMBODIMENTS

The drawings and description are to be regarded as illustrative in nature and not restrictive. When an element is referred to as being "on" another element, it can be directly on the other element or be indirectly on the other element with one or more intervening elements interposed therebetween. When an element is referred to as being "connected to" another element, it can be directly connected to the other element or be indirectly connected to the other element with one or more intervening elements interposed therebetween. Like reference numerals generally refer to like elements.

Herein, i) a shape, a size, a ratio, an angle, a number, etc. shown in the accompanying drawing are schematically shown and therefore, can be slightly changed. ii) since the drawings are shown with observer's eyes, a direction or a position explaining the drawings can be variously changed according to the position of the observer. iii) although different reference numerals can be used, like reference numerals can refer to like components iv) when 'comprising', 'having', 'consisting of', etc. are used, other components can be added unless 'only' is used. v) even when a component is explained in singular number they may be interpreted as plural number. vi) even though a shape, a size comparison, a positional relation, etc., are not described as 'about', 'substantially', etc., they are to be interpreted as including general tolerance. vii) even though terms such as 'after', 'before', 'next to', 'and', 'herein', 'subsequent to', 'at this time', etc. are used, they are not used as limiting temporal position. viii) terms such as 'first', 'second', 'third', etc., are selectively, compatibly, repeatedly, used for make convenience of division simple and are interpreted as a limiting meanings. ix) when positional relation of two portions is explained by 'on', 'upper', 'lower', 'beside', etc., one or more components may be positioned between two portions unless 'just' is not used. x) when portions are connected by 'or', the portions are interpreted as including 'alone' as well as 'combination thereof' but when portions are connected by 'or', 'one of', portions are interpreted as 'alone'.

FIG. 1 is a cross-sectional view of an embodiment of a liquid crystal display device.

The embodiment shown in FIG. 1 exemplifies a twisted nematic (TN) or vertical alignment (VA) mode liquid crystal display device, and for convenience of description, a lower substrate including a thin film transistor and a storage capacitor is shown.

Referring to FIG. 1, an embodiment of a liquid crystal display device includes a lower substrate 10, and a thin film

transistor TFT formed on a first region and a storage capacitor Cst on a second region of the lower substrate 10.

The thin film transistor TFT includes a gate electrode 12 formed on the lower substrate 10, a gate insulating layer 18 formed on the gate electrode 12, a semiconductor layer 23 formed on the gate insulating layer 18, and a source electrode 26 and a drain electrode 28 formed on the semiconductor layer 23.

The gate electrode 12 is electrically connected to a gate line (not shown) and receives a gate signal from the gate line. The gate insulating layer 18 is formed on the gate electrode 12 to electrically insulate the gate electrode 12 from the source/drain electrodes 26 and 28.

The semiconductor layer 23 forms a conduction channel between the source electrode 26 and the drain electrode 28. The semiconductor layer 23 includes an active layer 20 and an ohmic contact layer 22 formed on the active layer 20 and the source/drain electrodes 26 and 28. The active layer 20 may be made of amorphous silicon in which impurity is undoped and the ohmic contact layer 22 may be made of amorphous silicon in which N type or P type impurities are doped. The semiconductor layer 23 supplies a voltage, supplied to the source electrode 26, to the drain electrode 28, when the gate signal is supplied to the gate electrode 12.

The storage capacitor Cst comprises a storage lower electrode 30 and a storage upper electrode 25, and a gate insulating layer 18 therebetween. The storage lower electrode 30 may be made of a transparent conductive material, and may be on the same layer as the gate electrode 12. In some embodiments, the storage lower electrode 30 may be made of ITO (indium tin oxide), TO (tin oxide), IZO (indium zinc oxide), and ITZO (indium tin zinc oxide).

The storage upper electrode 25 is electrically connected to the drain electrode 28. The storage upper electrode 25 may be made of the same transparent conductive material as the storage lower electrode 30. The storage upper electrode 25 is electrically connected to a pixel electrode 42 through a contact hole 40. A contact electrode 32 is formed on the storage upper electrode 25 and is exposed by the contact hole 40.

The contact electrode 32 may be made of a material with a lower resistance than the transparent conductive material. In some embodiments, the contact electrode 32 may be made of the same material as the drain electrode 28 to lower the resistance of the storage upper electrode 25. The contact electrode 32 is electrically connected to the pixel electrode 42.

A passivation layer 38 is formed between the storage upper electrode 25 and the pixel electrode 42. The passivation layer 38 is formed to cover the source electrode 26, the drain electrode 28, the storage upper electrode 25, and the contact electrode 32.

In the embodiment shown in FIG. 1, electrodes 25 and 30 of the storage capacitor are made of a transparent conductive material.

Generally, liquid crystal display devices are classified into large liquid crystal display devices, which are typically over 11 inches, and medium and small-sized liquid crystal display devices, which are typically below 11 inches in the size of the picture.

Medium and small-sized liquid crystal display devices are generally smaller in pixel size than large liquid crystal display devices. The storage capacitor of medium and small-sized devices may be disposed in a transmissive region of a pixel. The transmissive region includes a region where a pixel electrode 42 formed on the lower substrate 10 overlaps the common electrode (not shown) of the upper substrate (not shown).

When the electrodes of the storage capacitor are made of opaque materials, the transmissive region of the medium and small-sized liquid crystal display device decreases, and the aperture ratio is significantly reduced.

In an embodiment of the present invention, it is possible to avoid reduction in the aperture ratio by forming the electrodes **25** and **30** of the storage capacitor using a transparent conductive material.

FIG. **2** is a plan view of another embodiment of a liquid crystal display device. FIG. **3A** is a cross-sectional view taken along line I-I' of FIG. **2** and FIG. **3B** is a cross-sectional view taken along line II-II' of FIG. **2**.

The embodiment shown in FIGS. **2** and **3** exemplify a High Vertical Alignment (HVA) mode, which generally improves a viewing angle of the liquid crystal display device by forming a liquid crystal domain therein.

FIGS. **3A** and **3B** show the liquid crystal display when there is no voltage applied between the pixel electrode and the common electrode. For the convenience of description, the embodiment of the display device shown includes a thin film transistor having a semiconductor layer including amorphous silicon and a bottom gate structure. Other embodiments may not include a thin film transistor.

Referring to FIGS. **2**, **3A**, and **3B**, the display device includes a first substrate **100**, a second substrate **200**, and a liquid crystal layer **300**.

The first substrate **100** includes a first base member **110**, a first gate line GL1, a second gate line GL2, a first insulating layer **120**, a first data line DL1, a second data line DL2, a thin film transistor SW that is a switching element, a second insulating layer **140**, a domain forming layer **150**, a pixel electrode PE, and first alignment layer AL1.

A storage line STL may be connected with a first electrode **160** of the storage capacitor overlapping the pixel electrode PE. A second electrode **170** of the storage capacitor may be disposed between the first electrode **160** and the pixel electrode PE to at least partially overlap the first electrode **160**. A storage capacitor Cst of each pixel may be formed by the first electrode **160** and the second electrode **170** included in the storage capacitor.

As described above, the medium and small-sized liquid crystal display devices (under 11 inches) are smaller in pixel size than larger liquid crystal display devices used for TVs, for example. The storage capacitor of medium and small-sized devices is disposed in a transmissive region P of the pixel. Accordingly, the transmittance is considerably reduced, when the first electrode **160** and the second electrode **170** of the storage capacitor include an opaque conductive material.

Liquid crystal display devices, unlike organic electro-luminescence display devices, are generally equipped with a backlight unit (not shown) providing light under the first substrate **100**. The areas of the first electrode **160** and the second electrode **170** formed of an opaque conductive material cannot be sufficiently increased in order to achieve desired transmittance. Therefore, it may be difficult to ensure sufficient capacitance of the storage capacitor, due to the limited expansion of the first electrode **160** and the second electrode **170**.

In some embodiments of the present invention, at least one of the first electrode **160** and the second electrode **170** of the storage capacitor may include a transparent conductive material. In some embodiments, the first electrode **160** and the second electrode **170** may include a transparent conductive material and an opaque conductive material, respectively. In other embodiments, the first electrode **160** and the second electrode **170** may include an opaque conductive material and

a transparent conductive material, respectively. In yet other embodiments, both of the first electrode **160** and the second electrode **170** may include a transparent conductive material.

In such embodiments, reduction of transmittance is relatively small, even if the area of at least one of the first electrode **160** and the second electrode **170** increases. Therefore, it is possible to increase the areas of the first electrode **160** and the second electrode **170** to increase the capacitance between the first electrode **160** and the second electrode.

The pixel electrode PE may correspond to the transmissive region P. In this configuration, at least one of the first electrode **160** and the second electrode **170** may extend to substantially correspond to the size of pixel electrode PE in some embodiments. In other embodiments, at least one of the first electrode **160** and the second electrode **170** may be formed wider than the pixel electrode PE. In such embodiments, at least one of the first electrode **160** and the second electrode **170** may overlap with a black matrix pattern **220** disposed in a non-transmissive region.

The reduction of transmittance is relatively small, even if at least one of the first electrode **160** and the second electrode **170** are formed in an area corresponding to the entire transmissive region P is made to overlap the pixel electrode PE substantially corresponding to the pixel region P of the pixel. It is thus possible to increase the capacitance by expanding one of the first electrode **160** and the second electrode **170** to the non-transmissive region.

In some embodiments, the transparent conductive material may include ITO (indium tin oxide), TO (tin oxide), IZO (indium zinc oxide), and ITZO (indium tin zinc oxide). These materials may be used alone or in combination.

The first and second gate lines GL1 and GL2 may extend in a first direction D1 on the first base member **110**. The first and second data lines DL1 and DL2 may be arranged substantially in parallel in a second direction D2 different from the first direction D1. The second direction D2, for example, may be perpendicular to the first direction D1. The storage line STL is disposed between the first and second gate lines GL1 and GL2 and may extend in the first direction D1. The first insulating layer **120** may be formed on the first base member **110** to cover the first and second gate lines GL1 and GL2, the storage line STL, and the first electrode **160**.

The first and second data lines DL1 and DL2 may extend in the second direction D2 on the first insulating layer **120**, and the first and second data lines DL1 and DL2 may cross the first and second gate lines GL1 and GL2 and the storage line STL. The first substrate **100** may be provided with pixel regions divided by the first and second gate lines GL1 and GL2 and the first and second data lines DL1 and DL2. A pixel electrode PE may be formed in the transmissive region P of the pixel region. In some embodiments, the pixel regions may be formed by the first and second gate lines GL1 and GL2 and the first and second data lines DL1 and DL2.

The pixel region may be divided into the transmissive region P where the pixel electrode PE and the first and second electrode **160** and **170** are formed, and a thin film transistor region where a thin film transistor SW is formed.

The thin film transistor SW may include a gate electrode GE connected with the first gate line GL1, a semiconductor layer **130** formed on an insulating layer **120** to correspond to the gate electrode GE, a source electrode SE connected with the first data line DL1 and overlapping the semiconductor layer **130**, and a drain electrode DE disposed apart from the source electrode SE1 and overlapping the semiconductor layer **130**.

The semiconductor layer **130** may include an active layer **130a** and an ohmic contact layer **130b** formed on the first insulating layer **120**.

In some embodiments, the end of the drain electrode **DE** may be electrically connected with the second electrode **170**, which is the upper electrode of the storage capacitor.

A second insulating layer **140** may be formed on the first insulating layer **120** to cover the first and second data lines **DL1** and **DL2**, the source electrode **SE**, and the drain electrode **DE**.

The domain forming layer **150** may be formed on the second insulating layer **140**, planarizing the first substrate **100**.

The domain forming layer **150** may have a depressed pattern **152** recessed down from the surface. The depressed pattern **152** may be formed in the transmissive region **P**, forming a liquid crystal domain of the transmissive region **P**. The depressed pattern **152** may be a dot type, and the domain forming layer **150** and the second insulating layer **140** which correspond to the position of the depressed pattern **152** may be open such that the second electrode **170** is exposed.

In some embodiments, a contact electrode **CNT** may be formed under the open depressed pattern **152**. The contact electrode **CNT** may be formed in an island shape on the second electrode **170**. The contact electrode **CNT** corresponds to the region that is opened by the depressed pattern **152**. The contact electrode **CNT** may be formed of the same material as the source electrode **SE** and the drain electrode **DE** of the thin film transistor. In some embodiments, the contact electrode **CNT** may include low-resistance metal.

The depressed pattern **152** may be a dot type hole exposing a portion of the contact electrode **CNT**. The depressed pattern **152** may include an organic substance or an inorganic substance. In some embodiments, the domain forming layer **150** may include an organic layer made of the organic substance and an inorganic layer made of the inorganic substance, and the depressed pattern **152** may be formed on the organic layer or the inorganic layer.

The pixel electrode **PE** is formed on the domain forming layer **150** in the transmissive region **P**. The pixel electrode **PE** may include a transparent conductive material. The pixel electrode **PE** may be formed to cover the entire depressed pattern **152**. The pixel electrode **PE** may be electrically connected with the thin film transistor **SW** by contacting the contact electrode **CNT** through the depressed pattern **152**.

High resistance of the first and second electrodes **160** and **170**, when such electrodes are formed using transparent conductive material, may be overcome by forming a contact electrode **CNT** using low-resistance metal.

In a region having the same planar area, the pixel electrode **PE** on the depressed pattern is larger in area than the pixel electrode **PE** formed on a flat region of the domain forming layer **150**. Therefore, when an electric field is generated between the first substrate **100** and the second substrate **200**, the magnitude of the electric field the closest to the depressed pattern **152** may be larger than the magnitude of the electric field in the flat region.

The first alignment layer **AL1** may be formed throughout the first base member **110** including the pixel electrode **PE**.

The second substrate **200** may include a second base member **210** opposite the first substrate **100**, a black matrix pattern **220**, first, second, and third color filters **232**, **234**, and **236**, an overcoating layer **240**, a common electrode layer **250**, and a second alignment layer **AL2**. In some embodiments, the second substrate **200** may not include the overcoating layer **240**.

The black matrix pattern **220** may be formed on a second base member **210** corresponding to the region formed by the

first and second gate lines **GL1** and **GL2**, the first and second data lines **DL1** and **DL2**, and the thin film transistor **SW**. The first, second, and third color filters **232**, **234**, and **236** may be formed in regions divided by the black matrix pattern **220** on the second base member **210**. In some embodiments, the first color filter **232** may be formed in the region corresponding to the transmissive region **P**, where the pixel electrode **PE** is formed, on the second base member **210**. The second color filter **234** may be formed in the first direction **D1** of the first color filter **232** and the third color filter **236** may be formed in opposite direction to the first direction **D1** of the first color filter **232**. The overcoating layer **240** may be formed on the region where the black matrix pattern **220** and the first, second, and third color filters **232**, **234**, and **236** may be formed, on the second base member **210**, and may planarize the second substrate **200**.

The common electrode **250** may be formed on the overcoating layer **240**. The common electrode **250** may include a transparent conductive material.

In some embodiments, the common electrode may be formed throughout the second substrate **200**, without a specific pattern. The liquid crystal domain of the liquid crystal layer **300** may be formed by the pixel electrode **PE**, which can change the magnitude of the electric field, using the depressed pattern **152**, and the patternless common electrode **250**.

The second alignment layer **AL2** may be formed on the common electrode **250** above the second base member **210**. The second alignment layer **AL2** may be formed throughout the second substrate **200**.

The liquid crystal layer **300** may be disposed between the first substrate **100** and the second substrate **200**. The liquid crystal layer **300** may include liquid crystal molecules **310** and reactive mesogen (**RM**) hardened material **320**.

The liquid crystal molecules **310** react differently to the electric field generated between the pixel electrode **PE** and the common electrode **250**, which makes it possible to adjust the light transmittance. The liquid crystal molecules **310**, for example, may have negative dielectric anisotropy.

When there is no voltage supplied to the pixel electrode **PE** and the common electrode **250**, the liquid crystal molecules **310** close to the first substrate **100** and/or the second substrate **200** may be arranged with their long axes perpendicular to the surface of the second base member **210** and/or the first base member **110**. The liquid crystal molecules **310** close to the depressed pattern **152** may be arranged with their long axes perpendicular to the side of the domain forming layer **150** forming the depressed pattern **152**.

The **RM** hardened material **320** may be disposed between the liquid crystal molecules **310**. The **RM** hardened material **320** may be disposed between the liquid crystal molecules **310** closest to the pixel electrode **PE** and/or the common electrode **250**. The **RM** hardened material **320** may be disposed between the liquid crystal molecules **310** close to the first alignment layer **AL1**. The **RM** hardened material **320** may be disposed between the liquid crystal molecules **310** close to the second alignment layer **AL2**.

Even if an electric field is not generated between the pixel electrode **PE** and the common electrode **250**, the **RM** hardened material **320** can keep the liquid crystal molecules **310** closest to the first substrate **100** and/or the second substrate pre-tilted with respect to the surface of the first base member **110** and/or second base member **210**. **RM** hardened material **320** may be formed by **RM** monomers that are polymerized by external light in the process of manufacturing the display device.

In some embodiments, the external light may be ultraviolet rays. The **RM** monomers are photo-reacted and polymerized



by the external light, such that the RM hardened material **320** is created between the liquid crystal molecules **310**.

The RM monomers are converted into the RM hardened material **320** attached to the pixel electrode PE and the common electrode **250**, by radiating ultraviolet rays of about 10 to 15 J for 6 to 7 minutes, with voltage applied to the pixel electrode PE and the common electrode **250**, and radiating strong ultraviolet rays of about 15 J for 50 to 60 minutes, with no voltage supplied to the pixel electrode PE and the common electrode **250**.

If the first electrode **160** and the second electrode **170** both include only reflective or opaque conductive materials, the RM hardened material **320** may not be completely created or the RM hardened material **320** may not be attached to the region where the first electrode **160** overlaps the second electrode **170**. In some embodiments, a transparent conductive material is provided in at least one of the first electrode **160** and the second electrode **170** to completely create or attach the RM hardened material.

In such embodiments, it is possible to form the liquid crystal domain, using the depressed pattern **152** on the domain forming layer **150**, without forming a specific pattern on the common electrode **250**. Since no pattern is formed on the common electrode **250**, it is possible to remove the cause of misalignment of the first substrate **100** and the second substrate **200**.

It is also possible to simplify the manufacturing process by removing a specific patterning process for patterning the common electrode **250**. This may help improve productivity and display quality of the display device.

In the embodiment shown in FIGS. **2** and **3**, the first electrode **160** and the second electrode **170** may have a thickness of about 150 Å to about 1500 Å, and the first insulating layer **120** formed between the first and second electrode may have a thickness of about 400 Å to about 6000 Å.

In embodiments where the liquid crystal display device is achieved with the thicknesses of the first and second electrodes **160** and **170** and the first insulating layer **120** optimized as described above, the transmittance of the light emitted through the first and second substrates from the backlight (not shown) under the first substrate **100** is 80% to 99.5%.

FIG. **3C** is a cross-sectional view illustrating application of voltage to the embodiment of the display device shown in FIG. **3B**.

Referring to FIG. **3C**, when an electric field is generated between the pixel electrode PE and the common electrode **250**, the direction of the electric field within the pixel region is perpendicular to the surface of the first substrate **100** and/or the second substrate **200**.

The electric field lines may be curved between the end of the pixel electrode PE and the common electrode **250**. The electric field lines may also be curved between the end of another pixel electrode, adjacent to the pixel electrode PE, and the common electrode **250**. The liquid crystal molecules **310** are aligned to be dissipated to different points of the common electrode **250** in adjacent pixel electrodes PE, such that the liquid crystal domain may be divided between adjacent pixel regions.

In the shape of the electric field at a region close to the depressed pattern **152**, the electric field may converge to one point of the common electrode **250**, for example, the common electrode **250** corresponding to the depressed pattern **152**, by the pre-tilt due to the sides of the depressed pattern **152**.

Embodiments of the invention used to implement HVA mode liquid crystal display devices which improve the viewing angle by forming a liquid crystal domain, help ensure sufficient electrostatic capacity while decreasing the reduc-

tion of transmittance by forming both of the first electrode **160** and the second electrode **170**, using a transparent conductive material in the area corresponding to the entire pixel region to overlap the pixel electrode corresponding to the pixel region P.

Fabrication Method of Liquid Crystal Display Device

Embodiments of a method of fabrication of a liquid crystal display device will be described with reference to FIGS. **4** to **6**.

FIGS. **4A** to **4B** are cross-sectional views illustrating an embodiment of a manufacturing process of the embodiment of a liquid crystal display device shown in FIG. **1**.

Referring to FIG. **4A**, a gate electrode **12** is formed in the thin film transistor TFT-forming region on the lower substrate **10**. The gate electrode **12** is stacked on the lower substrate **10** by deposition, such as sputtering. The gate electrode **12** may be made of Al, Mo, Cr, or Cu.

A storage lower electrode **30** is formed in the storage capacitor Cst-forming region on the lower substrate **10** by deposition. The storage lower electrode **30** is made of a transparent conductive material. In some embodiments, the storage lower electrode **30** may be made of any one of ITO, TO, IZO, and ITZO.

As shown in FIG. **4B**, the gate insulating layer **18** is formed on the lower substrate **10**. The semiconductor layer **23**, including the active layer **20** and the ohmic contact layer **22**, is formed in the thin film transistor TFT-forming region.

The gate insulating layer **18** is formed by depositing an inorganic insulating substance, such as silicon nitride SiN<sub>x</sub> and silicon oxide SiO<sub>x</sub>, to the entire surface of the lower substrate **10**, using a deposition process, such as PECVD (Plasma Enhanced Chemical Vapor Deposition). An amorphous silicon layer and an amorphous silicon layer with dopant are formed. The semiconductor layer **23**, including the active layer **20** and the ohmic contact layer **22**, is formed by patterning the amorphous silicon layer and the amorphous silicon layer with dopant, using photolithography and etching.

As shown in FIG. **4C**, a storage upper electrode **25** is formed in the storage capacitor Cst-forming region, by deposition. The storage upper electrode **25** is made of a transparent conductive material. In some embodiments, the storage upper electrode **25** may be made of any one of ITO, TO, IZO, and ITZO.

A source electrode **26**, a drain electrode **28**, and a contact electrode **32** are formed by deposition, such as sputtering. In some embodiments, the sputtering processing may include forming the electrodes by being deposited with metal (e.g. Mo or MoW) and then patterning by photolithography or etching. The active layer **20** is exposed by removing the ohmic contact layer **22** exposed between the two electrodes **26** and **28**, using as a mask the source electrode **26** and the drain electrode **28**. The drain electrode **28** partially overlaps the storage upper electrode **25**, allowing it to be electrically connected with the storage upper electrode **25**. The storage capacitor Cst can thus be charged with the pixel voltage supplied to the drain electrode **28** through the source electrode **26**.

The contact electrode **32** is formed in a portion of the storage upper electrode **25**. The contact electrode **32** is positioned at a region overlapping a contact hole **40** of a passivation layer **38**.

As shown in FIG. **4D**, the passivation layer **38** is formed to cover the source electrode **26**, drain electrode **28**, and storage upper electrode **25**. In some embodiments, the passivation layer is formed by PECVD, spin coating, or spinless coating, and the like. The contact hole **40** is formed by patterning the

passivation layer **38**, using photolithography and etching. The contact hole **40** is positioned at a region overlapping the contact electrode **32**. In some embodiments, the passivation layer **38** may be made of an inorganic insulating substance, or an organic insulating substance, such as acryl.

As shown in FIG. 4E, a pixel electrode **42** is formed on the passivation layer **38**. The pixel electrode **42** is formed by deposition, such as sputtering. The pixel electrode **42** electrically contacts with the contact electrode **32** through the contact hole **40**. This electrical contact controls the electric field of the liquid crystal which corresponds to the voltage charged in the storage capacitor Cst. In some embodiments, the pixel electrode **42** may be made of a transparent conductive material, such as ITO, TO, IZO, and ITZO.

In embodiments where the storage upper electrode **25** and the storage lower electrode **30** are made of a transparent conductive material, it is possible to increase the overlap area of the storage upper electrode **25** and the storage lower electrode **30** irrespective of the aperture ratio. Therefore, it is possible to achieve a high-capacity storage capacitor Cst and thereby improve reliability in driving. It is also possible to ensure high aperture ratio. In some embodiments, the increase in resistance due to the use of transparent conductive material is minimized by forming the contact electrode **32** of metal in the contact portion between the storage upper electrode **25** and the pixel electrode **42**.

FIGS. 5A to 5E are cross-sectional views illustrating an embodiment of a manufacturing process of the first substrate in the cross section of an embodiment of a liquid crystal display device as shown in FIG. 3A.

Referring to FIG. 5A, a transparent conductive material **162** and a low-resistance metal **164** are deposited on a substrate **110**. A gate line GL, a gate electrode GE, and a first electrode **160** of a storage capacitor are formed by patterning.

In some embodiments, the first electrode may be integrally formed with a storage line STL and may include a transparent conductive material.

In typical manufacturing processes, the first electrode **160** is positioned on the same layer as the gate line GL and the gate electrode GE, and the gate line GL and the gate electrode GE are made of different materials. In such processes, a mask process is added to form the first electrode **160**, a process which is additional to the mask process used to form the gate line GL and the gate electrode GE, increasing the manufacturing cost and the process time. For example, in some manufacturing processes, the gate line GL and the gate electrode GE include a low-resistance opaque metal, such as Mo, and the first electrode includes a transparent conductive material, such as ITO. In such processes, it may be difficult to form the first electrode **160** with the mask used for forming the gate line GL and the gate electrode GE.

In some embodiments of the present invention, the gate line GL/gate electrode GE and the first electrode are simultaneously formed by using a halftone mask process without adding an additional mask.

In such embodiments, the gate line GL/gate electrode GE are implemented by a structure in which transparent conductive material **162** and the low-resistance metal **164** are stacked. The thickness of the photoresistor PR disposed in the region where the first electrode **160** is formed is made to be smaller than the thickness of the photoresistor disposed in the region where the gate line/gate electrode are formed. Consequently, by performing the photo process, the gate line GL/gate electrode GE have a structure in which the transparent material **162** and the low-resistance metal **164** are stacked but only the first electrode **160** remains because the low-resistance material on the first electrode **160** is completely

removed. Therefore, it is possible to simultaneously form the gate line GL/gate electrode GE and the first electrode **160** without adding an additional mask process.

In some embodiments, the transparent conductive material may include ITO (indium tin oxide), TO (tin oxide), IZO (indium zinc oxide), and ITZO (indium tin zinc oxide). These materials may be used alone or in combination.

In some embodiments, the low-resistance metal may be Mo, Al, AlNd, and Ti, and the like. which may be used alone or in combination.

As shown in FIG. 5B, a first insulating layer **120** is formed on the substrate **110** with the gate line GL/gate electrode GE and the first electrode **160**, and a semiconductor layer **130** including an active layer **130a** and an ohmic contact layer **130b** is formed in the thin film transistor-forming region.

The first insulating layer **120** is formed by depositing an inorganic insulating substance, such as silicon nitride SiNx and silicon oxide SiOx, onto the substrate, using deposition, such as PECVD. An amorphous silicon layer and an amorphous silicon layer with dopant are formed. The semiconductor layer **130**, including the active layer **130a** and the ohmic contact layer **130b**, is formed by patterning the amorphous silicon layer and the amorphous silicon layer with dopant, using photolithography and etching.

A second electrode **170** of the storage capacitor is formed in the region overlapping the transmissive region P, or the first electrode **160**, as shown in FIG. 3C. In some embodiments, the second electrode **170** may be made of a transparent conductive material. The transparent conductive material may be ITO, TO, IZO, and ITZO etc. These materials may be used alone or in combination.

In some embodiments, since both of the first electrode **160** and the second electrode **170**, which are used as the electrodes of the storage capacitor, include a transparent conductive material, they can be formed to have an area corresponding to the entire transmissive region to overlap the pixel electrode PE corresponding to the transmissive region of the pixel. Therefore, it is possible to ensure sufficient electrostatic capacity, decreasing the reduction of transmittance.

A data line DL, a source electrode SE, a drain electrode DE, and a contact electrode CNT are formed. The source electrode SE, drain electrode DE, and contact electrode CNT may be formed by deposition, such as sputtering. The source electrode SE, drain electrode DE, and contact electrode CNT may be formed by being deposited with metal (e.g. Mo or MoW) and then performing photolithography. The active layer **130a** may be exposed by removing the ohmic contact layer **130b** exposed between the two electrodes, using the source electrode SE and the drain electrode DE as masks. The drain electrode DE may be formed to partially overlap the second electrode **170** to electrically contact with the second electrode **170**. The drain electrode DE may electrically contact with the second electrode **170** such that the storage capacitor Cst can be charged with the pixel electrode supplied to the drain electrode DE through the source electrode SE.

The contact electrode CNT may be formed in a portion of the second electrode **170**. The contact electrode CNT may be positioned to overlap the region exposed by the depressed pattern **152** of the second insulating layer and the domain forming layer **150**.

As shown in FIG. 5D, a second insulating layer **140** and the domain forming layer **150** may be formed to cover the source electrode SE, the drain electrode DE, and the second electrode **170**. The second insulating layer **140** and the domain forming layer **150** may be formed by PECVD, spin coating, and spinless coating etc. The depressed pattern **152** may be formed by patterning the second insulating layer and the

domain forming layer, using photolithography and etching. The depressed pattern **152** may be positioned in a region overlapping the contact electrode CNT.

The material of the second insulating layer **140** may be silicon oxide and silicon nitride, and the like. In some embodiments, the material included in the domain forming layer **150** may be an organic substance, such as positive type photoresist compound or negative type photoresist compound. In other embodiments, the material included in the domain forming layer **150** may be an inorganic substance, such as silicon oxide and silicon nitride.

Referring to FIG. **5E**, a transparent electrode layer (not shown) is formed on the domain forming layer **150** with the depressed pattern **152**. A pixel electrode PE is formed by patterning the transparent electrode layer.

The pixel electrode PE may be electrically connected with the thin film transistor SW by contacting with the contact electrode CNT through the depressed pattern **152**. In some embodiments, the material included in the transparent electrode layer may be ITO and IZO.

In some embodiments, a first alignment layer AL1 may be formed on the pixel electrode PE. In such embodiments, the first alignment layer AL1 may include a vertical alignment material that can vertically align liquid crystal molecules **310**.

In some embodiments, such as the bottom gate structure shown in FIG. **5**, the semiconductor layer may be implemented by a thin film transistor made of amorphous silicon. In other embodiments, such as a top gate structure, the semiconductor layer may be implemented by a thin film transistor made of polysilicon.

FIGS. **6A** to **6F** are cross-sectional views illustrating another embodiment of a manufacturing process of a portion of the embodiment of a liquid crystal display device shown in FIGS. **2** and **3**.

For the convenience of description, a pixel region defined by a gate line and data line is limitedly described. The pixel region is divided into a thin film transistor region and a transmissive region.

Referring to FIG. **6A**, a semiconductor layer **430** made of polysilicon (Poly-si) may be formed on the thin film transistor region above a substrate. In the semiconductor layer **430** made of polysilicon, an amorphous silicon layer is deposited and may be crystallized into a polysilicon layer by performing crystallization, such as ELA (Excimer Laser Annealing) using excimer laser, SLS (Sequential lateral Solidification) crystallization or heat treatment, or MILC (metal induced lateral crystallization). The semiconductor layer **430** may have an active region **430a** including pure center polysilicon and source/drain regions **430b** doped at both sides of the active region.

Referring to FIG. **6B**, a first insulating layer **420** may be formed throughout the substrate **110** with the semiconductor layer **430**. A gate electrode GE and a first electrode **160** of a storage capacitor may be formed in a region overlapping the semiconductor layer **430** and the transmissive region P, respectively.

This process is implemented by depositing a transparent conductive material and a low-resistance metal and patterning them. As described in reference to FIG. **5A**, it is possible to simultaneously form the gate electrode and the first electrode by using the halftone mask process without adding a mask.

When the halftone mask process is used, the gate electrode, may have a structure in which a transparent conductive material **462** and the low-resistance metal **464** are stacked.

The thickness of the photoresistor PR disposed in the region where the first electrode is formed is made to be

smaller than the thickness of the photoresistor disposed in the region where the gate electrode is formed. Consequently, by performing the photo process, the gate electrode GE has a structure in which the transparent material **462** and the low-resistance metal **464** are stacked, but the first electrode **460** is implemented by only the transparent conductive material, because the low-resistance material on the first electrode **460** is completely removed. Therefore, it is possible to simultaneously form the electrode GE and the first electrode **460** without adding an additional mask process.

In some embodiments, the transparent conductive material may include ITO (indium tin oxide), TO (tin oxide), IZO (indium zinc oxide), and ITZO (indium tin zinc oxide). These materials may be used alone or in combination.

In some embodiments, the low-resistance metal may be Mo, Al, AlNd, and Ti and the like, which may be used alone or in combination, in a simple structure or in a stacked structure.

As shown in FIG. **6C**, a second insulating layer **422** is formed on the substrate including the gate electrode GE and the first electrode **460** and a second electrode **470** of a storage capacitor is formed in a region overlapping the first electrode **460** on the second insulating layer.

In some embodiments, the second electrode **470** may be made of a transparent conductive material.

A source electrode SE, a drain electrode DE, and a contact electrode CNT may be formed, as shown in FIG. **6D**. The source electrode SE, drain electrode DE, and contact electrode CNT may be formed by deposition, such as sputtering. The electrodes may be formed by being deposited with metal (e.g. Mo or MoW) and then patterned by photolithography or etching.

The source electrode SW and the drain electrode DE are electrically connected with the source/drain region **430b** of the semiconductor layer **430**, respectively, which may be implemented by forming a contact hole in the second insulating layer **422** having the source region and the drain region.

The drain electrode DE may be formed to partially overlap the second electrode **470** to electrically contact with the second electrode **470** and the storage capacitor Cst can be charged with the pixel electrode supplied to the drain electrode DE through the source electrode SE.

The contact electrode CNT may be formed in a portion of the second electrode **470**. The contact electrode CNT may be positioned to overlap the region exposed by the depressed pattern **452** of the third insulating layer **440** and the domain forming layer **450**.

As shown in FIG. **6E**, the second insulating layer **440** and the domain forming layer **450** may be formed to cover the source electrode, the drain electrode, and the second electrode **470**. The third insulating layer **440** and the domain forming layer **450** may be formed by PECVD, spin coating, and spinless coating etc. The depressed pattern **452** may be formed by patterning the third insulating layer **440** and the domain forming layer **450**, using photolithography and etching. The depressed pattern **452** may be positioned in a region overlapping the contact electrode CNT.

The material of the third insulating layer **440** may be silicon oxide and silicon nitride etc. The material of the domain forming layer **450** may be an organic substance, such as positive type photoresist compound or negative type photoresist compound, or an inorganic substance, such as silicon oxide and silicon nitride.

As shown in FIG. **6F**, a transparent electrode layer (not shown) is formed on the domain forming layer **450** with the depressed pattern **452** and a pixel electrode PE is formed by patterning the transparent electrode layer. The pixel electrode

15

PE may be electrically connected with the thin film transistor SW by contacting with the contact electrode CNT through the depressed pattern 452. In some embodiments, the material of the transparent electrode layer may be ITO and IZO.

A first alignment layer AL1 is formed on the pixel electrode PE, in which the first alignment layer AL1 may include a vertical alignment material that can vertically align liquid crystal molecules 310.

While certain embodiments of the present invention have been described, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the invention.

What is claimed is:

1. A liquid crystal display device, comprising:  
a first substrate;

a thin film transistor formed on the first substrate and disposed in a first, non-transmissive region, the thin film transistor comprising a gate electrode, a source electrode and a drain electrode;

a storage capacitor comprising a first electrode and a second electrode formed in a second, transmissive region on the first substrate, wherein the first electrode and the second electrode of the storage capacitor are made of a transparent conductive material; and

a pixel electrode formed on the second, transmissive region, overlapping the first and second electrodes of the storage capacitor,

wherein the whole of the pixel electrode overlaps with both the first and second electrodes, and

wherein at least one of the first electrode and the second electrode extends to the outside of the transmissive region.

2. The liquid crystal display device as claimed in claim 1, wherein a domain forming layer having a depressed pattern for forming a liquid crystal domain is formed between the pixel electrode and the second electrode of the storage capacitor.

3. The liquid crystal display device as claimed in claim 1, further comprising: a second substrate comprising a common electrode formed throughout the surface facing the first substrate; and

a liquid crystal layer, comprising a reactive mesogen, wherein the reactive mesogen is disposed between the first substrate and the second substrate and aligns liquid crystal molecules forming the liquid crystal domain.

4. The liquid crystal display device as claimed in claim 1, wherein the source electrode and the drain electrode are spaced apart from the gate electrode by an insulating layer.

5. The liquid crystal display device as claimed in claim 4, wherein the gate electrode is formed on the same layer as the first electrode, and comprises a transparent conductive material and a low-resistance metal, stacked together.

16

6. The liquid crystal display device as claimed in claim 4, wherein the drain electrode is formed to overlap a portion of the second electrode and is electrically connected to the second electrode and the drain electrode.

7. The liquid crystal display device as claimed in claim 2, wherein a contact electrode is further formed on the second electrode exposed by the depressed pattern, and comprises the same material as the source electrode and the drain electrode of the thin film transistor.

8. The liquid crystal display device as claimed in claim 1, wherein the transparent conductive material comprises at least one of indium tin oxide, tin oxide, indium zinc oxide, and indium tin zinc oxide.

9. A liquid crystal display device, comprising:

a first substrate comprising:

a thin film transistor disposed in a non-transmissive region;

a storage capacitor comprising a transparent first electrode, a dielectric film, and a transparent second electrode which are sequentially formed, wherein the transparent first electrode and the transparent second electrode are formed in a transmissive region and wherein at least one of the first electrode and the second electrode extends to the outside of the transmissive region; and

a pixel electrode formed on the transmissive region, wherein the whole of the pixel electrode overlaps with both the first and second electrodes;

a second substrate facing the first substrate and having a common electrode; and

a liquid crystal layer disposed between the first substrate and the second substrate,

wherein the pixel electrode overlaps the common electrode.

10. The liquid crystal display device as claimed in claim 9, wherein the pixel electrode includes a transparent conductive material and forms capacitance with the storage capacitor by overlapping at least one of the first electrode and the second electrode.

11. The liquid crystal display device as claimed in claim 9, further comprising a backlight disposed under the first substrate, wherein transmittance of light emitted from the backlight unit and passing through the first substrate, the liquid crystal layer, and the second substrate within the transmissive region is 80% to 99.5%.

12. The liquid crystal display device as claimed in claim 9, wherein the dielectric film comprises at least one of silicon nitride and silicon oxide.

13. The liquid crystal display device as claimed in claim 12, wherein the thickness of the first electrode is between about 150 Å and about 1500 Å, the thickness of the insulating layer is between about 400 Å and 6000 Å, and the thickness of the second electrode is between about 150 Å and about 1500 Å.

\* \* \* \* \*

|                |                                                                                                                                                           |         |            |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------|
| 专利名称(译)        | 液晶显示装置及其制造方法                                                                                                                                              |         |            |
| 公开(公告)号        | <a href="#">US9025096</a>                                                                                                                                 | 公开(公告)日 | 2015-05-05 |
| 申请号            | US12/833807                                                                                                                                               | 申请日     | 2010-07-09 |
| [标]申请(专利权)人(译) | 三星显示有限公司                                                                                                                                                  |         |            |
| 申请(专利权)人(译)    | 三星移动显示器有限公司.                                                                                                                                              |         |            |
| 当前申请(专利权)人(译)  | 三星DISPLAY CO. , LTD.                                                                                                                                      |         |            |
| [标]发明人         | TAE SEUNG GYU<br>KIM DEOK HOI<br>YI CHUNG                                                                                                                 |         |            |
| 发明人            | TAE, SEUNG-GYU<br>KIM, DEOK-HOI<br>YI, CHUNG                                                                                                              |         |            |
| IPC分类号         | G02F1/1343 G02F1/1337 G02F1/1362 G02F1/139                                                                                                                |         |            |
| CPC分类号         | G02F1/136213 G02F1/133703 G02F1/1393 G02F2001/133792 H01L27/1288 G02F1/1341 G02F1/136277 G02F1/136286 G02F1/1368 G02F2001/136295 H01L27/1255 H01L29/66765 |         |            |
| 优先权            | 1020090113587 2009-11-23 KR<br>1020090113589 2009-11-23 KR<br>1020100028545 2010-03-30 KR                                                                 |         |            |
| 其他公开文献         | US20110122330A1                                                                                                                                           |         |            |
| 外部链接           | <a href="#">Espacenet</a> <a href="#">USPTO</a>                                                                                                           |         |            |

# 摘要(译)

公开了一种液晶显示装置。该器件包括：第一基板，形成在第一基板上的第一非透射区域中的薄膜晶体管，包括栅电极，源电极和漏电极，以及形成在第二透射区域中的存储电容器在第一基板上，存储电容器的第一电极和第二电极由透明导电材料制成。

