

(19) **United States**(12) **Patent Application Publication**
Kim et al.(10) **Pub. No.: US 2003/0043330 A1**(43) **Pub. Date: Mar. 6, 2003**(54) **LIQUID CRYSTAL DISPLAY DEVICE****Publication Classification**(76) Inventors: **Sung Woon Kim**, Kyoungki-do (KR);
Jin Mahn Kim, Kyoungki-do (KR);
Seung Hee Lee, Kyoungki-do (KR)(51) **Int. Cl.⁷** **G02F 1/1343**(52) **U.S. Cl.** **349/149**

Correspondence Address:

LADAS & PARRY**224 SOUTH MICHIGAN AVENUE, SUITE**
1200**CHICAGO, IL 60604 (US)**(21) Appl. No.: **10/228,984**(22) Filed: **Aug. 27, 2002**(30) **Foreign Application Priority Data**

Aug. 29, 2001 (KR) 2001-52533

(57) **ABSTRACT**

Disclosed is a LCD comprising a substrate; a signal applying unit having a gate line and a common line on the substrate; and a display unit forming a plurality of pixels with a data line, a counter electrode, a pixel electrode, a TFT and the gate line and the common line extended from the signal applying unit, wherein the pixel electrode comprises a body unit and a branch unit, the body unit being parallel to the gate line and the branch unit comprising a plurality of branches being parallel to the data line, and pixel electrode of the outmost pixel that is the most adjacent to the signal applying unit has some of branches formed on the signal applying unit.

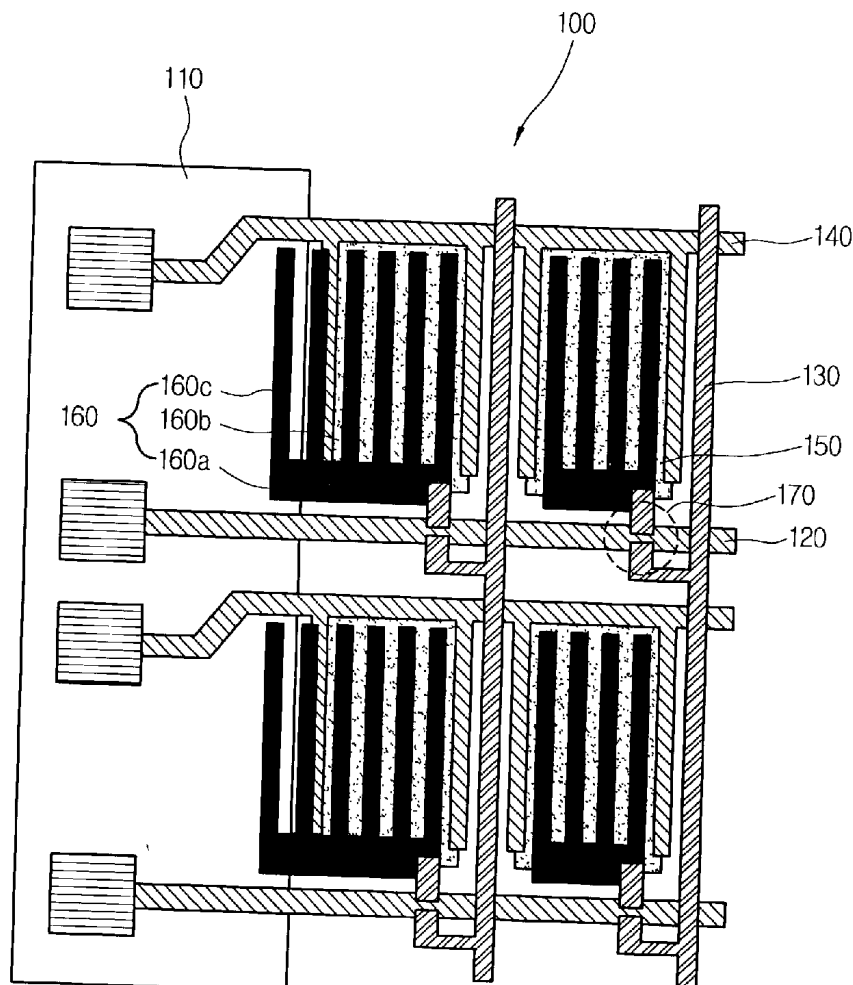


FIG. 1A

(PRIOR ART)

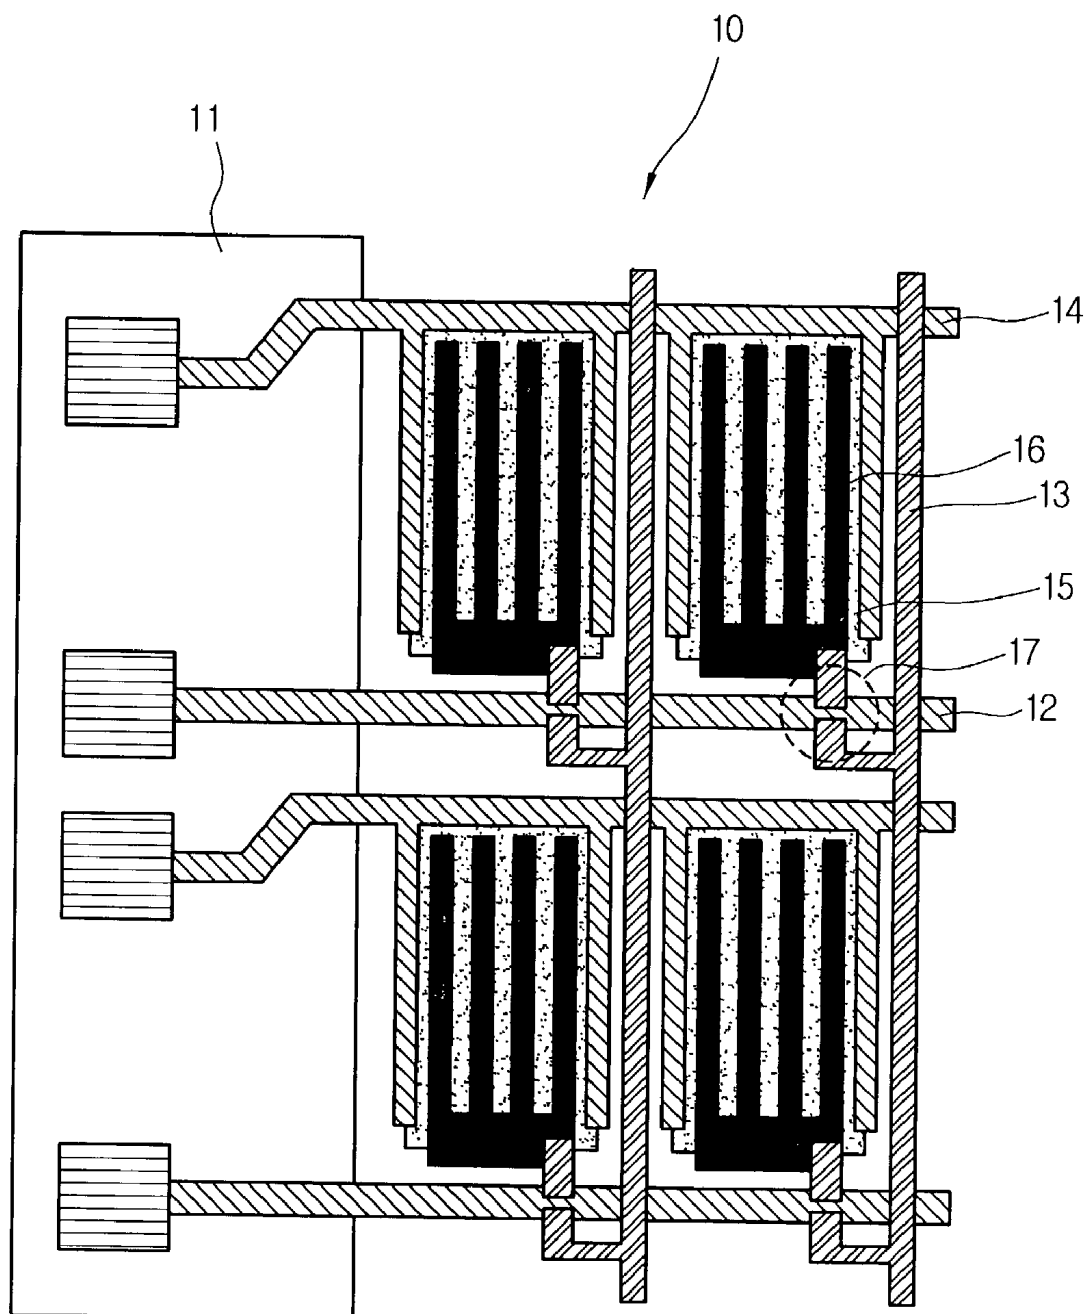


FIG. 1B

(PRIOR ART)

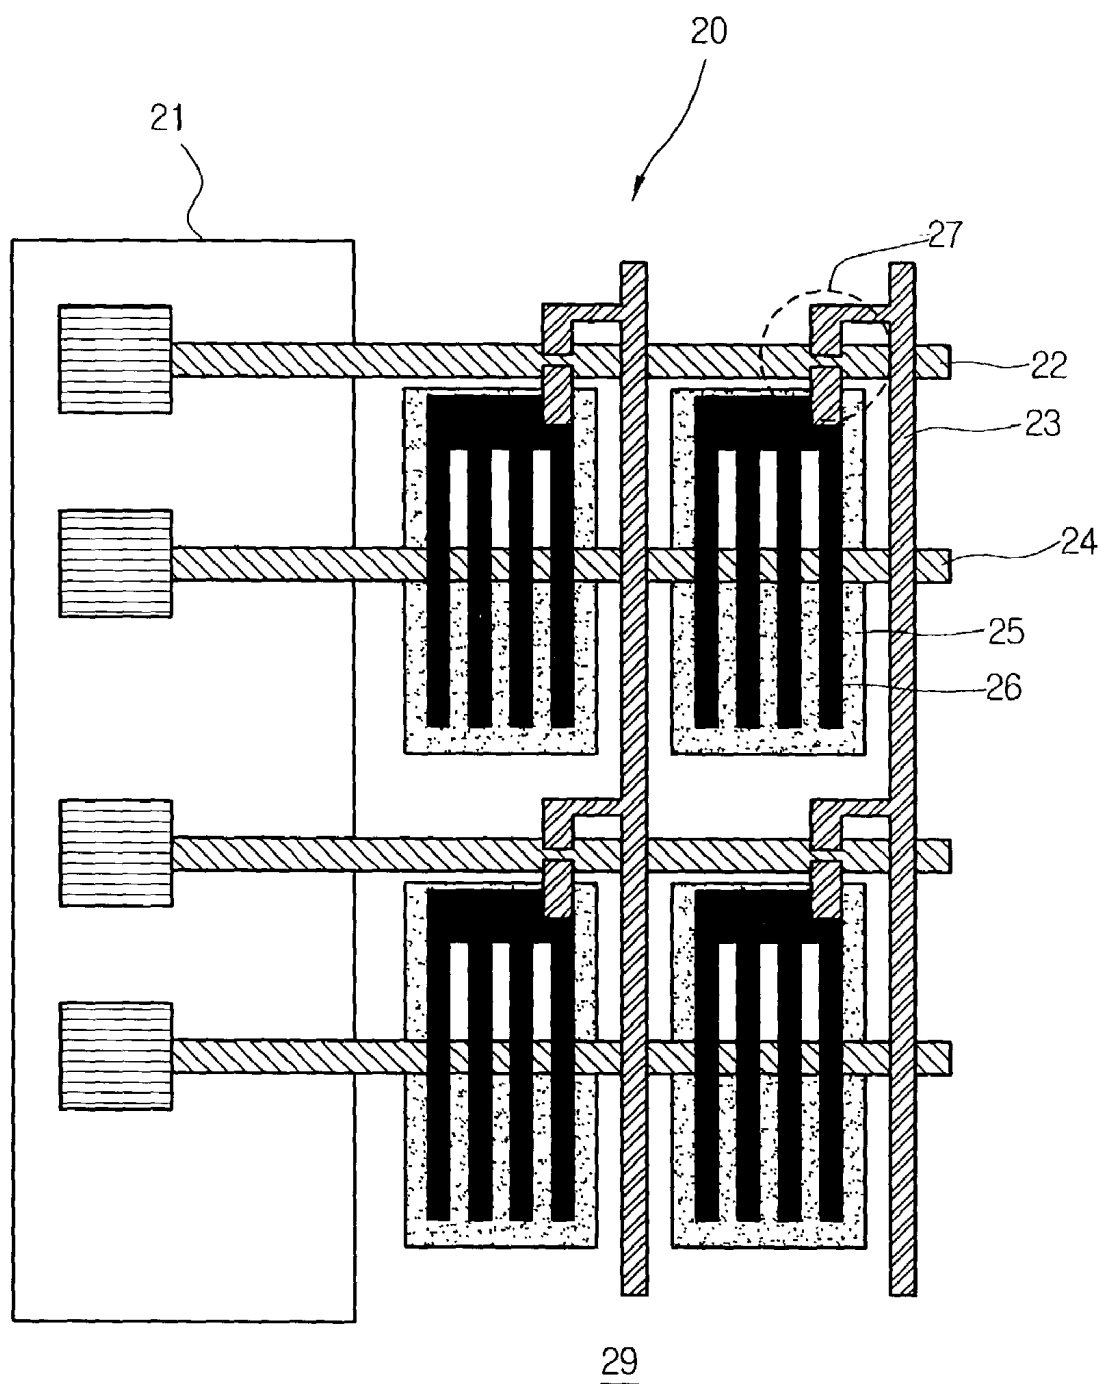


FIG. 2A


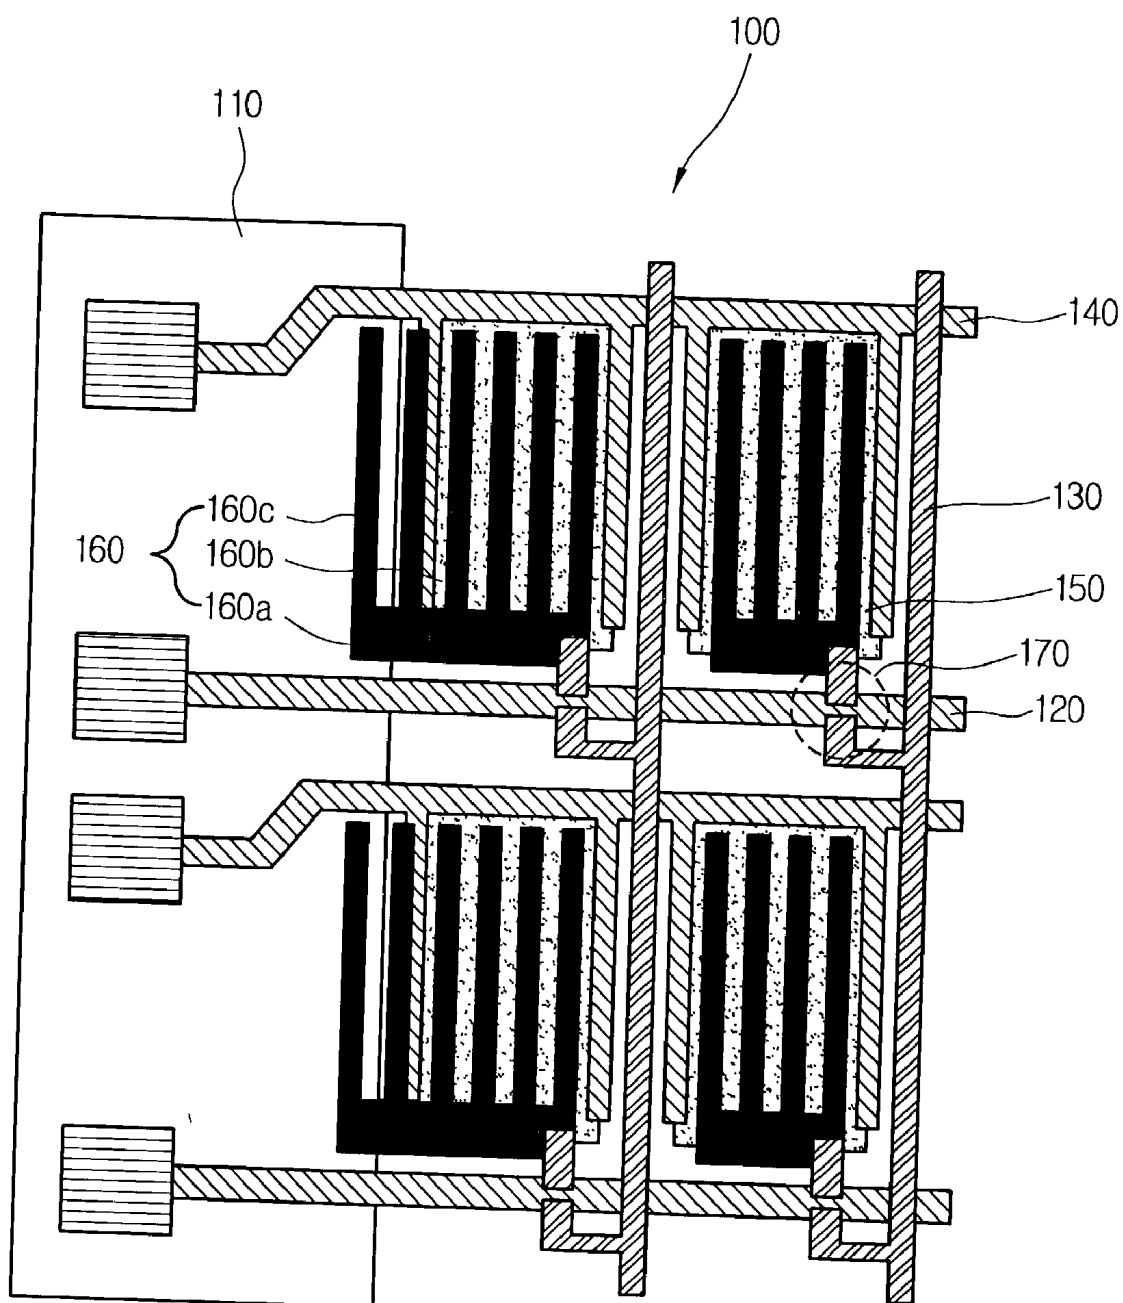


FIG. 2B

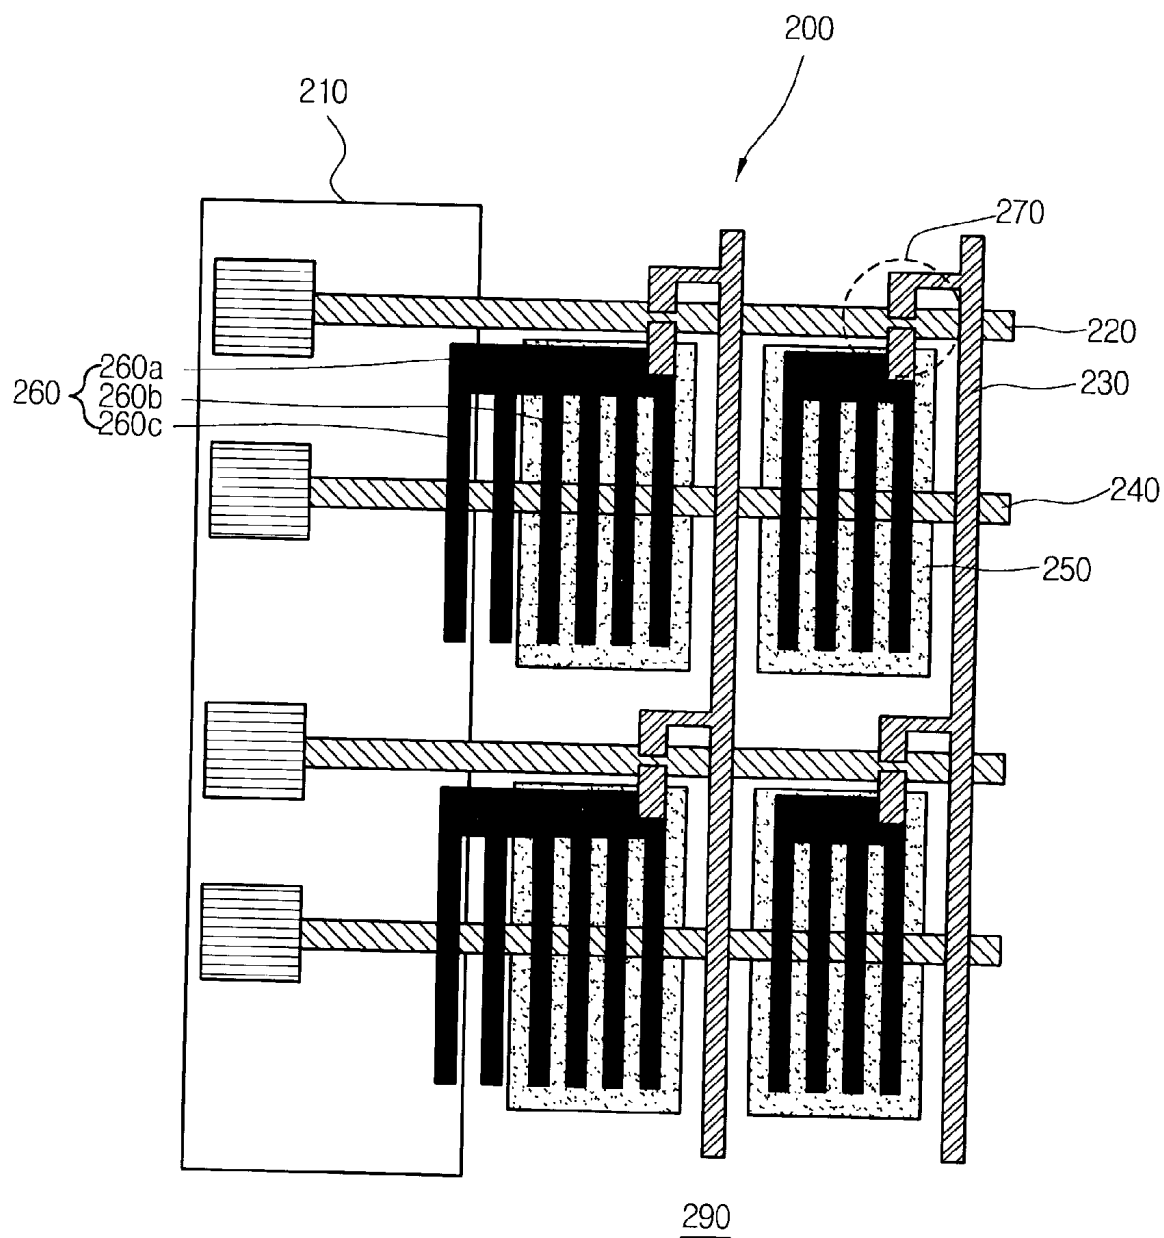

LIQUID CRYSTAL DISPLAY DEVICE

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a liquid crystal display device, and more particularly to a liquid crystal display device realizing a high screen quality by preventing light leakage due to ion adsorption in a signal applying unit.

[0003] 2. Description of the Prior Art

[0004] A liquid crystal display (hereinafter, referred to as LCD) has advantages of light weight, thin thickness and low power consumption, thereby advantageously applied to terminals of information apparatus and video apparatus instead of CRT (Cathode Ray Tube). Especially, TFT-LCD having thin film transistor (hereinafter, referred to as TFT) can realize the high screen quality and can be the large display device, because it has improved response features and is suitable for high number of pixels.

[0005] The LCD can be classified into Storage On Gate mode as illustrated in **FIG. 1A** and Storage On Common mode as illustrated in **FIG. 1B** by the line design.

[0006] As shown in **FIG. 1A**, the storage on gate mode LCD comprises a gate line **12** and a common line **14** in a signal applying unit **11** out of a display unit **10** realizing image on a substrate **19**, applying signals into the display unit **10**.

[0007] In the storage on gate mode LCD, all the pixels in the display unit **10** have the same structures and they are adjacent to a plurality of pixels comprising a gate line **12**, a data line **13**, a common line **14**, a counter electrode **15**, a pixel electrode **16** and a TFT LCD in the same manner.

[0008] However, the outmost pixel that is the most adjacent to the signal applying unit **11** has the structure different from other pixels in the display unit **10**. Or, a data line is not formed in the direction of the signal applying unit **11** in the outmost pixel.

[0009] When a scanning signal is applied to one of gate lines **12** and a display signal is applied to the data line, a TFT **17** disposed at the intersection of the gate line and the data line is turned on. Then, the display signal of data line **13** is transmitted to the pixel electrode **16** through the TFT **17** and the common signal is continuously applied to the counter electrode **15**, thereby generating electric field between the electrodes **15,16**.

[0010] Therefore, liquid crystal molecules (not shown) are arranged to be parallel to the electric field (positive dielectric anisotropy) or to be perpendicular thereto (negative dielectric anisotropy), thereby light leakage is generated and a predetermined image is realized.

[0011] Referring to **FIG. 1B**, the storage on common mode LCD is the same manner.

[0012] There are, however, several problems in the conventional LCD.

[0013] For gate line and common line, difference between DC (direct current) component signal of gate line and that of common line causes voltage difference. The data line is

swung into positive and negative voltage to common voltage in each frame, thereby preventing maintenance of a predetermined DC voltage.

[0014] As describe above, the conventional pixel the most adjacent to the signal applying unit has no data line formed in the direction of the signal applying unit. Therefore, ion adsorption is generated due to voltage difference between gate line and common line, and pixels are influenced by the resulting electric field.

[0015] In a normally black mode, outmost pixels, which are switched by the electric field generated due to ion adsorption, has a problem of light leakage in a low gray, thereby lowering screen quality.

SUMMARY OF THE INVENTION

[0016] The present invention has made to solve the above-mentioned problems and the primary objective of the present invention is to provide a LCD preventing light leakage due to ion adsorption in a signal applying unit by extending pixel electrode of outmost pixel to the signal applying unit.

[0017] In order to accomplish the objective, the present invention comprises: a substrate; a signal applying unit having a gate line and a common line on the substrate; and a display unit having a plurality of pixels with a data line, a counter electrode, a pixel electrode, a TFT and the gate line and the common line extended from the signal applying unit, wherein the pixel electrode comprises a body unit and a branch unit, the body unit being parallel to the gate line and the branch unit comprising a plurality of branches being parallel to the data line, and pixel electrode of the pixel the most adjacent to the signal applying unit has some of branches formed on the signal applying unit.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] **FIGS. 1A and 1B** are cross-sectional views of LCD according to a conventional method.

[0019] **FIGS. 2A and 2B** are cross-sectional views of LCD according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0020] The objects and features of the invention may be understood with reference to the following detailed description of an illustrative embodiment of the invention, taken together with the accompanying drawings.

[0021] Referring to **FIG. 2A**, a substrate **190** of the present invention is divided into a signal applying unit **110** and a display unit **100** according to whether an image is realized or not.

[0022] The signal applying unit **110** applies a gate signal and a common signal to the display unit **100** in order to realize an image, comprising a gate line **120** and a common line **140**.

[0023] The display unit **100** of the substrate **190** realizes an image, comprising a data line **130** arranged in a perpendicular direction, a gate line **120** arranged perpendicular to the data line **140** in a matrix shape and extended from the signal applying unit **110** and a common line **140** parallel to the gate line **120** and extended from the signal applying unit **100**.

[0024] And, at the intersection of the gate line **120** and the data line **130**, a TFT **170** is formed as a switching device.

[0025] A counter electrode **150** and a pixel electrode are formed on the display unit **100**, wherein the counter electrode **150** is formed in a pixel defined by a pair of gate line **120** and data line **130** and the pixel electrode **160** is overlapped with the counter electrode **150**, thereby generating electric field.

[0026] The pixel electrode **160** comprises a body unit **160a** and a plurality of branch units **160b**, **160c**. The body unit **160a** is parallel to the gate line **120** and the branch units **160b**, **160c** are parallel to the data line **130**.

[0027] In the pixel the most adjacent to the signal applying unit **110**, some branch unit **160c** in a plurality of branch units of pixel electrode **160** is formed on the signal applying unit **110**.

[0028] The branch unit **160c** formed on the signal applying unit **110** applies the same voltage as other branch unit **160b** of the pixel electrode **160** applies.

[0029] In the following, operation method of the present invention will be described in more detail.

[0030] A data signal is applied to a plurality of branch units **160b**, **160c** of the pixel electrode **160**, thereby a pulse signal as alternating current is applied to the common line voltage **140**.

[0031] Therefore, it is possible to prevent ion adsorption due to DC component voltage difference between the gate line **120** signal and the common line **140** signal by AC signal in a branch unit **160c** of pixel electrode formed out of the pixel, that is, on the signal applying unit **110**. And it is also possible to prevent ion adsorption and ion diffusion into the display unit **100**.

[0032] The above-mentioned operation method relates to Storage On Gate method LCD, wherein the common line **140** is formed out of the pixel.

[0033] Referring to FIG. 2B, it is the same with Storage On Common mode LCD, wherein the common line **240** is on the center part of pixel.

[0034] As described above, according to the present invention, it is possible to prevent ion adsorption due to voltage difference between a gate line and a common line in a signal applying unit since a pixel electrode of outmost pixel is extended to the signal applying unit.

[0035] As a result, undesirable electric field is not generated by ion adsorption, thereby preventing light leakage on the edge of screen and improving screen quality of LCD.

[0036] Although the invention has been described and illustrated with reference to specific illustrative embodiments thereof, it is not intended that the invention be limited to those illustrative embodiments. Those skilled in the art will recognize that variations and modifications can be made without departing from the spirit of the invention. It is therefore intended to include within the invention all such variations and modifications which fall within the scope of the appended claims and equivalents thereof.

What is claimed is:

1. A Liquid Crystal Display comprising:

- a substrate;
- a signal applying unit having a gate line and a common line on the substrate; and
- a display unit having a plurality of pixels with a data line, a counter electrode, a pixel electrode, a TFT and the gate line and the common line extended from the signal applying unit,

wherein the pixel electrode comprises a body unit and a branch unit, the body unit being parallel to the gate line and the branch unit comprising a plurality of branches being parallel to the data line, and pixel electrode of the pixel the most adjacent to the signal applying unit has some of branches formed on the signal applying unit.

2. The LCD of claim 1, wherein some branches of pixel electrode formed on the signal applying unit apply the same voltage as other branches of pixel electrode in the pixel the most adjacent to the signal applying unit.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US20030043330A1	公开(公告)日	2003-03-06
申请号	US10/228984	申请日	2002-08-27
[标]申请(专利权)人(译)	KIM SUNG WOON 金珍MAHN 李承HEE		
申请(专利权)人(译)	KIM SUNG WOON 金珍MAHN 李承HEE		
当前申请(专利权)人(译)	KIM SUNG WOON 金珍MAHN 李承HEE		
[标]发明人	KIM SUNG WOON KIM JIN MAHN LEE SEUNG HEE		
发明人	KIM, SUNG WOON KIM, JIN MAHN LEE, SEUNG HEE		
IPC分类号	G02F1/1333 G02F1/1343 G02F1/1368		
CPC分类号	G02F1/134363 G02F2001/133388		
优先权	1020010052533 2001-08-29 KR		
其他公开文献	US6707522		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种包括基板的LCD;信号施加单元,在基板上具有栅极线和公共线;显示单元,形成多个像素,具有数据线,对电极,像素电极,TFT和栅极线以及从信号施加单元延伸的公共线,其中像素电极包括主体单元和分支单元,主体单元与栅极线平行,分支单元包括与数据线平行的多个分支,与信号施加单元最邻近的最外部像素的像素电极具有形成在其上的一些分支。信号应用单元。

