



US 20080158126A1

(19) **United States**(12) **Patent Application Publication****Tung et al.**(10) **Pub. No.: US 2008/0158126 A1**(43) **Pub. Date: Jul. 3, 2008**(54) **LIQUID CRYSTAL DISPLAY AND DRIVING METHOD THEREOF****Publication Classification**(75) Inventors: **Chien-Fan Tung**, Miao-Li (TW);
Shun-Ming Huang, Shenzhen (CN); **Sha Feng**, Shenzhen (CN)(51) **Int. Cl.**
G09G 3/36 (2006.01)
(52) **U.S. Cl.** **345/92; 345/98**


Correspondence Address:

WEI TE CHUNG
FOXCONN INTERNATIONAL, INC.
1650 MEMOREX DRIVE
SANTA CLARA, CA 95050(57) **ABSTRACT**

A liquid crystal display (1) includes a liquid crystal panel (12) including a number of thin film transistors (123), a timing control circuit (16), a common voltage generating circuit (14) and a gamma circuit (13). The timing control circuit is configured for generating timing signals. The common voltage generating circuit is configured for generating a common voltage. The gamma circuit is configured for generating gray-scale voltages. When the liquid crystal panel is powered on, the common voltage is applied to the liquid crystal panel and reaches a predetermined value before the gray-scale voltages are applied to the liquid crystal panel and comes to predetermined values. And when liquid crystal panel is powered off the common voltage and the gray-scale voltages drops to 0V simultaneously by control of the common voltage generating circuit and the gamma circuit with the thin film transistors switched on.

(73) Assignees: **INNOCOM TECHNOLOGY (SHENZHEN) CO., LTD.;**
INNOLUX DISPLAY CORP.(21) Appl. No.: **12/005,726**(22) Filed: **Dec. 28, 2007**(30) **Foreign Application Priority Data**

Dec. 29, 2006 (TW) 95149685

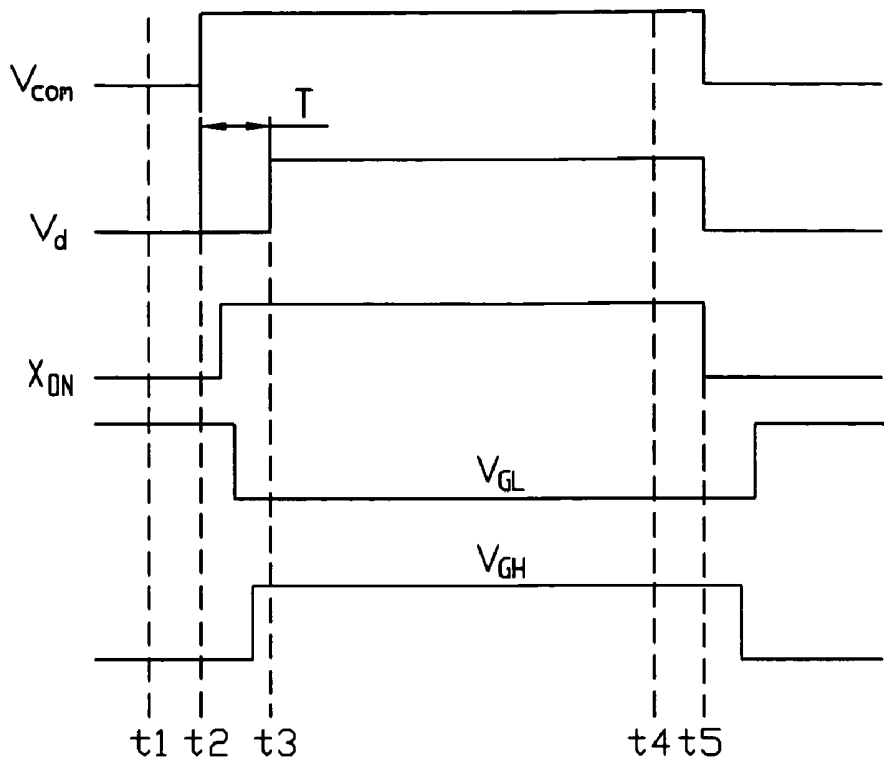

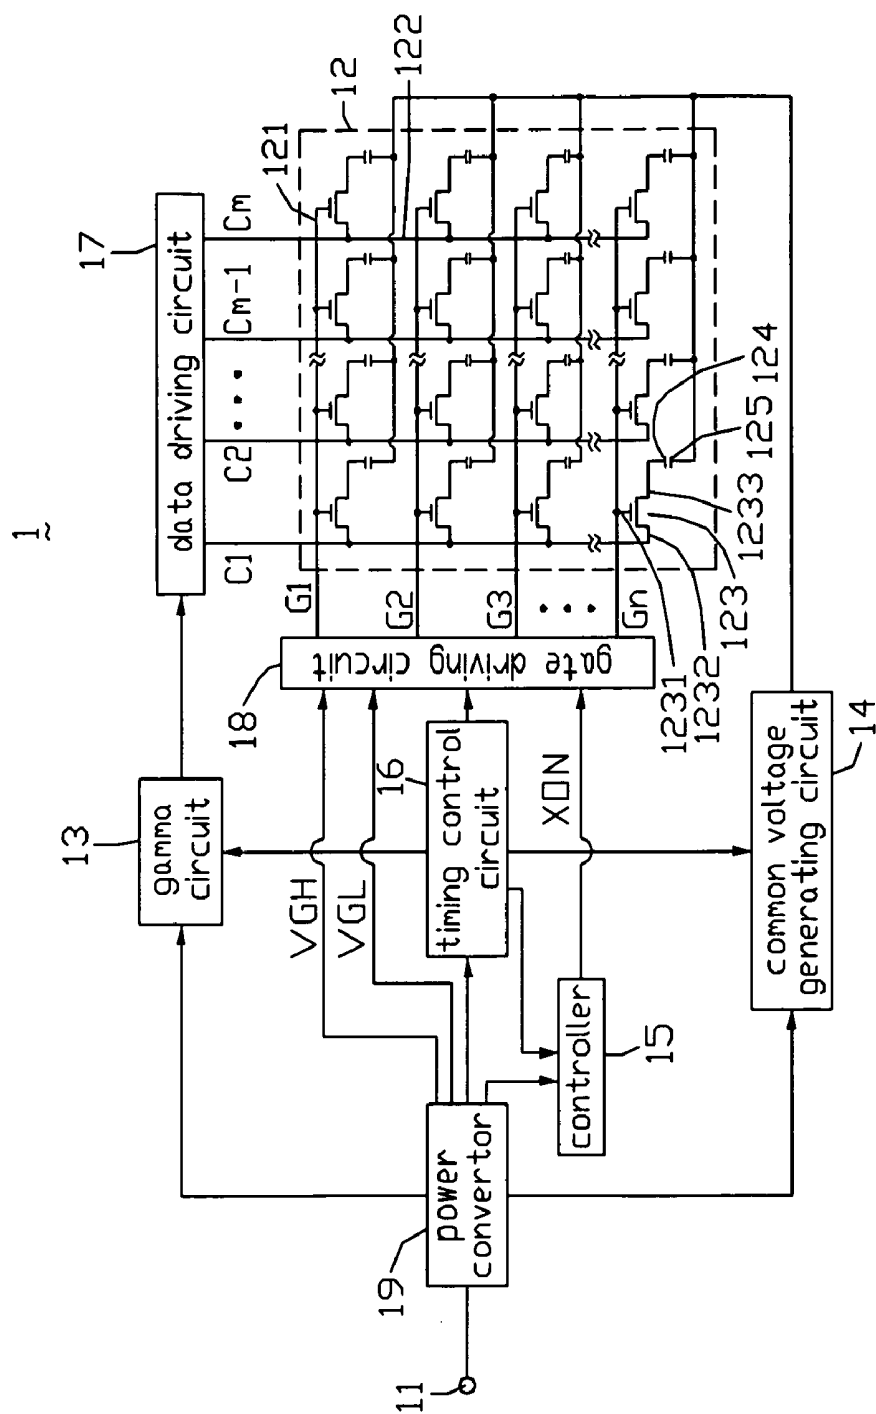


FIG. 1

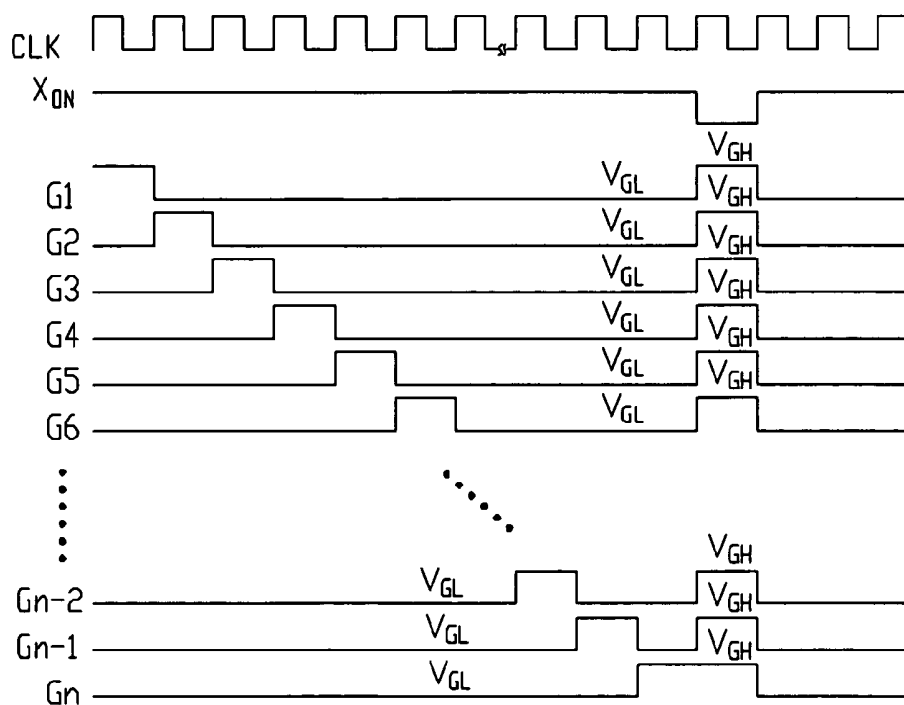


FIG. 2

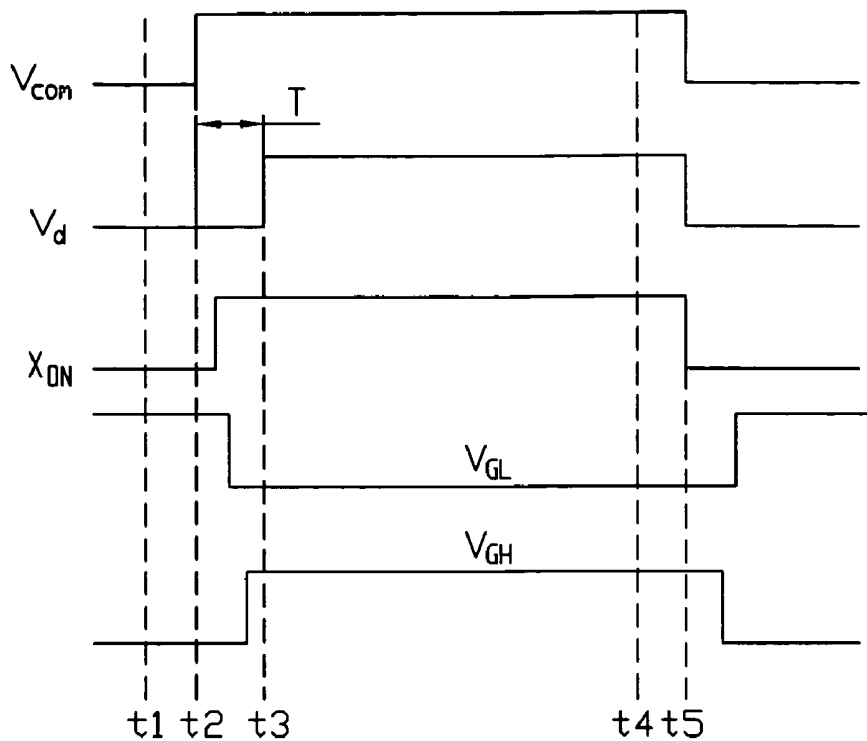


FIG. 3

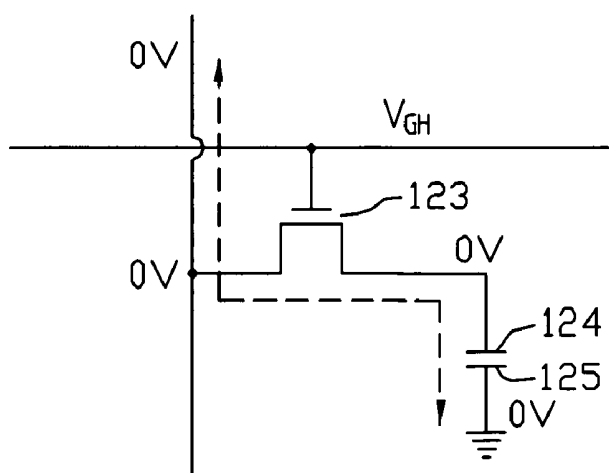


FIG. 4

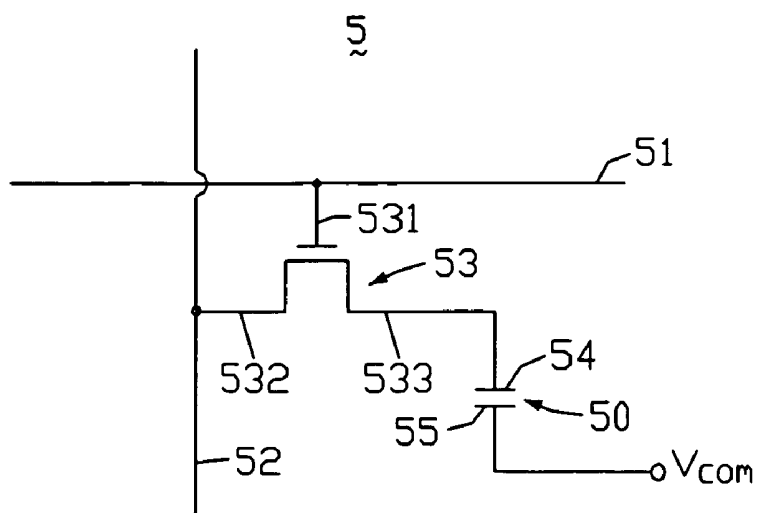


FIG. 5
(RELATED ART)

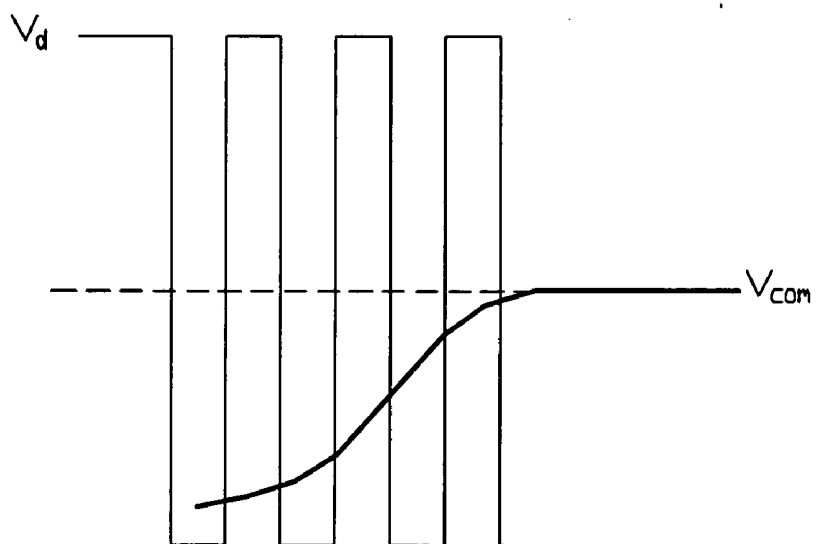


FIG. 6
(RELATED ART)

LIQUID CRYSTAL DISPLAY AND DRIVING METHOD THEREOF

FIELD OF THE INVENTION

[0001] The present invention relates to liquid crystal displays (LCDs) and particularly relates to a liquid crystal display that can eliminate flicker effect when switched on and can eliminate residual image effect when switched off, and a driving method of the liquid crystal display.

GENERAL BACKGROUND

[0002] A liquid crystal display has the advantages of portability, low power consumption, and low radiation, and has been widely used in various portable information products such as notebooks, personal digital assistants (PDAs), video cameras and the likes. The liquid crystal display generally includes a liquid crystal panel and a backlight module opposite to the liquid crystal panel. The liquid crystal panel includes a plurality of pixel units for displaying images.

[0003] Referring to FIG. 5, this is a circuit diagram of a pixel unit 5 of a typical liquid crystal display (not labeled). The pixel unit 5 includes a gate line 51, a data line 52, a thin film transistor 53, a pixel electrode 54, a common electrode 55 and a liquid crystal layer (not shown) sandwiched between the pixel electrode 54 and the common electrode 55. The thin film transistor 53 includes a gate electrode 531 coupled to the gate line 51, a source electrode 532 coupled to the data line 52, and a drain electrode 533 coupled to the pixel electrode 54. The pixel electrode 54, the common electrode 55 and the liquid crystal layer cooperatively form a liquid crystal capacitor 50.

[0004] Typically, the common electrode 55 is applied with a predetermined common voltage V_{com} , and the pixel electrode 54 is applied with a gray-scale voltage V_d . The common voltage V_{com} of the common electrode 55 and the gray-scale voltage V_d of the pixel electrode 54 generate an electric field. The strength of the electrical field controls an amount of light beams transmitting through the liquid crystal capacitor 50. Thus, the pixel unit 5 displays an image with a desired gray-scale level. Generally, the gray-scale voltage of the pixel electrode 54 is switched from a positive value to a negative value with respect to the common voltage V_{com} of the common electrode 55, in order to avoid deterioration of the liquid crystal layer.

[0005] Referring to FIG. 6, a sequence waveform diagram of the gray-scale voltage and the common voltage is shown. When the pixel unit 5 is switched on, the gray-scale voltage V_d is generated earlier than the common voltage V_{com} . When the gray-scale voltage V_d is applied to the pixel electrode 54, the common voltage V_{com} is still rising and does not reach a predetermined value. Thus, a voltage difference between the common electrode 55 and the pixel electrode 54 varies during a preliminary period after the pixel unit 5 is switched on. Thus, the amount of transmission light beams varies during this period. Therefore, the viewer can feel flickering.

[0006] Furthermore, when the liquid crystal display is powered off, the pixel unit 5 is switched off, and the common voltage V_{com} slowly drops to 0V. Thus, the voltage difference still exists between the common electrode 55 and the pixel electrode 54, and the electric field still exists for allowing the amount of transmission of light beams. Therefore, a residual image is induced.

[0007] What is needed, therefore, is a liquid crystal display which can overcome the above-described deficiencies. What is also needed, is a driving method of such liquid crystal display.

SUMMARY

[0008] An exemplary liquid crystal display includes a liquid crystal panel including a number of thin film transistors, a timing control circuit, a common voltage generating circuit and a gamma circuit. The timing control circuit is configured for generating a number of timing signals. The common voltage generating circuit is configured for generating a common voltage. The gamma circuit is configured for generating a plurality of gray-scale voltages. When the liquid crystal panel is powered on, the common voltage is applied to the liquid crystal panel and comes to a predetermined value before the gray-scale voltages are applied to the liquid crystal panel and reaches predetermined values. And when liquid crystal panel is powered off, the common voltage and the gray-scale voltages drops to 0V simultaneously by control of the common voltage generating circuit and the gamma circuit with the thin film transistors switched on.

[0009] Novel features and advantages of the liquid crystal display will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings. In the drawings, all the views are schematic.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 is essentially an abbreviated circuit diagram of a liquid crystal display according to a preferred embodiment of the present invention, the liquid crystal display including a plurality of pixel units, each pixel unit including a thin film transistor.

[0011] FIG. 2 is an abbreviated waveform diagram of driving signals of the liquid crystal display of FIG. 1.

[0012] FIG. 3 is a sequence waveform diagram of a common voltage, a gray-scale voltage, a control signal, a switch-on voltage of the thin film transistor, and a switch-off voltage of the thin film transistor of one of the pixel units of FIG. 1.

[0013] FIG. 4 is an equivalent circuit diagram of one pixel unit of FIG. 1.

[0014] FIG. 5 is an equivalent circuit diagram of a pixel unit of a conventional liquid crystal display.

[0015] FIG. 6 is a sequence waveform diagram of a common voltage and a gray-scale voltage of the pixel unit of FIG. 5.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0016] Reference will now be made to the drawings to describe preferred and exemplary embodiments of the present invention in detail.

[0017] Referring to FIG. 1, a liquid crystal display 1 according to a preferred embodiment of the present invention is shown. The liquid crystal display 1 includes a power source 11, a liquid crystal panel 12, a gamma circuit 13, a common voltage generating circuit 14, a controller 15, a timing control circuit 16, a data driving circuit 17, a gate driving circuit 18 and a power converter 19.

[0018] The liquid crystal panel 12 includes a plurality of gate lines 121 that are parallel to each other and that extend along a first direction, a plurality of data lines 122 that are

parallel to each other and that extend along a second direction orthogonal to the first direction, a plurality of thin film transistors **123** that are provided in the vicinity of points of intersections of the gate lines **121** and the data lines **122** and function as switching elements, a plurality of pixel electrodes **124**, a common electrode **125** opposite to the pixel electrodes **124**, and a liquid crystal layer (not shown) sandwiched between the pixel electrodes **124** and the common electrode **125**. Each thin film transistor **123** includes a gate electrode **1231** coupled to one corresponding gate line **121**, a source electrode **1232** coupled to one corresponding data line **122**, and a drain electrode **1233** coupled to one corresponding pixel electrode **124**. A smallest area formed by every adjacent two data lines **122** and every adjacent two gate lines **121** is defined as a pixel unit (not labeled).

[0019] The power convertor **19** includes an input terminal (not labeled) coupled to the power source **11**, a first output terminal (not labeled) coupled to the timing control circuit **16**, a second output terminal (not labeled) coupled to the common voltage generating circuit **14**, a third output terminal (not labeled) coupled to the gamma circuit **13**, a fourth output terminal (not labeled) coupled to the controller **15**, a fifth output terminal (not labeled) coupled to the gate driving circuit **18**, and a sixth output terminal (not labeled) coupled to the gate driving circuit **18**.

[0020] The power convertor **19** is configured for generating working voltages for the timing control circuit **16**, the common voltage generating circuit **14**, the gamma circuit **13**, and the controller **15**, and generating a switch-on voltage V_{GH} and a switch-off voltage V_{GL} of the thin film transistors **123** for the gate driving circuit **18**. The switch-on voltage V_{GH} is a high level voltage, and the switch-off voltage V_{GL} is a low level voltage.

[0021] The timing control circuit **16** includes an input terminal (not labeled) coupled to the power convertor **19** for receiving a working voltage, a first control terminal (not labeled) coupled to the common voltage generating circuit **14**, a second control terminal (not labeled) coupled to the gamma circuit **13**, a third control terminal (not labeled) coupled to the controller **15**, and a fourth control terminal (not labeled) coupled to the gate driving circuit **18**. The timing control circuit **16** is configured for generating a common voltage timing control signal for the common voltage generating circuit **14**, generating a gray-scale voltage timing control signal for the gamma circuit **13**, and generating a plurality of other timing control signals for the controller **15** and the gate driving circuit **18**.

[0022] The common voltage generating circuit **14** includes a first input terminal (not labeled) coupled to the power convertor **19** for receiving a working voltage, a second input terminal (not labeled) coupled to the timing control circuit **16**, and an output terminal (not labeled) coupled to the common electrode **125**. The common voltage generating circuit **14** is configured for generating a common voltage V_{com} and providing the common voltage V_{com} to the common electrode **125** according to the common voltage timing control signal of the timing control circuit **16**.

[0023] The gamma circuit **13** includes a third input terminal (not labeled) coupled to the power convertor **19** for receiving a working voltage, a fourth input terminal (not labeled) coupled to the timing control circuit **16**, and an output terminal coupled to the data driving circuit **17**. The gamma circuit **13** is configured for generating a gray-scale voltage V_d , and

providing the gray-scale voltages to the data driving circuit **17** according to the gray-scale voltage timing control signal of the timing control circuit **16**.

[0024] The controller **15** includes a fifth input terminal (not labeled) coupled to the power convertor **19** for receiving a working voltage, a sixth input terminal (not labeled) coupled to the timing control circuit **16**, and an output terminal (not labeled) coupled to the gate driving circuit **18**. The controller **15** is configured for generating a control signal X_{on} for the gate driving circuit **18** according to a timing control signal of the timing control circuit **16**. The control signal X_{on} can be a high level voltage or a low level voltage.

[0025] The gate driving circuit **18** includes a seventh input terminal (not labeled) coupled to the timing control circuit **16**, an eighth input terminal (not labeled) coupled to the controller **15**, a ninth input terminal (not labeled) coupled to the power convertor **19** to receive the switch-on voltage V_{GH} , a tenth input terminal (not labeled) coupled to the power convertor **19** to receive the switch-off voltage V_{GL} , and a plurality of output terminals (not labeled) respectively coupled to the gate lines **121**. The gate driving circuit **18** is configured for generating a plurality of scanning signals for the gate lines **121** according to a timing control signal of the timing control circuit **16**.

[0026] The data driving circuit **17** includes an input terminal (not labeled) coupled to the gamma circuit **13**, and a plurality of output terminals (not labeled) respectively coupled to the data lines **122**. The data driving circuit **17** is configured for applying the gray-scale voltages to the data lines **122**, respectively.

[0027] Referring to FIG. 2, "CLK" represents a waveform of timing signal. " X_{ON} " represents a waveform of the control signal. " G_1-G_n " represents waveforms of the scanning signals applied to the gate lines **121**. When the control signal X_{ON} is a high level voltage, the gate driving circuit **18** sequentially applies the switch-on voltage V_{GH} to the gate lines **121**. When one gate line **121** is applied with the switch-on voltage V_{GH} , the thin film transistors **123** connected to the gate line **121** are switched on. And other gate lines **121** are applied with the switch-off voltage V_{GL} , and the thin film transistors **123** connected thereto are switched off.

[0028] When the control signal X_{ON} is a low level voltage, the gate driving circuit **18** applies the switch-on V_{GH} voltage to all the gate lines **121** simultaneously, and all the thin film transistors **123** are switched on.

[0029] When the thin film transistors **123** are switched on, the gray-scale voltages generated by the gamma circuit **13** are applied to the pixel electrodes **124** via the data driving circuit **17**, the data lines **122**, and the thin film transistors **123**. The common electrode **125** is applied with the common voltage V_{com} . Thus, electric fields are generated between the common electrode **125** and the pixel electrodes **124**, and the strength of the electric fields controls amounts of transmission light beams of the pixel units. The electric fields keep during a frame period.

[0030] Referring to FIG. 3, " V_d " represents the gray-scale voltage, " V_{com} " represents the common voltage, " X_{ON} " represents the control signal, " V_{GH} " represents the switch-on voltage of the thin film transistors **123**, and " V_{GL} " represents the switch-off voltage of the thin film transistors **123**. A driving method of the liquid crystal display **1** is as follows.

[0031] At a time t_1 , the liquid crystal display **1** is powered on. That is, the power source **11** is switched on.

[0032] At a time t_2 , the common voltage generating circuit 14 generates a common voltage V_{com} according to the common voltage timing control signal of the timing control circuit 16, and outputs the common voltage V_{com} to the common electrode 125.

[0033] At a time t_3 , the gamma circuit 13 generates a gray-scale voltage V_d according to the gray-scale voltage timing control signal of the timing control circuit 16, and outputs the gray-scale voltage V_d to the pixel electrode 124.

[0034] During a “T” period from t_2 to t_3 , the common voltage V_{com} is set at a predetermined value. The “T” period generally lasts about 10 ms to 30 ms. In the “T” period, the controller 15 generates the control signal X_{ON} according to a timing control signal of the timing control circuit 16, and outputs the control signal X_{ON} to the gate driving circuit 18. And the power convertor 19 generates the switch-on voltage V_{GH} and the switch-off voltage V_{GL} for the gate driving circuit 18.

[0035] After the time t_3 , the liquid crystal display 1 starts to work normally. The gate driving circuit 18 sequentially applies the switch-on voltage V_{GH} to the gate lines 121, thus the thin film transistors 123 connected thereto are switched on. Then the gray-scale voltage V_d generated by the gamma circuit 13 is applied to the pixel electrodes 124 via the data driving circuit 17, the data lines 122 and the switched on thin film transistors 123. The common electrode 125 is applied with the common voltage V_{com} . Thus, an electric field generates between the common electrode 125 and the pixel electrodes 124, and the strength of the electric fields controls amounts of transmission light beams of the pixel units. In the next frame periods, the steps are repeated.

[0036] At a time t_4 , the liquid crystal display 1 is powered off. That is, the power 11 is switched off, and a switch-off process is executed.

[0037] At a time t_5 , the common voltage V_{com} and the gray-scale voltage V_d simultaneously drop to 0V. The control signal X_{ON} also drops to a low level voltage. The gate driving circuit 18 simultaneously applies the switch-on voltage V_{GH} to all the gate lines 121, thus all the thin film transistors 123 are switched on. The voltages of the pixel electrodes 124 also drop to 0V with the dropping of the gray-scale voltages V_d . Therefore, voltages of the pixel electrodes 124 and the common electrode 125 all drop to 0V. Referring also to FIG. 4, charges stored between the common electrode 125 and one pixel electrode 124 are released via the thin film transistor 123, and no residual images are displayed.

[0038] Unlike conventional liquid crystal displays, when the liquid crystal display 1 is powered on, the common voltage V_{com} is generated by the common voltage generating circuit 14 before the gray-scale voltage V_d is generated. And the common voltage V_{com} is applied to the common electrode 125 and reaches to a predetermined value before the gray-scale voltages V_d are applied to the pixel electrodes 124. That is, voltage difference between the common electrode 125 and the pixel electrodes 124 do not vary, thus no flicker is induced. Furthermore, when the liquid crystal display 1 is powered off, the common voltage V_{com} of the common electrode 125 and the gray-scale voltages V_d of the pixel electrodes 124 drop to 0V simultaneously, and all the thin film transistors 123 are switched on. Therefore, charges stored between the common electrode 125 and the pixel electrodes 14 are released via the activated thin film transistors 123 quickly. Accordingly, no residual images are induced.

[0039] It is to be understood, however, that even though numerous characteristics and advantages of preferred embodiments have been set out in the foregoing description, together with details of the structures and functions of the embodiments, the disclosure is illustrative only; and that changes may be made in detail, especially in matters of shape, size, and arrangement of parts within the principles of the present invention to the full extent indicated by the broad general meaning of the terms in which the appended claims are expressed.

What is claimed is:

1. A liquid crystal display comprising:

- a liquid crystal panel comprising a plurality of thin film transistors;
 - a timing control circuit configured for generating a plurality of timing signals;
 - a common voltage generating circuit configured for generating a common voltage according to the timing signals; and
 - a gamma circuit configured for generating a plurality of gray-scale voltages according to the timing signals;
- wherein when the liquid crystal display is powered on, the common voltage is applied to the liquid crystal panel and reaches a predetermined value before the gray-scale voltages are applied to the liquid crystal panel, and when the liquid crystal display is powered off, the common voltage and the gray-scale voltages drop to 0V simultaneously by control of the common voltage generating circuit and the gamma circuit with all the thin film transistors switched on.

2. The liquid crystal display as claimed in claim 1, further comprising a power convertor configured for generating a plurality of working voltages and outputting the working voltages to the timing control circuit, the gamma circuit and the common voltage generating circuit, and generating a switch-on voltage and outputting the switch-on voltage to the thin film transistors.

3. The liquid crystal display as claimed in claim 2, further comprising a controller configured for generating a control signal and outputting the control signal to the thin film transistors.

4. A driving method of a liquid crystal display, the liquid crystal display comprising a liquid crystal panel, a timing control circuit, a gamma circuit and a common voltage generating circuit, the liquid crystal panel comprising a plurality of thin film transistors, the method comprising the following steps:

- a. switching on the liquid crystal display;
- b. generating a common voltage through the common voltage generating circuit, and outputting the common voltage to the liquid crystal panel;
- c. after the common voltage reaches a predetermined value, generating a plurality of gray-scale voltages through the gamma circuit, and outputting the gray-scale voltages to the liquid crystal panel,
- d. switching off the liquid crystal display, and switching on all the thin film transistors, and making the common voltage and the gray-scale voltages all drop to 0V substantially at the same time.

5. The driving method as claimed in claim 4, wherein the liquid crystal panel comprises a common electrode and a plurality of pixel electrodes opposite to the common electrode.

6. The driving method as claimed in claim 5, wherein the common voltage is applied to the common electrode 10 ms to 30 ms before the gray-scale voltages are applied to the pixel electrodes.

7. The driving method as claimed in claim 4, wherein the timing control circuit generates a plurality of timing control signals and outputting the timing control signals to common voltage generating circuit and the gamma circuit.

8. The driving method as claimed in claim 7, wherein, in step b, the timing control circuit generates a common voltage timing signal and outputs the common voltage timing signal to the common voltage generating circuit, and the common voltage generating circuit generates the common voltage accordingly.

9. The driving method as claimed in claim 8, wherein, in step d, the common voltage generating circuit makes the common voltage drop to 0V according to the common voltage timing signal.

10. The driving method as claimed in claim 7, wherein, in step c, the timing control circuit generates a gray-scale voltage timing control signal, and outputs the gray-scale voltage timing control signal to the gamma circuit.

11. The driving method as claimed in claim 10, wherein, in step c, the gamma circuit generates the gray-scale voltage according to the gray-scale voltage timing control signal.

12. The driving method as claimed in claim 10, wherein, in step d, the gamma circuit makes the gray-scale voltage drop to 0V according to the gray-scale voltage timing control signal.

13. The driving method as claimed in claim 7, wherein the liquid crystal display further comprises a controller and a gate driving circuit, the liquid crystal panel comprising a plurality of gate lines, between the step b and step c the controller applies a control signal with a high level voltage to the gate driving circuit, and the gate driving circuit applies a switch-on voltage of the thin film transistor and a switch-off voltage of the thin film transistor to the gate lines.

14. The driving method as claimed in claim 13, wherein the switch-on voltage is a high level voltage, and the switch-off voltage is a low level voltage.

15. The driving method as claimed in claim 13, wherein the switch-on voltage is applied to the gate lines to switch on the thin film transistors connected thereto.

16. The driving method as claimed in claim 15, wherein when one gate line is applied with the switch-on voltage, the thin film transistors connected with the gate line are switched on.

17. The driving method as claimed in claim 13, wherein, in step d, the controller applies a control signal with a low level voltage to the gate driving circuit, the gate driving circuit applies the switch-on voltage to all the gate lines.

18. The driving method as claimed in claim 17, wherein all the thin film transistors are switched on.

* * * * *

专利名称(译)	液晶显示器及其驱动方法		
公开(公告)号	US20080158126A1	公开(公告)日	2008-07-03
申请号	US12/005726	申请日	2007-12-28
[标]申请(专利权)人(译)	群康科技(深圳)有限公司 群创光电股份有限公司		
申请(专利权)人(译)	INNOCOM科技 (深圳) 有限公司. 群创光电股份有限公司.		
当前申请(专利权)人(译)	群创光电 INNOCOM科技 (深圳) 有限公司.		
[标]发明人	TUNG CHIEN FAN HUANG SHUN MING FENG SHA		
发明人	TUNG, CHIEN-FAN HUANG, SHUN-MING FENG, SHA		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3648 G09G2330/027 G09G2330/026 G09G2310/063		
优先权	095149685 2006-12-29 TW		
其他公开文献	US8106871		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示器 (1) 包括 : 液晶面板 (12) , 包括多个薄膜晶体管 (123) ; 定时控制电路 (16) , 公共电压产生电路 (14) 和伽马电路 (13) 。定时控制电路被配置用于生成定时信号。公共电压产生电路配置用于产生公共电压。伽马电路配置用于产生灰度电压。当液晶面板通电时 , 公共电压施加到液晶面板并在灰度电压施加到液晶面板之前达到预定值并达到预定值。并且当液晶面板断电时 , 通过控制公共电压产生电路和接通薄膜晶体管的伽马电路 , 公共电压和灰度电压同时下降到0V。

