


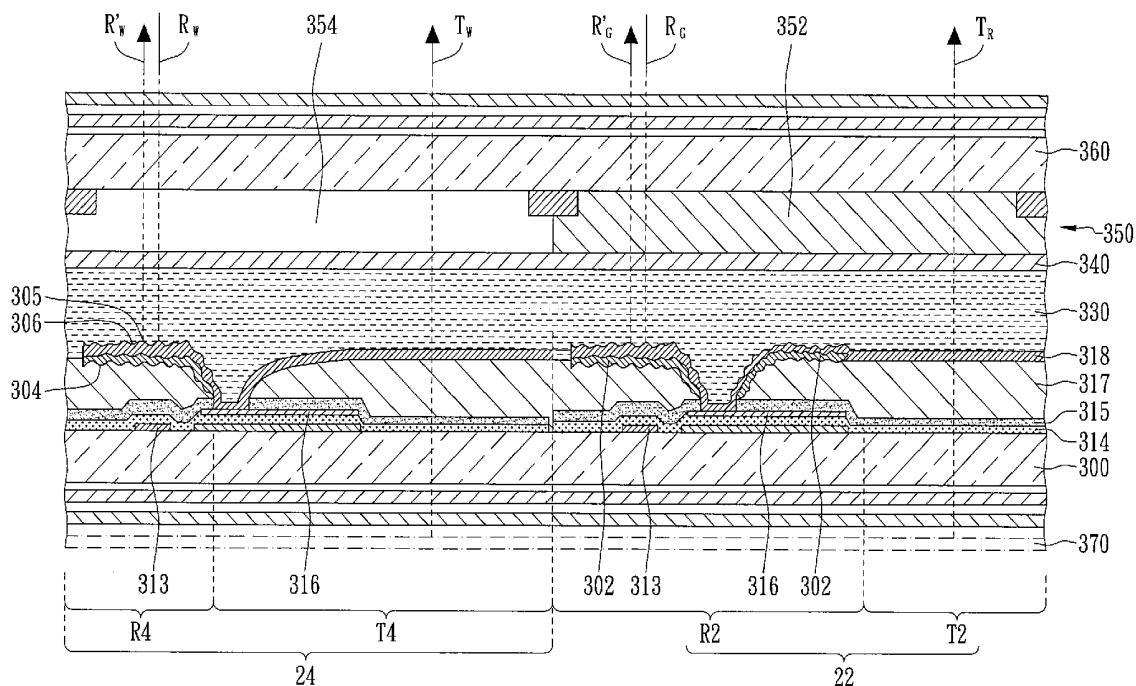

(43) **Pub. Date:** Dec. 25, 2008

(21) Appl. No.: **11/767,343**



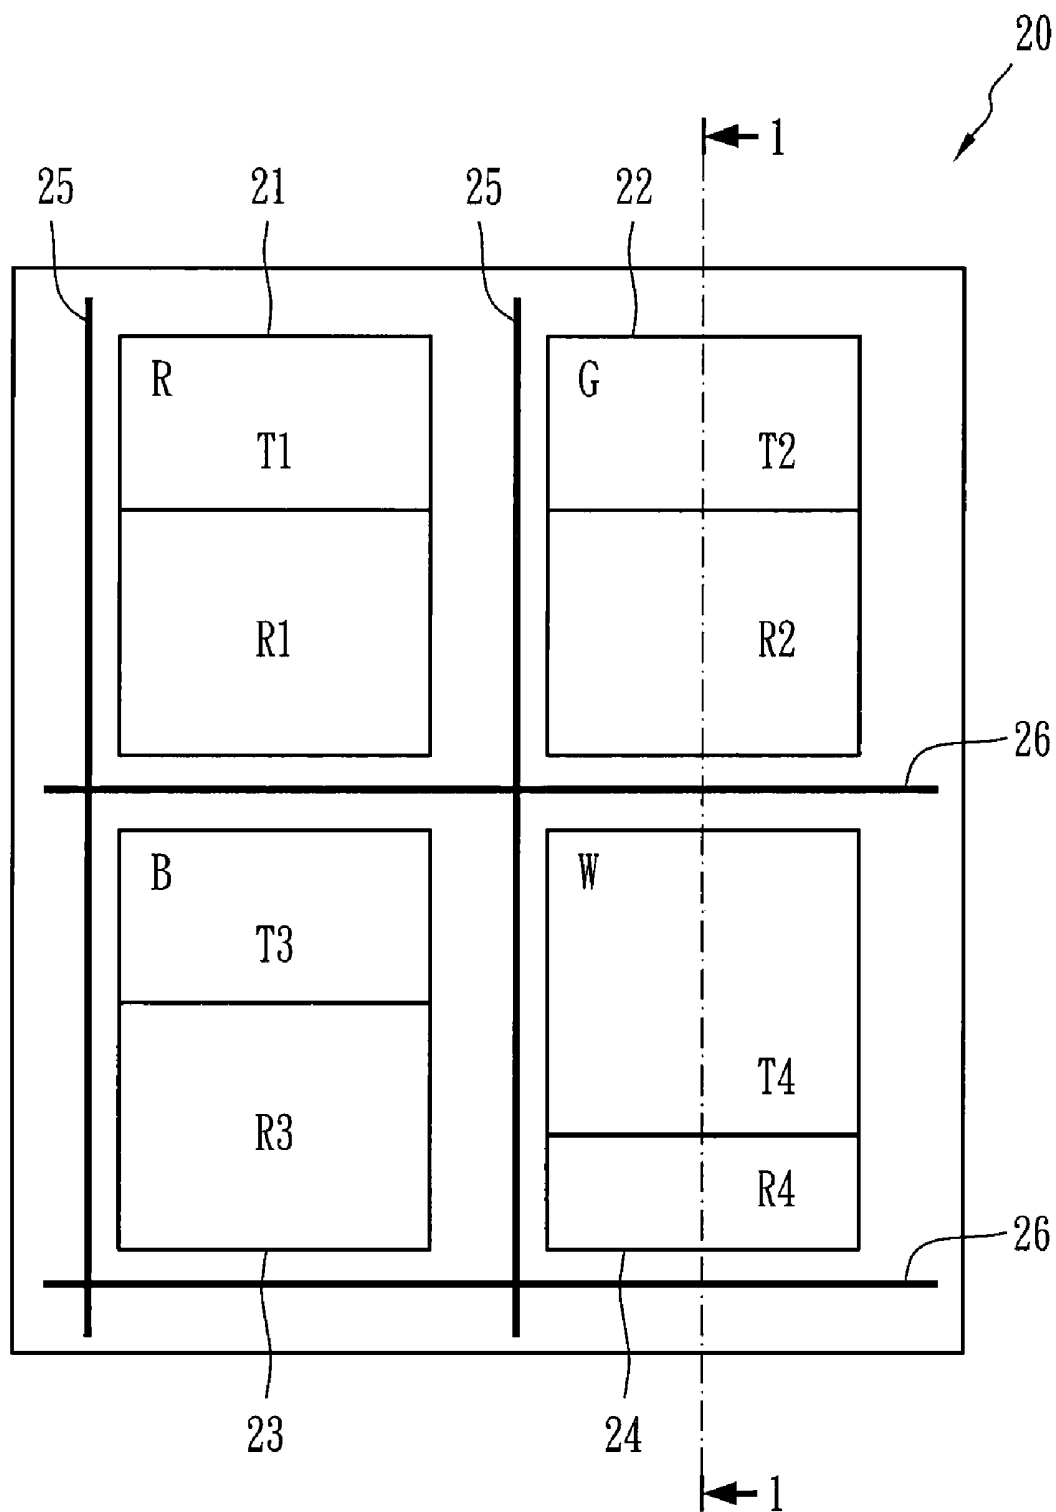


FIG. 2

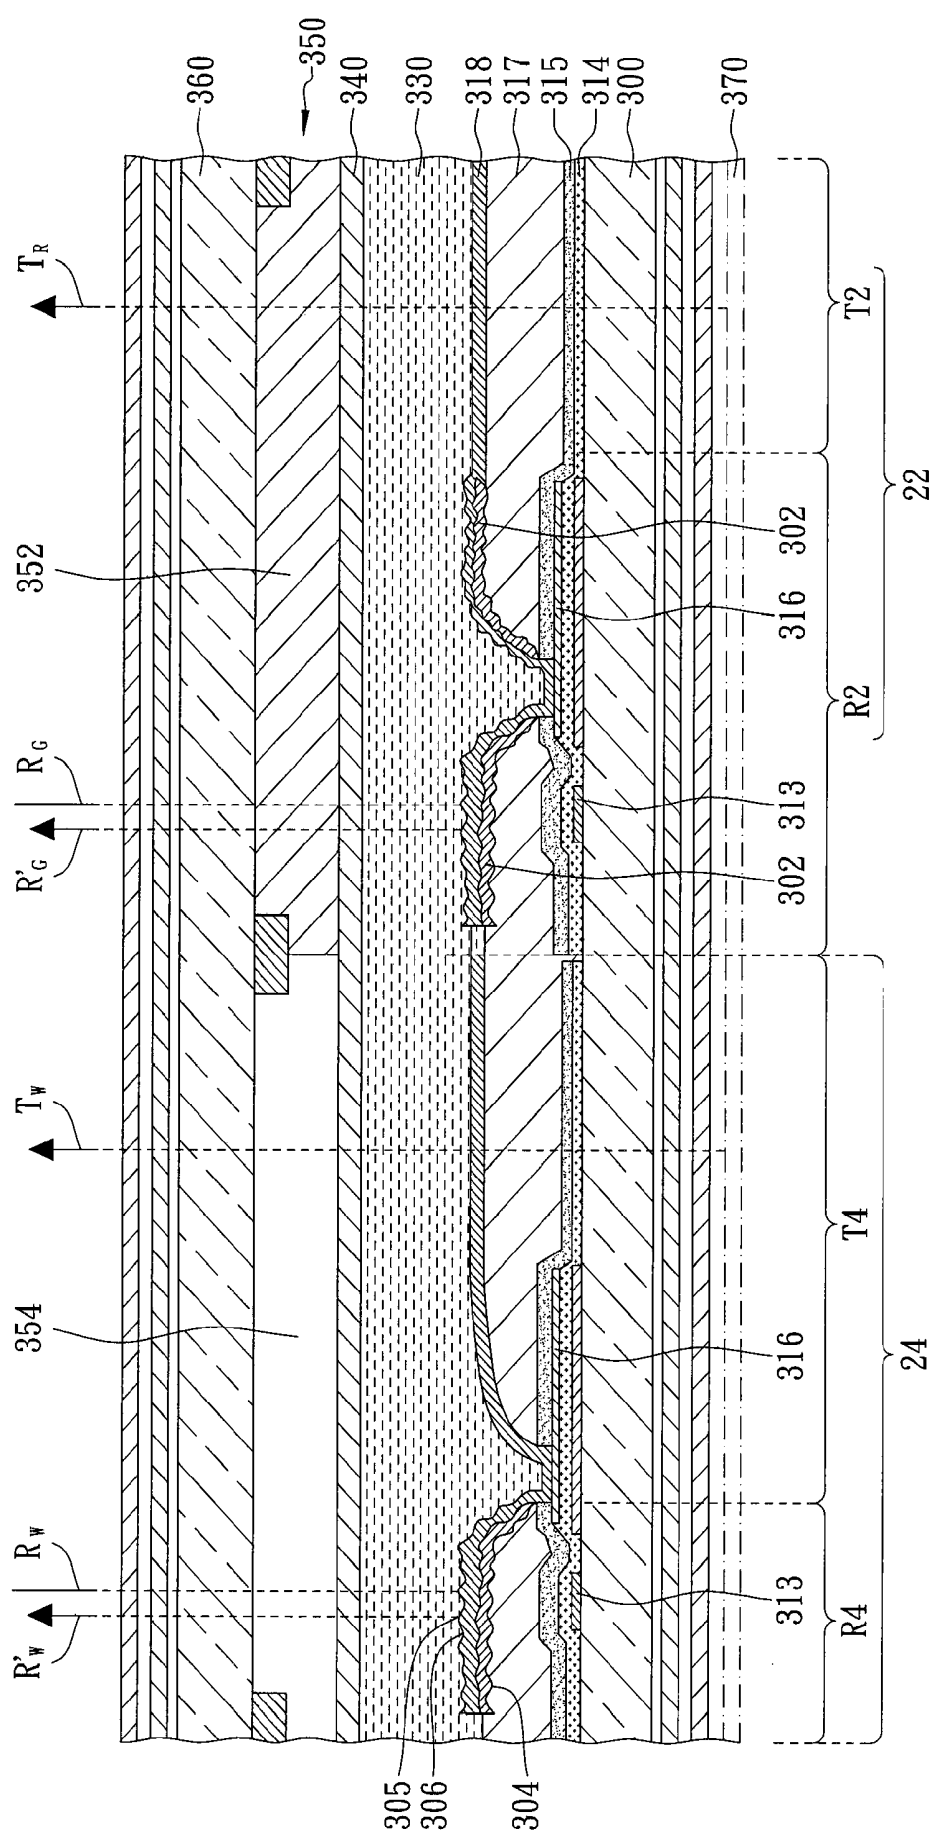


FIG. 3

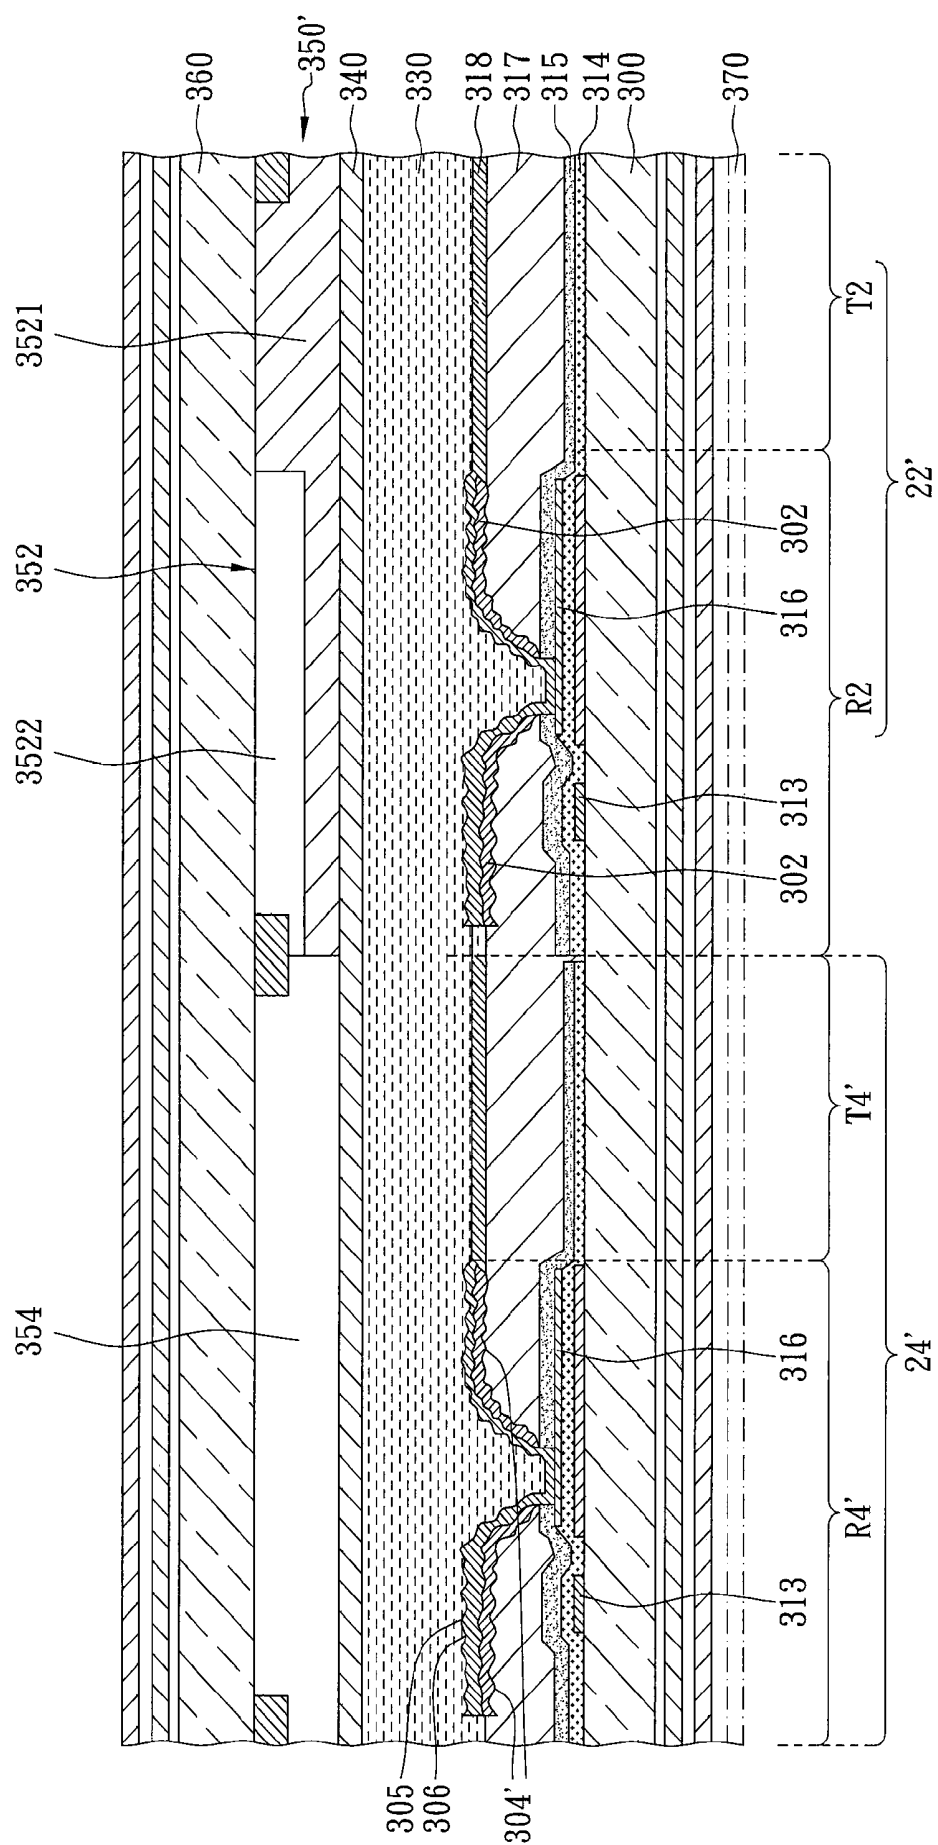


FIG. 4

TRANSREFLECTIVE LIQUID CRYSTAL DISPLAY

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a transreflective liquid crystal display (LCD), and more particularly, to an RGBW transreflective LCD with improved image quality.

[0003] 2. Description of the Related Art

[0004] LCDs are among the most widely used flat panel display devices. Generally, an LCD includes a pair of panels each having an electrode on inner surface, and a dielectric anisotropic liquid crystal layer interposed between the panels. In the LCD, the variation of the voltage difference between the field generating electrodes, e.g., the variation in the strength of an electric field generated by the electrodes, changes the transmittance of the light passing through the LCD, and thus desired images are obtained by controlling the voltage difference between the electrodes.

[0005] Depending on the type of the light source used for image display, an LCD may be classified as one of the following three types: a transmissive LCD, a reflective LCD, and a transreflective LCD. The transmissive LCD utilizes a backlight module as the light source, and the reflective LCD utilizes ambient light to illuminate the pixels from a front side. The transreflective LCD combines the transmissive and the reflective characteristics. Under medium light conditions such as an indoor environment or under complete darkness conditions, transreflective LCDs operate in the transmissive mode, while under bright conditions such as in an outdoor environment, they operate in the reflective mode.

[0006] Recently, an RGBW technology, in which a white subpixel is added to a set of red, green and blue subpixels, has been developed to improve the brightness of LCD panels. This technology can further enhance the resolution of an LCD by a rendering method. In the subpixel rendering method, red, green, blue and white subpixels are individually controlled. When a specific subpixel is displayed, the subpixels adjacent thereto are displayed along with the specific subpixel, so that a pixel is represented as the brightness divided by the specific subpixel and the adjacent displayed subpixels. With this method, more specific expressions of slant lines or curved lines become more possible, improving the resolution.

[0007] FIG. 1 is a sectional view of a conventional transreflective LCD, which helps to illustrate the operation of such an LCD. As shown in FIG. 1, the LCD 10 includes a lower substrate 100, an upper substrate 160 and a liquid crystal layer 130 interposed therebetween. The upper substrate 160 has a common electrode 140 and a color filter 150 formed thereon. The color filter 150 includes red (R), green (G), blue (B) and white (W) regions 151-154. The lower substrate 100 has an insulating layer 110 and a pixel electrode 120 formed thereon. The pixel electrode 120 has an opaque portion 124 capable of reflecting ambient light and a transparent portion 122 capable of transmitting light from a backlight module 190 disposed at the exterior of the low substrate 100. The liquid crystal layer 130 is interposed between the low substrate 100 and the upper substrate 160. Therefore, the transreflective LCD 10 can display in both reflective and transmissive modes.

[0008] The R, G, B and W regions 151-154 respectively provide red, green, blue and white subpixels 11-14 to display different colors. Furthermore, the transmittance of the uncolored region 154 is above 0.9 (or deemed as 1), and that of each of the R, G, and B regions 151-153 is around 1/3. The B region

153 absorbs 2/3 of the ambient light 283 when the ambient light 283 passes through the B region 153. In particular, the B region 153 further absorbs 2/3 of the reflective light 283' when the reflective light 283' passes through the B region 153. That is, the ratio of the reflective light 283' to the incident ambient light 283 is 1:9. However, the transmitting light 273 from the backlight module 190 passes through the B region 153 just one time so that the ratio of the transmitting light 273 to its incident light is 1:3. Similarly, regarding to the W region 154, the ratio of the reflective light 284' to the incident ambient light 284 is above 81:100, and the ratio of the transmitting light 274 to its incident light is above 9:10.

[0009] Apparently, the percentages of effective output light of the white subpixel 14 and the subpixels 11-13 are inconsistent in both reflective and transmissive modes. Such an inconsistency gets worse, when the sub-pixel rendering technology is applied to the LCD 10. This leads to different chrominance in reflective regions and transmissive regions, decreasing display quality.

SUMMARY OF THE INVENTION

[0010] An objective of the present invention is to provide a transreflective liquid crystal display with improved image quality. The reflective area of the W subpixel is optimized and smaller than that of each of the R, G, and B subpixels so that the percentages of effective output light of the white subpixel and the subpixels are consistent in both reflective and transmissive modes.

[0011] The second objective of the present invention is to provide a transreflective liquid crystal display with balanced luminance and chrominance. An uncolored block is inserted into each of the R, G, and B regions on a color filter to increase the transmittance of each of the R, G, and B regions. Therefore, the percentages of effective output light of the white subpixel and the subpixels are consistent in both reflective and transmissive modes.

[0012] To achieve the objective, the present invention provides a transreflective liquid crystal display comprising a plurality of pixels. Each pixel includes at least four subpixels including a white subpixel, a red subpixel, a green subpixel and a blue subpixel. Each subpixel comprises a transmissive area and a reflective area. The reflective area of the white subpixel is smaller than that of each of the R, G and B subpixels so that the percentages of effective output light of the white subpixel and the other subpixels are consistent in both reflective and transmissive modes.

[0013] The present invention also provides a transreflective liquid crystal display comprising a plurality of pixels and a color filter. Each pixel includes at least four subpixels including a white subpixel, a red subpixel, a green subpixel and a blue subpixel. Each subpixel comprises a transmissive area and a reflective area. An uncolored block is inserted into each of the red, green and blue regions on the color filter, and the uncolored block is located above the reflective area. Therefore, the percentages of effective output light of the white subpixel and the other subpixels are consistent in both reflective and transmissive modes.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The invention will be described according to the appended drawings in which:

[0015] FIG. 1 is a sectional view of a conventional transreflective LCD;

[0016] FIG. 2 is a plan view showing the arrangement of one pixel including R, G, B and W sub-pixels according to an embodiment;

[0017] FIG. 3 is partial cross-sectional view taken along the 1-1 of FIG. 2 and shows the structure including a white subpixel and a green subpixel; and

[0018] FIG. 4 is cross-sectional view shows another pixel structure including a white subpixel and a green subpixel.

PREFERRED EMBODIMENT OF THE PRESENT INVENTION

[0019] FIG. 2 is a plan view showing the arrangement of one pixel including R, G, B and W sub-pixels according to an embodiment. A transreflective liquid crystal display comprises a plurality of pixels. As shown in FIG. 2, a pixel 20 is composed of a red subpixel 21, a green subpixel 22, a blue subpixel 23 and a white subpixel 24 that are arranged in a two-by-two matrix. Two gate lines 26 extend substantially in a transverse direction, while being separated from each other, and transmit gate signals. Two source lines 25 extend substantially in a longitudinal direction and across the gate lines 26, and transmit data voltages.

[0020] The red subpixel 21 comprises a transmissive area T1 and a reflective area R1, the green subpixel 22 comprises a transmissive area T2 and a reflective area R2, the blue subpixel 23 comprises a transmissive area T3 and a reflective area R3, and the white subpixel 24 comprises a transmissive area T4 and a reflective area R4. Because the transmittance of the uncolored region on a color filter is much higher than that of each of the red, green and blue regions, the ratio of the transmissive area T4 to the reflective area R4 is different from the ratio of the transmissive area (T1, T2 or T3) of a colored subpixel (R, G or B) to the reflective area (R1, R2 or R3) of the colored subpixel and is optimized to have balanced chrominance for the pixel 20 in both reflective and transmissive modes. Especially, subpixel rendering in the RGBW is balanced between the reflective and transmissive modes.

[0021] FIG. 3 is partial cross-sectional view taken along the 1-1 of FIG. 2 and shows the structure including a white subpixel and a green subpixel. An upper substrate 360 has a common electrode 340 and a color filter 350 formed thereon. As shown in FIG. 3, the color filter 350 includes a green region 352 and an uncolored region 354, but a red region and a blue region of the color filter 350 cannot be illustrated in the same figure. Gate lines 313 are formed on a lower substrate 300 formed of glass, quartz, or the like. A gate insulating layer 314 having an insulation property is formed on the lower substrate 300 and the gate lines 313. A passivation layer 315 is formed on source lines (not shown), capacitance holding electrodes 316 and the gate insulating layer 314. The passivation layer 315 has contact holes (openings) at positions where the passivation layer 315 overlaps the capacitance holding electrodes 316. A plurality of resin layers 317 is overlaid on the passivation layer 315. Reflectors 302 and 304 formed of Al (aluminum), AlNd (Neodymium) or the like and having a reflective function are provided on the resin layers 317, and have a plurality of concave portions 306 and convex portions 305 for scattering light. Pixel electrodes 318 are formed on the reflectors 302 and 304 and the resin layers 317. A liquid crystal layer 330 is interposed between the common electrode 340 and the pixel electrodes 318. Furthermore, the thickness of the liquid crystal layer 330 within the reflective area R2 (or R4) and the thickness of that within the transmissive area T2 (or T4) are different.

[0022] The green region 352 absorbs around $\frac{2}{3}$ of ambient light R_G when the ambient light R_G passes through the green region 352. In particular, the green region 352 further absorbs $\frac{2}{3}$ of the reflective light R_G' when the reflective light R_G' passes through the green region 352. In contrast, the uncolored region 354 absorbs few of ambient light R_W when the ambient light R_W passes through the uncolored region 354. In particular, the uncolored region 354 also absorbs very few of the reflective light R_W' when the incident reflective light passes through the uncolored region 354. Furthermore, the transmitting light T_G from the backlight module 370 passes through the green region 352 just one time so that $\frac{2}{3}$ of original incident light is absorbed by the green region 352.

[0023] Examples of the optimal design of the areas of the reflectors 302 and 304 are illustrated hereinafter. When the ratio of the reflective areas R1-R3 to the transmissive areas T1-T3 is given as 15:85, the ratio of the reflective area R4 to the transmissive area T4 should be 56:944. Furthermore, when the ratio of the reflective areas R1-R3 to the transmissive areas T1-T3 is changed into 45:55, the ratio of the reflective area R4 to the transmissive area T4 should be 214:786. In other words, the reflective areas R1-R4 and the reflective area R1-R4 should satisfy the equation as follows:

$$\frac{A_{T4} \times n_W}{(A_{T1} + A_{T2} + A_{T3}) \times n_C} = \frac{A_{R4} \times n_W^2}{(A_{R1} + A_{R2} + A_{R3}) \times n_C^2}$$

where A_{T1} , A_{T2} , A_{T3} and A_{T4} respectively represent the areas of T1-T4, A_{R1} , A_{R2} , A_{R3} and A_{R4} respectively represent the areas of R1-R4, n_W is the light transmission rate of the uncolored region of the color filter and n_C is the light transmission rate of the colored regions (R, G, B) of the color filter. In the aforesaid examples, n_C is given as $\frac{1}{3}$, and n_W is given as 1. If the color of the uncolored region 354 is gray, instead of white, n_W will be smaller than 1.

[0024] Further examples of the optimal design of the areas of the reflectors 302 and 304 are illustrated hereinafter.

EXAMPLE A

[0025] The relationship between the reflective areas and the transmissive areas of the red, green, blue and white subpixels can be represented as:

$$\frac{T_{N+1} \times n_{N+1}}{\left(\sum_{i=1}^N T_i \right) \times \left(\frac{\sum_{i=1}^N n_i}{N} \right)} \cong \frac{R_{N+1} \times n_{N+1}^2}{\left(\sum_{i=1}^N R_i \right) \times \left(\frac{\sum_{i=1}^N n_i}{N} \right)^2}$$

where the transmissive areas of the subpixels are represented by T, the reflective areas of the subpixels are represented by R, the light transmission rates of the red, green and blue regions are represented by n_i , the light transmission rates of the uncolored region is represented by n_{N+1} , the number of the red, green and blue subpixels is represented by N, and the number of the white subpixel is represented by N+1.

[0026] Accompanying the above equation, the relationship between the reflective areas and the transmissive areas of the red, green, blue and white subpixels would be satisfied the inequality as follows:

$$\left| \frac{T_{N+1} \times n_{N+1}}{\left(\sum_{i=1}^N T_i \right) \times \left(\frac{\sum_{i=1}^N n_i}{N} \right)} - \frac{R_{N+1} \times n_{N+1}^2}{\left(\sum_{i=1}^N R_i \right) \times \left(\frac{\sum_{i=1}^N n_i}{N} \right)^2} \right| \leq 0.01$$

EXAMPLE B

[0027] The relationship between the reflective areas and the transmissive areas of the red, green, blue and white subpixels can be represented as:

$$\frac{T_{N+1} \times n_{N+1}}{\sum_{i=1}^N T_i \times n_i} \cong \frac{R_{N+1} \times n_{N+1}^2}{\sum_{i=1}^N R_i \times n_i^2}$$

where the transmissive areas of the subpixels are represented by T, the reflective areas of the subpixels are represented by R, the light transmission rates of the red, green and blue regions are represented by n_i , the light transmission rates of the uncolored region is represented by n_{N+1} , the number of the red, green and blue subpixels is represented by N, and the number of the white subpixel is represented by N+1.

[0028] Accompanying the above equation, the relationship between the reflective areas and the transmissive areas of the red, green, blue and white subpixels would be satisfied the inequality as follows:

$$\left| \frac{T_{N+1} \times n_{N+1}}{\sum_{i=1}^N T_i \times n_i} - \frac{R_{N+1} \times n_{N+1}^2}{\sum_{i=1}^N R_i \times n_i^2} \right| \leq 0.01$$

EXAMPLE C

[0029] The relationship between the reflective areas and the transmissive areas of the red, green, blue and white subpixels can be represented as:

$$\frac{T_{N+1}}{T_i} \cong \frac{R_{N+1} \times n_{N+1} \times N}{\sum_{i=1}^N n_i}$$

where the transmissive areas of the subpixels are represented by T, the reflective areas of the subpixels are represented by R, the light transmission rates of the red, green and blue regions are represented by n_i , the light transmission rates of the uncolored region is represented by n_{N+1} , the number of the red, green and blue subpixels is represented by N, and the number of the white subpixel is represented by N+1.

[0030] Accompanying the above equation, the relationship between the reflective areas and the transmissive areas of the red, green, blue and white subpixels would be satisfied the inequality as follows:

$$\left| \frac{T_{N+1}}{T_i} - \frac{R_{N+1} \times n_{N+1} \times N}{\sum_{i=1}^N n_i} \right| \leq 0.01$$

[0031] FIG. 4 is cross-sectional view shows another pixel structure including a white subpixel and a green subpixel. Compared with the FIG. 3, the area of reflectors 304' is the same as the area of reflector 302 so that the transmissive area T4' of a white subpixel 24' is substantial equal to the transmissive area T2 of a green subpixel 22. Similarly, the reflective area R4' of the white subpixel 24' is substantial equal to the reflective area R2 of the white subpixel 22. Instead of decreasing the reflective area of the white subpixel, an uncolored block 3522 is inserted into a green region 3521 or the other colored regions, and located above the reflective area R2 so as to balance chrominance between the reflective and transmissive modes.

[0032] The above-described embodiments of the present invention are intended to be illustrative only. Numerous alternative embodiments may be devised by persons skilled in the art without departing from the scope of the following claims.

What is claimed is:

1. A transreflective liquid crystal display, comprising: a substrate; a plurality of pixels, each pixel comprising a first subpixel and a second subpixel;

wherein each of the subpixels comprises a transmissive area and a reflective area, and the reflective area of the first subpixel is smaller than that of the second subpixel.

2. The transreflective liquid crystal display of claim 1, wherein the pixels operate with a rendering method.

3. The transreflective liquid crystal display of claim 1, further comprising a color filter including a colored region and uncolored region.

4. The transreflective liquid crystal display of claim 3, wherein the transmissive area of the subpixel is represented by T, and the reflective area of the subpixel is represented by R.

5. The transreflective liquid crystal display of claim 4, wherein a number of the second subpixels is represented by N, and a number of the first subpixel is represented by N+1.

6. The transreflective liquid crystal display of claim 5, wherein a light transmission rate of the colored region is represented by n_i , and a light transmission rate of the uncolored region is represented by n_{N+1} .

7. The transreflective liquid crystal display of claim 6, wherein the relationship between the reflective areas and the transmissive areas of the first and second subpixels is represented as:

$$\frac{T_{N+1} \times n_{N+1}}{\left(\sum_{i=1}^N T_i \right) \times \left(\frac{\sum_{i=1}^N n_i}{N} \right)} \cong \frac{R_{N+1} \times n_{N+1}^2}{\left(\sum_{i=1}^N R_i \right) \times \left(\frac{\sum_{i=1}^N n_i}{N} \right)^2}$$

8. The transreflective liquid crystal display of claim 6, wherein the relationship between the reflective areas and the transmissive areas of the first and second subpixels is represented as:

$$\left| \frac{T_{N+1} \times n_{N+1}}{\left(\sum_{i=1}^N T_i \right) \times \left(\frac{\sum_{i=1}^N n_i}{N} \right)} - \frac{R_{N+1} \times n_{N+1}^2}{\left(\sum_{i=1}^N R_i \right) \times \left(\frac{\sum_{i=1}^N n_i}{N} \right)^2} \right| \leq 0.01$$

9. The transreflective liquid crystal display of claim 6, wherein the relationship between the reflective areas and the transmissive areas of the first and second subpixels is represented as:

$$\frac{T_{N+1} \times n_{N+1}}{\sum_{i=1}^N T_i \times n_i} \cong \frac{R_{N+1} \times n_{N+1}^2}{\sum_{i=1}^N R_i \times n_i^2}$$

10. The transreflective liquid crystal display of claim 6, wherein the relationship between the reflective areas and the transmissive areas of the first and second subpixels is represented as:

$$\left| \frac{T_{N+1} \times n_{N+1}}{\sum_{i=1}^N T_i \times n_i} - \frac{R_{N+1} \times n_{N+1}^2}{\sum_{i=1}^N R_i \times n_i^2} \right| \leq 0.01$$

11. The transreflective liquid crystal display of claim 6, wherein the relationship between the reflective areas and the transmissive areas of the first and second subpixels is represented as:

$$\frac{T_{N+1}}{T_i} \cong \frac{R_{N+1} \times n_{N+1} \times N}{\sum_{i=1}^N n_i}$$

12. The transreflective liquid crystal display of claim 6, wherein the relationship between the reflective areas and the transmissive areas of the first and second subpixels is represented as:

$$\left| \frac{T_{N+1}}{T_i} - \frac{R_{N+1} \times n_{N+1} \times N}{\sum_{i=1}^N n_i} \right| \leq 0.01$$

13. The transreflective liquid crystal display of claim 1, further comprising a plurality of reflectors formed in the reflective areas.

14. The transreflective liquid crystal display of claim 13, further comprising a passivation layer interposed between the reflectors the substrate.

15. The transreflective liquid crystal display of claim 14, further comprising a plurality of resin layers interposed between the reflectors and the passivation layer.

16. The transreflective liquid crystal display of claim 1, further comprising a first color filter and a second color filter, wherein the second color filter including an uncolored block located above the reflective area.

17. The transreflective liquid crystal display of claim 16, wherein the first color filter is white color filter, and second color filter is red, green or blue color filter.

18. The transreflective liquid crystal display of claim 1, further comprising a liquid crystal layer formed on the reflective areas and the transmissive areas, wherein a thickness of the liquid crystal layer on the reflective areas and a thickness of the liquid crystal layer on the transmissive areas are different.

19. A transreflective liquid crystal display, comprising: a plurality of pixels, each pixel comprising a red subpixel, a green subpixel, a blue subpixel and a white subpixel, each of the four subpixels including a transmissive area and a reflective area; and a color filter comprising red regions, green regions, blue regions and uncolored regions, one of the red regions, the green regions and the blue regions including a uncolored block located above one of the reflective areas.

20. The transreflective liquid crystal display of claim 19, wherein a percentage of effective output light of the white subpixel is consistent with that of the other subpixels in one of the pixels upon reflective and transmissive modes.

* * * * *

专利名称(译)	透反液晶显示器		
公开(公告)号	US20080316401A1	公开(公告)日	2008-12-25
申请号	US11/767343	申请日	2007-06-22
[标]申请(专利权)人(译)	瀚宇彩晶股份有限公司		
申请(专利权)人(译)	瀚宇彩晶股份有限公司		
当前申请(专利权)人(译)	瀚宇彩晶股份有限公司		
[标]发明人	CHANG CHING CHAO		
发明人	CHANG, CHING CHAO		
IPC分类号	G02F1/1335		
CPC分类号	G02F1/133514 G02F1/133555 G02F2201/52		
其他公开文献	US7605891		
外部链接	Espacenet USPTO		

摘要(译)

透射反射型液晶显示器包括多个像素。每个像素包括至少四个子像素，包括白色子像素，红色子像素，绿色子像素和蓝色子像素。每个子像素包括透射区域和反射区域。白色子像素的反射区域小于R，G和B子像素中的每一个的反射区域，使得白色子像素和其他彩色子像素的有效输出光的百分比在反射和透射模式下都是一致的。

