



(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2003/0197815 A1**

**Choi et al.**

(43) **Pub. Date:**

**Oct. 23, 2003**

(54) **LIQUID CRYSTAL DISPLAY**

(30) **Foreign Application Priority Data**

(76) Inventors: **Seung Kyu Choi**, Book-ku (KR); **June Ho Park**, Kumi-shi (JP); **Sang Moo Song**, Nam-ku (JP)

Apr. 20, 2002 (KR) ..... P2002-21791

**Publication Classification**

Correspondence Address:

**SONG K. JUNG**  
**McKenna Long & Aldridge LLP**  
**1900 K Street, NW**  
**Washington, DC 20006 (US)**

(51) **Int. Cl.<sup>7</sup>** ..... **G02F 1/136**

(52) **U.S. Cl.** ..... **349/43**

(57) **ABSTRACT**

A liquid crystal display having a liquid crystal display panel driven according a dot inversion method using a data driver driven according to a column inversion method includes dummy liquid crystal cells formed in first and last ones of successive columns in the liquid crystal display panel.

(21) Appl. No.: **10/316,890**

(22) Filed: **Dec. 12, 2002**

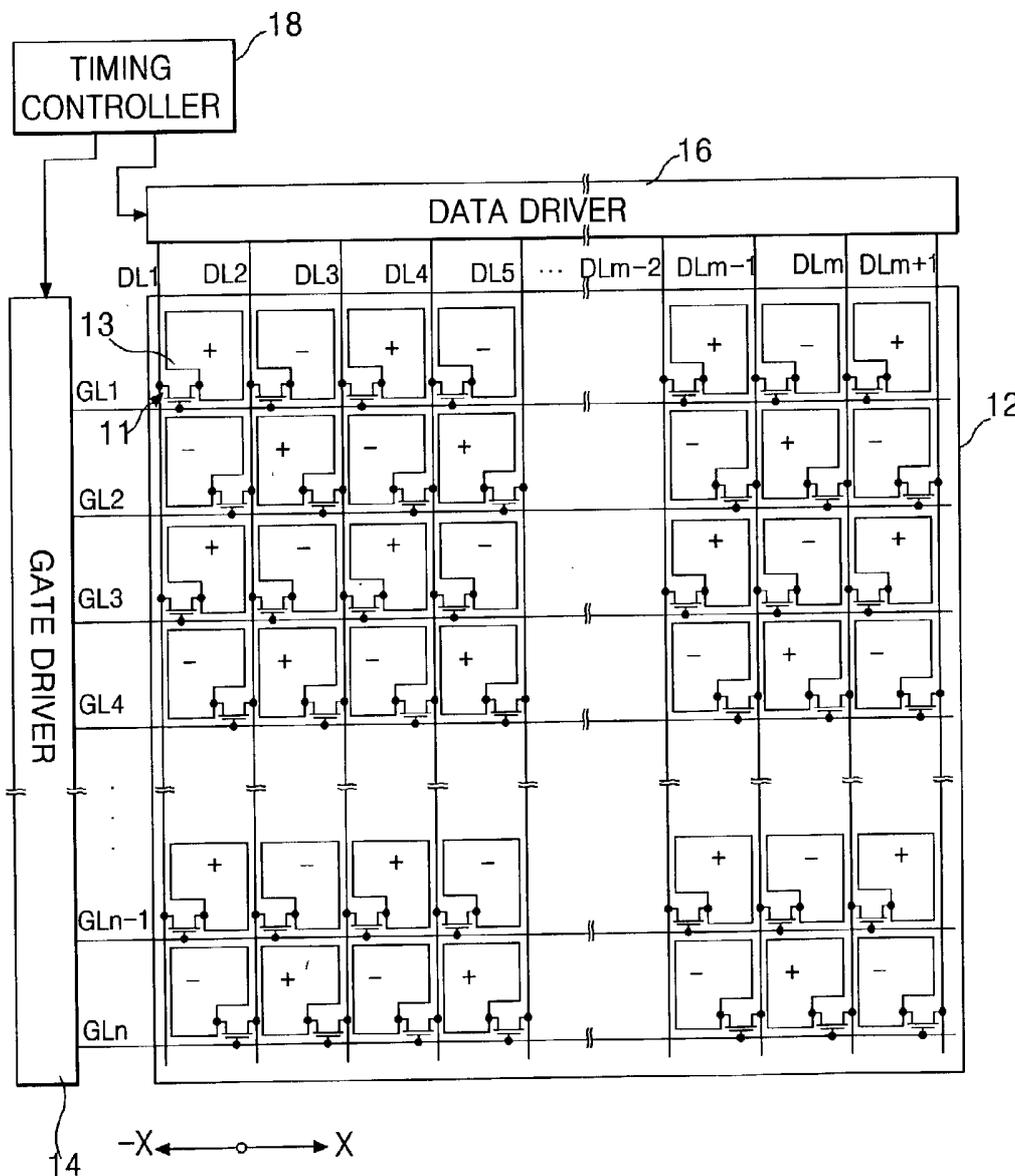


FIG. 1  
RELATED ART

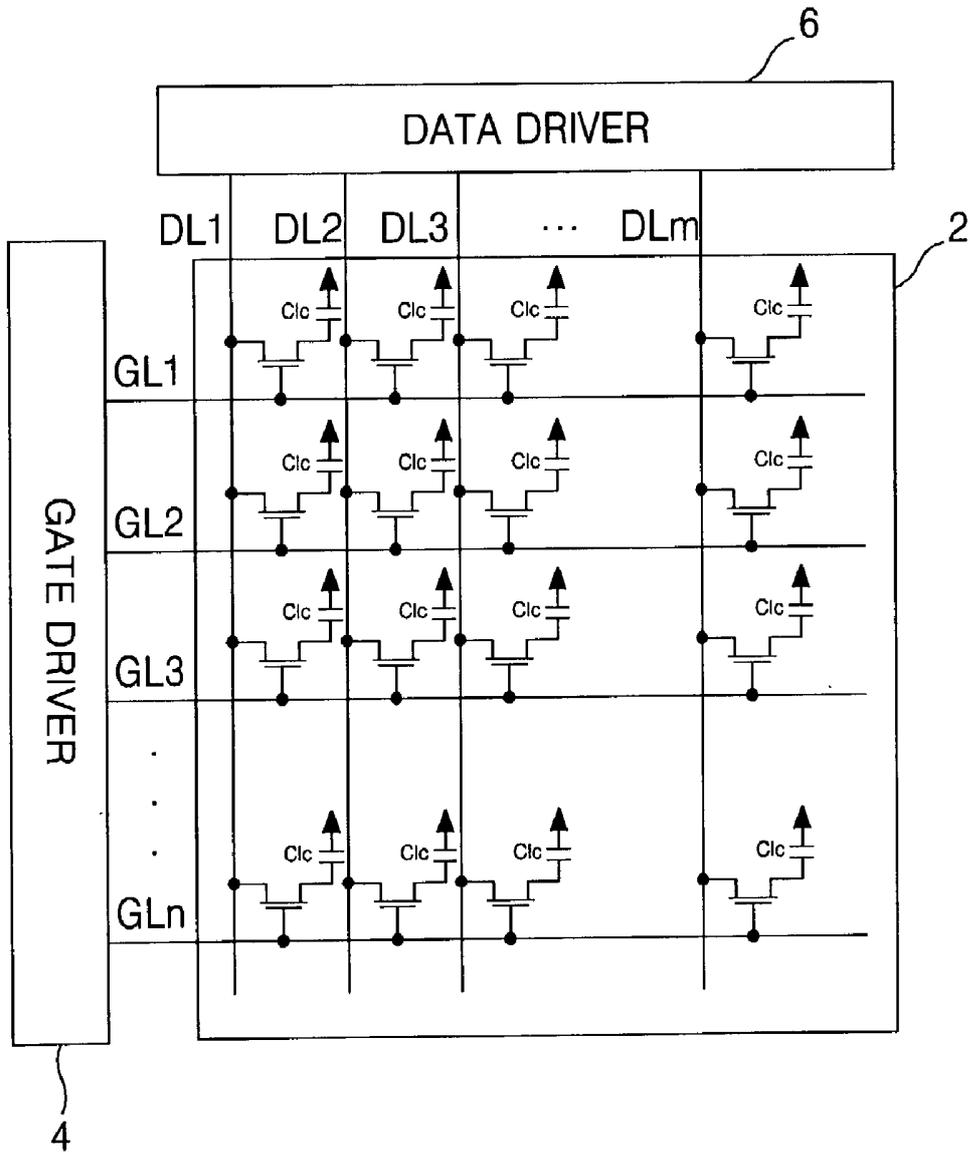


FIG. 2A  
RELATED ART

+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-

FIG. 2B  
RELATED ART

-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+



FIG. 4A  
RELATED ART

+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+

FIG. 4B  
RELATED ART

-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-

FIG. 5

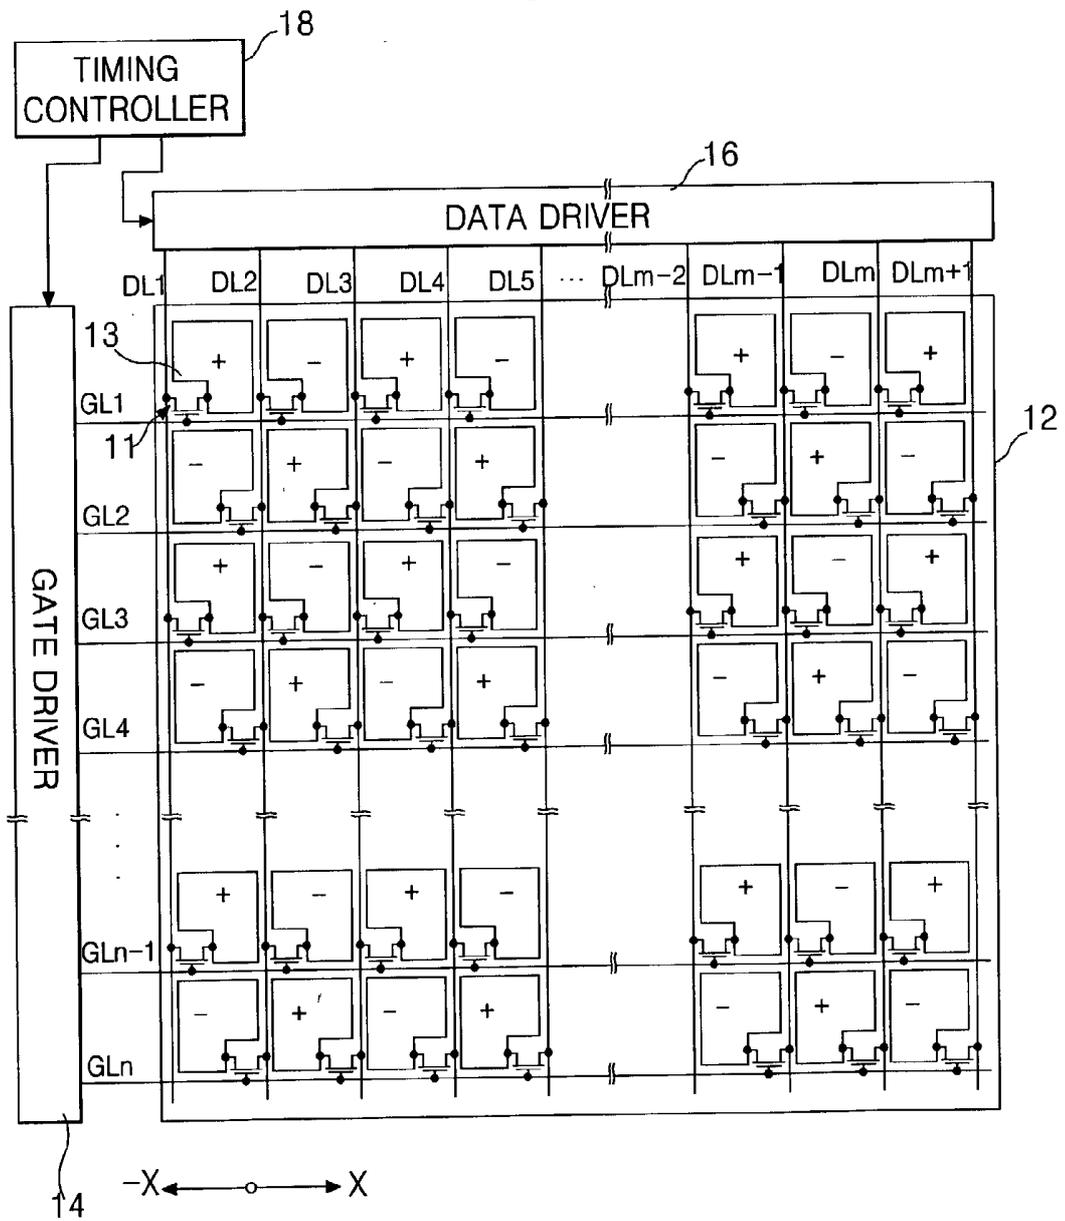


FIG. 6

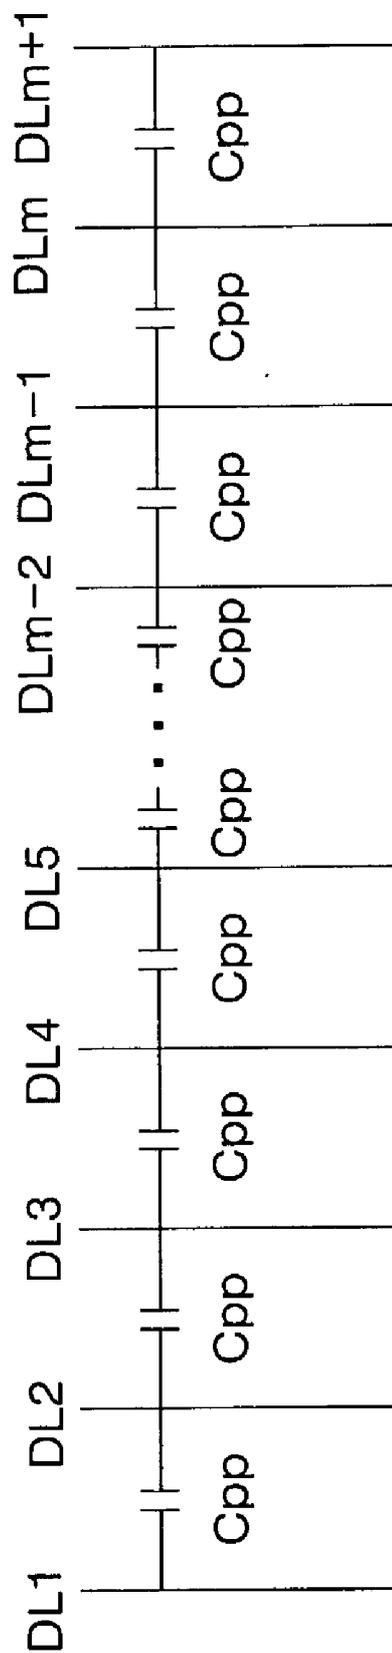


FIG. 7

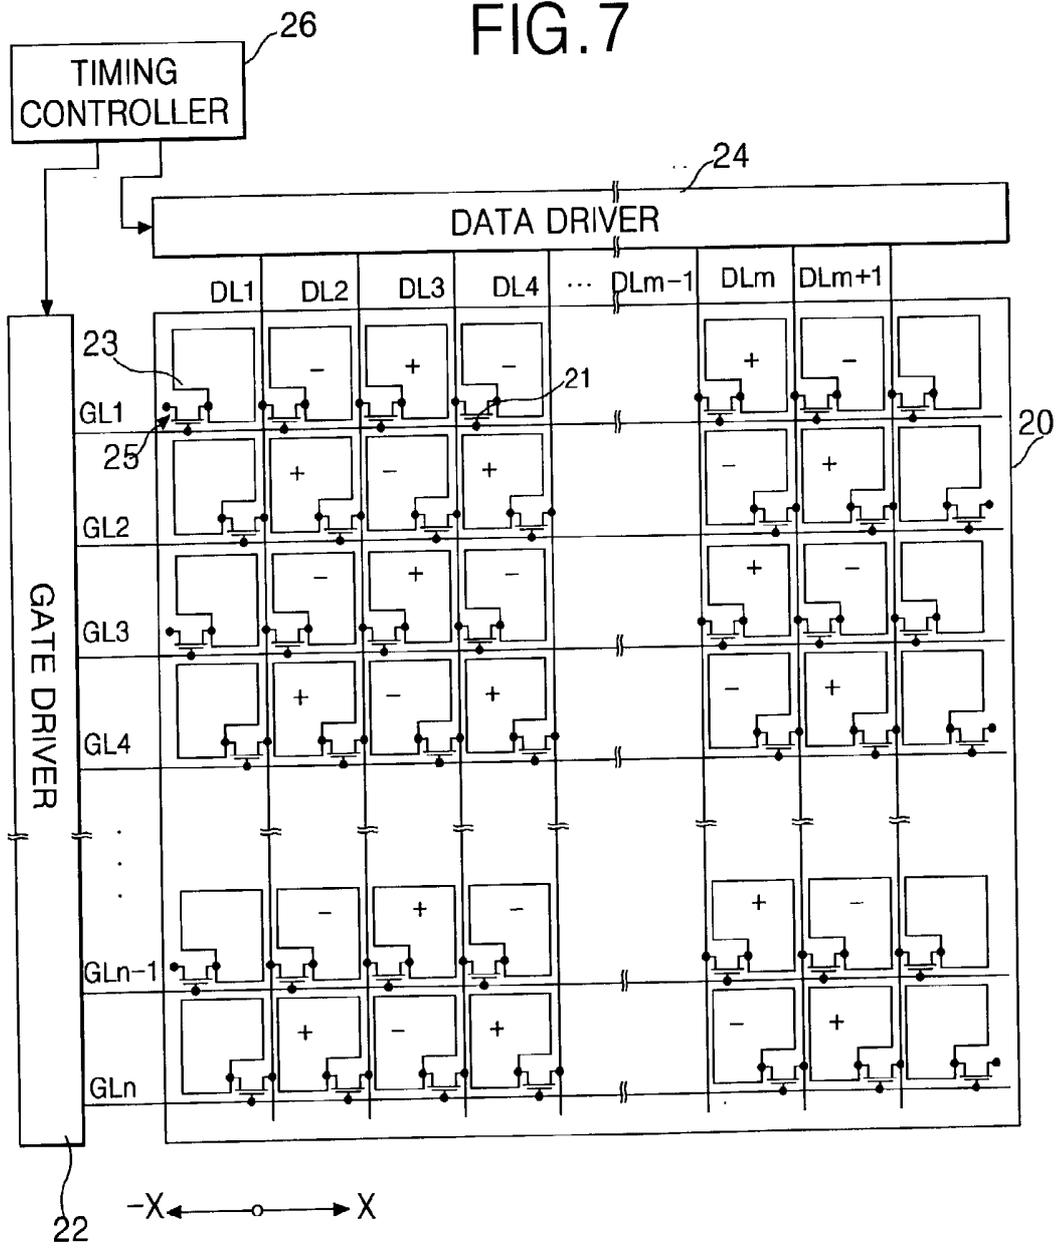


FIG. 8

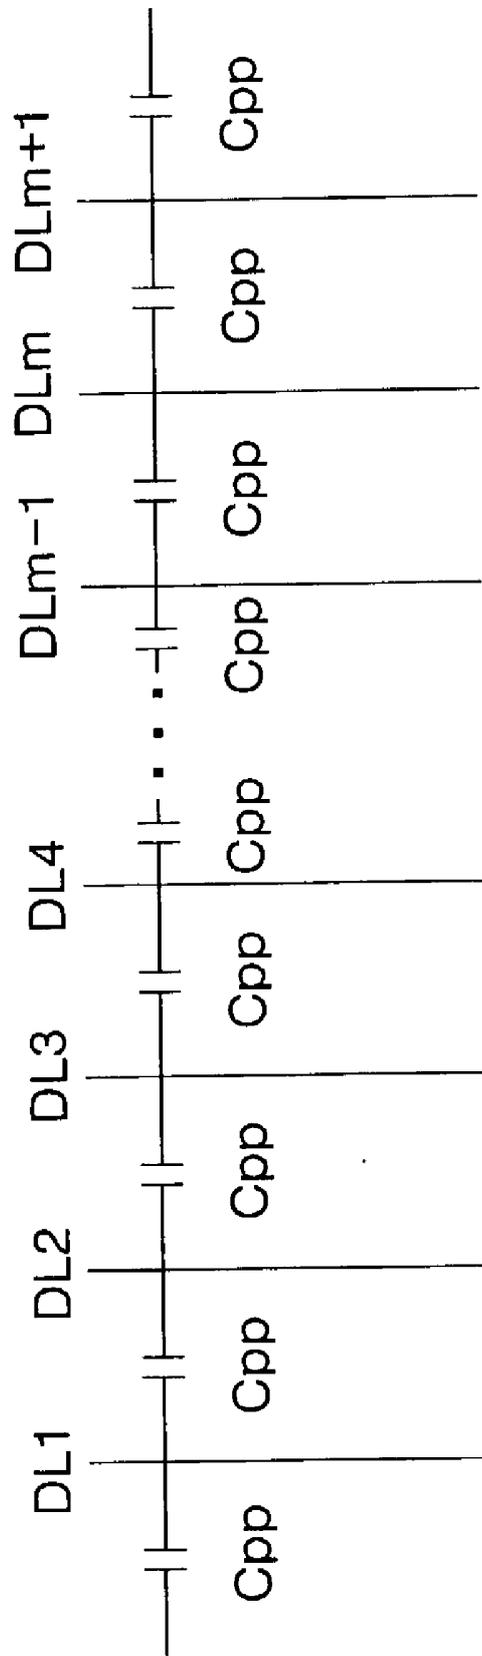


FIG. 9

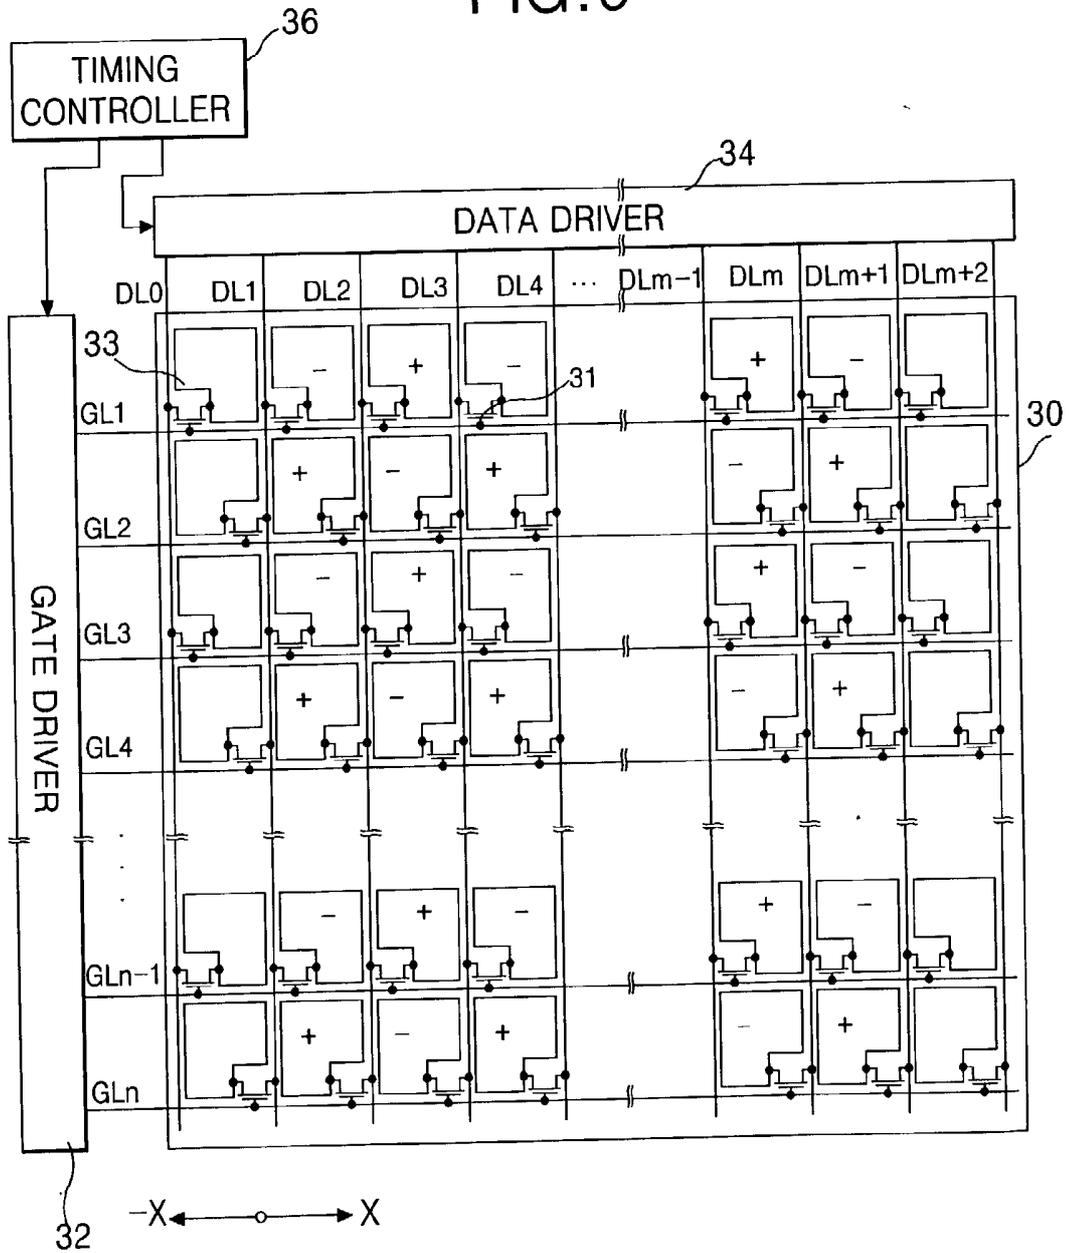


FIG. 10


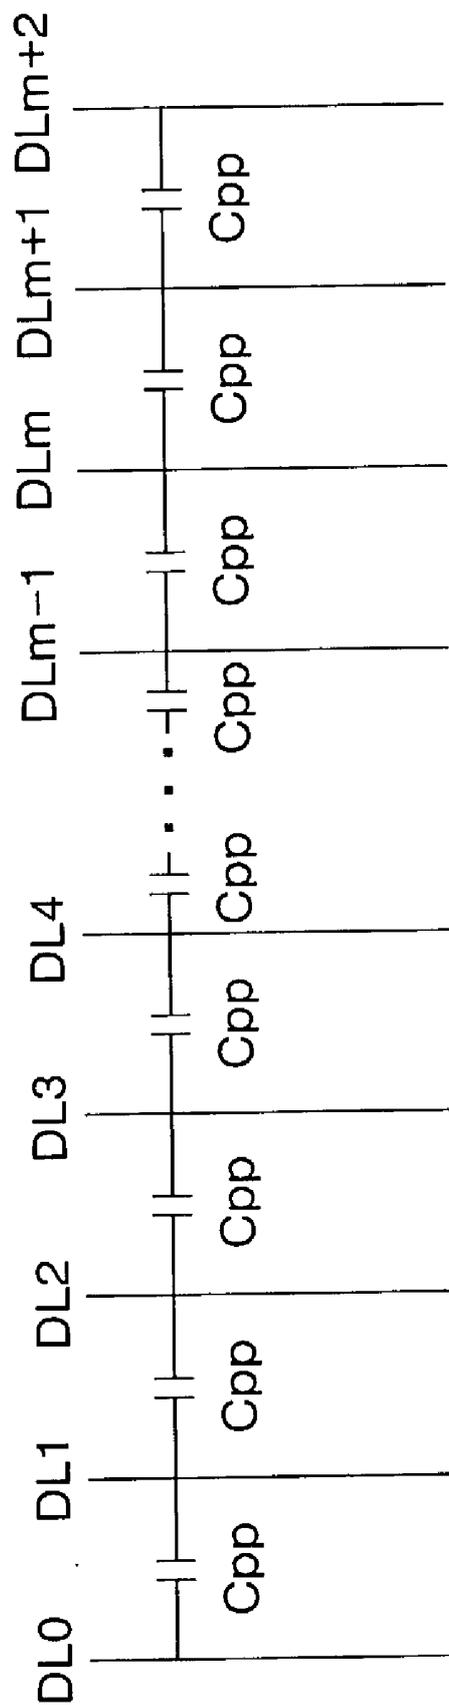


FIG. 11

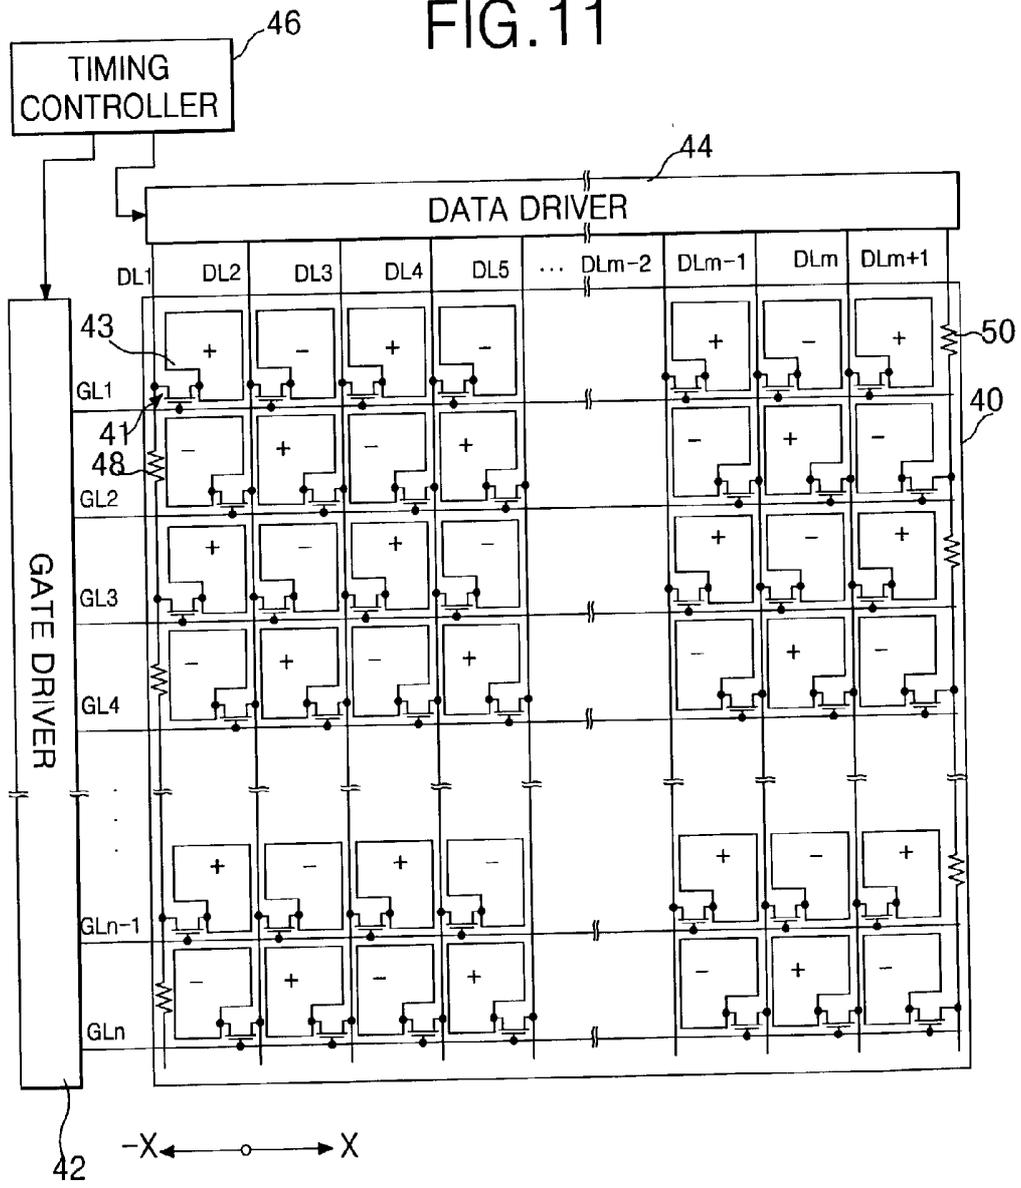

## LIQUID CRYSTAL DISPLAY

[0001] This application claims the benefit of Korean Patent Application No. 2002-21791 filed on Apr. 20, 2002, which is hereby incorporated by reference for all purposes as if fully set forth herein.

### BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display, and more particularly to a liquid crystal display driven according to a dot inversion method using a data driver driven according to a column inversion method, wherein all liquid crystal cells of a liquid crystal display panel express images at a uniform brightness.

[0004] 2. Description of the Related Art

[0005] Generally, liquid crystal displays typically include a liquid crystal display panel having a plurality of liquid crystal cells arranged in a matrix pattern and driving circuit for driving the liquid crystal display panel. To display pictures, liquid crystal displays control light transmittance characteristics of the liquid crystal cells in accordance with inputted video signals.

[0006] The liquid crystal cells are located at areas defined by crossings of gate lines and data lines. Each the liquid crystal cell is provided with a common electrode and a pixel electrode with which an electric field may be generated. Each pixel electrode is connected to a corresponding data line via a switching device such as a thin film transistor (TFT). A terminal of a TFT is connected to a gate line such that video signals may be applied to corresponding pixel electrodes. The driving circuit includes a gate driver for driving gate lines, a data driver for driving data lines, and a common voltage generator for driving the common electrode.

[0007] The gate driver sequentially scans the gate lines of the liquid crystal display panel, supplies gate signals to gate lines, and drives the liquid crystal cells on the liquid crystal display panel one gate line at a time. Whenever a gate signal is supplied to a gate line, the data driver supplies suitable video signals to each of data lines crossing that scanned gate line while the common voltage generator supplies common voltage signals to the common electrode. Depending on the video signal applied to the data line, an orientation of molecules of liquid crystal material provided within the liquid crystal cell, between the pixel and common electrodes, may be altered and the light transmittance of the liquid crystal cell may be controlled. Accordingly, as the light transmittances of each of the liquid crystal cells in the liquid crystal display panel are individually controlled, the liquid crystal display panel may display a picture.

[0008] FIG. 1 illustrates a schematic view of a related art liquid crystal display.

[0009] Referring to FIG. 1, liquid crystal displays typically include a liquid crystal display panel 2 having a plurality of liquid crystal cells arranged in a matrix pattern, a gate driver 4 for driving gate lines GL1 to GLn arranged in the liquid crystal display panel 2, and a data driver 6 for driving data lines DL1 to DLm also arranged in the liquid crystal display panel 2.

[0010] Each of the liquid crystal cells include a TFT that responds to gate signals applied to the gate lines GL1 to GLn by supplying video signals, applied to the data lines DL1 to DLm, to the liquid crystal cells. Each liquid crystal cell can be represented as a pixel electrode and a common electrode connected to each other via a TFT and a liquid crystal capacitor Clc. A storage capacitor (not shown), for maintaining a voltage of the video signal, is included within the liquid crystal cell. The storage capacitor maintains the charge within liquid crystal capacitor Clc until the next video signal is supplied.

[0011] Storage capacitors of liquid crystal cells are formed between preceding gate electrodes and pixel electrodes of each liquid crystal cell. The gate driver 4 sequentially applies gate signals to gate lines GL1 to GLn to drive the corresponding TFTs. The data driver 6 converts inputted video data into analog video signals and supplies analog video signals, specific to the scanned gate line, to the data lines DL1 to DLm during the period when the gate signal is supplied to the scanned gate line. Additionally, the data driver 6 converts inputted video data into analog video signals using gamma voltages supplied from a gamma voltage generator (not shown).

[0012] Liquid crystal cells within liquid crystal display panels such as those illustrated in FIG. 1 may be driven according to various inversion methods including frame, line, column, and dot inversion methods.

[0013] When driven according to the frame inversion method, the polarity of video signals supplied to the liquid crystal cells is inverted every frame.

[0014] Referring to FIGS. 2A and 2B, when driven according to the line inversion method, the polarity of video signals supplied to liquid crystal cells connected to a gate line is opposite the polarity of video signals supplied to liquid crystal cells connected to gate lines adjacent that gate line. Further, the polarities of the video signals applied to the liquid crystal cells are inverted every frame. Driving liquid crystal cells by the line inversion method, however, is disadvantageous in that a flicker phenomenon is induced in horizontal lines due to electrical cross-talk between liquid crystal cells arranged along the gate lines.

[0015] Referring to FIGS. 3A and 3B, when driven according to the column inversion method, the polarity of video signals supplied to liquid crystal cells connected to a data line is opposite the polarity of video signals supplied to liquid crystal cells connected to data lines adjacent that data line. Further, the polarities of the video signals applied to the liquid crystal cells are inverted every frame. Driving liquid crystal cells by the column inversion method, however, is disadvantageous in, that a flicker phenomenon is induced in vertical lines due to electrical cross-talk between liquid crystal cells arranged along the data lines.

[0016] Referring to FIGS. 4A and 4B, when driven according to the dot inversion method, the polarity of a video signal supplied to a liquid crystal cell is opposite the polarity of video signals supplied to adjacent liquid crystal cells (e.g., liquid crystal cells connected to adjacent gate and data lines). Further, the polarities of the video signals applied to the liquid crystal cells are inverted every frame. Driving liquid crystal cells by the dot inversion method offsets any flicker phenomenon that may be induced

between vertically or horizontally adjacent liquid crystal cells. Accordingly, pictures generated by the liquid crystal display panel driven using the dot inversion method have superior qualities over pictures generated by liquid crystal display panels driven using other inversion methods.

[0017] Use of the dot inversion method, however, is disadvantageous in that the polarity of video signals supplied from the data driver to the data line need to be inverted in horizontal and vertical directions and individual pixel voltages required by the dot inversion method are typically greater than those required by other inversion methods. Accordingly, liquid crystal displays driven using a dot inversion method typically consume a relatively large amount of power during their operation.

#### SUMMARY OF THE INVENTION

[0018] Accordingly, the present invention is directed to liquid crystal display that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

[0019] An advantage of the present invention provides a liquid crystal display driven by a dot inversion method using a data driver driven by a column inversion method, wherein such a liquid crystal display is capable of consuming a relatively small amount of power during its operation.

[0020] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. These and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0021] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, a liquid crystal display including a liquid crystal display panel having liquid crystal cells at crossings of gate and data lines may include liquid crystal cells consecutively arranged within a column alternately connected to data lines adjacent to left and right sides of the liquid crystal cells and a plurality of dummy liquid crystal cells arranged in first and last ones of successive columns of liquid crystal cells.

[0022] In one aspect of the present invention, dummy liquid crystal cells may be formed adjacently on the left of the first data line and adjacently on the right of the last data line.

[0023] In another aspect of the present invention, among the dummy liquid crystal cells included in the first column, the dummy liquid crystal cells arranged in even numbered horizontal lines may be connected to the first data line, and among the dummy liquid crystal cells included in the last column, the dummy liquid crystal cells arranged in odd numbered horizontal lines may be connected to the last data line.

[0024] In yet another aspect of the present invention, among the dummy liquid crystal cells included in the first column, the dummy liquid crystal cells arranged in odd numbered horizontal lines may be connected to the first data line, and among the dummy liquid crystal cells included in

the last column, the dummy liquid crystal cells arranged in even numbered horizontal lines may be connected to the last data line.

[0025] In still another aspect of the present invention, the dummy liquid crystal cells may be formed to overlap with a black matrix.

[0026] According to the principles of another aspect of the present invention, a liquid crystal display panel may include a plurality of dummy liquid crystal cells arranged within first and second columns a liquid crystal cells, a first dummy data line arranged adjacently to the left of the dummy liquid crystal cells to be connected with dummy liquid crystal cells formed within the first column, and a second dummy data line arranged adjacently to the right of the dummy liquid crystal cells to be connected with dummy liquid crystal cells formed within the second column.

[0027] In one aspect of the present invention, among the dummy liquid crystal cells within the first column, the dummy liquid crystal cells arranged in odd numbered horizontal lines may be connected to the first dummy data line, and among the dummy liquid crystal cells within the last column the dummy liquid crystal cells arranged in even numbered horizontal lines may be connected to the second dummy data line.

[0028] In another aspect of the present invention, among the dummy liquid crystal cells within the first vertical line, the dummy liquid crystal cells arranged in even numbered horizontal lines may be connected to the first dummy data line, and among the dummy liquid crystal cells within the last vertical line the dummy liquid crystal cells arranged in odd numbered horizontal lines may be connected to the second dummy data line.

[0029] In yet another aspect of the present invention, the dummy liquid crystal cells may be formed to overlap with a black matrix.

[0030] According to the principles of an aspect of the present invention, a liquid crystal display may include a first resistor group coupled to the first of successive data lines, and a second resistor group coupled to the last of successive data lines.

[0031] In one aspect of the present invention, a resistance value of first resistors included within the first resistor group and a resistance value of second resistors included within the second resistor group may be substantially equal to the resistance value of a liquid crystal cell.

[0032] In another aspect of the present invention, a number of first resistors included within the first resistor group may be substantially half of the number of liquid crystal cells arranged within a column.

[0033] In yet another aspect of the present invention, a number of second resistors included within the second resistor group may be substantially half of the number of liquid crystal cells arranged within a column.

[0034] In still another aspect of the present invention, the first of successive data lines may be connected to liquid crystal cells arranged in odd numbered horizontal lines and the first resistors may be arranged in every even numbered horizontal line.

[0035] In a further aspect of the present invention, the last of successive data lines may be connected to the liquid crystal cells arranged in even numbered horizontal lines and the second resistors may be arranged in every odd numbered horizontal line.

[0036] In still a further aspect of the present invention, the first of successive data lines may be connected to liquid crystal cells arranged in even numbered horizontal lines and the first resistors may be arranged in every odd numbered horizontal line.

[0037] In yet a further aspect of the present invention, the last of successive data lines may be connected to liquid crystal cells arranged in odd numbered horizontal lines and the second resistors may be arranged in every even numbered horizontal line.

[0038] In an additional aspect of the present invention, the first and the second resistors may be formed by providing the first and last of successive data lines with an increased width.

[0039] In another aspect of the present invention, the first and the second resistors may be formed by providing the first and last of successive data lines with an increased thickness.

[0040] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0041] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0042] In the drawings:

[0043] **FIG. 1** illustrates a schematic view of a related art liquid crystal display;

[0044] **FIGS. 2A and 2B** illustrate a line inversion method of driving a liquid crystal display;

[0045] **FIGS. 3A and 3B** illustrate a column inversion method of driving a liquid crystal display;

[0046] **FIGS. 4A and 4B** illustrate a dot inversion method of driving a liquid crystal display;

[0047] **FIG. 5** illustrates a schematic view of a liquid crystal display according to one aspect of the present invention;

[0048] **FIG. 6** illustrates a diagram representing an equivalent circuit diagram of parasitic capacitors formed in the liquid crystal display shown in **FIG. 5**;

[0049] **FIG. 7** illustrates a schematic view of a liquid crystal display according to another aspect of the present invention;

[0050] **FIG. 8** illustrates a diagram representing an equivalent circuit diagram of parasitic capacitors formed in the liquid crystal display shown in **FIG. 7**;

[0051] **FIG. 9** illustrates a schematic view of a liquid crystal display according to yet another aspect of the present invention;

[0052] **FIG. 10** illustrates a diagram representing an equivalent circuit diagram of parasitic capacitors formed in the liquid crystal display shown in **FIG. 9**; and

[0053] **FIG. 11** illustrates a schematic view of a liquid crystal display according to still another aspect of the present invention.

#### DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0054] Reference will now be made in detail to embodiments of the present invention, example of which is illustrated in the accompanying drawings.

[0055] **FIG. 5** illustrates a schematic view of a liquid crystal display according to an aspect of the present invention.

[0056] Referring to **FIG. 5**, a liquid crystal display may, for example, include a liquid crystal display panel **12** having a plurality of liquid crystal cells arranged in a matrix pattern, a gate driver **14** for driving gate lines GL1 to GLn arranged in the liquid crystal display panel **12**, a data driver **16** for driving data lines DL1 to DLm+1 also arranged in the liquid crystal display panel **12**, and a timing controller **18** for controlling the gate and data drivers **14** and **16**, respectively.

[0057] In one aspect of the present invention, a plurality of gate lines GL1 to GLn and a plurality of data lines DL1, to DLm+1 may be insulated from each other where they cross in the liquid crystal display panel **12**. The liquid crystal cells, arranged in a matrix pattern, are provided at every crossing of the gate lines GL1 to GLn and the data lines DL1 to DLm+1. Each liquid crystal cell may include a thin film transistor (TFT) **11** connected to one of gate lines GL1 to GLn and a corresponding one of data lines DL1 to DLm+1.

[0058] Still referring to **FIG. 5**, liquid crystal cells consecutively arranged within a column may include TFTs **11** that are alternately connected left and right adjacent data lines DL. For example, liquid crystal cells arranged in odd numbered horizontal lines (e.g., liquid crystal cells including TFTs **11** connected to odd numbered gate lines GL1, GL3, GL5, etc.) may be connected to the first to m<sup>th</sup> data lines DL1 to DLm arranged in a -X axis direction with respect to a terminal connecting the TFT **11** to the gate line GL. Liquid crystal cells of even numbered horizontal lines (e.g., liquid crystal cells including TFTs **11** connected to even numbered gate lines GL2, GL4, GL6, etc.) may be connected to the second to (m+1)<sup>th</sup> data lines DL2 to DLm+1 arranged in a +X axis direction with respect to a terminal connecting the TFT **11** to the gate line GL.

[0059] The TFTs **11** respond to gate signals applied to gate lines GL1 to GLn by supplying video signals, applied to the data lines DL1 to DLm+1, to the liquid crystal cells. Depending on the video signal applied to the data line, an orientation of liquid crystal molecules (not shown) included within the liquid crystal cell, between a common electrode (not shown) and a pixel electrode **13**, may be altered and the light transmittance of the liquid crystal cell may thereby be controlled. Accordingly, as the light transmittances of each

of the liquid crystal cells in the liquid crystal display panel are individually controlled, the liquid crystal display panel may display a picture.

[0060] The gate driver **14** scans and sequentially applies gate signals to the gate lines  $GL1$  to  $GLn$  to drive the corresponding TFTs **11**. The data driver **16** converts inputted video data into analog video signals and supplies analog video signals, specific to the scanned gate line, to the data lines  $DL1$  to  $DLm+1$  during the period when the gate signal is supplied to the scanned gate line. Additionally, the data driver **16** may convert inputted video data into analog video signals using gamma voltages supplied from a gamma voltage generator (not shown).

[0061] In one aspect of the present invention, the data driver **16** may supply video signals to data lines  $DL1$  to  $DLm+1$  using a column inversion driving method. For example, the data driver **16** may supply video signals having a first polarity to the odd numbered data lines  $DL1$ ,  $DL3$ , etc., and supply video signals having a second polarity, opposite the first polarity, to the even numbered data lines  $DL2$ ,  $DL4$ , etc. In one aspect of the present invention, the data driver **16** may supply video signals to the liquid crystal cells in the liquid crystal display illustrated in **FIG. 5** via data lines  $DL1$  to  $DLm+1$  in every horizontal period. Alternatively, the data driver **16** may supply the video signals by shifting them to the right by one channel. Accordingly, the data driver **16** may be driven by a column inversion method and the video signals may be applied directly to the data lines or they may be shifted to the right by one channel before being applied to the data lines, thereby driving the liquid crystal cells of the liquid crystal display by a dot inversion method.

[0062] In one aspect of the present invention, the data driver **16** may apply video signals to odd numbered horizontal lines via the first to  $m^{\text{th}}$  data lines  $DL1$  to  $DLm$ . Subsequently, the data driver **16** may apply video signals to even numbered horizontal lines via the second to  $(m+1)^{\text{th}}$  data lines  $DL2$  to  $DLm+1$  by shifting the previously applied video signals to the right by one channel to each of the data lines.

[0063] For example, in a first horizontal period when the first gate line  $GL1$  is driven, video signals having a positive polarity applied from the data driver **16** may be supplied to the odd numbered liquid crystal cells connected to odd numbered data lines  $DL1$ ,  $DL3$ , etc., while video signals having a negative polarity applied from the data driver **16** may be supplied to the even numbered liquid crystal cells connected to the even numbered data lines  $DL2$ ,  $DL4$ , etc. Subsequently, in a second horizontal period when, for example, the second gate line  $GL2$  is driven, the data driver **16** shifts the video signals applied in the first horizontal period to the right by one channel such that video signals having a negative polarity are applied to the odd numbered liquid crystal cells connected to the even numbered data lines  $DL2$ ,  $DL4$ , etc., video signals having a positive polarity may be applied to the even numbered liquid crystal cells connected to the odd numbered data lines  $DL3$ ,  $DL5$ , etc., with the exception of the first data line  $DL1$ . Accordingly, the data driver **16** may be driven by a column inversion method while liquid crystal cells of the liquid crystal display panel **12** may be driven by a dot inversion method.

[0064] As shown in **FIG. 5**, consecutive liquid crystal cells arranged within a column may be alternately connected

to left and right adjacent data lines may be driven using a dot inversion method while the data driver is driven by a column inversion method. Accordingly, the liquid crystal display shown in **FIG. 5** may consume a relatively small amount of power during its operation compared to liquid crystal displays using data drivers driven according to dot inversion methods such as those illustrated in **FIG. 1**.

[0065] The brightness to which images may be displayed by liquid crystal cells connected to the first data line  $DL1$  and the last data line  $DLm+1$  of the liquid crystal display shown in **FIG. 5**, however, is different from a brightness to which images may be displayed by liquid crystal cells connected to the second data line  $DL2$  to the  $m^{\text{th}}$  data line  $DLm$ .

[0066] For example, TFTs **11** that are connected to the first data line  $DL1$  are formed at crossings of the first data line  $DL1$  and the odd numbered gate lines  $GL1$ ,  $GL3$ , etc., and, TFTs **11** connected to the last data line  $DLm+1$  are formed at crossings of the last data line  $DLm+1$  and the even numbered gate lines  $GL2$ ,  $GL4$ , etc. TFTs **11** connected to the second to  $m^{\text{th}}$  data line  $DL2$  to  $DLm$ , however, are formed at crossings of the odd and even numbered gate lines  $GL1$  to  $GLn$ . Accordingly, the number of the liquid crystal cells connected to the first and last data lines  $DL1$  and  $DLm+1$  is substantially half the number of the liquid crystal cells connected to the second to  $m^{\text{th}}$  data lines  $DL2$  to  $DLm$ . Accordingly, the first and last data lines  $DL1$  and  $DLm+1$  have half the resistive load of the second to  $m^{\text{th}}$  data lines  $DL1$  to  $DLm$ . Since the loads of the first and last data lines  $DL1$  and  $DLm+1$  and the loads of the second to  $m^{\text{th}}$  data lines  $DL2$  to  $DLm$  are different, a delay of video signals supplied through the data lines  $DL1$  to  $DLm+1$  varies. For example, as the video signals supplied to the liquid crystal cells connected to the first and last data lines  $DL1$  and  $DLm+1$  are the same as those supplied to the second to  $m^{\text{th}}$  data line  $DL2$  to  $DLm$ , a problem occurs in that a brightness is not uniformly expressed by the liquid crystal display.

[0067] Referring to **FIG. 6**, parasitic capacitors  $C_{pp}$  exist between the data lines  $DL1$  to  $DLm+1$  shown in **FIG. 5**. For example, two parasitic capacitors  $C_{pp}$  may be connected to the second to the  $m^{\text{th}}$  data lines  $DL2$  to  $DLm$  because liquid crystal cells are arranged at both sides of lines  $DL2$  to  $DLm$ . Because liquid crystal cells are arranged only at the right of the first data line  $DL1$ , only one parasitic capacitor  $C_{pp}$  is connected to the first data line  $DL1$ . Similarly, only one parasitic capacitor  $C_{pp}$  is connected to the left of the last data line  $DLm+1$ .

[0068] If the number of the parasitic capacitors  $C_{pp}$  are connected to the first and last data line  $DL1$  and  $DLm+1$  are different from the number of the parasitic capacitors connected to the second to the  $m^{\text{th}}$  data lines  $DL2$  to  $DLm$ , the brightness capable of being expressed by liquid crystal cells connected to the first and last data lines  $DL1$  and  $DLm+1$  is different from the brightness capable of being expressed by liquid crystal cells connected to the second to  $m^{\text{th}}$  data lines  $DL2$  to  $DLm$ .

[0069] Accordingly, driving conditions of liquid crystal cells are different and proportional to a voltage drop component induced by the parasitic capacitors  $C_{pp}$ . For example, if video signals specific to a single brightness are supplied to all of the data lines  $DL1$  to  $DLm+1$ , pictures expressed by liquid crystal cells connected to the first and

last data lines DL1 and DLm+1 will be expressed at a higher brightness than pictures expressed by liquid crystal cells connected to the second to m<sup>th</sup> data lines DL2 to DLm. Even though identical video signals are supplied to all the data lines DL1 to DLm+1, uniform brightness may not be obtained by the liquid crystal display illustrated in FIG. 5.

[0070] FIG. 7 illustrates a schematic view of a liquid crystal display according to another aspect of the present invention.

[0071] Referring to FIG. 7, a liquid crystal display may, for example, include a liquid crystal display panel 20 having a plurality of liquid crystal cells arranged in a matrix pattern, a gate driver 22 for driving gate lines GL1 to GLn arranged in the liquid crystal display panel 20, a data driver 24 for driving data lines DL1 to DLm+1 also arranged in the liquid crystal display panel 20, and a timing controller 26 for controlling the gate and data drivers 22 and 24, respectively.

[0072] In one aspect of the present invention, a plurality of gate lines GL1 to GLn and a plurality of data lines DL1 to DLm+1 may be insulated from each other where they cross in the liquid crystal display panel 20. The liquid crystal cells, arranged in a matrix pattern, are provided at every crossing of the gate lines GL1 to GLn and data lines DL1 to DLm+1. Each liquid crystal cell may include a first thin film transistor (TFT) 21 connected to one of gate lines GL1 to GLn and a corresponding one of data lines DL1 to DLm+1. In one aspect of the present invention, second thin film transistors (TFT) 25 connected to any of gate lines GL1 to GLn and not connected to the data lines DL1 to DLm+1 may be formed in predetermined liquid crystal cells. Accordingly, the second TFTs 25 may be arranged to the left of the first data line DL1 and to the right of the last data line DLm+1.

[0073] Still referring to FIG. 7, first TFTs 21 of liquid crystal cells consecutively arranged within a column may be alternately connected to left or right adjacent data lines DL. Dummy liquid crystal cells may be arranged to the left of the first data line DL1 and to the right of the last data line DLm+1. In one aspect of the present invention, the dummy liquid crystal cells may be arranged to be overlapped by a black matrix (not shown).

[0074] In one aspect of the present invention, the first and second TFTs 21 and 25, respectively, may be alternately provided within consecutive dummy liquid crystal cells arranged to the left of the first data line DL1. In another aspect of the present invention, the first and second TFTs 21 and 25, respectively, may alternately be provided within dummy liquid crystal cells arranged to the right of the last data line DLm+1.

[0075] The numbers of liquid crystal cells in the liquid crystal display shown in FIG. 7 that are connected to any of the data lines DL1 to DLm+1 are substantially equal. Since the data lines DL1 to DLm+1 each have substantially the same resistive load, all liquid crystal cells of the liquid crystal display panel express images at a substantially uniform brightness.

[0076] Referring to FIG. 8, data lines DL1 to DLm+1 have substantially the same number of the parasitic capacitors Cpp. Due to the presence of dummy liquid crystal cells arranged to the left of the first data line DL1, parasitic capacitors Cpp may be formed adjacent to the left and right of the first data line DL1. Due to the presence of the dummy

liquid crystal cells arranged to the right of the last data line DLm+1, parasitic capacitors Cpp may be formed adjacent to the left and right of the last data line DLm+1. Accordingly, parasitic capacitors may be formed adjacent the left and right of all the data lines DL1 to DLm+1 and all liquid crystal cells of the liquid crystal display panel may express images at a substantially uniform brightness when substantially identical video signals are applied to data lines DL1 to DLm+1.

[0077] Referring back to FIG. 7, the first TFTs 21 respond to the gate signals applied to gate lines GL1 to GLn by supplying video signals, applied to the data lines DL1 to DLm+1, to the liquid crystal cells. Depending on the video signal applied to the data line, an orientation of liquid crystal molecules (not shown) included within the liquid crystal cell, between a common electrode (not shown) and a pixel electrode 23, may be altered and the light transmittance of the liquid crystal cell may thereby be controlled. Accordingly, as the light transmittances of each of the liquid crystal cells in the liquid crystal display panel are individually controlled, the liquid crystal display panel may display a picture.

[0078] The gate driver 22 scans and sequentially applies gate signals to the gate lines GL1 to GLn to drive the corresponding first TFTs 21. The data driver 24 converts inputted video data into analog video signals and supplies analog video signals, specific to the scanned gate line, to the data lines DL1 to DLm+1 during the period when the gate signal is supplied to the scanned gate line. Additionally, the data driver 24 may convert the inputted video data into analog video signals using gamma voltages supplied from a gamma voltage generator (not shown).

[0079] In one aspect of the present invention, the data driver 24 may supply video signals to the data lines DL1 to DLm+1 using a column inversion driving method. For example, the data driver 24 may supply video signals having a first polarity to the odd numbered data lines DL1, DL3, etc., and supply video signals having a second polarity, opposite the first polarity, to the even numbered data lines DL2, DL4, etc. In one aspect of the present invention, the data driver 24 may supply video signals to the liquid crystal cells in the liquid crystal display illustrated in FIG. 7 via data lines DL1 to DLm+1 in every horizontal period. Alternatively, the data driver 24 may supply the video signals by shifting them to the right by one channel. Accordingly, the data driver 24 may be driven by a column inversion method and the video signals may be applied directly to the data lines or they may be shifted to the right by one channel before being applied to the data lines, thereby driving the liquid crystal cells of the liquid crystal display by a dot inversion method.

[0080] The liquid crystal display illustrated in FIG. 7 may be driven according to a dot inversion method using a data driver driven according to a column inversion method. Accordingly, the liquid crystal display illustrated in FIG. 7 may consume a relatively small amount of power during its operation compared to liquid crystal displays using data drivers driven according to dot inversion methods such as those illustrated in FIG. 1. By providing dummy liquid crystal cells at both right and left ends of the liquid crystal display panel 20, all liquid crystal cells of the liquid crystal display panel may express images at a substantially uniform brightness.

[0081] Still referring to **FIG. 7**, liquid crystal cells arranged in odd numbered horizontal lines (e.g., liquid crystal cells including TFTs connected to odd numbered gate lines **GL1**, **GL3**, **GL5**, etc.) may be connected to the second to  $(m+1)^{\text{th}}$  data lines **DL2** to **DL $m+1$**  arranged in a  $-X$  axis direction with respect to a terminal connecting the TFT to the gate line **GL**. Liquid crystal cells arranged in even numbered horizontal lines (e.g., liquid crystal cells including TFTs connected to even numbered gate lines **GL2**, **GL4**, **GL6**, etc.) may be connected to the first to  $m^{\text{th}}$  data lines **DL1** to **DL $m$**  arranged in a  $+X$  axis direction with respect to a terminal connecting the TFT to the gate line **GL**.

[0082] In another aspect of the present invention, liquid crystal cells arranged in odd numbered horizontal lines (e.g., liquid crystal cells including TFTs connected to odd numbered gate lines **GL1**, **GL3**, **GL5**, etc.) may be connected to the second to  $(m+1)^{\text{th}}$  data lines **DL2** to **DL $m+1$**  arranged in a  $+X$  axis direction with respect to a terminal connecting the TFT to the gate line **GL**. Liquid crystal cells arranged in even numbered horizontal lines (e.g., liquid crystal cells including TFTs connected to even numbered gate lines **GL2**, **GL4**, **GL6**, etc.) may be connected to the first to  $m^{\text{th}}$  data lines **DL1** to **DL $m$**  arranged in a  $-X$  axis direction with respect to a terminal connecting the TFT to the gate line **GL**.

[0083] In one aspect of the present invention, first and second TFTs **21** and **25**, respectively, may be alternately provided within consecutive dummy liquid crystal cells provided in the column left of the first data line **DL1**. First and second TFTs **21** and **25**, respectively, may also be alternately provided within dummy liquid crystal cells arranged in the column right of the last data line **DL $m+1$** .

[0084] **FIG. 9** illustrates a schematic view of a liquid crystal display according to the yet another aspect of the present invention.

[0085] Referring to **FIG. 9**, a liquid crystal display may, for example, include a liquid crystal display panel **30** having a plurality of liquid crystal cells arranged in a matrix pattern, a gate driver **32** for driving gate lines **GL1** to **GL $n$**  arranged in the liquid crystal display panel **30**, a data driver **34** for driving data lines **DL0** to **DL $m+2$**  also arranged in the liquid crystal display panel **30**, and a timing controller **36** for controlling the gate and data drivers **32** and **34**, respectively.

[0086] In one aspect of the present invention, a plurality of gate lines **GL1** to **GL $n$**  and a plurality of data lines **DL0** to **DL $m+2$**  may be insulated from each other where they cross in the liquid crystal display panel **30**. The liquid crystal cells, arranged in a matrix pattern, are provided at every crossing of the gate lines **GL1** to **GL $n$**  and data lines **DL0** to **DL $m+2$** . Each liquid crystal cell may include a thin film transistor (TFT) **31** connected to one of gate lines **GL1** to **GL $n$**  and a corresponding one of data lines **DL0** to **DL $m+2$** .

[0087] Still referring to **FIG. 9**, TFTs **31** of liquid crystal cells within consecutively arranged within a column may be alternately connected to left or right adjacent data lines **DL**. In one aspect of the present invention, the  $0^{\text{th}}$  and  $(m+2)^{\text{th}}$  data lines **DL0** and **DL $m+2$** , respectively, may be provided as dummy data lines. In another aspect of the present invention, liquid crystal cells formed in the first and last columns may be provided as dummy liquid crystal cells.

[0088] According to the principles of the present invention, liquid crystal cells arranged in odd numbered horizon-

tal lines (e.g., liquid crystal cells including TFTs connected to odd numbered gate lines **GL1**, **GL3**, **GL5**, etc.) may be connected to data lines **DL** arranged in a  $-X$  axis direction with respect to a terminal connecting the TFT to the gate line **GL**. Liquid crystal cells arranged in even numbered horizontal lines (e.g., liquid crystal cells including TFTs connected to even numbered gate lines **GL2**, **GL4**, **GL6**, etc.) may be connected to the data lines **DL** arranged in a  $+X$  axis direction with respect to a terminal connecting the TFT to the gate line **GL**.

[0089] In another aspect of the present invention, liquid crystal cells arranged in odd numbered horizontal lines (e.g., liquid crystal cells including TFTs connected to the odd numbered gate lines **GL1**, **GL3**, **GL5**, etc.) may be connected to data lines **DL** arranged in a  $+X$  axis direction with respect to a terminal connecting the TFT to the gate line **GL**. Liquid crystal cells arranged in even numbered horizontal lines (e.g., liquid crystal cells including TFTs connected to even numbered gate lines **GL2**, **GL4**, **GL6**, etc.) may be connected to the data lines **DL** arranged in a  $-X$  axis direction with respect to a terminal connecting the TFT to the gate line **GL**.

[0090] In the liquid crystal display illustrated in **FIG. 9**, images displayed in the dummy liquid crystal cells via the data driver **34** and the gate driver **32** are different than those displayed in the non-dummy liquid crystal cells and not desirably viewed. Accordingly, in order to prevent images displayed by the dummy liquid crystal cells from being viewed, a black matrix (not shown) may be arranged over the dummy liquid crystal cells.

[0091] Video signals related to images that are to be displayed may be supplied to the first to  $(m+1)^{\text{th}}$  data lines **DL1** to **DL $m+1$** . Left and right sides of the first to  $(m+1)^{\text{th}}$  data lines **DL1** to **DL $m+1$**  may be connected to liquid crystal cells. Accordingly, the first to  $(m+1)^{\text{th}}$  data lines **DL1** to **DL $m+1$**  may be provided with the same resistive load and the liquid crystal cells connected to the first to  $(m+1)^{\text{th}}$  data lines are able to display pictures at a uniform brightness.

[0092] Referring now to **FIG. 10**, data lines **DL0** to **DL $m+2$**  have substantially the same number of the parasitic capacitors  $C_{pp}$ . Due to the presence of dummy liquid crystal cells arranged to the left of the first data line **DL1**, parasitic capacitors  $C_{pp}$  may be formed adjacent to the left and right of the first data line **DL1**. Due to the presence of the dummy liquid crystal cells arranged to the right of the last data line **DL $m+1$** , parasitic capacitors  $C_{pp}$  may be formed adjacent on the left and right of the last data line **DL $m+1$** .

[0093] Since the first to  $(m+1)^{\text{th}}$  data lines **DL1** to **DL $m+1$**  are connected to substantially the same number of parasitic capacitors  $C_{pp}$ , images of a substantially uniform brightness may be displayed by the liquid crystal cells connected to the first to  $(m+1)^{\text{th}}$  data lines **DL1** to **DL $m+1$**  when in receipt of substantially identical video signals.

[0094] Referring back to **FIG. 9**, the TFTs **31** respond to the gate signals applied from the gate lines **GL1** to **GL $n$**  by supplying video signals, applied to the data lines **DL0** to **DL $m+2$** , to the liquid crystal cells. Depending on the video signal applied to the data line, an orientation of liquid crystal molecules (not shown) included within the liquid crystal cell, between a common electrode (not shown) and a pixel electrode **33**, may be altered and the light transmittance of

the liquid crystal cell may thereby be controlled. Accordingly, as the light transmittances of each of the liquid crystal cells in the liquid crystal display panel are individually controlled, the liquid crystal display panel may display a picture.

[0095] The gate driver **32** scans and sequentially applies gate signals to the gate lines **GL1** to **GLn** to drive the corresponding TFTs **31**. The data driver **34** converts inputted video data into analog video signals and supplies analog video signals, specific to the scanned gate line, to the data lines **DL0** to **DLm+2** during the when the gate signal is supplied to the scanned gate line. Additionally, the data driver **34** may supply video signals using a column inversion driving method during every horizontal period so that it is possible to drive liquid crystal cells within the liquid crystal display illustrated in **FIG. 9** using a dot inversion driving method.

[0096] The liquid crystal display illustrated in **FIG. 9** may be driven by a dot inversion method using a data driver driven by a column inversion method. Accordingly, the liquid crystal display illustrated in **FIG. 9** may consume a relatively small amount of power during its operation compared to liquid crystal displays using data drivers driven according to dot inversion methods such as those illustrated in **FIG. 1**. By providing dummy liquid crystal cells at both right and left ends of the liquid crystal display panel **30**, all liquid crystal cells of the liquid crystal display panel may express images at a substantially uniform brightness.

[0097] **FIG. 11** illustrates a schematic view of a liquid crystal display according to still another aspect of the present invention.

[0098] Referring to **FIG. 11**, a liquid crystal display may, for example, include a liquid crystal display panel **40** having a plurality of liquid crystal cells arranged in a matrix pattern, a gate driver **42** for driving gate lines **GL1** to **GLn** arranged in the liquid crystal display panel **40**, a data driver **44** for driving data lines **DL1** to **DLm+1** also arranged in the liquid crystal display panel **40**, and a timing controller **46** for controlling the gate and data drivers **42** and **44**, respectively.

[0099] In one aspect of the present invention, a plurality of gate lines **GL1** to **GLn** and a plurality of data lines **DL1** to **DLm+1** may be insulated from each other where they cross in the liquid crystal display panel **40**. The liquid crystal cells, arranged in a matrix pattern, are provided at every crossing of the gate lines **GL1** to **GLn** and data lines **DL1** to **DLm+1**. Each liquid crystal cell may include a thin film transistor (TFT) **41** connected to one of gate lines **GL1** to **GLn** and any a corresponding one of data lines **DL1** to **DLm+1**. TFTs **41** of liquid crystal cells within a column may be alternately connected to left or right adjacent data lines **DL** at every horizontal line.

[0100] In one aspect of the present invention, first and second resistors **48** and **50**, respectively, may be respectively provided on the first and last data lines **DL1** and **DLm+1**, wherein a resistance value of each of the first and the second resistors **48**, **50** is substantially equal to the load of one liquid crystal cell. In another aspect of the present invention, first resistors **48** may be provided within even numbered horizontal lines and second resistors **50** may be provided within odd numbered horizontal lines. In another aspect of the present invention, first resistors **48** may be provided within

odd numbered horizontal lines and second resistors **50** may be provided within even numbered horizontal lines. Accordingly, the number of first resistors **48** provided may be substantially half the number of liquid crystal cells within a column and the number of second resistors **50** provided may be substantially half the number of liquid crystal cells within a column. The first and last data lines **DL1** and **DLm+1** may have substantially the same resistive load as data lines **DL2** to **DLm** when provided with the first and second resistors **48** and **50**, respectively. Accordingly, images having a substantially uniform brightness may be displayed by the liquid crystal cells of the liquid crystal display panel.

[0101] In one aspect of the present invention, the first and second resistors **48** and **50**, respectively, may be formed in the liquid crystal display panel **40** by controlling a line width and/or a thickness of the first and last data lines **DL1** and **DLm+1**.

[0102] In one aspect of the present invention, liquid crystal cells arranged in odd numbered horizontal lines (e.g., liquid crystal cells including TFTs connected to odd numbered gate lines **GL1**, **GL3**, **GL5**, etc.) may be connected to the data lines **DL** arranged in a  $-X$  axis direction with respect to a terminal connecting the TFT to the gate line **GL**. Liquid crystal cells arranged in even numbered horizontal lines (e.g., liquid crystal cells including TFTs connected to even numbered gate lines **GL2**, **GL4**, **GL6**, etc.) may be connected to data lines **DL** arranged in a  $+X$  axis direction with respect to a terminal connecting the TFT to the gate line **GL**.

[0103] In another aspect of the present invention, liquid crystal cells arranged in odd numbered horizontal lines (e.g., liquid crystal cells including TFTs connected to odd numbered gate lines **GL1**, **GL3**, **GL5**, etc.) may be connected to the data lines **DL** arranged in a  $+X$  axis direction with respect to a terminal connecting the TFT to the gate line **GL**. Liquid crystal cells arranged in even numbered horizontal lines (e.g., liquid crystal cells including TFTs connected to even numbered gate lines **GL2**, **GL4**, **GL6**, etc.) may be connected to data lines **DL** arranged in a  $-X$  axis direction with respect to a terminal connecting the TFT to the gate line **GL**.

[0104] Referring to still to **FIG. 11**, TFTs **41** respond to the gate signals applied to gate lines **GL1** to **GLn** by supplying video signals, applied to data lines **DL1** to **DLm+1**, to the liquid crystal cells. Depending on the video signal applied to the data line, an orientation of liquid crystal molecules (not shown) included within the liquid crystal cell, between a common electrode (not shown) and a pixel electrode **43**, may be altered and the light transmittance of the liquid crystal cell may thereby be controlled. Accordingly, as the light transmittances of each of the liquid crystal cells in the liquid crystal display panel are individually controlled, the liquid crystal display panel may display a picture.

[0105] The gate driver **42** scans and sequentially applies gate signals to the gate lines **GL1** to **GLn** to drive the corresponding TFTs **41**. The data driver **44** converts inputted video data into analog video signals and supplies analog video signals specific to the scanned gate line, to the data lines **DL1** to **DLm+1** during the period when the gate signal is supplied to the scanned gate line. Additionally, the data driver **44** may convert the video data into analog video

signals using gamma voltages supplied from a gamma voltage generator (not shown).

[0106] In one aspect of the present invention, the data driver 44 may supply video signals to the data lines DL1 to DLm+1 using a column inversion driving method. Accordingly, the liquid crystal display shown in FIG. 11 consume a relatively small amount of power during its operation compared to liquid crystal displays using data drivers driven according to dot inversion methods such as those illustrated in FIG. 1. Further, the resistors added to the first and last data lines allow the liquid crystal cells of the liquid crystal display panel to express images at a substantially uniform brightness.

[0107] According to the principles of the present invention, TFTs of liquid crystal cells within a column may be alternately connected to adjacent data lines on the left and right, thereby enabling the liquid crystal display panel to be driven by a dot inversion method while the data driver is driven by a column inversion method. The liquid crystal display panel is capable of operating under a reduced power consumption compared to liquid crystal display panels driven using dot inversion systems such as those illustrated in FIG. 1.

[0108] Additionally, dummy liquid crystal cells may be formed at the left or right end of the liquid crystal display panel. Further, resistive components may be added to the first and last data lines. Accordingly, images may be displayed by the liquid crystal cells such that the pictures produced by the liquid crystal display are provided at a uniform brightness.

[0109] It will be apparent to those skilled in the art that various modifications and variation can be made in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A liquid crystal display, comprising:

a liquid crystal display panel;

a plurality of gate lines;

a plurality of successive data lines crossing the plurality of gate lines;

a plurality of liquid crystal cells arranged at crossings of the gate and data lines and arranged in successive columns defined by at least one adjacent data line of the plurality of successive data lines, the plurality of liquid crystal cells including a plurality of dummy liquid crystal cells arranged within a first and last one of successive columns,

wherein consecutive ones of the plurality of liquid crystal cells within the columns are alternately coupled to the at least one adjacent data line.

2. The liquid crystal display according to claim 1, wherein the plurality of dummy liquid crystal cells are arranged to the left of the first of successive data lines and to the right of the last of successive data lines.

3. The liquid crystal display according to claim 1, wherein dummy liquid crystal cells included in the first of successive columns arranged in even numbered horizontal lines are connected to the first of successive data lines; and

dummy liquid crystal cells included in the last of successive columns arranged in odd numbered horizontal lines are connected to the last of successive data lines.

4. The liquid crystal display according to claim 1, wherein dummy liquid crystal cells included in the first of successive columns arranged in odd numbered horizontal lines are connected to the first of successive data lines; and

dummy liquid crystal cells included in the last of successive columns arranged in even numbered horizontal lines are connected to the last of successive data lines.

5. The liquid crystal display according to claim 1, further comprising a black matrix overlapping the dummy liquid crystal cells.

6. A liquid crystal display, comprising:

a liquid crystal display panel;

a plurality of gate lines;

a plurality successive data lines crossing the plurality of gate lines;

a plurality of liquid crystal cells arranged at crossings of the gate and data lines and arranged in successive columns defined by at least one adjacent data line of the plurality of successive data lines, the plurality of liquid crystal cells including a plurality of dummy liquid crystal cells arranged within a first and last one of successive columns, wherein consecutive ones of the plurality of liquid crystal cells within the columns are alternately coupled to the at least one adjacent data line, wherein

the plurality of successive data lines comprising a first dummy data line coupled to the left of dummy liquid crystal cells arranged within the first of successive columns and a second dummy data line coupled to the right of dummy liquid crystal cells arranged within the last of successive columns.

7. The liquid crystal display according to claim 6, wherein

dummy liquid crystal cells included in the first of successive columns arranged in odd numbered horizontal lines are connected to the first dummy data line; and

dummy liquid crystal cells included in the last of successive columns arranged in even numbered horizontal lines are connected to the second dummy data line.

8. The liquid crystal display according to claim 6, wherein

dummy liquid crystal cells included in the first of successive columns arranged in even numbered horizontal lines are connected to the first dummy data line; and

dummy liquid crystal cells included in the last of successive columns arranged in odd numbered horizontal lines are connected to the second dummy data line.

9. The liquid crystal display according to claim 6, further comprising a black matrix overlapping the dummy liquid crystal cells.

- 10. A liquid crystal display, comprising:
  - a liquid crystal display panel;
  - a plurality of gate lines;
  - a plurality of successive data lines crossing the plurality of gate lines;
  - a plurality of liquid crystal cells arranged at crossings of the gate and data lines and arranged in successive columns defined by at least one adjacent data line of the plurality of successive data lines, wherein consecutive ones of the plurality of liquid crystal cells within the columns are alternately coupled to the at least one adjacent data line;
  - a first resistor group including a plurality of first resistors arranged on the first of successive data lines; and
  - a second resistor group including a plurality of second resistors arranged on the last of successive data lines.

11. The liquid crystal display according to claim 10, wherein a resistance value of the plurality of first resistors and a resistance value of the plurality of second resistors are substantially equal to a resistance value of one liquid crystal cell.

12. The liquid crystal display according to claim 10, wherein a number of first resistors within the first resistor group is substantially half of a number of liquid crystal cells arranged within a column.

13. The liquid crystal display according to claim 10, wherein a number of second resistors within the second resistor group is substantially half of a number of liquid crystal cells arranged within a column.

14. The liquid crystal display according to claim 10, wherein the first of successive data lines is connected to

liquid crystal cells formed in odd numbered horizontal lines and the plurality of first resistors are arranged in even numbered horizontal lines.

15. The liquid crystal display according to claim 14, wherein the last of successive data lines is connected to liquid crystal cells formed in even numbered horizontal lines and the plurality of second resistors are arranged in odd numbered horizontal lines.

16. The liquid crystal display according to claim 10, wherein the first of successive data lines is connected to liquid crystal cells formed in even numbered horizontal lines and the plurality of first resistors are arranged in odd numbered horizontal lines.

17. The liquid crystal display according to claim 16, wherein the last of successive data lines is connected to liquid crystal cells formed in odd numbered horizontal lines and the plurality of second resistors are arranged in even numbered horizontal lines.

18. The liquid crystal display according to claim 10, wherein the plurality of first and second resistors include portions of the first and last ones of successive data lines that are wider relative to portions of the first and last ones of successive data lines adjacent the plurality of first and second resistors.

19. The liquid crystal display according to claim 10, wherein the plurality of first and second resistors include portions of the first and last ones of successive data lines that are thicker relative to portions of the first and last ones of successive data lines adjacent the plurality of first and second resistors.

\* \* \* \* \*

专利名称(译)	液晶显示器		
公开(公告)号	<a href="#">US20030197815A1</a>	公开(公告)日	2003-10-23
申请号	US10/316890	申请日	2002-12-12
[标]申请(专利权)人(译)	崔胜KYU PARK JUNE HO 宋相MOO		
申请(专利权)人(译)	崔胜KYU PARK JUNE HO 宋相MOO		
当前申请(专利权)人(译)	崔胜KYU PARK JUNE HO 宋相MOO		
[标]发明人	CHOI SEUNG KYU PARK JUNE HO SONG SANG MOO		
发明人	CHOI, SEUNG KYU PARK, JUNE HO SONG, SANG MOO		
IPC分类号	G02F1/133 G02F1/1335 G02F1/1345 G02F1/1362 G02F1/136		
CPC分类号	G02F1/133512 G02F1/136286 G02F1/1345		
优先权	1020020021791 2002-04-20 KR		
其他公开文献	US6822718		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

具有使用根据列反转方法驱动的数据驱动器的点反转方法驱动的液晶显示板的液晶显示器包括在液晶显示板中的第一列和最后一列中形成的虚设液晶单元。

