



US 20040257514A1

(19) **United States**(12) **Patent Application Publication****Hsieh et al.**(10) **Pub. No.: US 2004/0257514 A1**(43) **Pub. Date: Dec. 23, 2004**(54) **IN-PLANE SWITCHING MODE THIN FILM TRANSISTOR LIQUID CRYSTAL DISPLAY DEVICE FOR REDUCING COLOR SHIFT****Publication Classification**(51) **Int. Cl.⁷** **G02F 1/1343**(52) **U.S. Cl.** **349/143**(76) **Inventors:** Tsau-Hua Hsieh, Miao-Li (TW);
Jia-Pang Pang, Miao-Li (TW);
Cheuh-Ju Chen, Miao-Li (TW)

Correspondence Address:


WEI TE CHUNG**FOXCONN INTERNATIONAL, INC.****1650 MEMOREX DRIVE****SANTA CLARA, CA 95050 (US)**(21) **Appl. No.:** 10/871,141(22) **Filed:** Jun. 18, 2004(30) **Foreign Application Priority Data**

Jun. 18, 2003 (TW)..... 92116597

(57)

ABSTRACT

An LCD device (2) includes two substrates (21, 22), a liquid crystal layer (27) therebetween, and gate lines (24) and data lines (23) formed on one substrate thereby defining pixel regions. A set of pixel electrodes (26) and a set of common electrodes (25) are provided in each pixel region. A first subset of the pixel electrodes and a first subset of the common electrodes are disposed parallel to each other in alternating fashion and extend along a first horizontal axis, a second subset of the pixel electrodes and a second subset of the common electrodes are disposed parallel to each other in alternating fashion and extend along a second horizontal axis, and the first and second axes are inclined at respective angles relative to the data lines. Thus when voltage is applied, liquid crystal molecules are twisted in two different directions (281, 282) so as to reduce color shift.

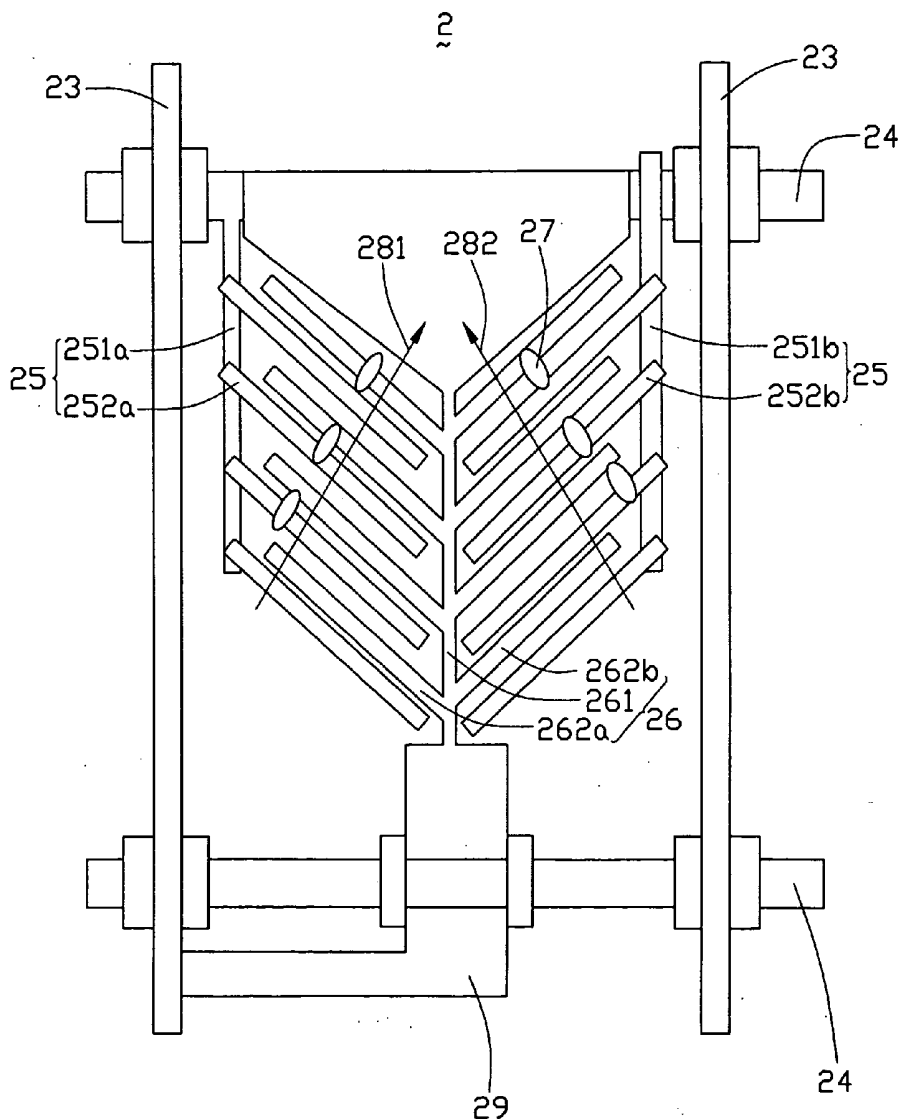

2

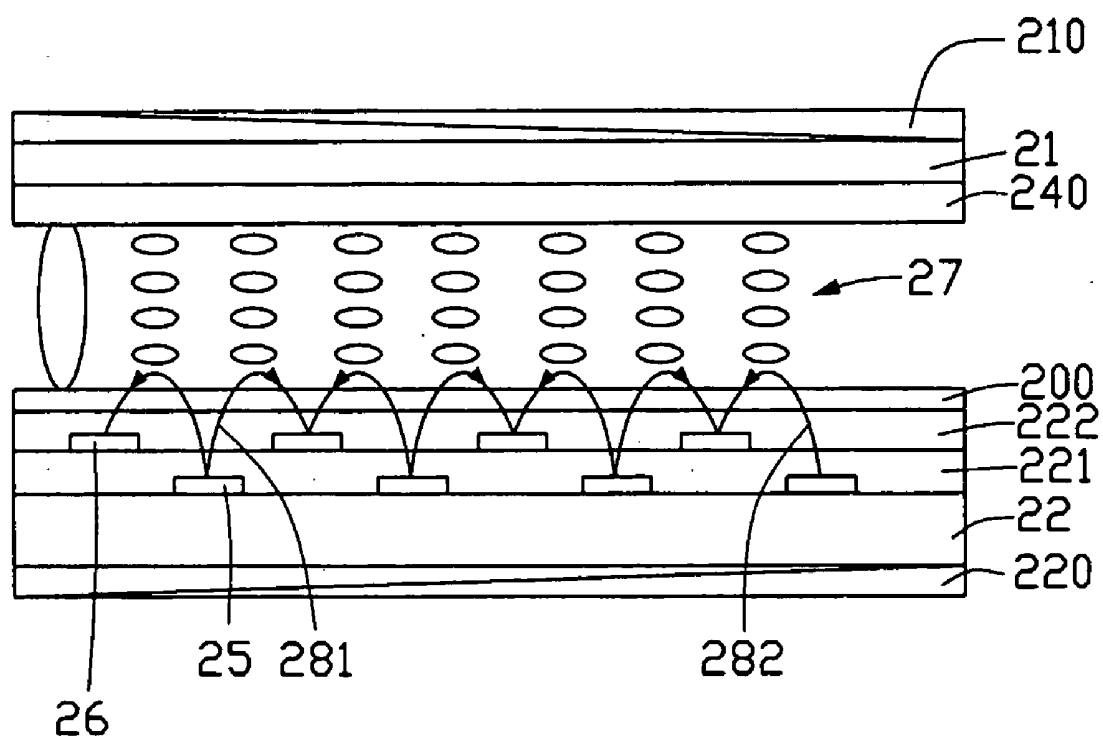


FIG. 1

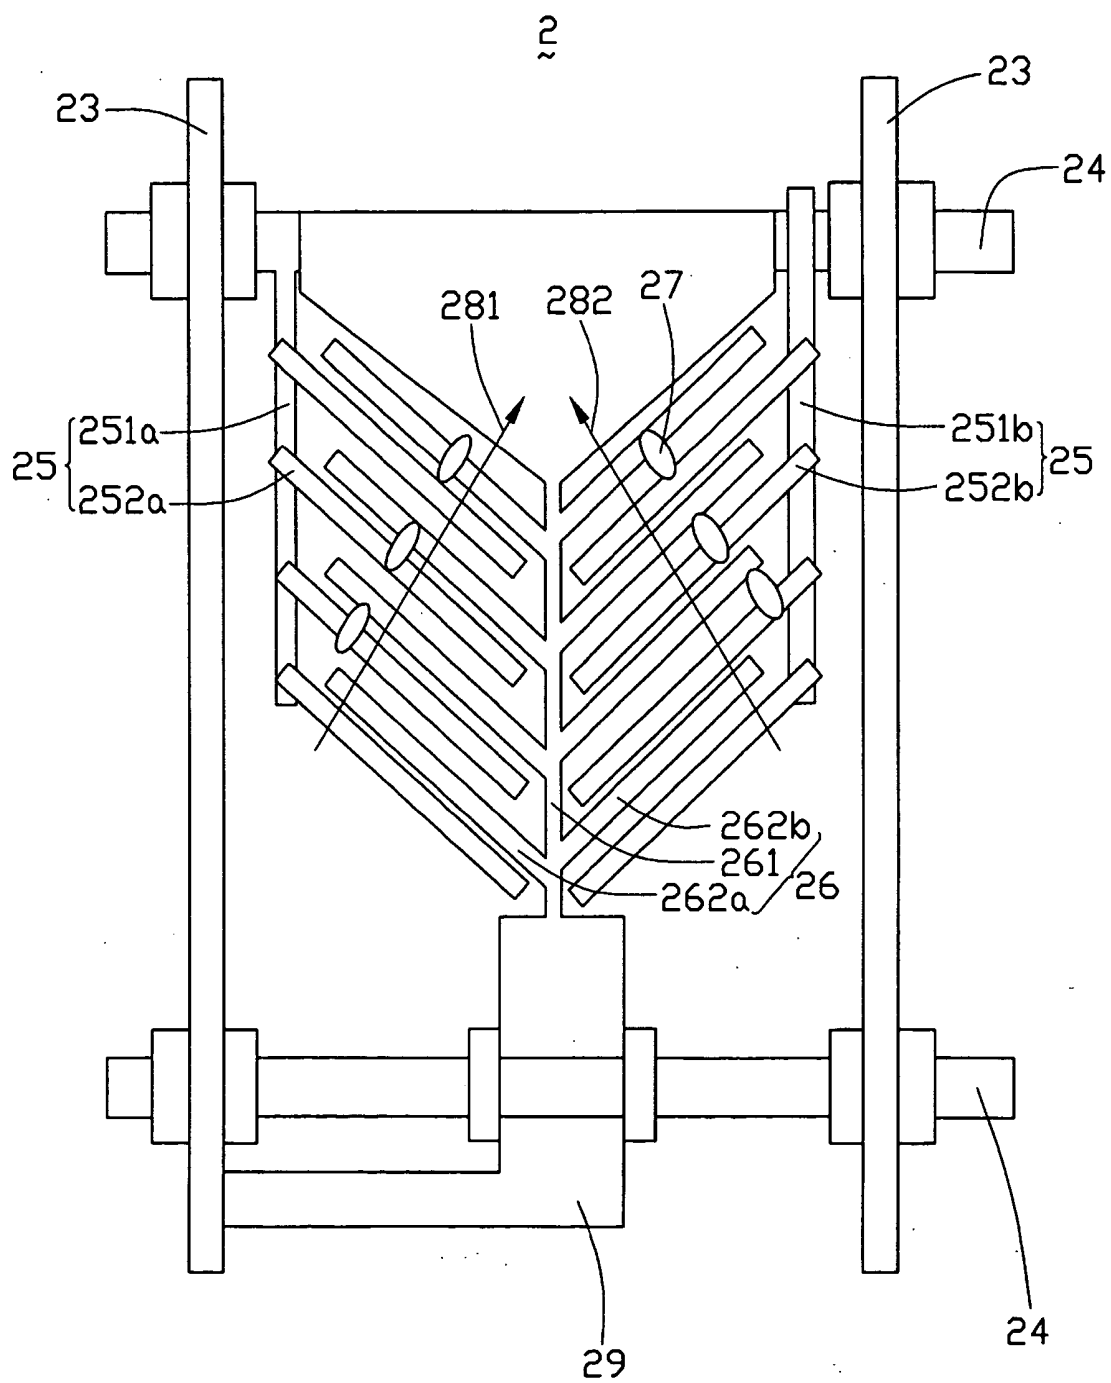


FIG. 2

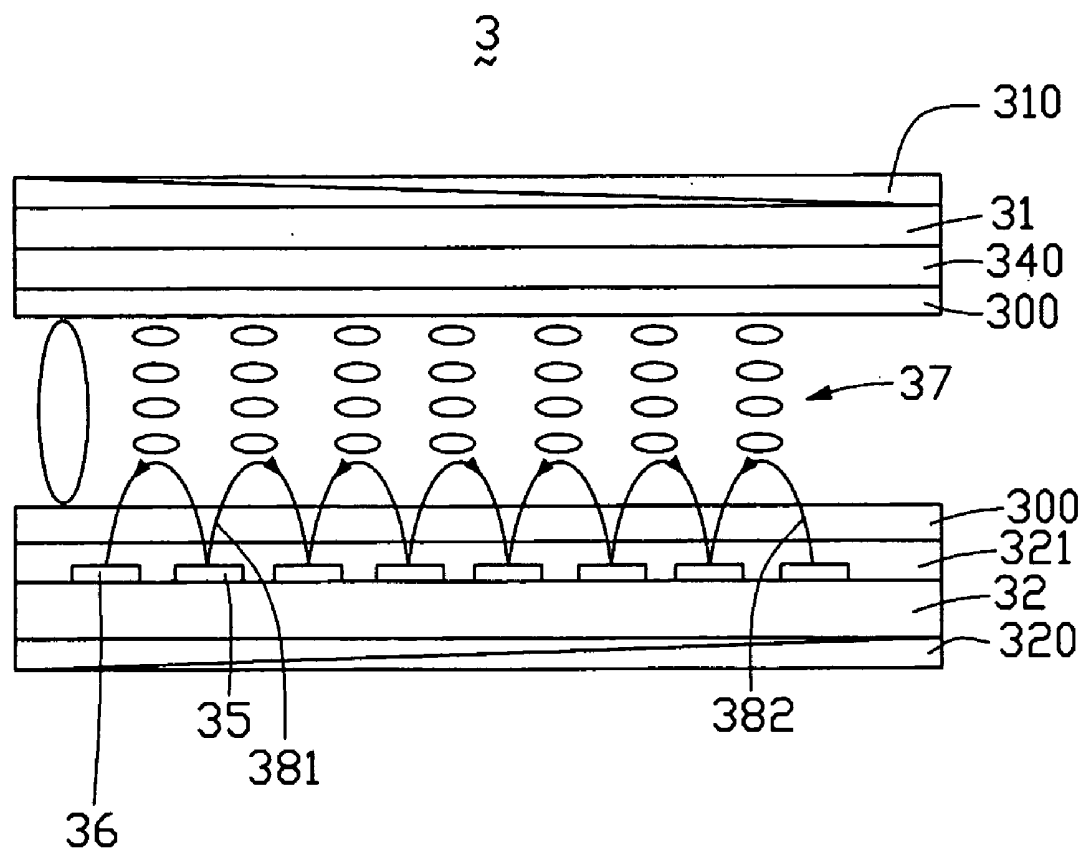


FIG. 3

3

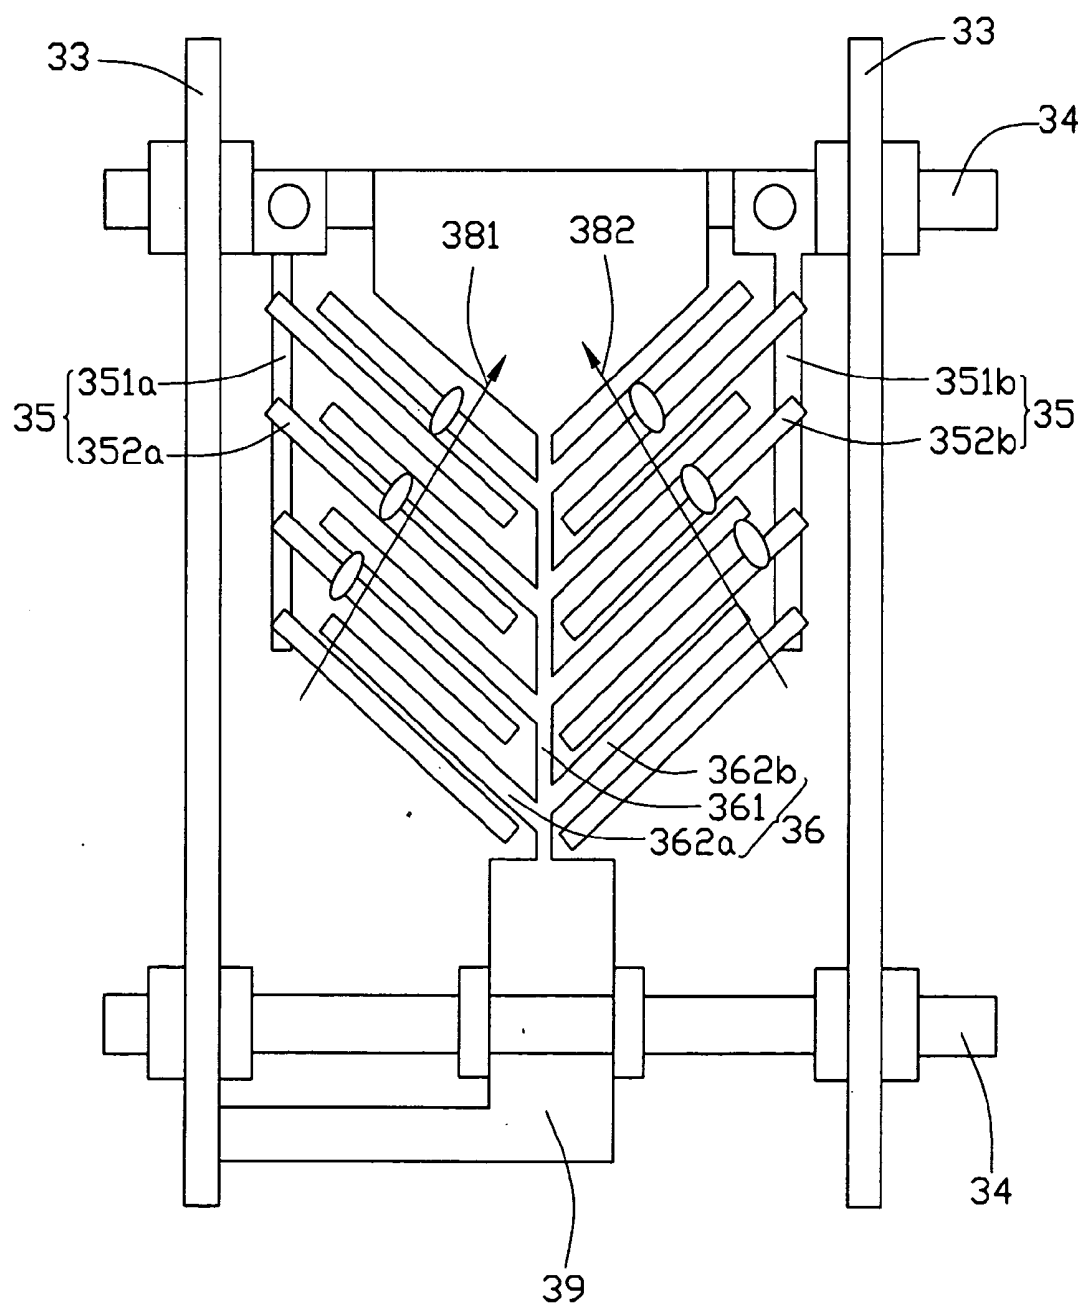


FIG. 4

1
~

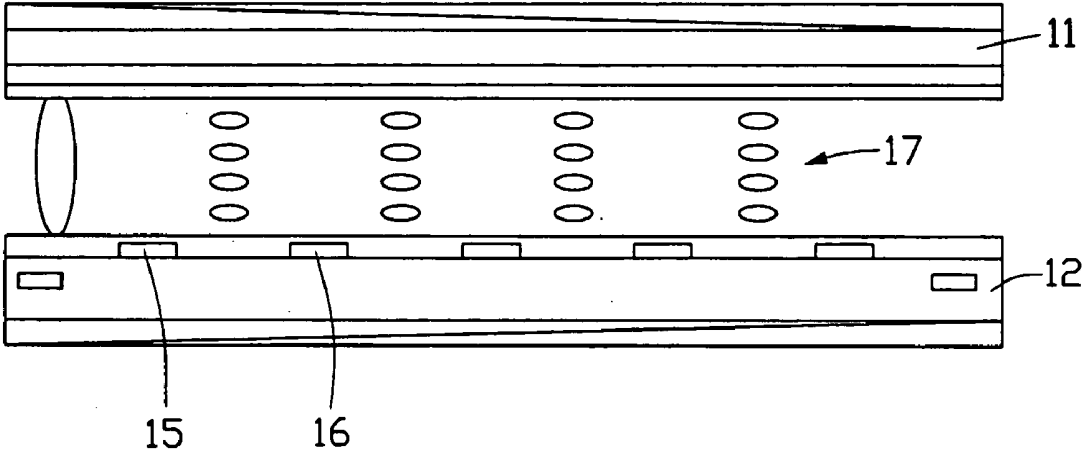


FIG. 5
(PRIOR ART)

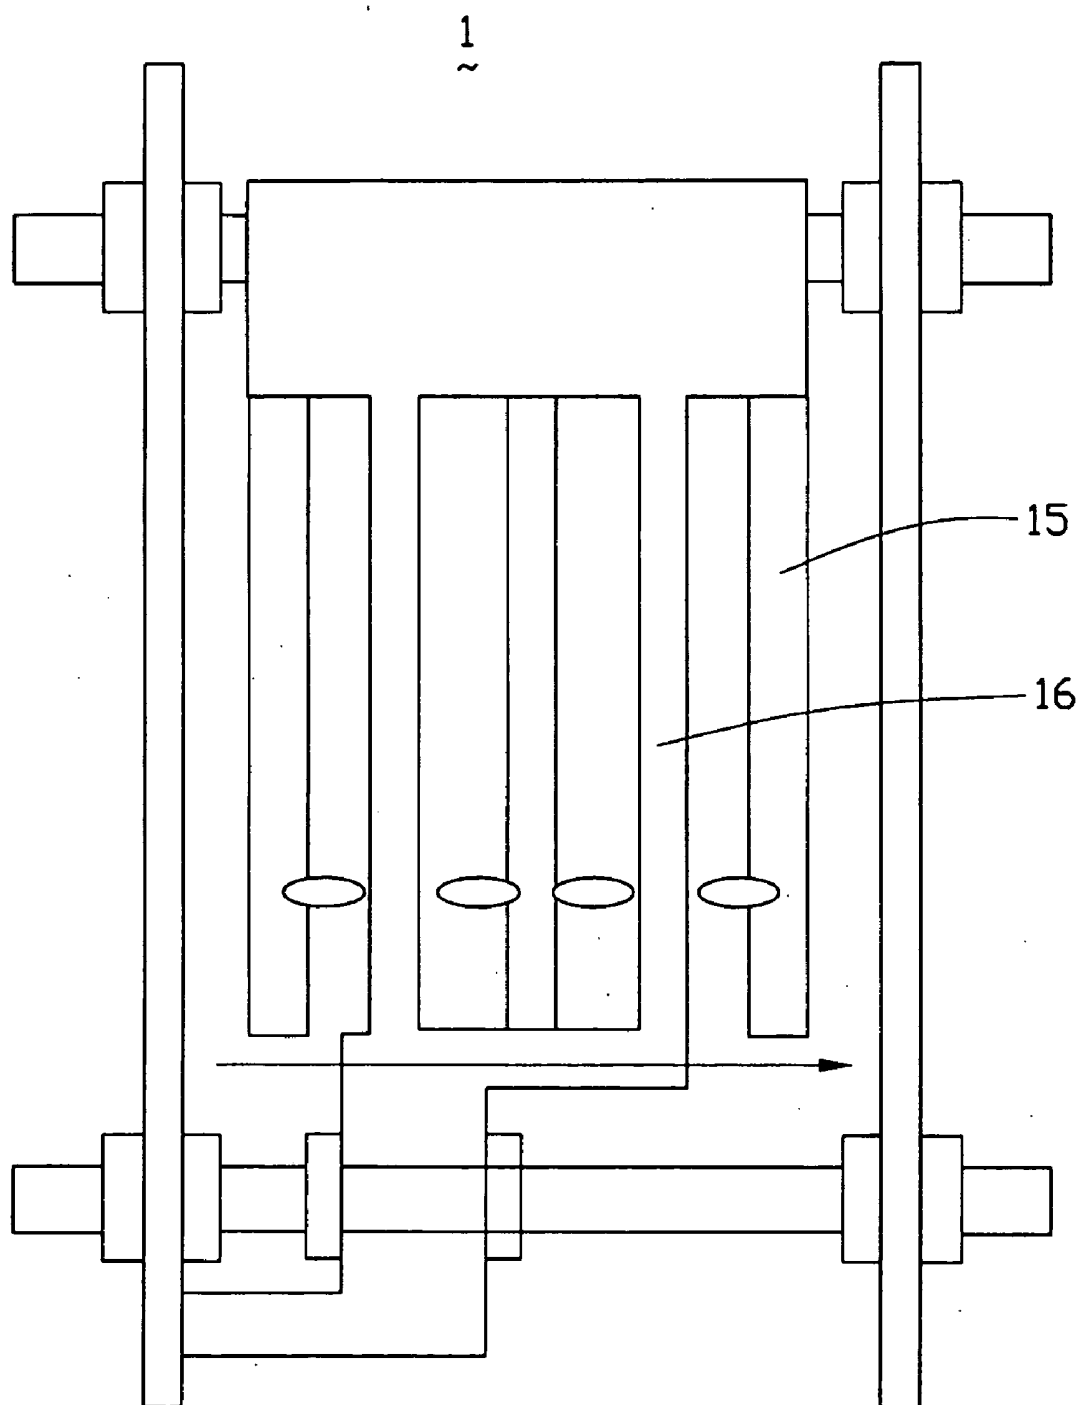


FIG. 6
(PRIOR ART)

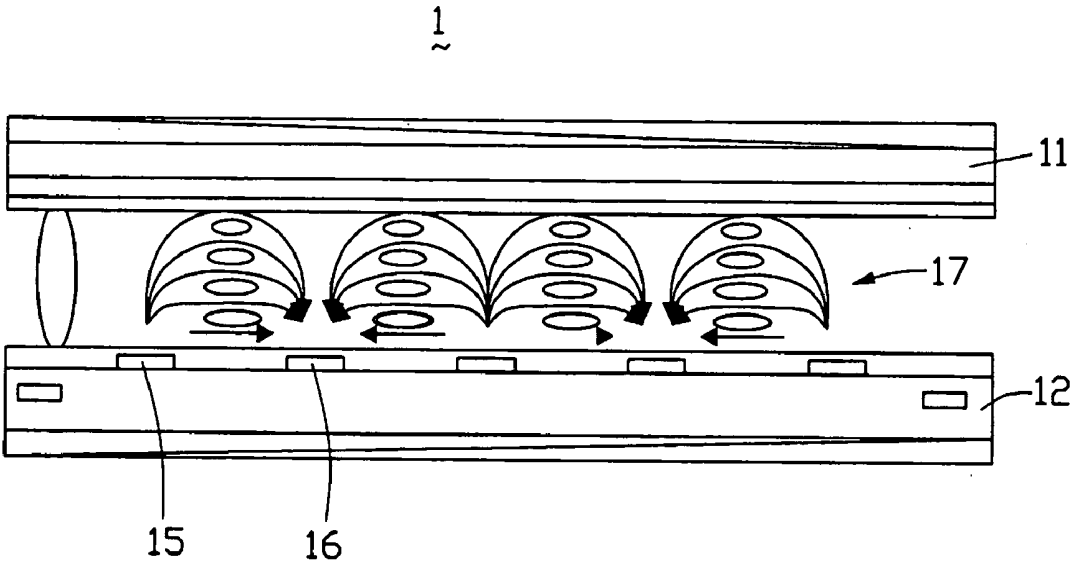


FIG. 7
(PRIOR ART)

IN-PLANE SWITCHING MODE THIN FILM TRANSISTOR LIQUID CRYSTAL DISPLAY DEVICE FOR REDUCING COLOR SHIFT

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a liquid crystal display (LCD) device, and more particularly to a two-domain in-plane switching (IPS) mode thin film transistor (TFT) LCD device.

[0003] 2. Description of Prior Art

[0004] In a conventional liquid crystal display, a pair of facing transparent electrodes is respectively formed on two substrates, and is used for driving a liquid crystal layer therebetween. In such a device, a displaying means known as a TN (twisted nematic) display is adopted. That is, the liquid crystal display operates by being supplied with an electric field having a direction orthogonal to inner surfaces of the substrates.

[0005] However, the TN mode LCD has a narrow viewing angle, which means that the quality of the display greatly depends on the direction of viewing. In order to obtain a wide viewing angle, the IPS type LCD has been developed.

[0006] A detailed explanation about operation modes of a typical IPS-LCD device is provided hereinbelow, with reference to **FIGS. 5 through 7**.

[0007] As shown in **FIGS. 5-6**, the IPS-LCD device **1** comprises upper and lower substrates **11** and **12** spaced apart from each other, and a liquid crystal layer **17** provided therebetween. The substrates **11** and **12** are called a color filter substrate and a TFT substrate, respectively. A multiplicity of pixel electrodes **16** and common electrodes **15** are disposed on the lower substrate **12**. The pixel electrodes **16** and the common electrodes **15** are parallel to but spaced apart from each other.

[0008] When no electric field is applied between the pixel and common electrodes **16** and **15**, long axes of liquid crystal molecules in the liquid crystal layer **17** maintain a predetermined angle relative to the pixel and common electrodes **16** and **15**. Typically, the angle is 45 degrees, as represented in **FIG. 5**.

[0009] As shown in **FIG. 7**, when a voltage is applied between the pixel and common electrodes **16** and **15**, a horizontal in-plane electric field that is parallel to a surface of the lower substrate **12** is established between the pixel and common electrodes **16** and **15**. The liquid crystal molecules are twisted so as to align according to the electric field. That is, the long axes of the liquid crystal molecules are oriented perpendicular to the pixel and common electrodes **16** and **15**.

[0010] The IPS-LCD device **1** is a conventional single-domain IPS-LCD device. This type of IPS-LCD device has the following inherent problem. Because the pixel and common electrodes **16** and **15** are all oriented in a single direction, the liquid crystal molecules are rotated in a single direction only. This means that an associated display screen exhibits color shift when the display screen is obliquely viewed while displaying white.

[0011] It is desired to provide an improved liquid crystal display device which overcomes the above problem.

SUMMARY OF THE INVENTION

[0012] It is an object of the present invention to provide a liquid crystal display device having two domains so as to reduce color shift.

[0013] In order to achieve the object set forth, a liquid crystal display device in accordance with the present invention includes a pair of substrates, a liquid crystal layer contained between the substrates, and a plurality of gate lines and data lines formed on one of the substrates thereby defining a plurality of pixel regions. A set of pixel electrodes and a set of common electrodes are provided in each of the pixel regions. A first subset of the pixel electrodes and a first subset of the common electrodes are disposed parallel to each other in alternating fashion and extend along a first horizontal axis, a second subset of the pixel electrodes and a second subset of the common electrodes are disposed parallel to each other in alternating fashion and extend along a second horizontal axis different from the first horizontal axis, and the first and second horizontal axes are inclined at respective angles relative to the data lines. Thus when voltage is applied to the liquid crystal display device, liquid crystal molecules in the liquid crystal layer are twisted in two different directions so as to reduce color shift.

[0014] Other objects, advantages, and novel features of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] **FIG. 1** is a schematic, side cross-sectional view of part of an LCD device according to a first embodiment of the present invention, shown when voltage is applied thereto.

[0016] **FIG. 2** is a top plan view of a configuration of electrodes of the LCD device of **FIG. 1**.

[0017] **FIG. 3** is a schematic, side cross-sectional view of part of an LCD device according to a second embodiment of the present invention, shown when voltage is applied thereto.

[0018] **FIG. 4** is a top plan view of a configuration of electrodes of the LCD device of **FIG. 3**.

[0019] **FIG. 5** is a schematic, side cross-sectional view of part of a conventional LCD device, showing the LCD device in a passive state.

[0020] **FIG. 6** is a top plan view of a configuration of electrodes of the LCD device of **FIG. 5**.

[0021] **FIG. 7** is similar to **FIG. 5**, but showing the LCD device when voltage is applied thereto.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

[0022] Referring to **FIG. 1**, an LCD device **2** of the first embodiment of the present invention includes a transparent first substrate **21**, a transparent second substrate **22**, and a liquid crystal layer **27** sandwiched between the first and second substrates **21** and **22**.

[0023] A color filter **240** is provided on a surface of the first substrate **21** opposite to the second substrate **22**. An alignment film **200** is coated on a surface of the second

substrate **22** opposite to the first substrate **21**, such that the liquid crystal **27** is sandwiched between the alignment film **200** and the color filter **240**. In a passive state, liquid crystal molecules in the liquid crystal layer **27** are substantially uniformly aligned in a direction according to the alignment film **200**.

[0024] A polarizing plate **210** is adhered to an outer surface of the first substrate **21**, and a polarizing plate **220** is adhered to an outer surface of the second substrate **22**. The polarizing plates **210** and **220** respectively have polarizing axes perpendicular to each other, with one of the polarizing axes being set parallel to the direction in which the liquid crystal molecules are aligned in the passive state.

[0025] Common electrodes **25** are directly formed on a surface of the second substrate **22**, and an insulating layer **221** is formed on said surface of the second substrate **22** such that it also covers the common electrodes **25**. Pixel electrodes **26** are directly formed on a surface of the insulating layer **221**, and a passivation film **222** is formed on said surface of the insulating layer **221** such that it also covers the pixel electrodes **26**.

[0026] Also referring to FIG. 2, two parallel gate lines **24** orthogonally cross two parallel data lines **23**, thereby defining a rectangular pixel region. A TFT device **29**, two comb-shaped pixel electrodes **26** and two comb-shaped common electrodes **25** are provided in the pixel region.

[0027] The pixel and common electrodes **26**, **25** are made of a transparent conductive material such as indium-tin-oxide (ITO) or indium-zinc-oxide (IZO). The common electrodes **25** include wirings **251a**, **251b**, which are disposed substantially parallel to the data lines **23**. A plurality of bones **252a** obliquely extends from the wiring **251a** in first direction, and a plurality of bones **252b** obliquely extends from the wiring **251b** in a second direction that is different from the first direction. The bones **252a** are parallel to each other, and the bones **252b** are parallel to each other.

[0028] The pixel electrodes **26** share a common central wiring **261** connecting to a drain electrode (not labeled) of the TFT device **29**, the wiring **261** being disposed essentially parallel to the data lines **23**. A plurality of bones **262a** and **262b** obliquely extends in alternate fashion from opposite long sides of the wiring **261**, in two directions that are respectively parallel to the bones **252a** and **252b**. Thus the bones **252a**, **262a** are arranged in alternate fashion at one of said long sides of the wiring **261**, and the bones **252b**, **262b** are arranged in alternate fashion at the other of said long sides of the wiring **261**.

[0029] In operation, a common voltage is applied to the common electrodes **25**, and another voltage is applied to the pixel electrodes **26**. A horizontal electric field in two directions **281** and **282** is thereby established, the directions **281** and **282** spanning respectively between the bones **252a** and **262a**, and between the bones **252b** and **262b**. The electric field causes liquid crystal molecules in the liquid crystal layer **27** to be twisted in a plane that is parallel to the substrates **21** and **22**, for controlling a corresponding display.

[0030] According to the configuration of the common and pixel electrodes **25**, **26**, an electric field is generated in the directions **281** and **282** that are different from each other, so as to form two regions in the spaces defined between the

bones **252a** and **262a**, and between the bones **252b** and **262b**. Accordingly, the liquid crystal molecules in the liquid crystal layer **27** are twisted in the two different directions **281** and **282**.

[0031] As a result, when the display screen is obliquely viewed while displaying white, two different colors can be seen in two regions of the display screen corresponding to said two regions in said space. The two colors compensate for each other, thereby reducing the color shift.

[0032] Referring to FIG. 3, an LCD device **3** according to the second embodiment of the present invention is shown. The LCD device **3** has a configuration similar to the LCD device **2** of the first embodiment. Upper and lower substrates **31** and **32** are spaced apart from each other, and a liquid crystal layer **37** is sandwiched therebetween.

[0033] A color filter **340** is provided on an undersurface of the upper substrate **31**. An alignment film **300** is coated on an undersurface of the color filter **340**, and another alignment film **300** is coated on a surface of the lower substrate **32** nearest to the liquid crystal layer **37**, such that the liquid crystal layer **37** is sandwiched between the alignment films **300**. In a passive state, liquid crystal molecules in the liquid crystal layer **37** are substantially uniformly aligned in a direction according to the alignment films **300**.

[0034] The upper and lower substrates **31** and **32** have polarizing plates **310** and **320** adhered to outer surfaces thereof, respectively. The polarizing plates **310** and **320** respectively have polarizing axes perpendicular to each other, with one of the polarizing axes being set parallel to the direction in which the liquid crystal molecules are aligned in the passive state.

[0035] Common and pixel electrodes **35** and **36** are directly formed on a surface of the lower substrate **32**, and an insulating layer **321** is formed on said surface of the lower substrate **32** such that it also covers the common and pixel electrodes **35** and **36**.

[0036] Also referring to FIG. 4, two parallel gate lines **34** orthogonally cross two parallel data lines **33**, thereby defining a rectangular pixel region. A TFT device **39**, two comb-shaped pixel electrodes **36** and two comb-shaped common electrodes **35** are provided in the pixel region.

[0037] The pixel and common electrodes **36**, **35** are made of a transparent conductive material such as indium-tin-oxide (ITO) or indium-zinc-oxide (IZO). The common electrodes **35** and pixel electrodes **36** are formed directly on the lower substrate **32**. The common electrodes **35** include wirings **351a**, **351b**, and bones **352a**, **352b** obliquely extending in two different directions from the wirings **351a**, **351b** respectively. The bones **352a** are parallel to each other, and the bones **352b** are parallel to each other.

[0038] The pixel electrodes **36** share a common central wiring **361** connecting to a drain electrode (not labeled) of the TFT device **39**, the wiring **361** being disposed essentially parallel to the data lines **33**. A plurality of bones **362a** and **362b** obliquely extends in alternate fashion from opposite long sides of the wiring **361**, in two directions that are respectively parallel to the bones **352a** and **352b**. Thus the bones **352a**, **362a** are arranged in alternate fashion at one of said long sides of the wiring **361**, and the bones **352b** and **362b** are arranged in alternate fashion at the other of said

long sides of the wiring **361**. All the bones **352a**, **352b**, **362a**, **362b** are disposed at a same level on the lower substrate **32**.

[0039] In operation, a common voltage is applied to the common electrodes **35**, and a voltage is applied to the pixel electrodes **36**. A horizontal electric field in two directions **381** and **382** is thereby established respectively between the bones **352a** and **362a**, and between the bones **352b** and **362b**. The electric field causes liquid crystal molecules in the liquid crystal layer **37** to be twisted in a plane that is parallel to the substrates **31** and **32**, for controlling a corresponding display.

[0040] According to the configuration of the common and pixel electrodes **35**, **36**, an electric field is generated in the directions **381** and **382** that are different from each other, so as to form two regions in the spaces defined between the bones **352a** and **362a**, and between the bones **352b** and **362b**. Accordingly, the liquid crystal molecules in the liquid crystal layer **37** are twisted in the two different directions **381** and **382**.

[0041] Compared with the conventional single-domain IPS-LCD device **1** of the prior art, the liquid crystal molecules in the LCD devices **2**, **3** are twisted in the two different directions **281**, **282**, and **381**, **382** respectively. As a result, when the corresponding display screen is obliquely viewed while displaying white, two different colors can be seen in two regions of the display screen corresponding to said two regions in said space. Because the two colors compensate for each other, the color shift is reduced. Furthermore, the pixel and common electrodes **26**, **36**, **25**, **35** are made of a transparent conductive material, so that the aperture ratio of the LCD devices **2**, **3** is improved.

[0042] It is to be understood, however, that even though numerous characteristics and advantages of the present invention have been set forth in the foregoing description, together with details of the structure and function of the invention, the disclosure is illustrative only, and changes may be made in detail, especially in matters of shape, size, and arrangement of parts within the principles of the invention to the full extent indicated by the broad general meaning of the terms in which the appended claims are expressed.

What is claimed is:

1. A liquid crystal display device, comprising:

a pair of substrates;

a liquid crystal layer sandwiched between the substrates;

a plurality of gate lines and data lines formed on one of the substrates, thereby defining a plurality of pixel regions; and

a set of pixel electrodes and a set of common electrodes provided in each of the pixel regions;

wherein, a first subset of the pixel electrodes and a first subset of the common electrodes are disposed parallel to each other in alternating fashion and extend along a first horizontal axis, a second subset of the pixel electrodes and a second subset of the common electrodes are disposed parallel to each other in alternating fashion and extend along a second horizontal axis different from the first horizontal axis, and the first and second horizontal axes are inclined at respective angles relative to the data lines.

2. The liquid crystal display device as claimed in claim 1, wherein the set of pixel electrodes comprises a wiring and a plurality of bones extending obliquely from the wiring along the first and second axes.

3. The liquid crystal display device as claimed in claim 2, wherein the set of common electrodes comprises two wirings and a plurality of bones extending obliquely from the wirings parallel to corresponding bones of the pixel electrodes.

4. The liquid crystal display device as claimed in claim 3, wherein the bones of the pixel and common electrodes are alternately disposed parallel to each other along the respective first and second axes.

5. The liquid crystal display device as claimed in claim 1, further comprising an insulating layer covering the set of common electrodes.

6. The liquid crystal display device as claimed in claim 5, wherein the set of pixel electrodes is located on the insulating layer.

7. The liquid crystal display device is claimed in claim 6, further comprising a passivation layer covering the set of pixel electrodes.

8. The liquid crystal display device as claimed in claim 1, wherein the pixel electrodes and the common electrodes are located at a same level relative to said one of the substrates.

9. A liquid crystal display device, comprising:

a pair of substrates oppositely facing each other in a vertical direction;

a liquid crystal layer sandwiched between the substrates; and

a set of pixel electrodes and a set of common electrodes located at a same level between said pair of substrates in the vertical direction, the set of pixel electrodes extending along at least two different horizontal axes, the set of common electrodes extending along horizontal axes being the same as said at least two horizontal axes, said at least two horizontal axes being inclined at respective angles relative to data lines of the liquid crystal display device.

10. The liquid crystal display device as claimed in claim 9, wherein the pixel electrodes and the common electrodes are alternately disposed parallel to each other along the respective said at least two horizontal axes.

11. A liquid crystal display device, comprising:

a pair of substrates;

a liquid crystal layer sandwiched between the substrates; and

a set of pixel electrodes and a set of common electrodes located between the substrates;

wherein, the set of pixel electrodes and the set of common electrodes are each obliquely oriented at two respective angles relative to data lines of the liquid crystal display device, and an electric field is generated along two different directions by the set of pixel electrodes and the set of common electrodes, the two directions being perpendicular to the set of pixel electrodes and the set of common electrodes.

12. The liquid crystal display device as claimed in claim 11, wherein the two different directions are located in a same horizontal plane parallel to the substrates.

13. The liquid crystal display device as claimed in claim 11, wherein the set of pixel electrodes and the set of common electrodes are each formed of transparent conductive material.

14. The liquid crystal display device as claimed in claim 13, wherein the transparent conductive material is indium-tin-oxide.

15. The liquid crystal display device as claimed in claim 13, wherein the transparent conductive material is indium-zinc-oxide.

16. A liquid crystal display device, comprising:

a pair of substrates; and

a liquid crystal layer sandwiched between the substrates, and defining a plurality of pixel regions;

wherein, each pixel region comprises a common electrode and a pixel electrode positioned on one of the sub-

strates, the common and pixel electrodes each comprise at least one wiring and at least two bones obliquely extending from the at least one wiring along two different axes, and the bones are inclined at respective angles relative to data lines of the liquid crystal display device.

17. The liquid crystal display device as claimed in claim 16, wherein a horizontal electric field in two directions is established between the bones when a voltage is applied between the common and pixel electrodes.

18. The liquid crystal display device as claimed in claim 17, wherein the electric field causes liquid crystal molecules in the liquid crystal layer to be twisted in two directions that are both parallel to the substrates.

* * * * *

专利名称(译)	面内切换模式薄膜晶体管用于减少色偏的液晶显示装置		
公开(公告)号	US20040257514A1	公开(公告)日	2004-12-23
申请号	US10/871141	申请日	2004-06-18
[标]申请(专利权)人(译)	HSIEH TSAU 华 庞贾庞 陈CHEUH JU		
申请(专利权)人(译)	HSIEH TSAU-HUA 庞贾鹏 陈CHEUH-JU		
当前申请(专利权)人(译)	群创光电		
[标]发明人	HSIEH TSAU HUA PANG JIA PANG CHEN CHEUH JU		
发明人	HSIEH, TSAU-HUA PANG, JIA-PANG CHEN, CHEUH-JU		
IPC分类号	G02F1/1343		
CPC分类号	G02F1/134363 G02F2201/122		
优先权	092116597 2003-06-18 TW		
其他公开文献	US7102719		
外部链接	Espacenet USPTO		

摘要(译)

LCD装置(2)包括两个基板(21,22),其间的液晶层(27),以及形成一个基板上的栅极线(24)和数据线(23),从而限定像素区域。在每个像素区域中提供一组像素电极(26)和一组公共电极(25)。像素电极的第一子集和公共电极的第一子集以交替方式彼此平行设置并沿第一水平轴延伸,像素电极的第二子集和公共电极的第二子集平行设置它们以交替的方式相互连接并沿第二水平轴延伸,并且第一和第二轴相对于数据线以各自的角度倾斜。因此,当施加电压时,液晶分子在两个不同的方向(281,282)上扭曲,以减少色移。

