



US 20020041268A1

(19) **United States**

(12) **Patent Application Publication**
Yajima et al.

(10) **Pub. No.: US 2002/0041268 A1**

(43) **Pub. Date: Apr. 11, 2002**

(54) **LIQUID CRYSTAL DISPLAY**

Publication Classification

(76) Inventors: **Toshihiro Yajima, Mobara (JP); Seiichi Nishiyama, Mobara (JP); Shigetake Takaku, Mobara (JP); Shoichi Noguchi, Shirako (JP); Yoshiharu Takeda, Mobara (JP)**

(51) **Int. Cl.⁷** G09G 3/36
(52) **U.S. Cl.** 345/102

(57) **ABSTRACT**

There is provided a liquid crystal display device which can be lengthened in life and in which the area of its so-called a picture frame can be narrowed. The liquid crystal display device includes a liquid crystal display panel having a display part in its central portion except its periphery; and a backlight disposed on a back side of the liquid crystal display panel. The backlight includes a discharge tube having electrodes at at least its opposite ends, and the electrodes are disposed at the exterior of the discharge tube. The opposite end portions of the discharge tube where the respective electrodes are disposed are positioned to be superposed on the periphery of the liquid crystal display panel, and are bent with an angle with respect to the central axis of the discharge tube.


Correspondence Address:
**ANTONELLI TERRY STOUT AND KRAUS
SUITE 1800
1300 NORTH SEVENTEENTH STREET
ARLINGTON, VA 22209**

(21) Appl. No.: **09/942,618**

(22) Filed: **Aug. 31, 2001**

(30) **Foreign Application Priority Data**

Sep. 4, 2000 (JP) 2000-266619

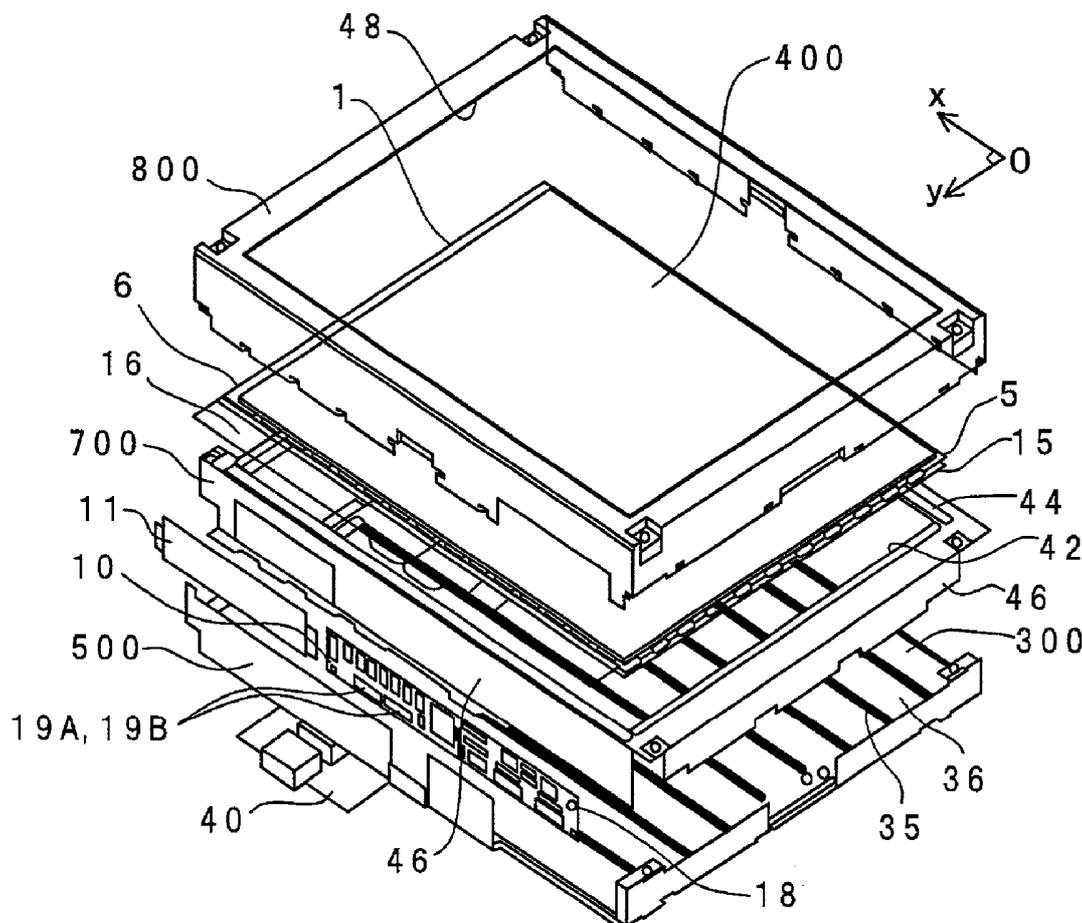

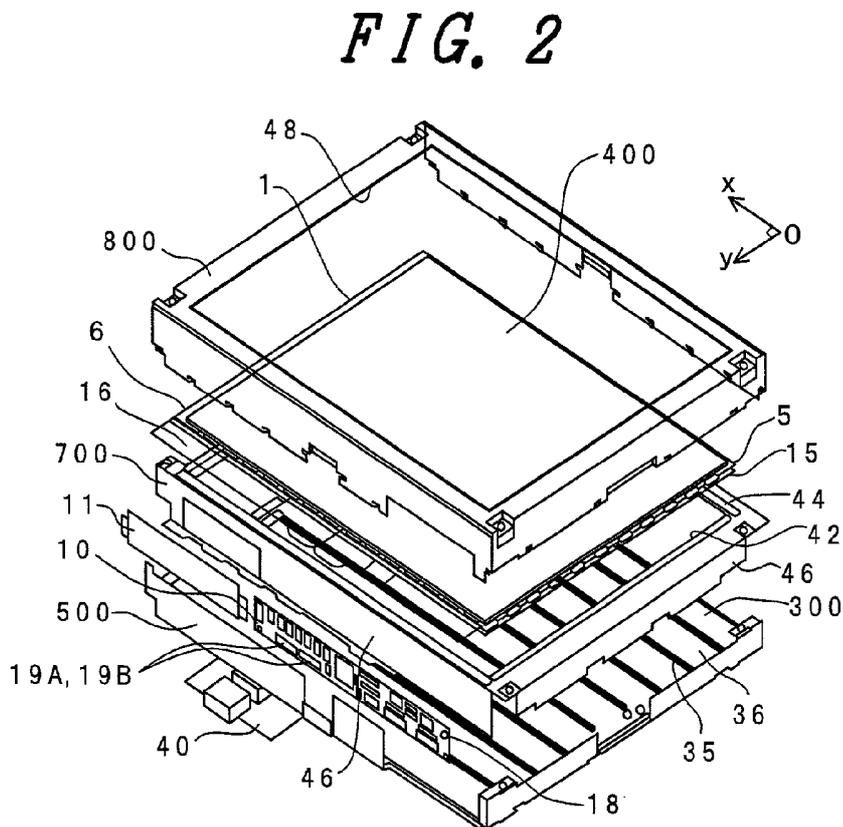
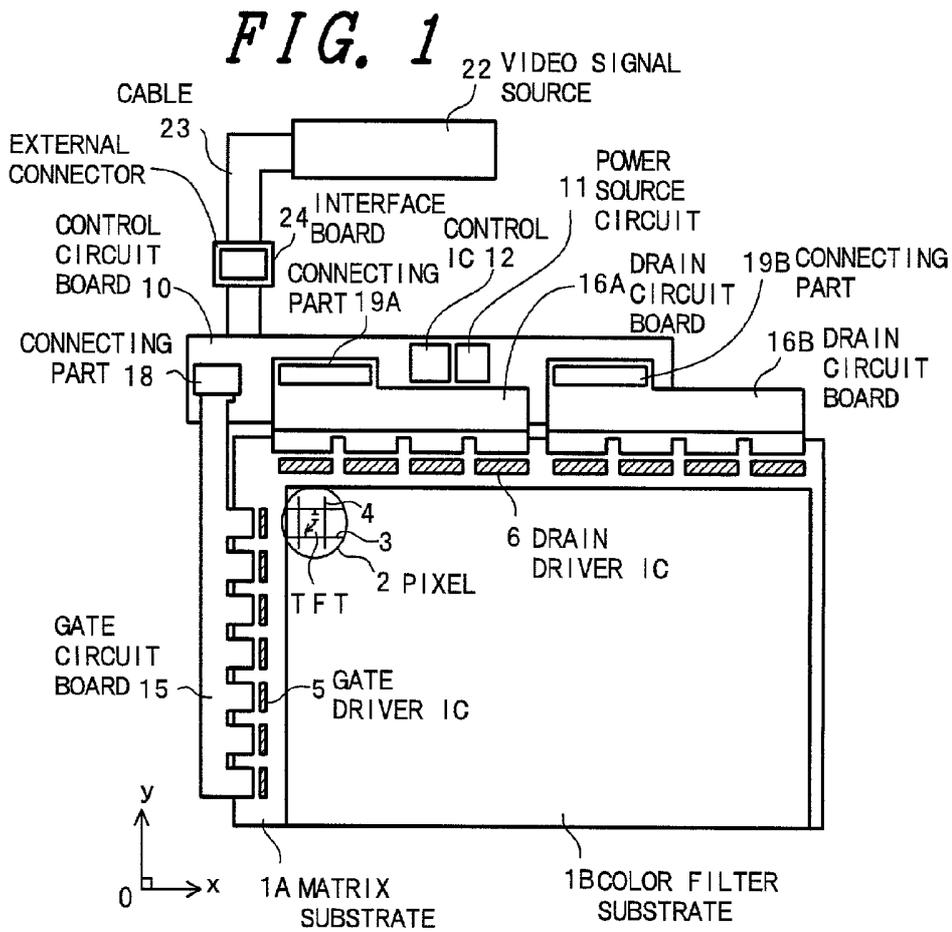


FIG. 3

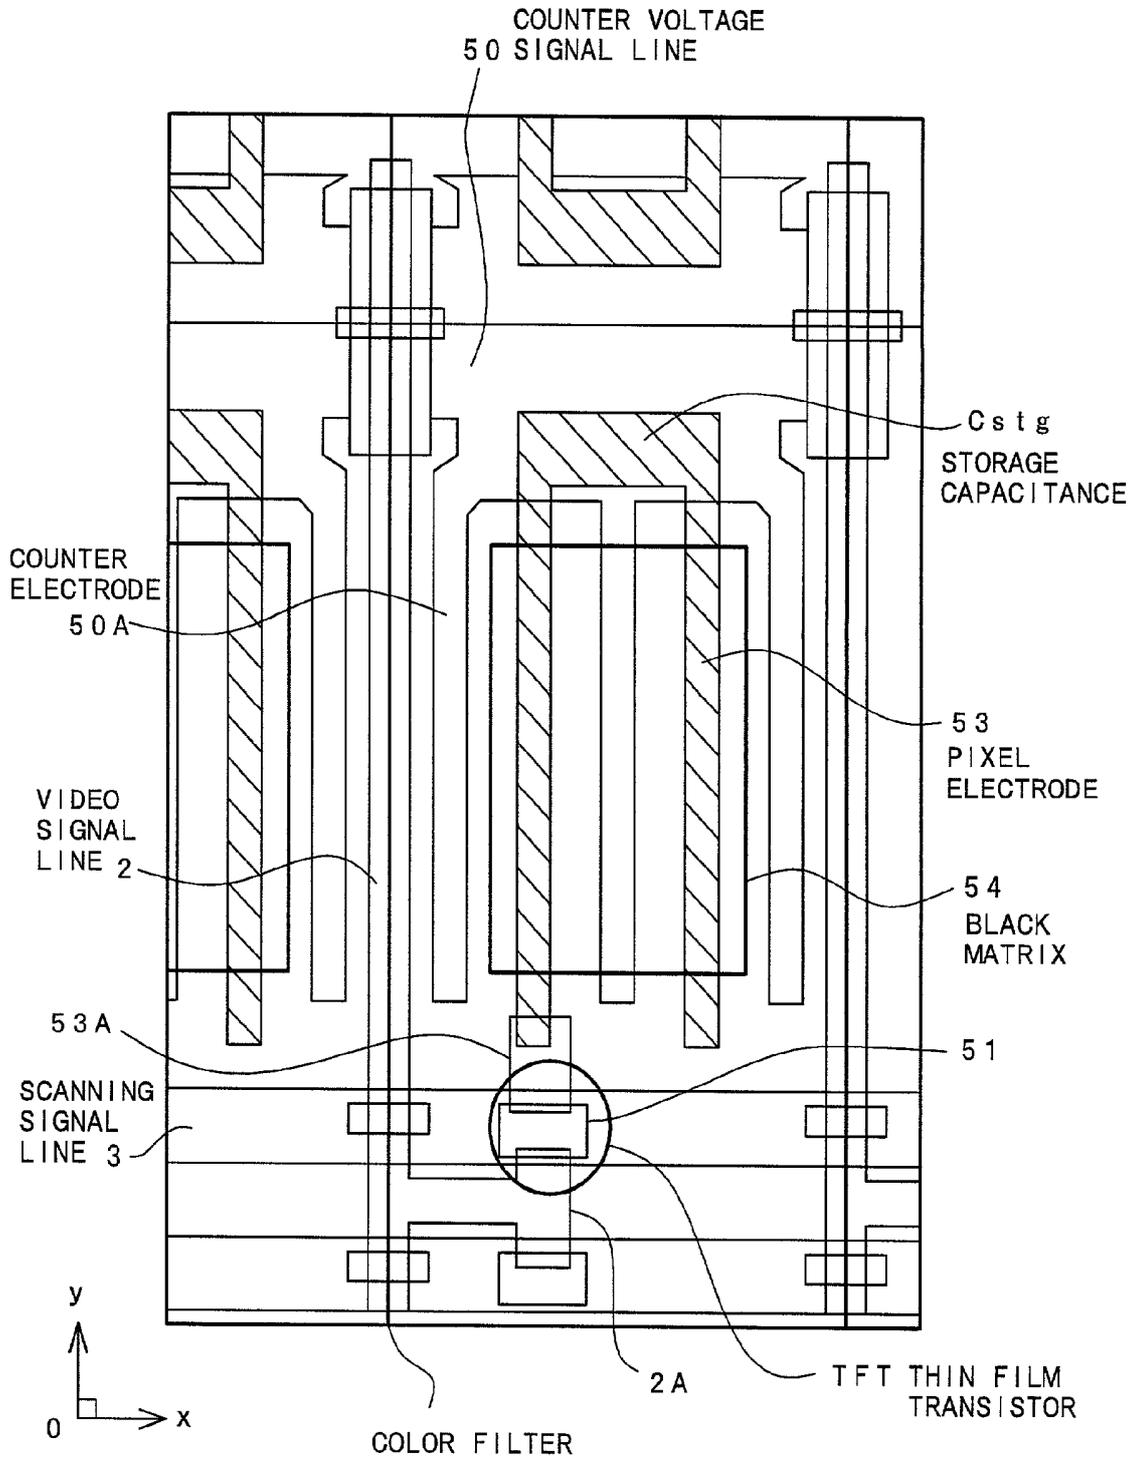


FIG. 4

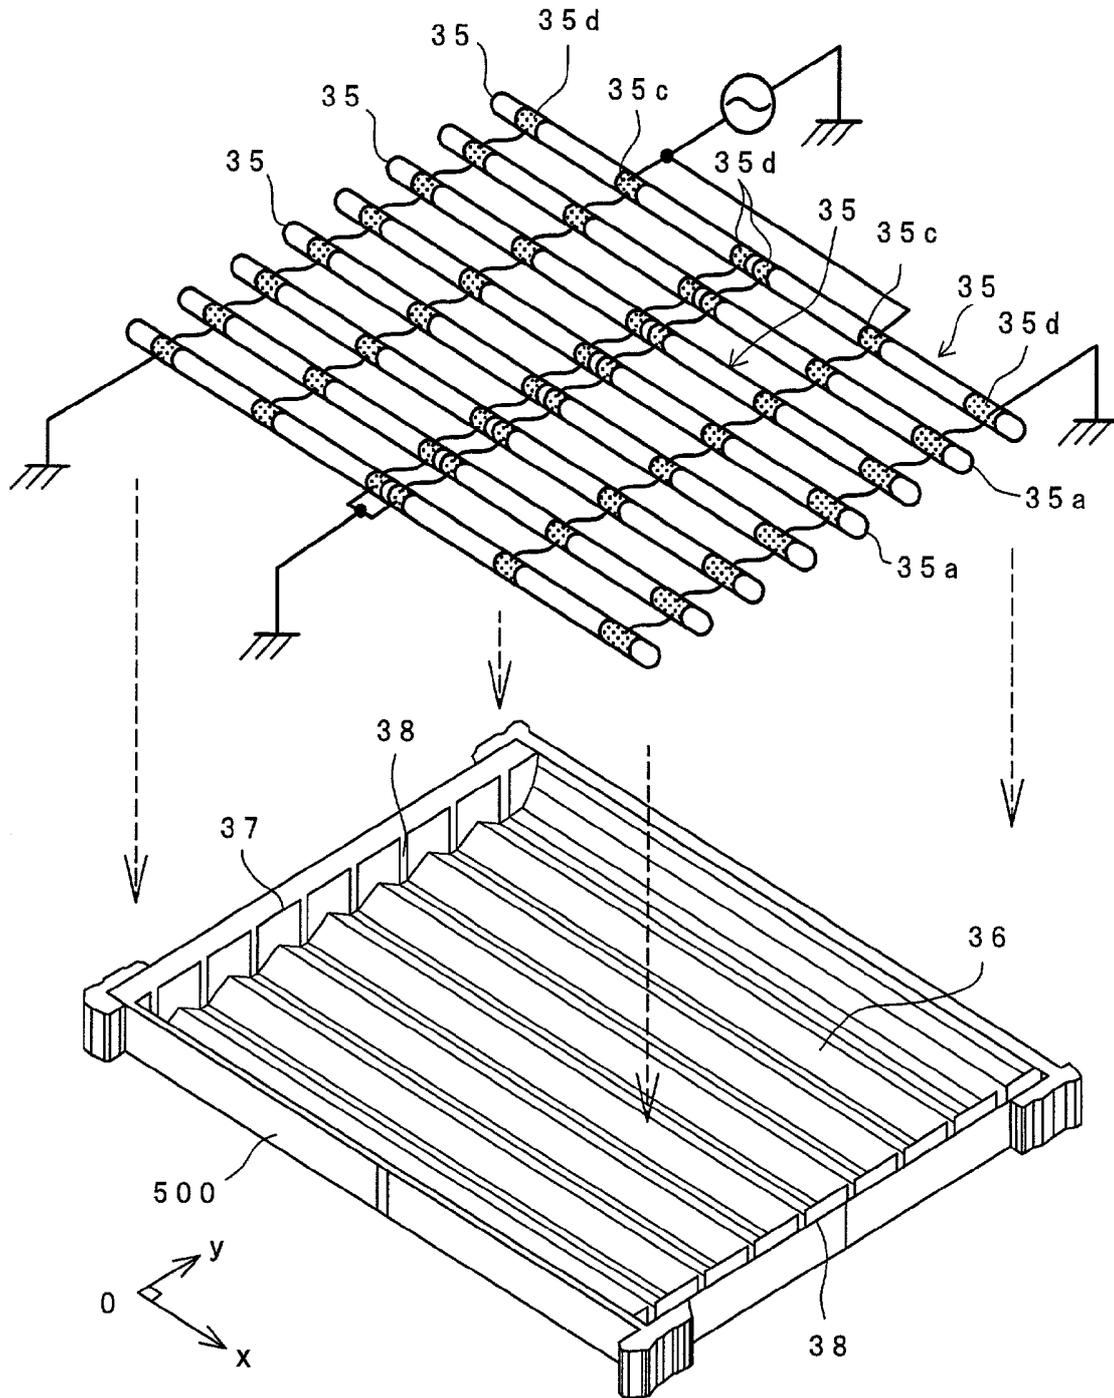


FIG. 5

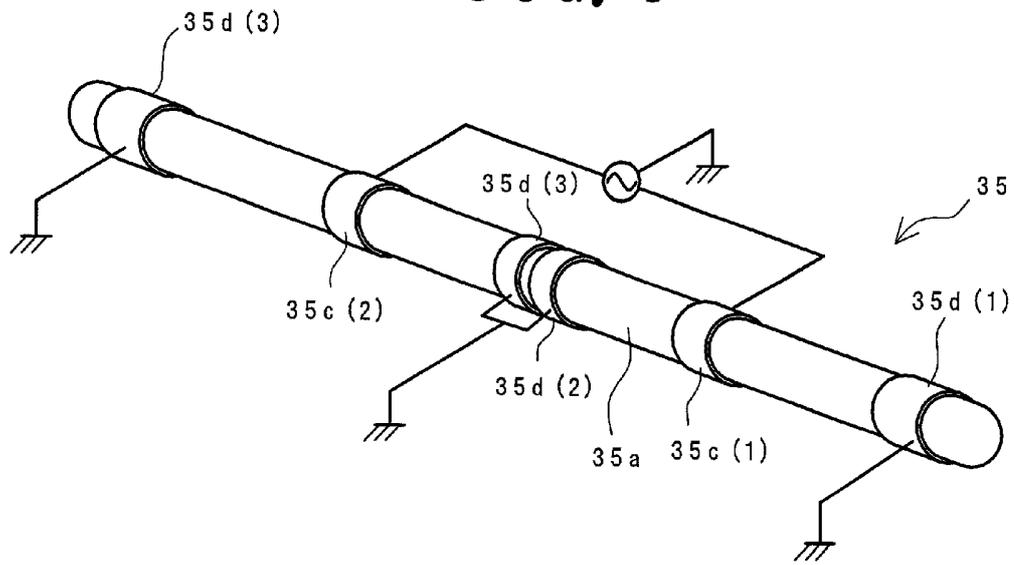


FIG. 6A

FIG. 6B

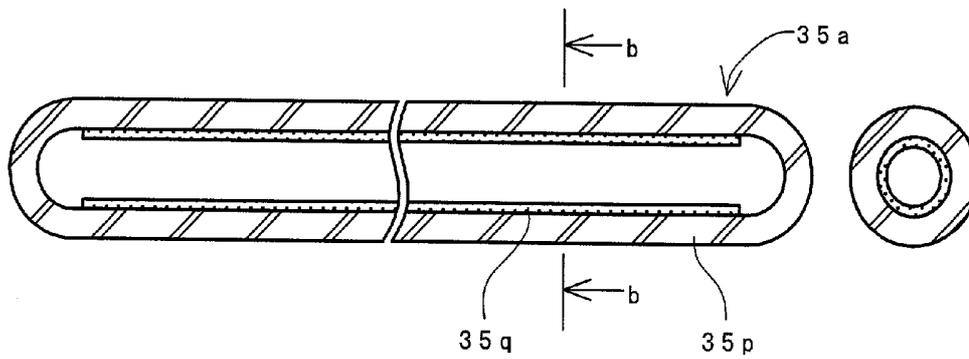


FIG. 7A

800 (V_{p-p})

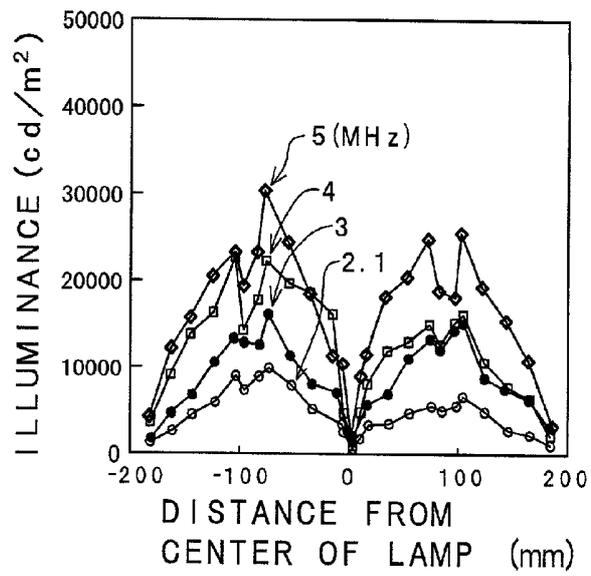


FIG. 7B

900 (V_{p-p})

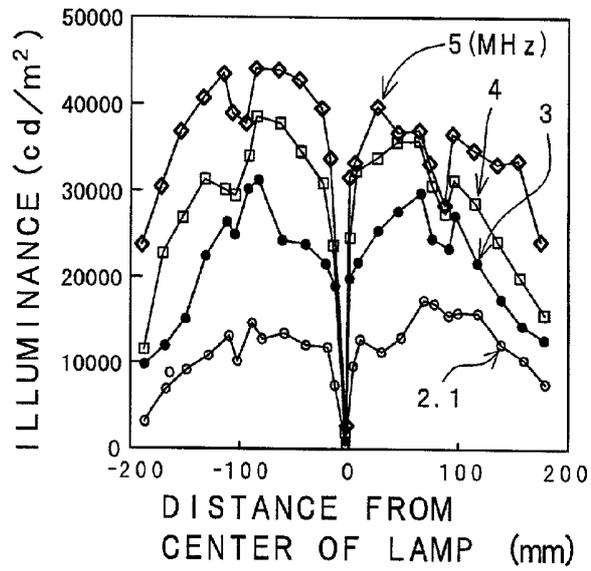


FIG. 7C

1000 (V_{p-p})

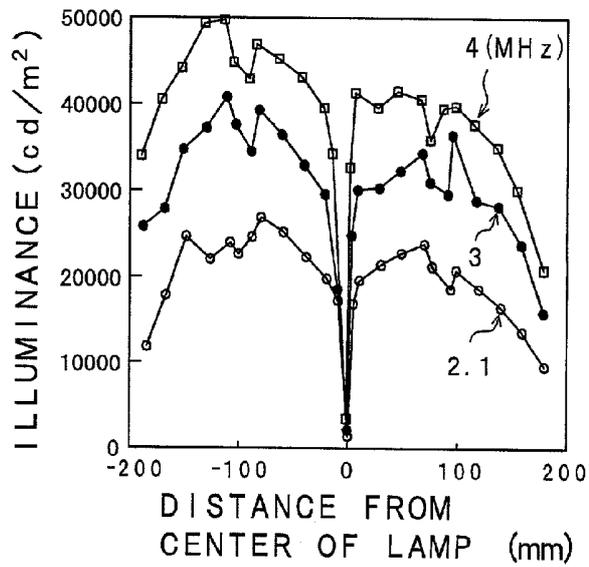


FIG. 8A

FIG. 8B

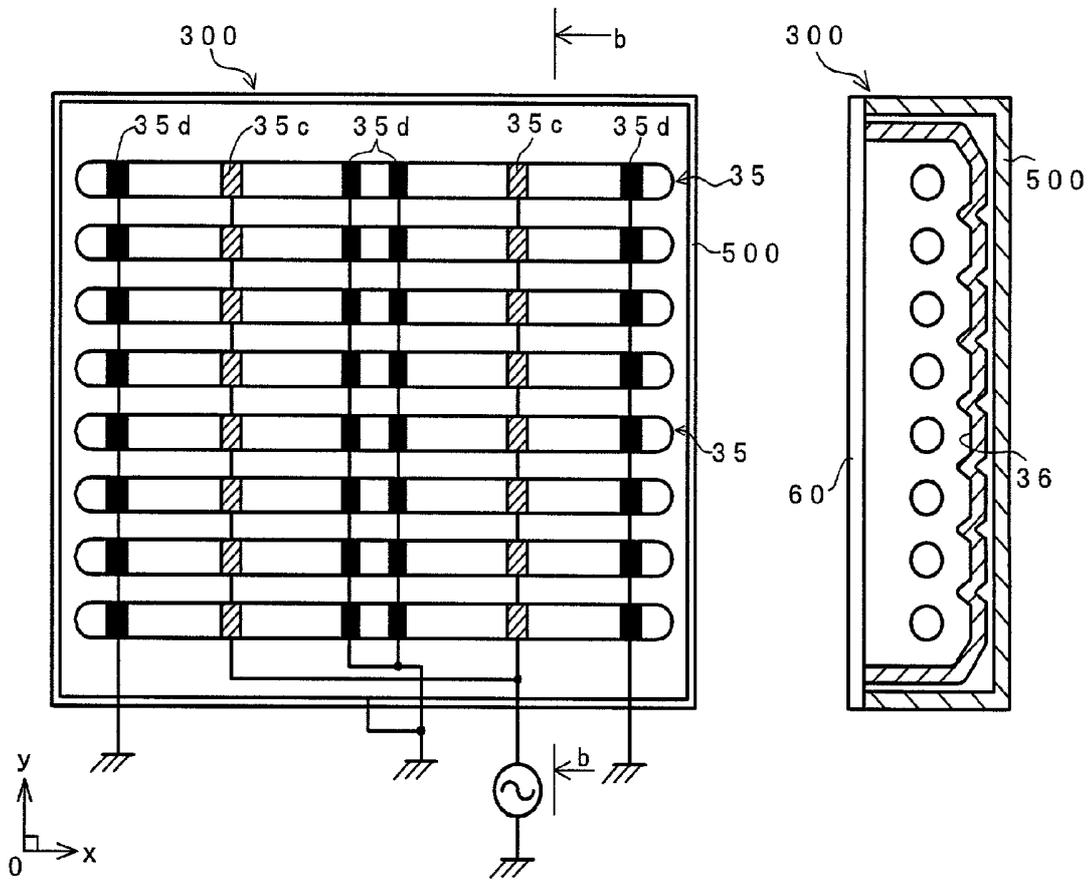


FIG. 9

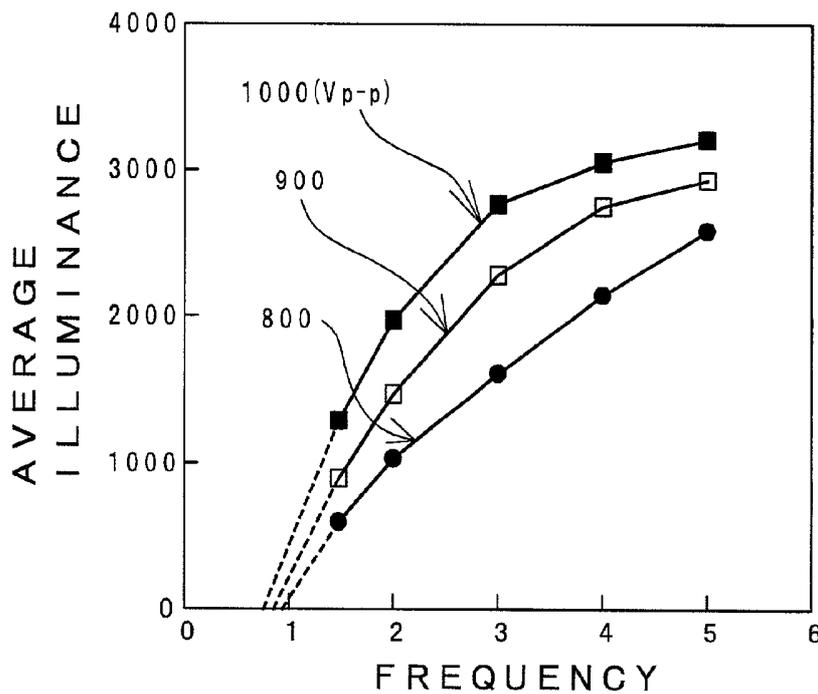


FIG. 10

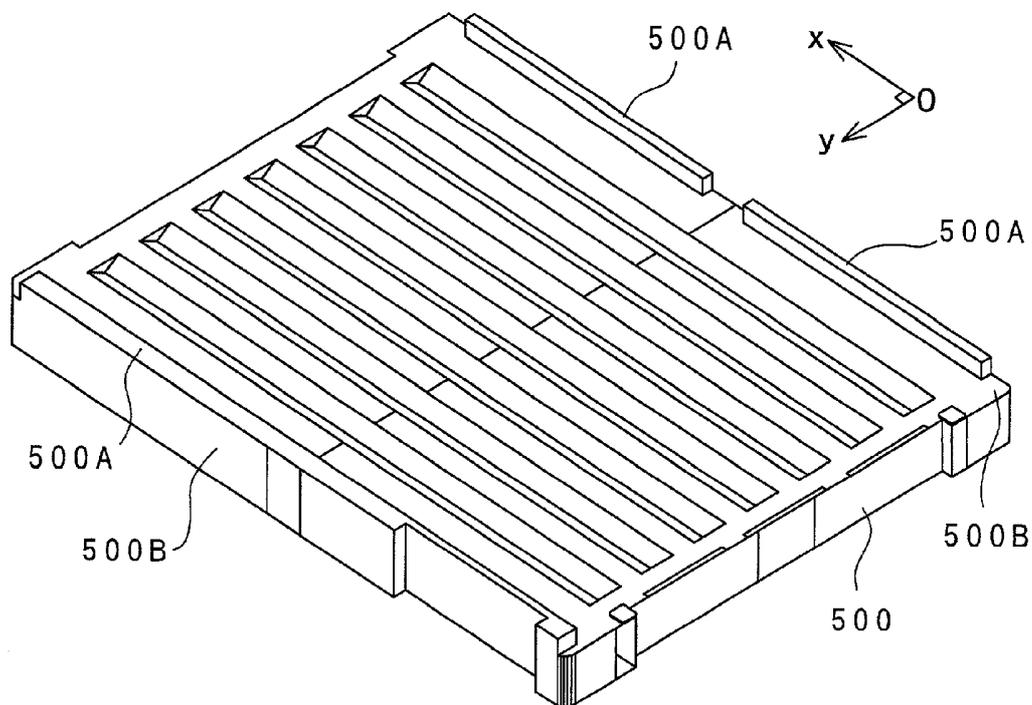


FIG. 11

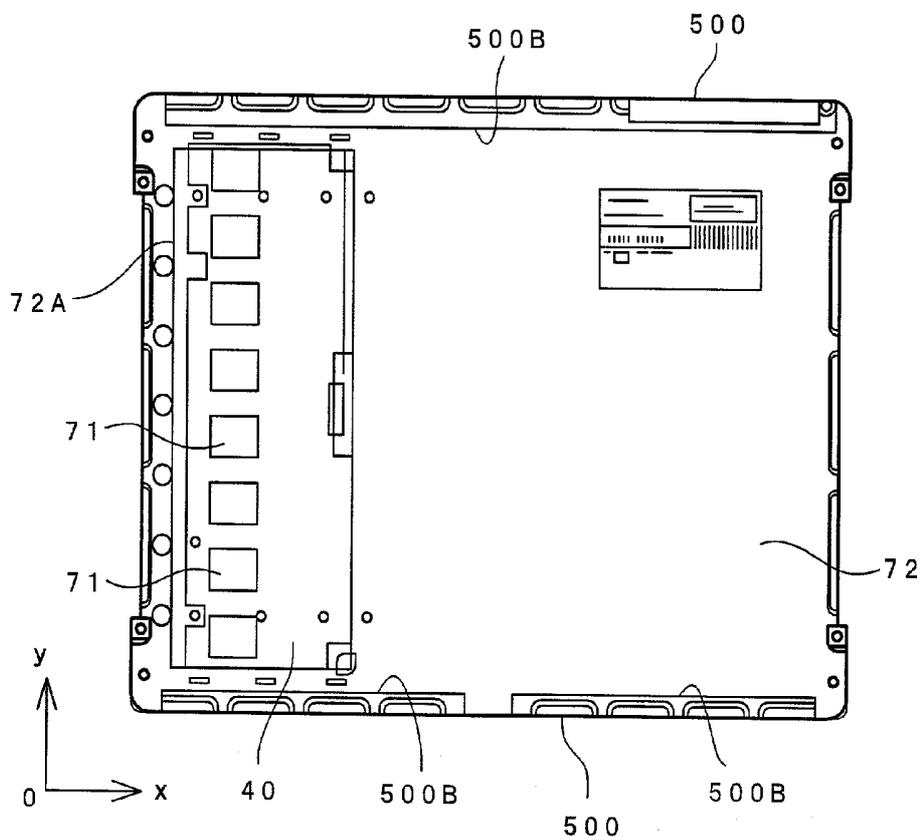


FIG. 12

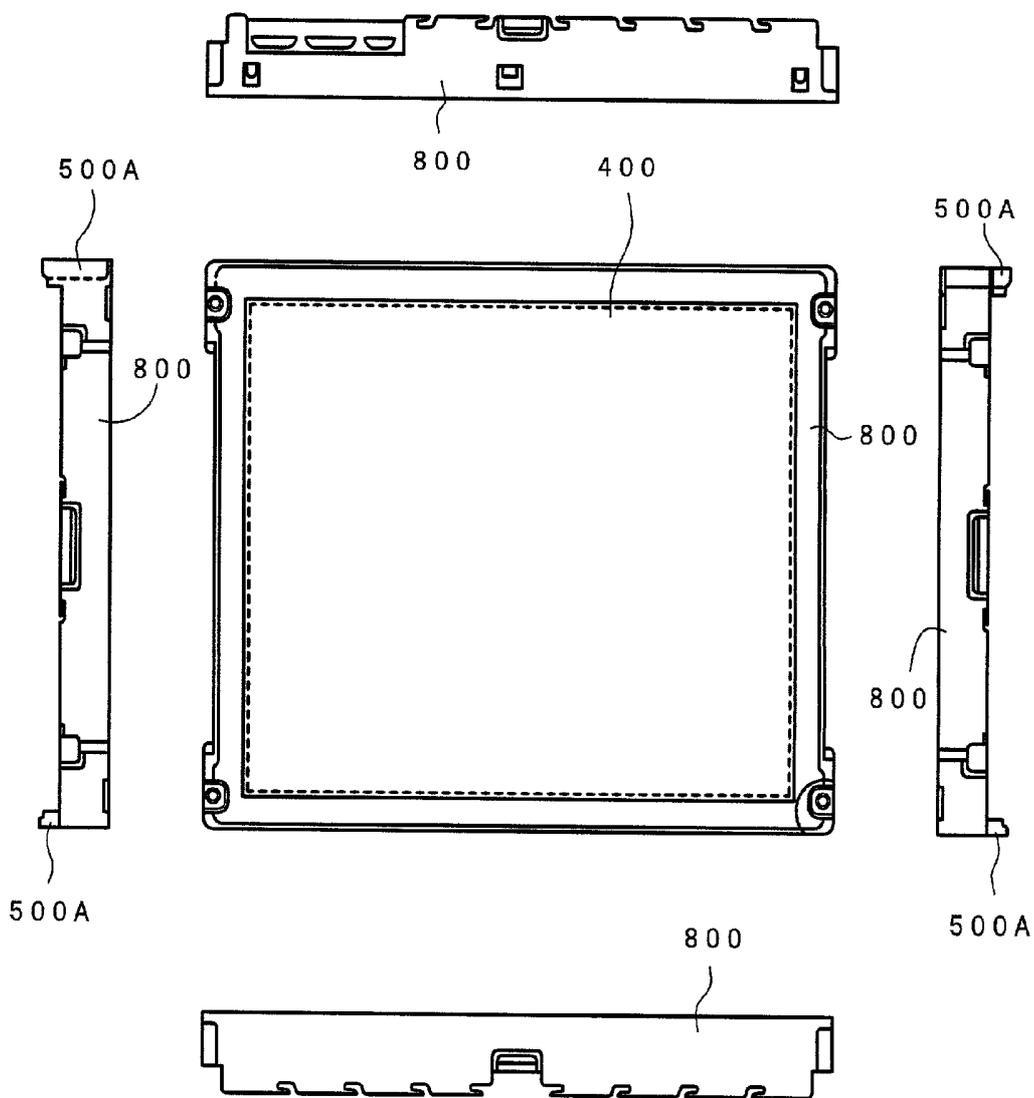


FIG. 13

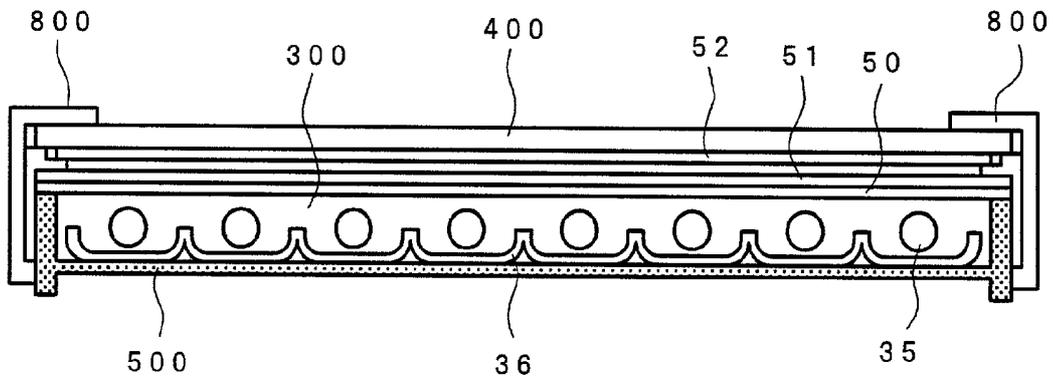


FIG. 14A

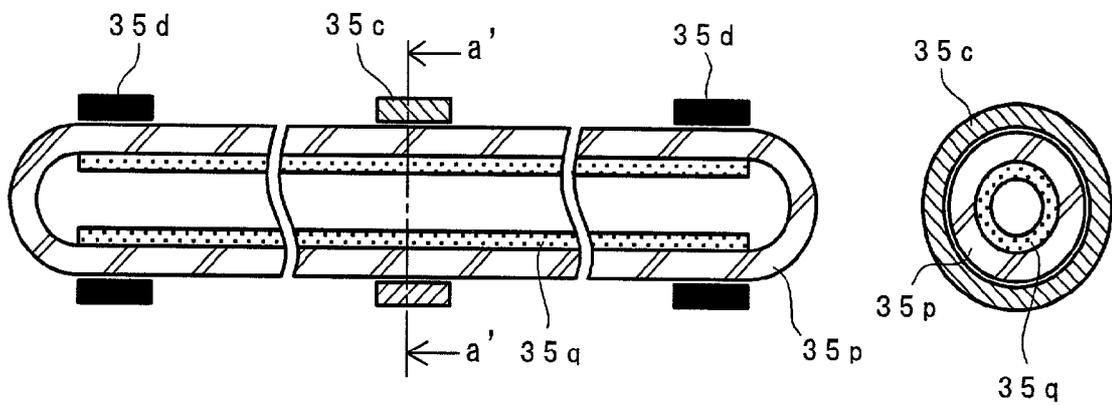


FIG. 14B

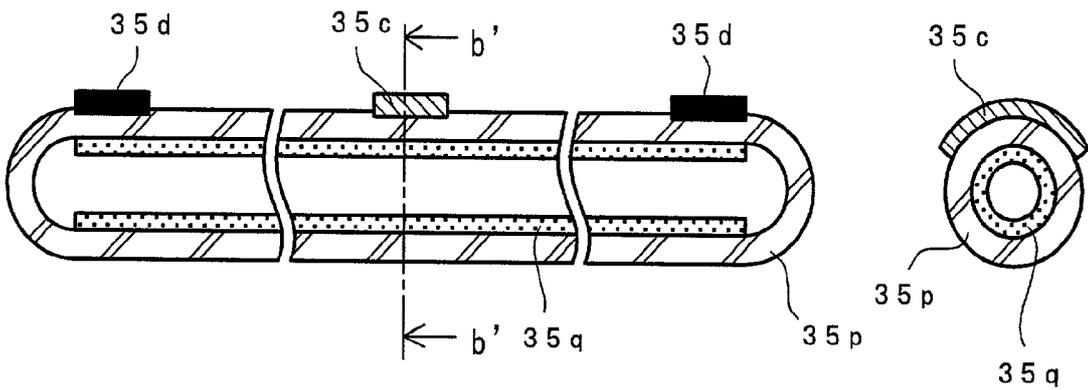


FIG. 14C

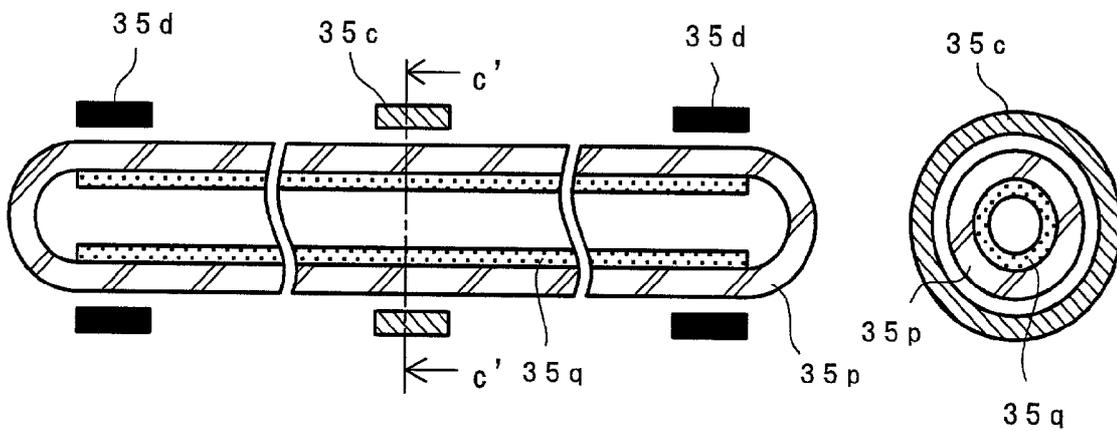


FIG. 15A

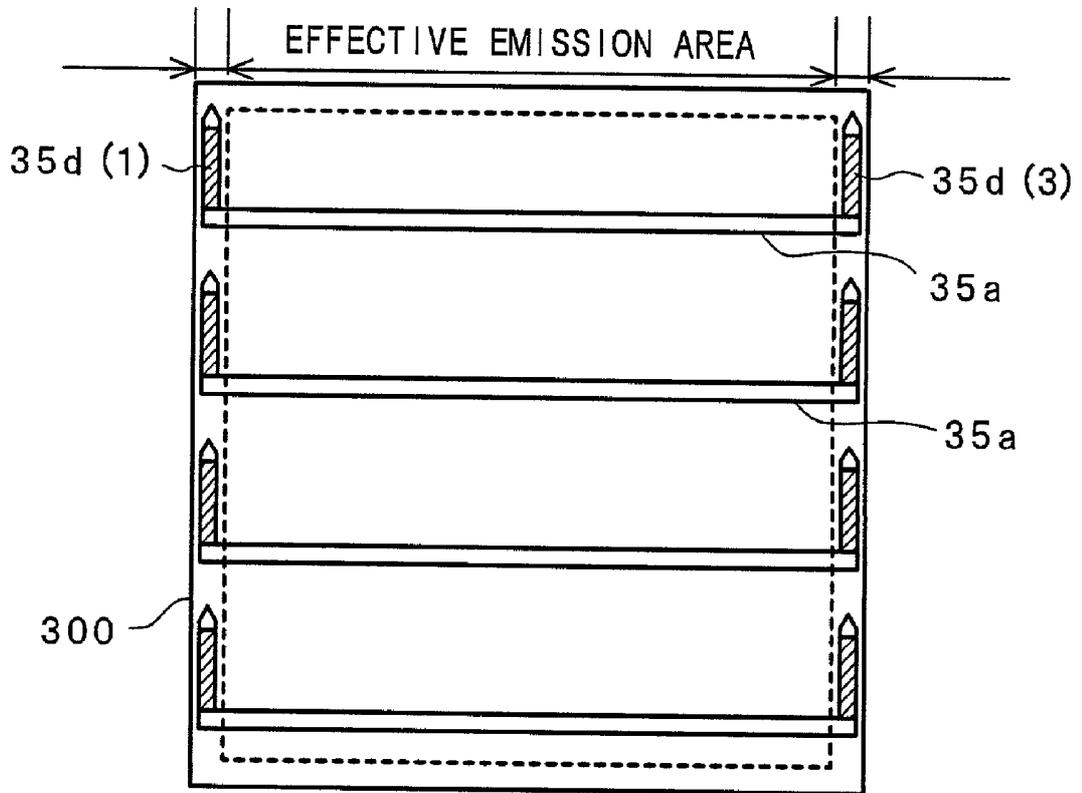


FIG. 15B

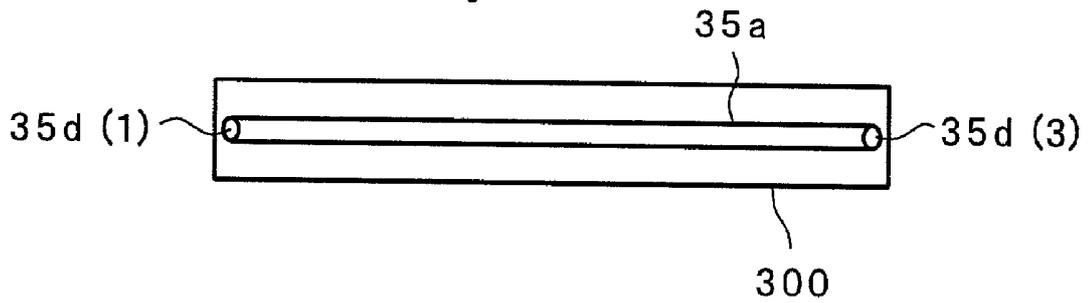


FIG. 16A

FIG. 16B

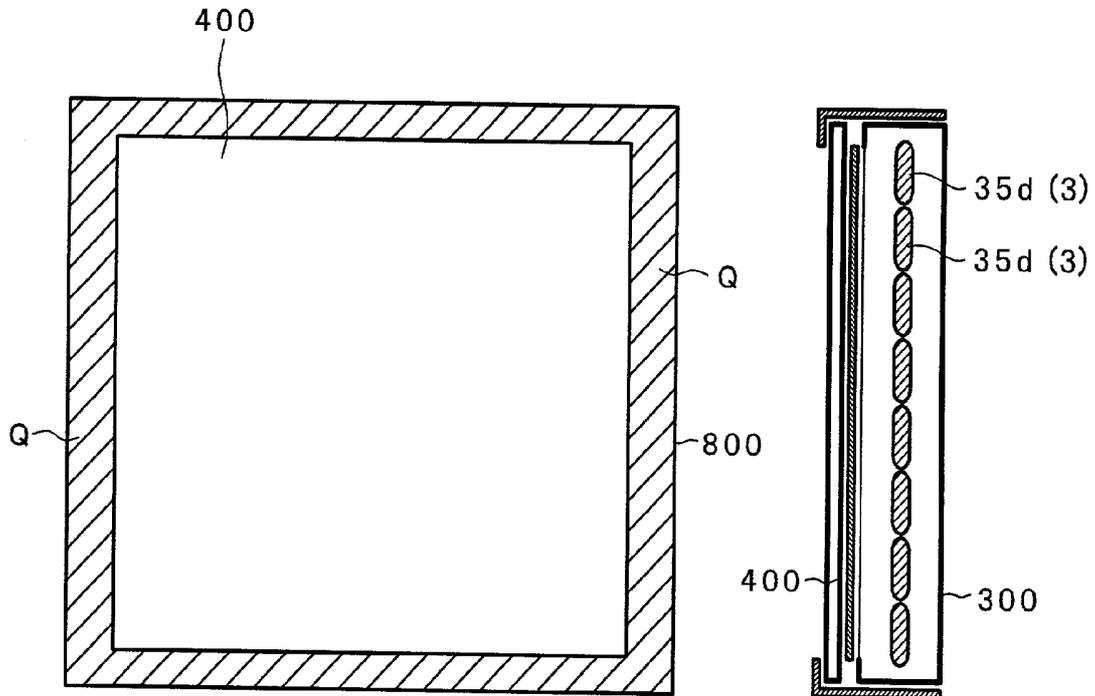


FIG. 16C

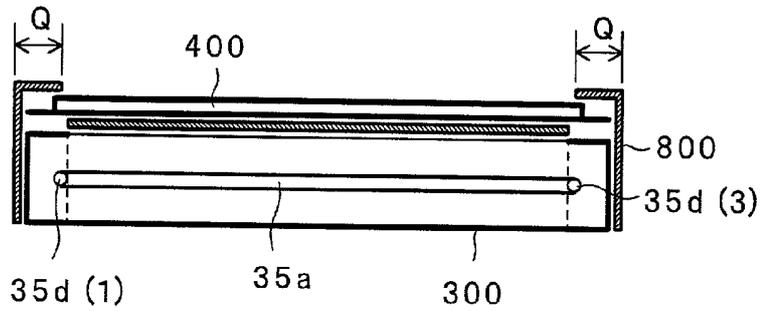


FIG. 17

LAMP LENGTH (DISTANCE BETWEEN ELECTRODES:
CONSTANT AT 300mm), ONE EXAMPLE AT DRIVING
FREQUENCY OF ABOUT 50 kHz

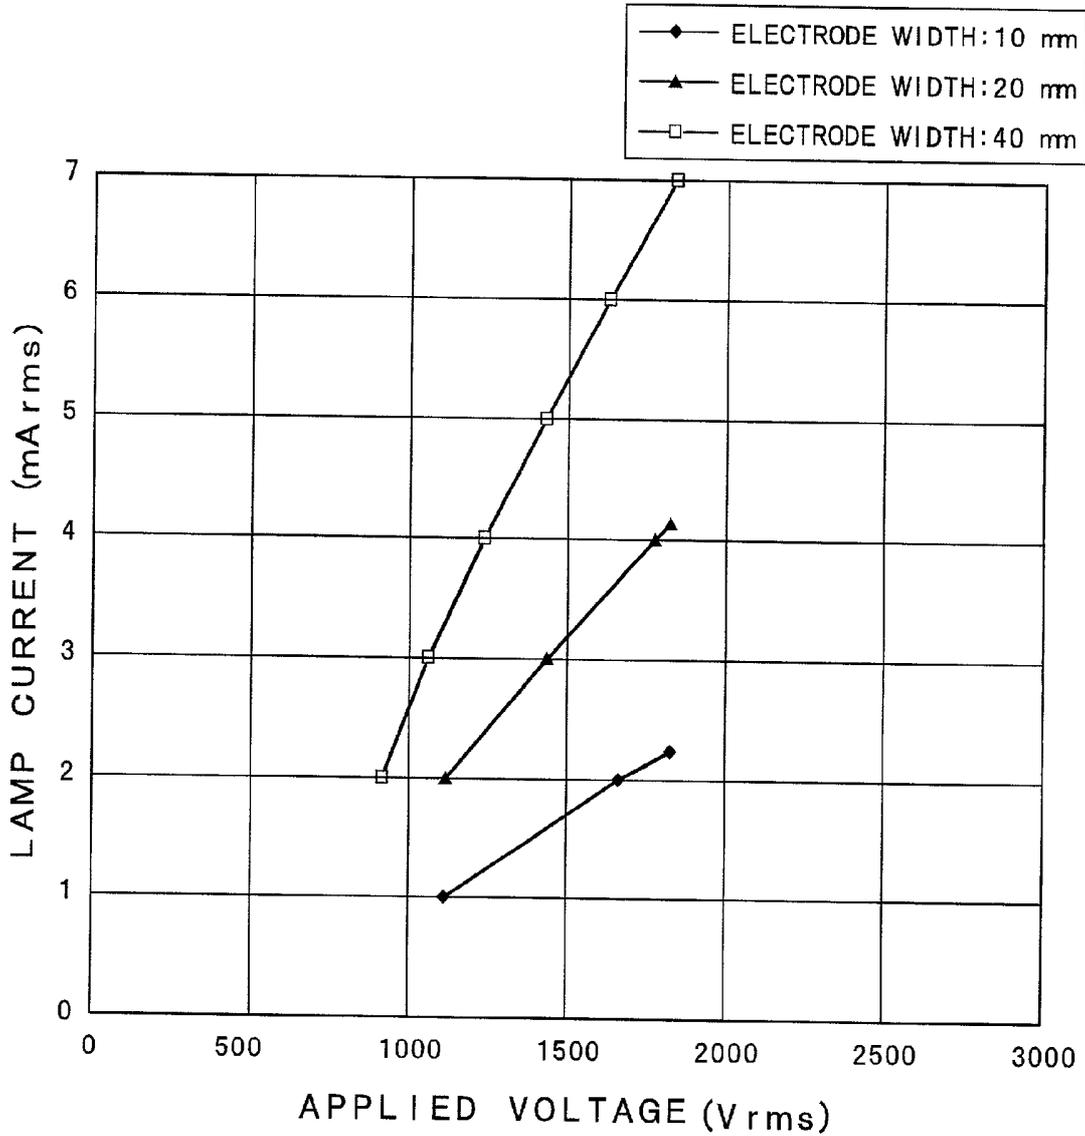


FIG. 18

APPLIED VOLTAGE: CONSTANT AT 1920 V, ONE EXAMPLE
AT DRIVING FREQUENCY OF ABOUT 50 kHz

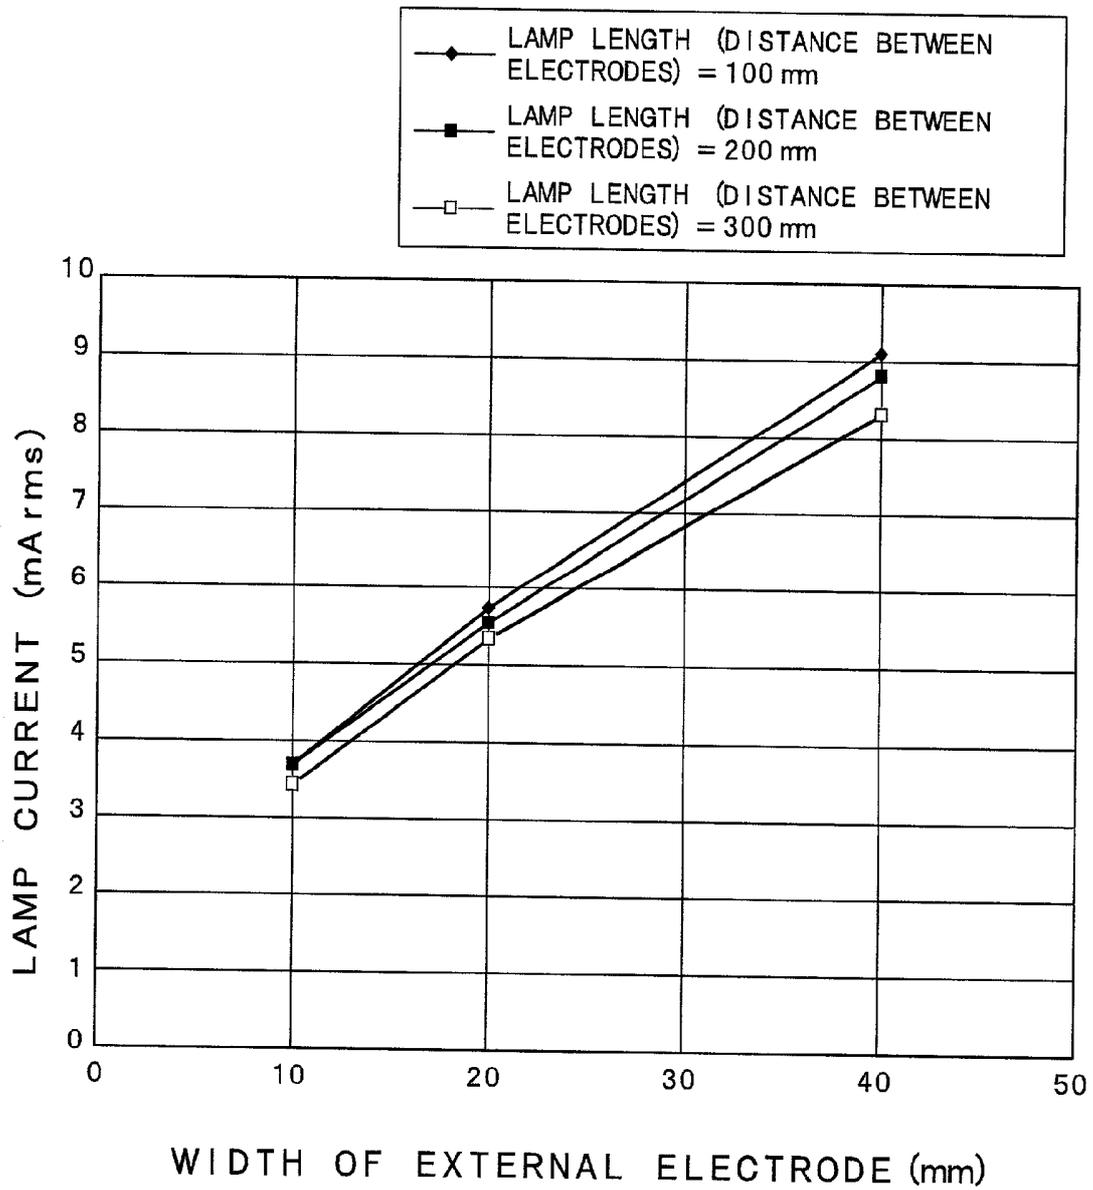


FIG. 19



FIG. 20

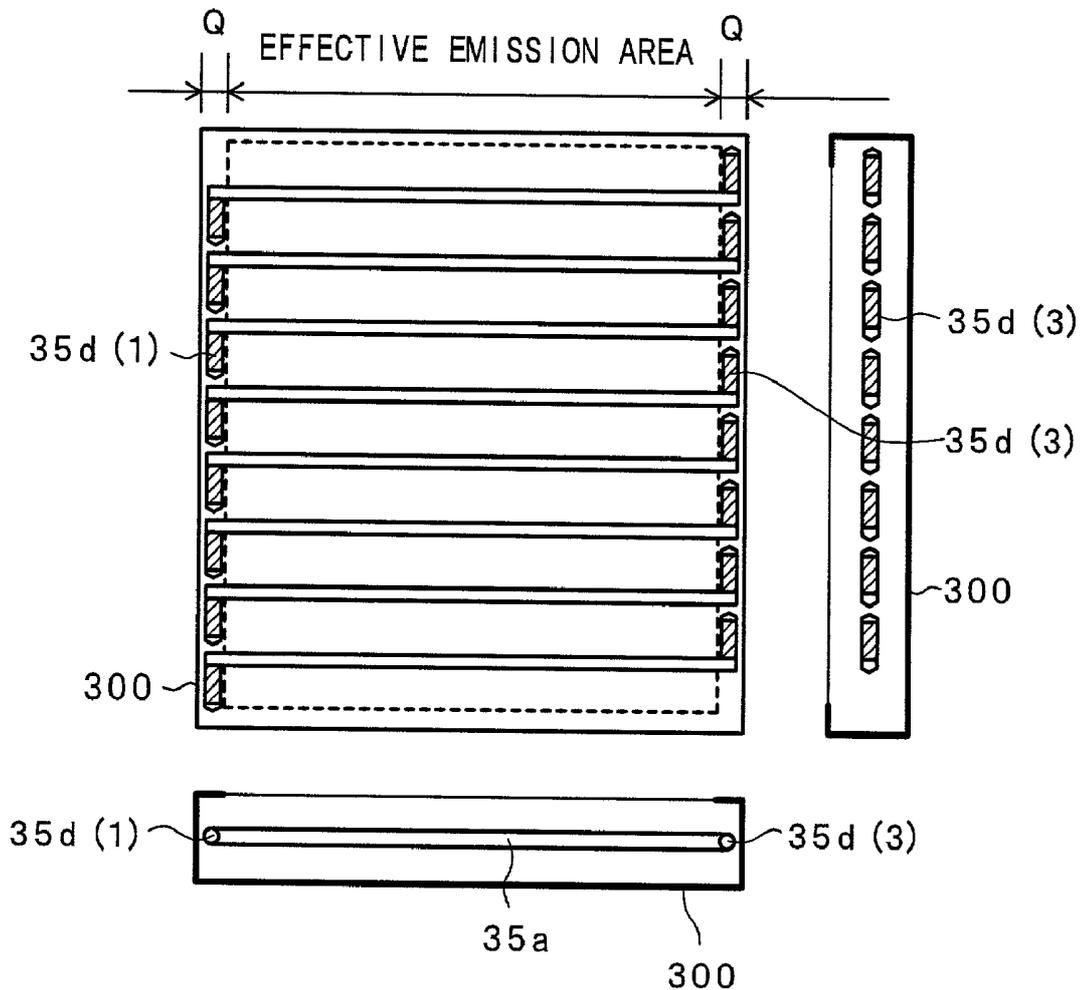


FIG. 21

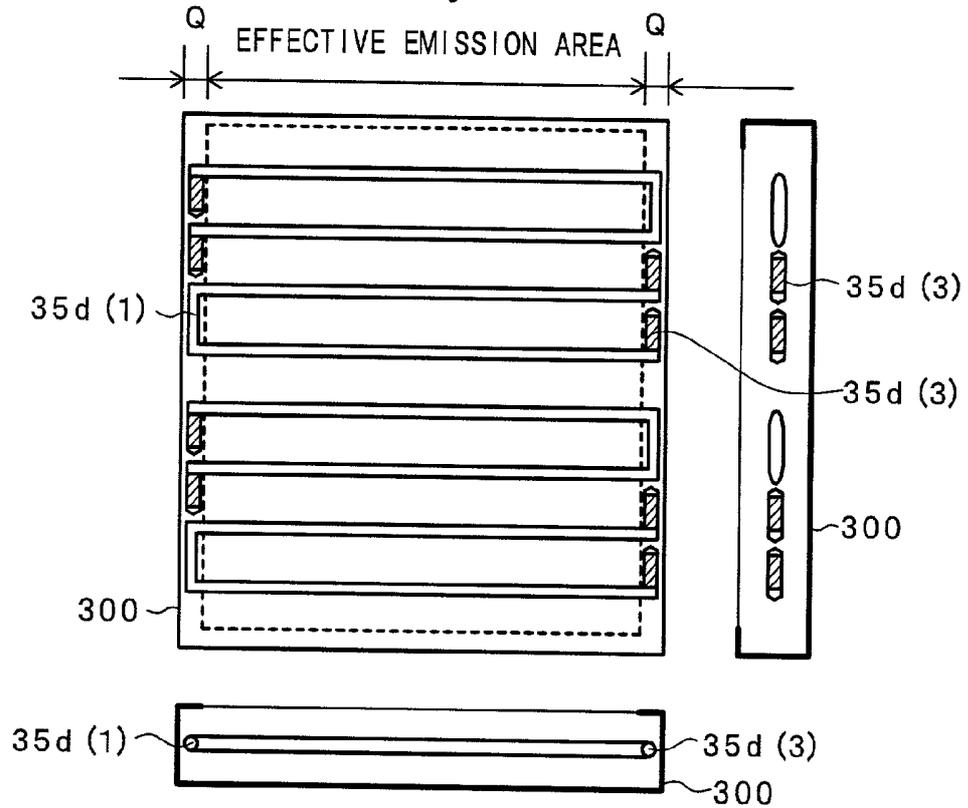


FIG. 22

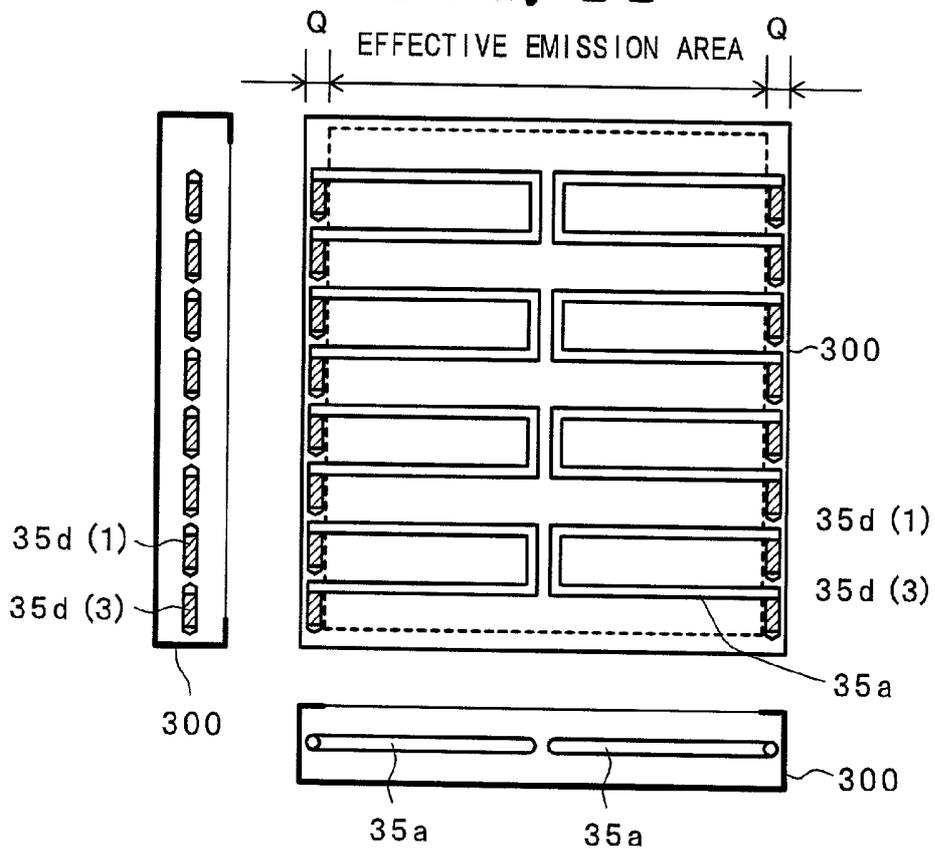


FIG. 23

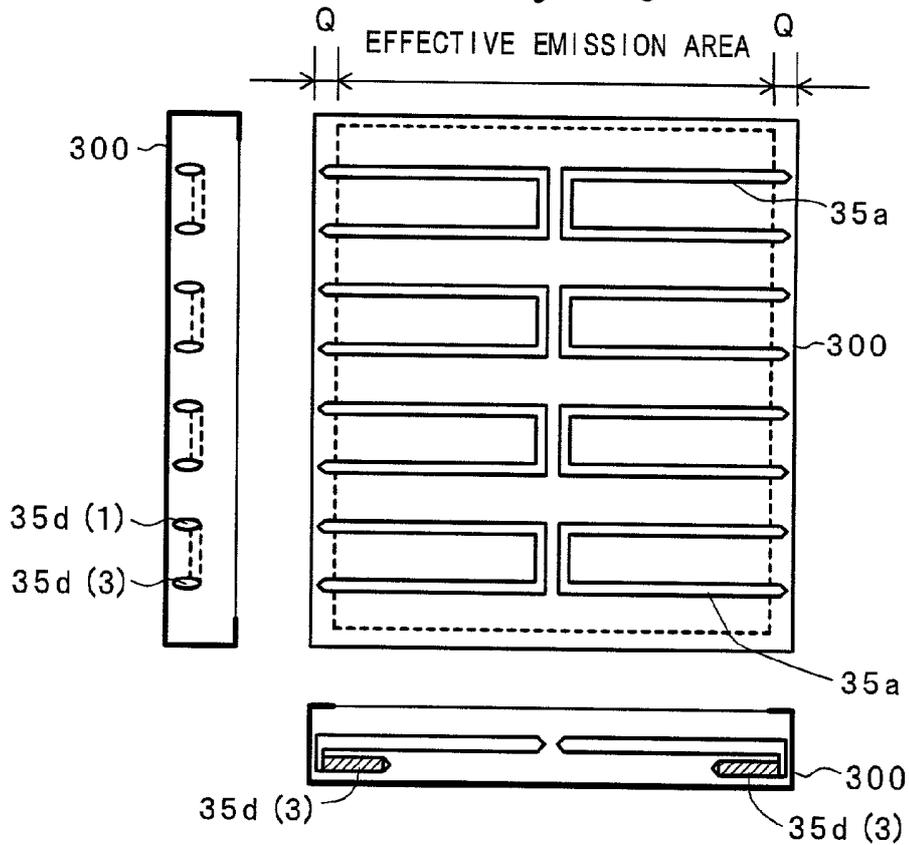


FIG. 24

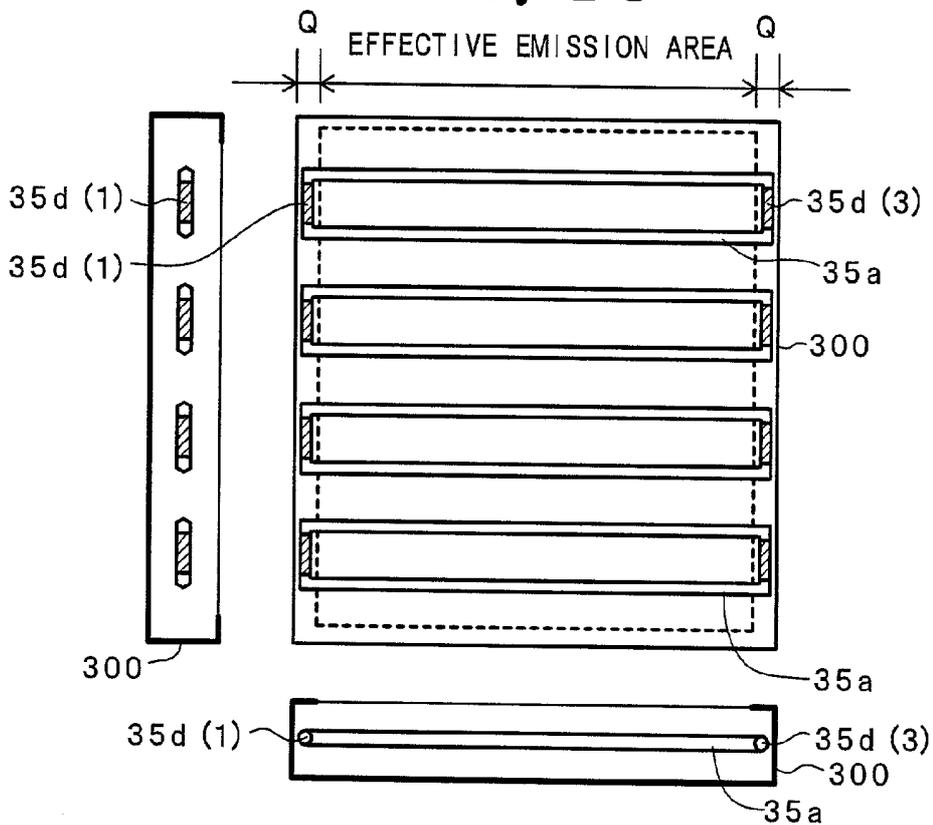


FIG. 25

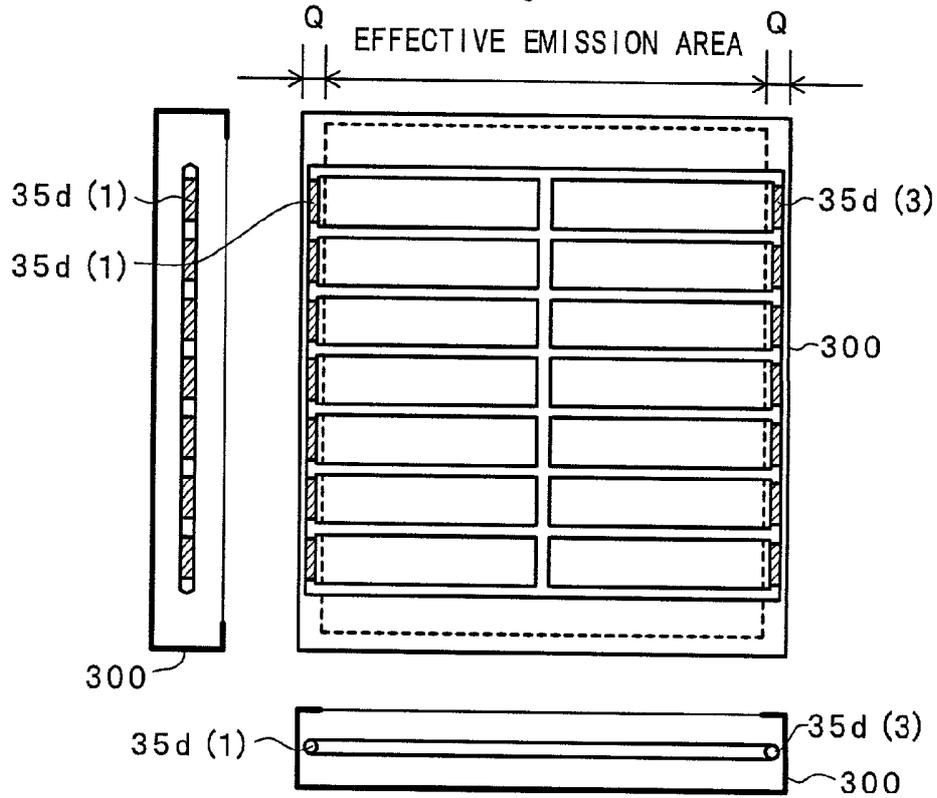


FIG. 26

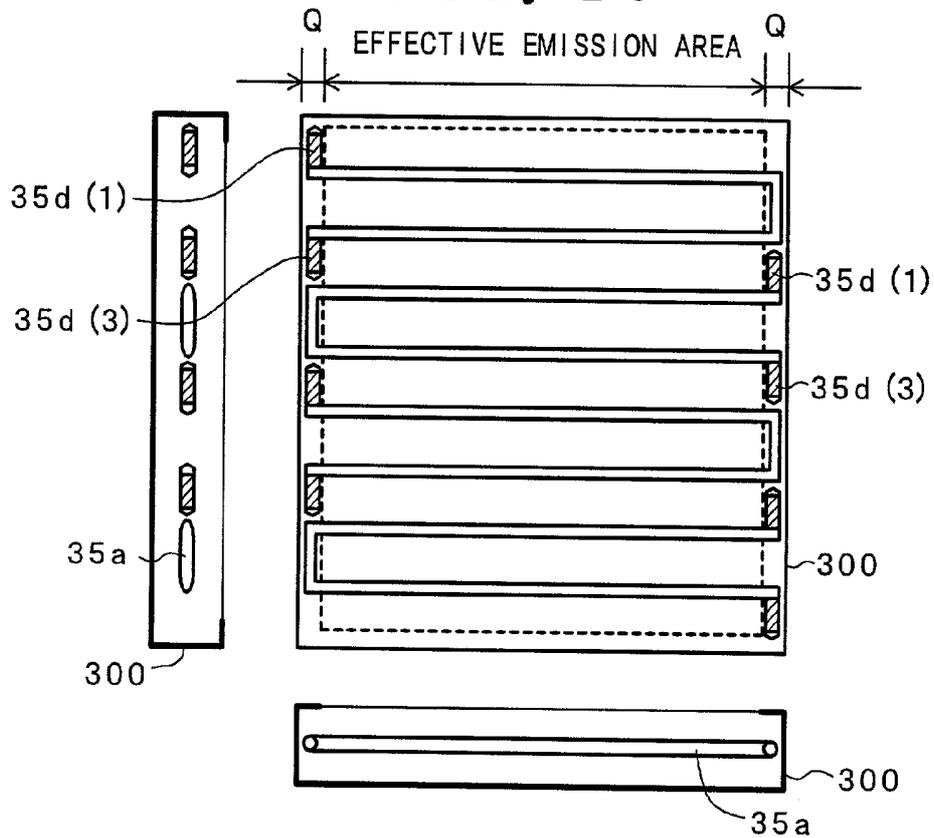


FIG. 27

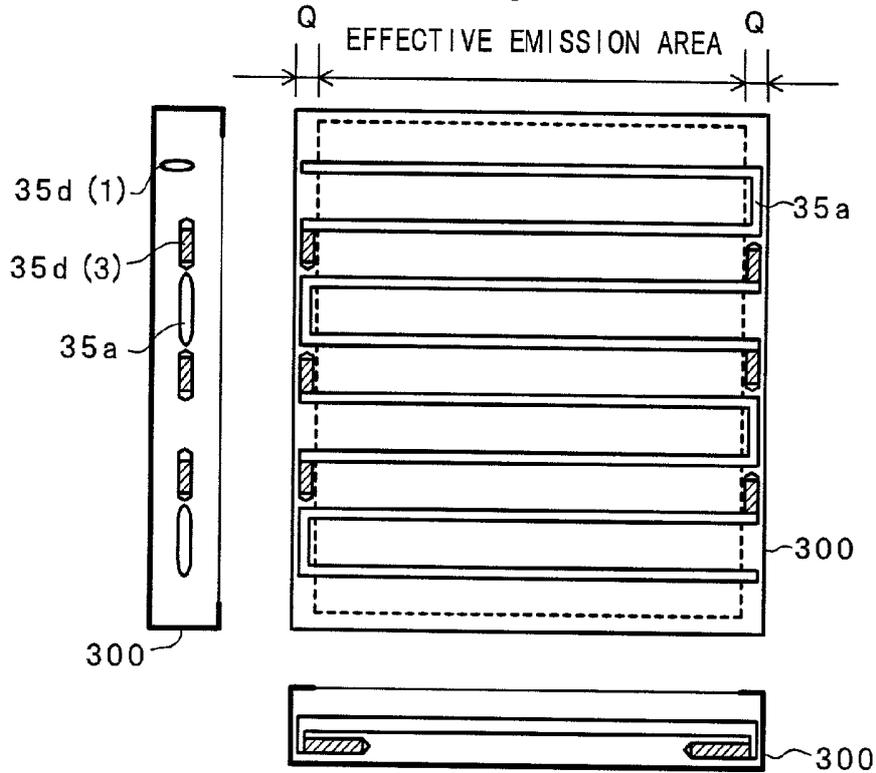


FIG. 28

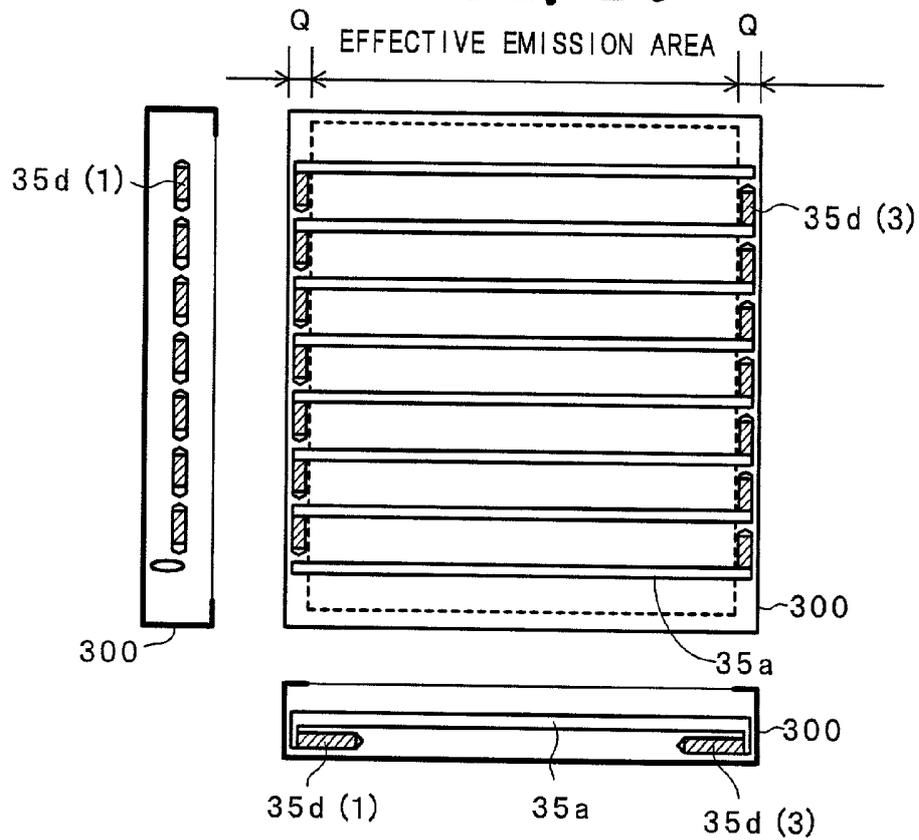


FIG. 29

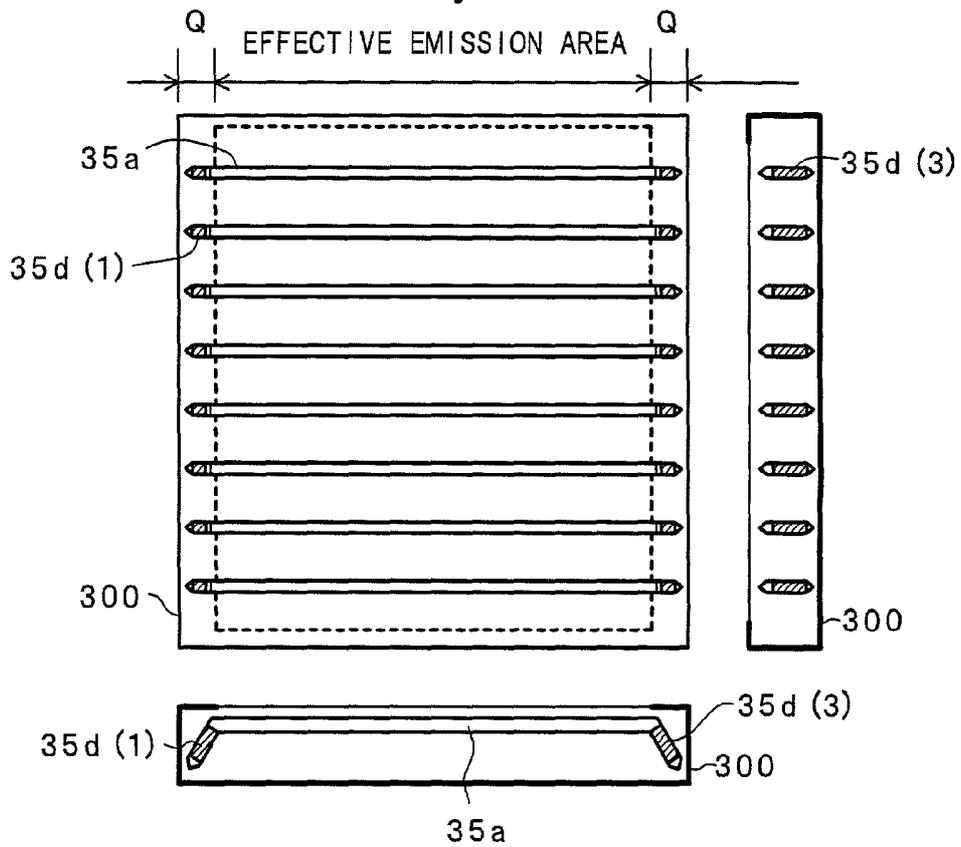


FIG. 30

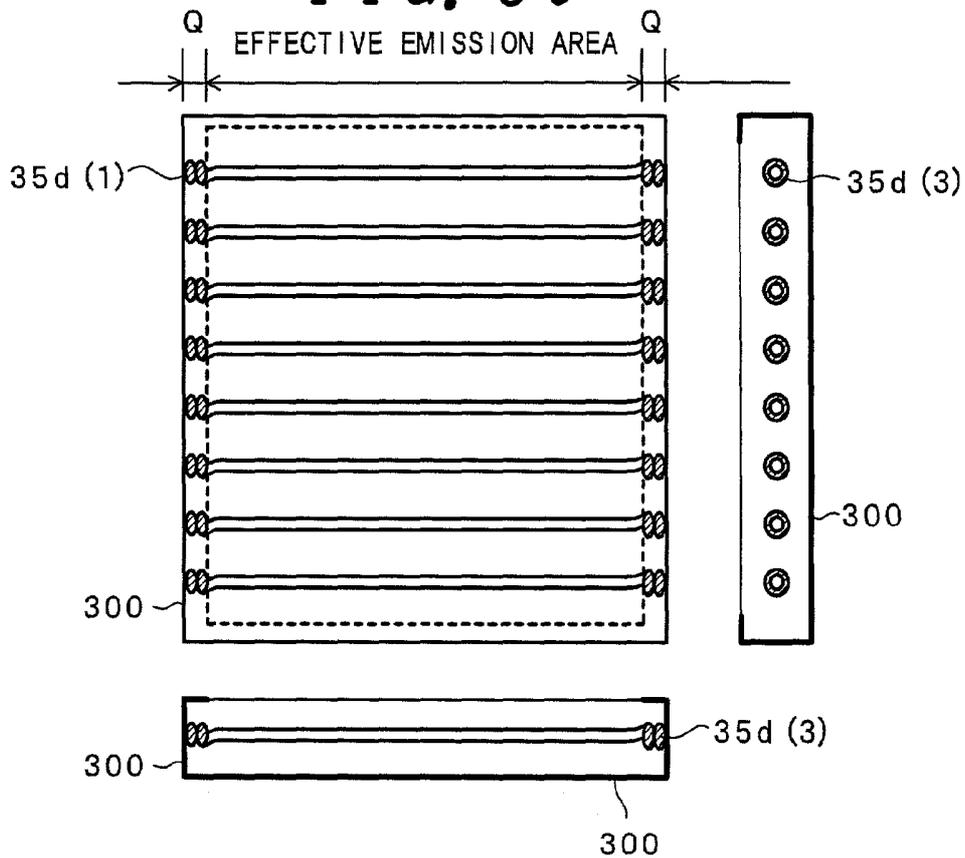


FIG. 31

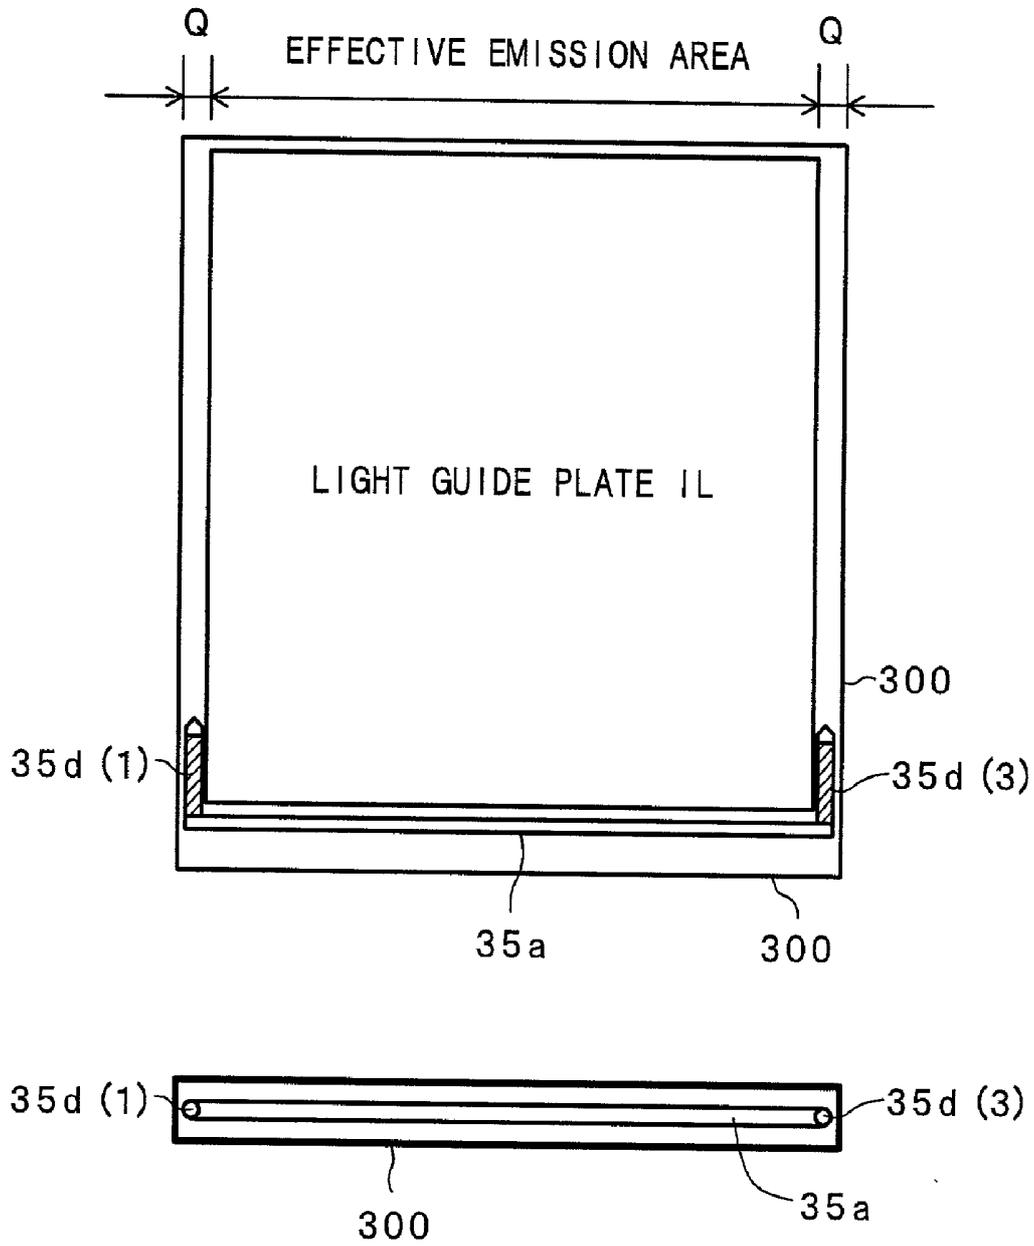


FIG. 32

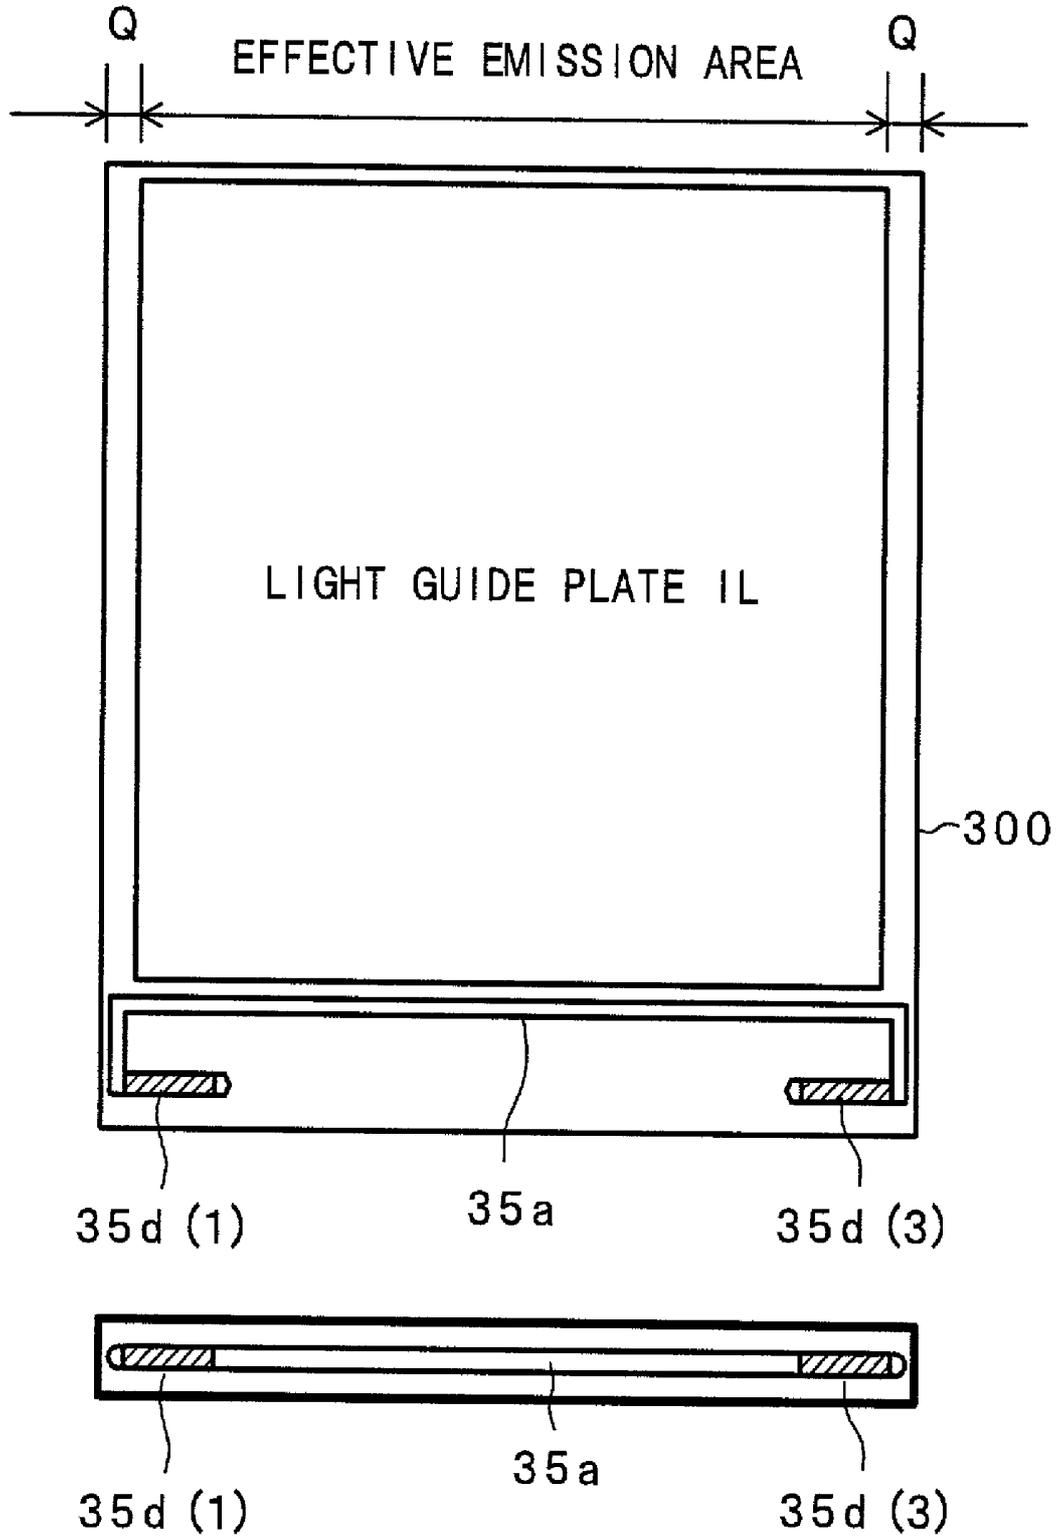


FIG. 33

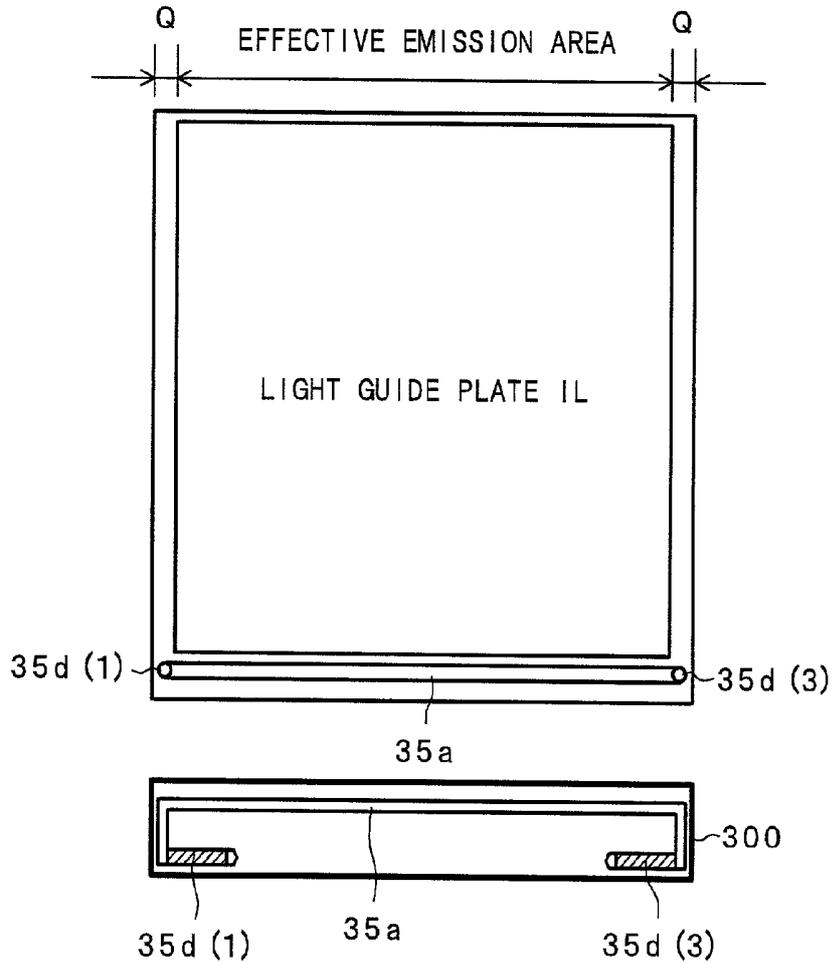


FIG. 34

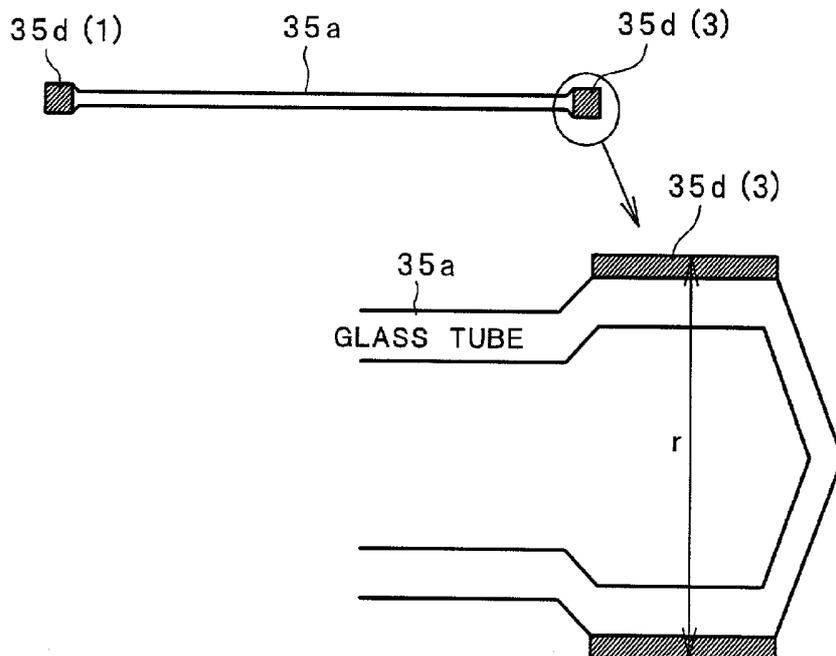


FIG. 35

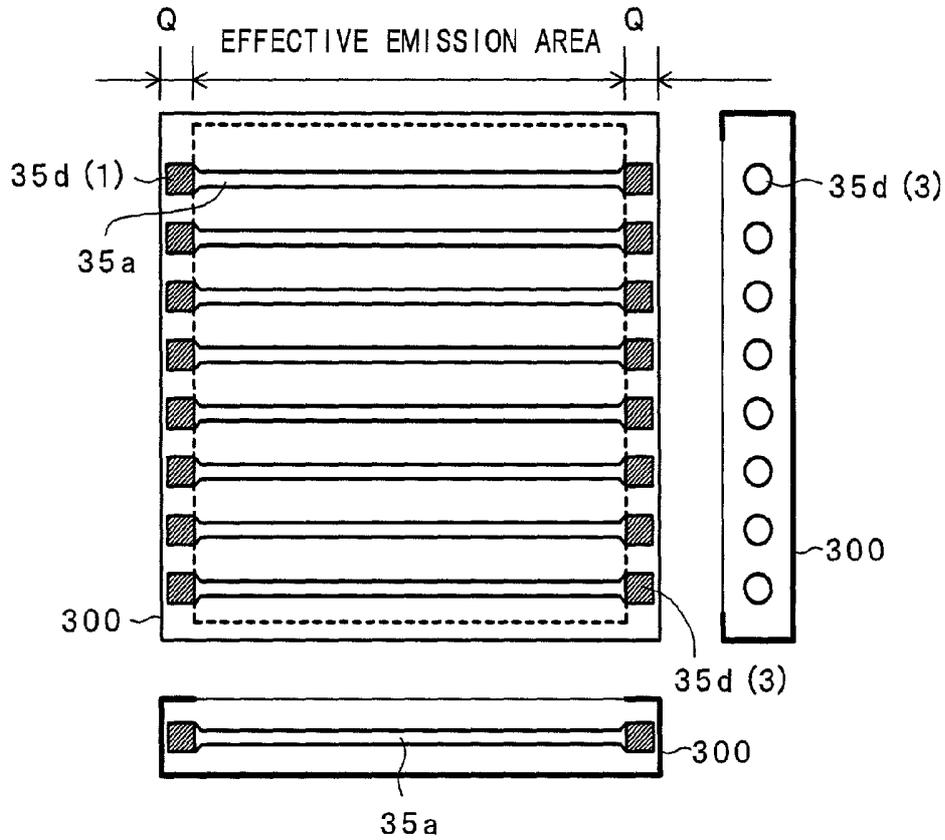


FIG. 36

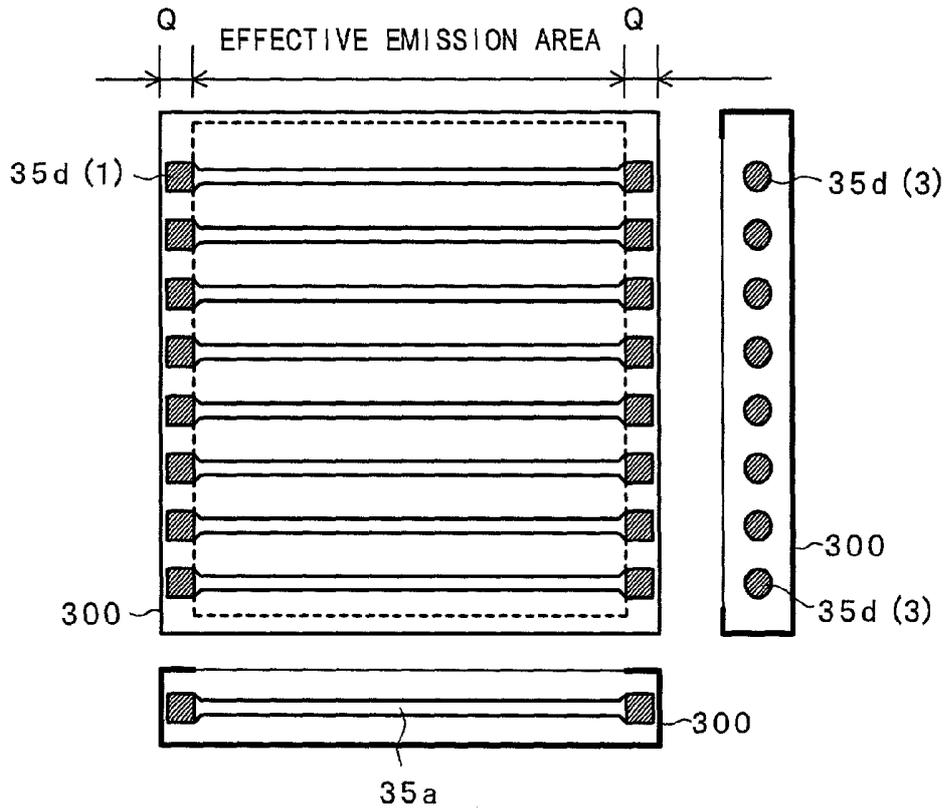


FIG. 37

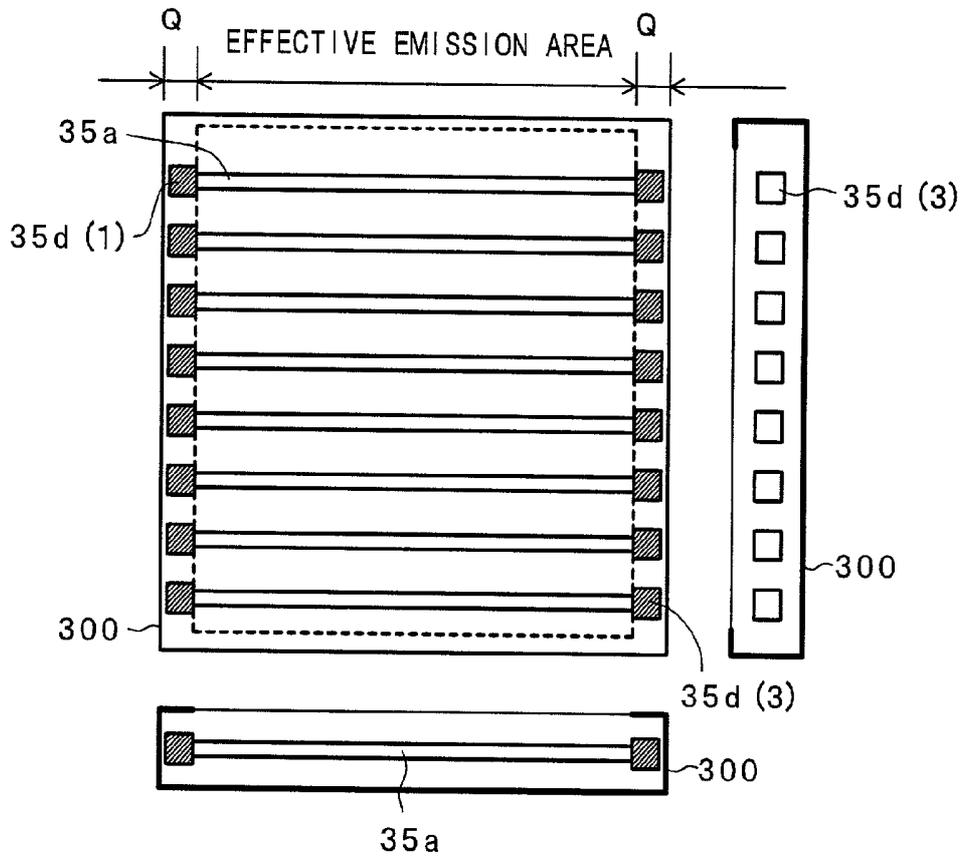


FIG. 38

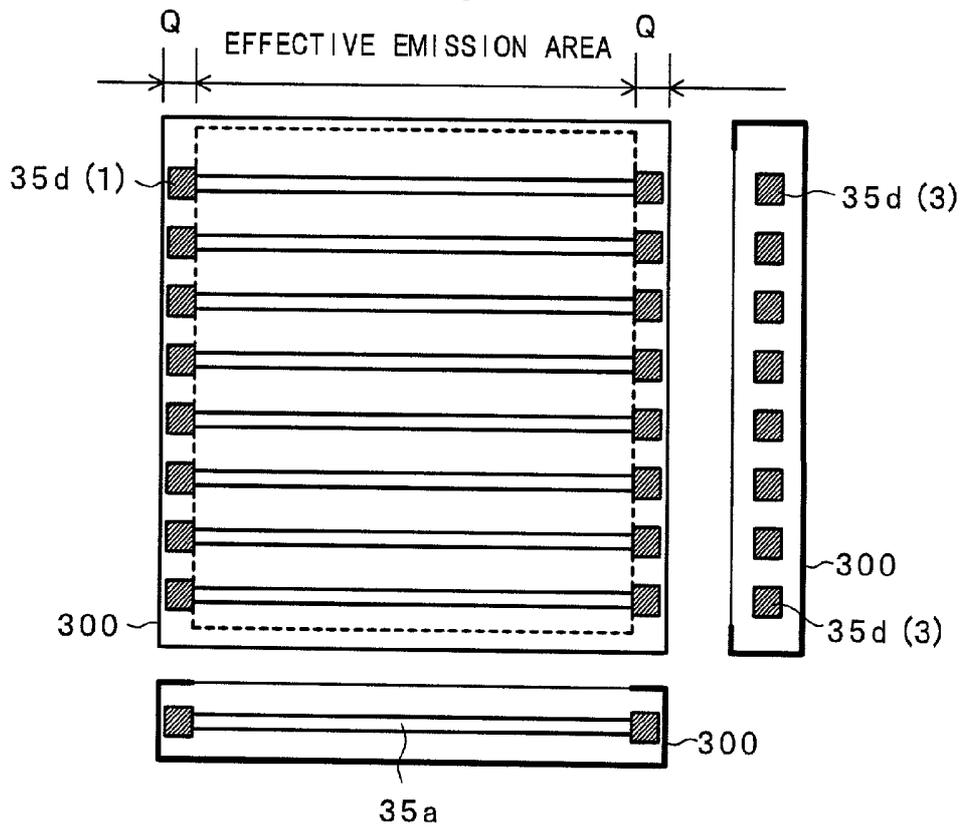


FIG. 39A

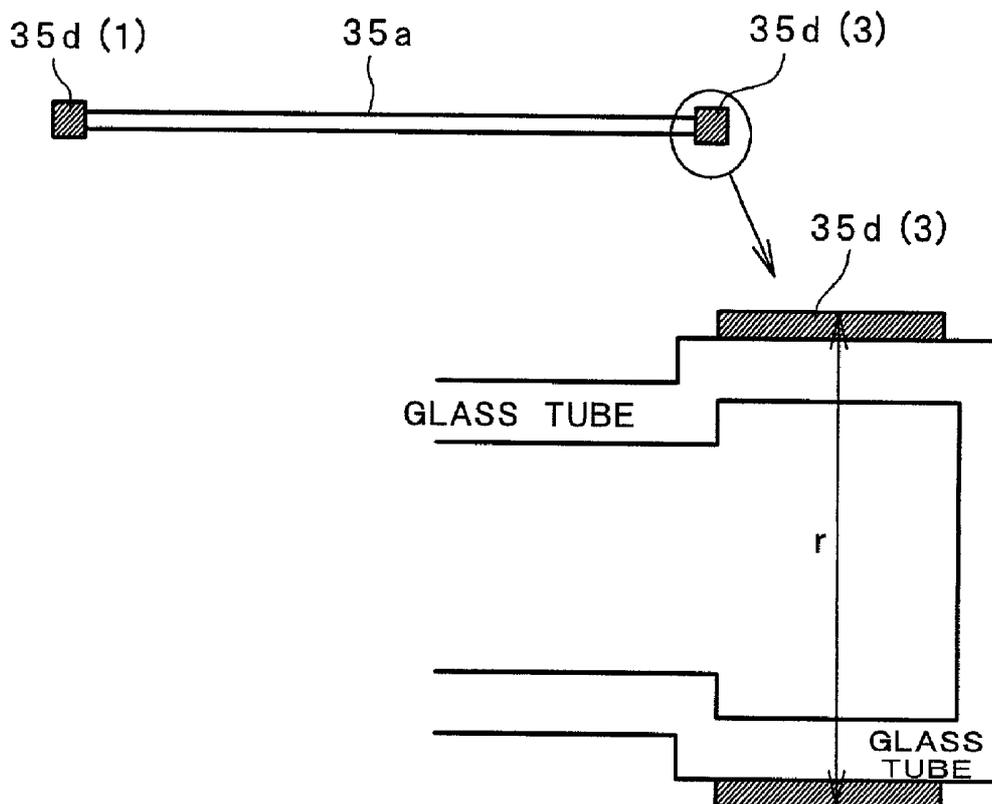


FIG. 39B

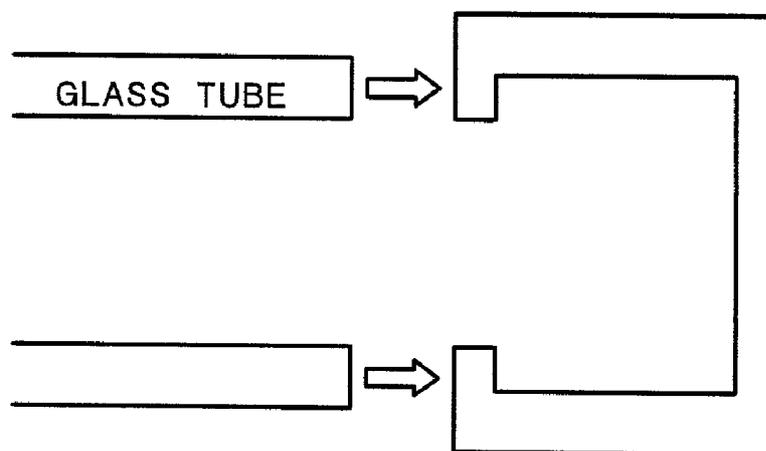


FIG. 40


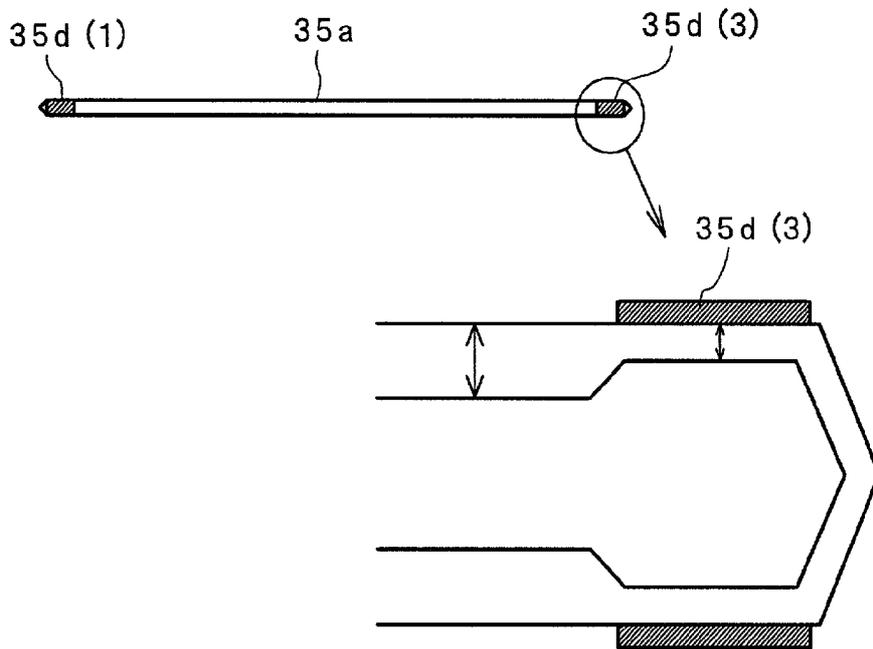


FIG. 41

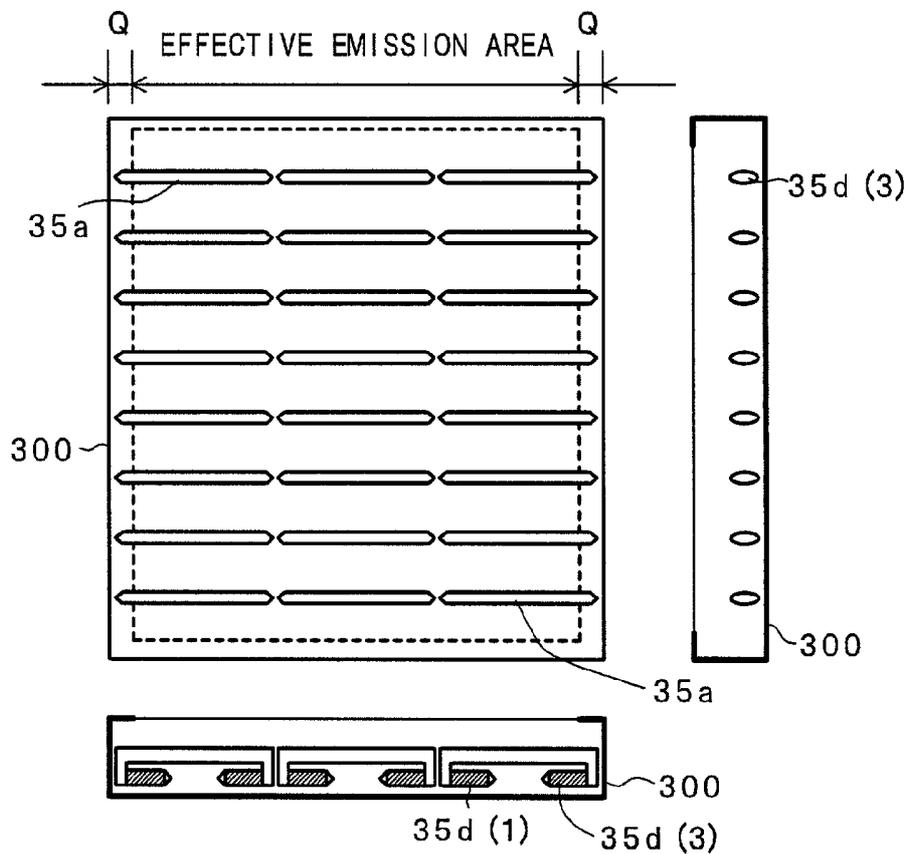

LIQUID CRYSTAL DISPLAY

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a liquid crystal display device, and particularly, to a liquid crystal display device made of a liquid crystal display panel and a backlight disposed on the back side of the liquid crystal display panel

[0003] 2. Background Art

[0004] A liquid crystal display device includes a vessel made of transparent substrates disposed to be opposed to each other with a liquid crystal interposed therebetween, and multiple pixels formed in the spreading direction of the liquid crystal

[0005] In this case, each of the pixels only has the function of controlling the amount of light being transmitted through the liquid crystal, and does not emit light in itself. For this reason, ordinarily, a backlight is disposed on the back side of the liquid crystal display panel.

[0006] This backlight is provided with not only a light source but also a diffusing sheet and a reflector in order to make uniform the irradiation of light onto the liquid crystal display panel.

[0007] The light source uses a cold-cathode fluorescent tube (CFL) having a length approximately equal to the length of one side of the liquid crystal display panel, and is made to function as an illuminant by a voltage being applied to each of the electrodes formed to project from the opposite ends of the tube.

[0008] However, in the liquid crystal display device having such a construction, the life of the light source is not sufficient, and it is no exaggeration to say that the life of the liquid crystal display device is determined by the life of the light source.

[0009] Specifically, during the lighting of the cold-cathode fluorescent tube, an electrode substance in side the tube is sputtered, and the electrode substance sticks to the tube wall. This stuck electrode substance can be recognized as a black substance at the out side of the tube.

[0010] The electrode substance which is stuck to the tube wall is alloyed (forms an amalgam) with mercury in the tube, and the consumption of mercury leads to the end of the life of the cold-cathode fluorescent tube.

SUMMARY OF THE INVENTION

[0011] The invention has been made in view of the above-described problems, and an object of the invention is to provide a liquid crystal display device the life of which can be lengthened.

[0012] An other object of the invention is to provide a liquid crystal display device in which it is possible to narrow an area called a picture frame (the area between the outline of the outer frame of the liquid crystal display device and the outline of its display part).

[0013] Representative aspects of the invention disclosed herein will be described below in brief.

[0014] A liquid crystal display device according to the invention includes, for example, a liquid crystal display panel having a display part in its central portion except its periphery and a backlight disposed on a back side of the liquid crystal display panel. The backlight includes a discharge tube having electrodes at at least its opposite ends, and the electrodes are disposed at the exterior of the discharge tube. The opposite end portions of the discharge tube where the respective electrodes are disposed are positioned to be superposed on the periphery of the liquid crystal display panel, and are bent with an angle with respect to the central axis of the discharge tube.

[0015] In the liquid crystal display device constructed in this manner, the electrodes of the discharge tube which serves as a light source are disposed at the exterior of the discharge tube; that is to say, the electrodes are not formed in side the discharge tube. Accordingly, mercury in the discharge tube is not consumed by electrodes, where by it is possible to lengthen the life of the light source.

[0016] The opposite end portions of the discharge tube where the respective electrodes are disposed are positioned to be superposed on an area other than the display part of the liquid crystal display panel, and are bent with an angle with respect to the central axis of the discharge tube. Accordingly, it is possible to narrow an area called a picture frame.

[0017] In the case of the construction in which the electrodes of the discharge tube are disposed at the exterior of the tube, it has been confirmed that the discharge effect of the discharge tube can be enhanced by increasing the width of each of the electrodes along the axial direction of the discharge tube.

[0018] Accordingly, in a case where the portions of the electrodes are positioned to be superposed on the area other than the display part of the liquid crystal display panel without being bent, the width occupied by the area called a picture frame becomes large. However, this disadvantage can be solved by adopting the above-described construction.

[0019] Contrarily, in a case where it is not necessary to narrow the width of the area of the picture frame, by bending the opposite end portions of the discharge tube where the respective electrodes are disposed, it is possible to increase the lengths of the opposite end portions, and hence it is possible to increase the width of each of the electrodes. Accordingly, it is possible to enhance the discharge effect of the discharge tube.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The invention will become more readily appreciated and understood from the following detailed description of preferred embodiments of the invention when taken in conjunction with the accompanying drawings, in which

[0021] **FIG. 1** is an equivalent circuit diagram showing one embodiment of the liquid crystal display device according to the invention;

[0022] **FIG. 2** is an exploded perspective view showing one embodiment of the liquid crystal display device according to the invention;

[0023] **FIG. 3** is a plan view showing one embodiment of a pixel of the liquid crystal display device according to the invention;

- [0024] **FIG. 4** is an exploded perspective view showing one embodiment of a backlight of the liquid crystal display device according to the invention;
- [0025] **FIG. 5** is a perspective view showing one embodiment of a light source to be incorporated into the backlight of the liquid crystal display device according to the invention;
- [0026] **FIGS. 6A and 6B** are cross-sectional views showing cross sections of a discharge tube which constitutes the light source of the liquid crystal display device according to the invention;
- [0027] **FIGS. 7A to 7C** are graphs showing the illuminance distribution of the light source of the liquid crystal display device according to the invention;
- [0028] **FIGS. 8A and 8B** are a plan view and a cross-sectional view showing one embodiment of the backlight of the liquid crystal display device according to the invention;
- [0029] **FIG. 9** is a graph showing the relationship between the frequency of a power source and the average illuminance of the backlight of the liquid crystal display device according to the invention;
- [0030] **FIG. 10** is a perspective view showing one embodiment of a resin frame of the liquid crystal display device according to the invention;
- [0031] **FIG. 11** is an explanatory view showing one embodiment of a high-frequency power source board disposed on the reverse side of the resin frame of the liquid crystal display device according to the invention;
- [0032] **FIG. 12** is a view including five side views showing the construction of an assembly of the liquid crystal display device according to the invention;
- [0033] **FIG. 13** is a cross-sectional view showing another embodiment of the liquid crystal display device according to the invention;
- [0034] **FIGS. 14A to 14C** are explanatory views showing other embodiments of the light source of the liquid crystal display device according to the invention;
- [0035] **FIGS. 15A and 15B** are views showing the construction of another embodiment of the backlight unit of the liquid crystal display device according to the invention;
- [0036] **FIGS. 16A, 16B and 16C** are explanatory views showing the advantage of the embodiment shown in **FIGS. 15A and 15B**;
- [0037] **FIG. 17** is a graph showing the advantage obtained by increasing the lengths of the electrodes of the discharge tube
- [0038] **FIG. 18** is a graph showing the advantage obtained by increasing the lengths of the electrodes of the discharge tube
- [0039] **FIG. 19** is a view showing the equivalent circuit of the discharge tube which causes a discharge
- [0040] **FIG. 20** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention ;
- [0041] **FIG. 21** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention
- [0042] **FIG. 22** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention
- [0043] **FIG. 23** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention;
- [0044] **FIG. 24** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention;
- [0045] **FIG. 25** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention;
- [0046] **FIG. 26** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention
- [0047] **FIG. 27** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention
- [0048] **FIG. 28** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention
- [0049] **FIG. 29** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention
- [0050] **FIG. 30** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention;
- [0051] **FIG. 31** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention;
- [0052] **FIG. 32** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention;
- [0053] **FIG. 33** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention
- [0054] **FIG. 34** is a construction view showing another embodiment of a discharge tube to be provided in the backlight unit of the liquid crystal display device according to the invention
- [0055] **FIG. 35** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention
- [0056] **FIG. 36** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention;
- [0057] **FIG. 37** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention;
- [0058] **FIG. 38** is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention **FIGS. 39A and 39B** are construction views showing another embodiment of

a discharge tube to be provided in the backlight unit of the liquid crystal display device according to the invention;

[0059] FIG. 40 is a construction view showing another embodiment of a discharge tube to be provided in the backlight unit of the liquid crystal display device according to the invention; and

[0060] FIG. 41 is a construction view showing another embodiment of the backlight unit of the liquid crystal display device according to the invention.

DETAILED DESCRIPTION

[0061] Preferred embodiments of a liquid crystal display device according to the invention will be described below with reference to the accompanying drawings.

Embodiment 1

Equivalent Circuit of Liquid Crystal Display Device

[0062] FIG. 1 is an equivalent circuit diagram showing one embodiment of a liquid crystal display device according to the invention. FIG. 1 is a circuit diagram which is depicted to correspond to an actual geometrical arrangement.

[0063] In Embodiment 1, the invention is applied to a liquid crystal display device adopting a so-called in-plane-switching mode which is known as a mode having a wide viewing angle.

[0064] In FIG. 1, there is shown a liquid crystal display panel 1. This liquid crystal display panel 1 has a vessel made of transparent substrates 1A and 1B disposed to be opposed to each other with a liquid crystal interposed there between. In this case, one of the transparent substrates (in FIG. 1, a lower substrate: the matrix substrate 1A) is formed to be slightly larger in size than the other transparent substrate (in FIG. 1, an upper substrate: the color filter substrate B). As shown in FIG. 1, the transparent substrates 1A and 1B are disposed in such a manner that the bottom and right peripheral edges of one of the transparent substrates 1A and 1B approximately coincide with those of the other.

[0065] Accordingly, as viewed in FIG. 1, the left and top peripheries of the transparent substrate 1A are disposed to be extended outwardly from those of the other transparent substrate 1B. As will be described later in detail, the portion of the transparent substrate 1A that is disposed to be extended outwardly from the transparent substrate 1B is used as an area in which the gate driver circuits 5 and drain driver circuits 6 are mounted.

[0066] Pixels 2 are disposed in matrix form in the area in which the transparent substrates 1A and 1B are superposed on each other. Scanning signal lines 3 are disposed to be extended in the x direction and to be juxtaposed in the y direction as viewed in FIG. 1, while video signal lines 4 are disposed to be extended in the y direction and to be juxtaposed in the x direction as viewed in FIG. 1, and the respective pixels 2 are formed in areas each of which is surrounded by adjacent ones of the scanning signal lines 3 and adjacent ones of the video signal lines 4. Each of the pixels 2 is provided with at least a switching element TFT to be driven by the supply of a scanning signal from one of

the adjacent scanning signal lines 3, and a pixel electrode to which apply a video signal to be supplied from one of the adjacent video signal lines 4 via this switching element TFT.

[0067] In Embodiment 1, each of the pixels 2 is of the type which adopts the so-called in-plane-switching mode as described above, and is also provided with a counter electrode and an added capacitance element in addition to the switching element TFT and the pixel electrode, as will be described later.

[0068] Each of the scanning signal lines 3 has one end (in FIG. 1, the left end) disposed to be extended to the outside of the transparent substrate 1B, and is connected to the output terminal of the corresponding one of the gate driver circuits (ICs) 5 mounted on the transparent substrate 1A.

[0069] In this case, plural gate driver circuits 5 are disposed, and mutually adjacent ones of the scanning signal lines 3 are grouped and each of the grouped scanning signal lines 3 is connected to the proximate one of the gate driver circuits 5.

[0070] Similarly, each of the video signal lines 4 has one end (in FIG. 1, the top end) disposed to be extended to the outside of the transparent substrate 1B, and is connected to the output terminal of the corresponding one of the drain driver circuits (IC) 6 mounted on the transparent substrate 1A.

[0071] In this case, plural drain driver circuits 6 are disposed, and mutually adjacent ones of the video signal lines 4 are grouped and each of the grouped video signal lines 4 is connected to the proximate one of the corresponding one of the drain driver circuits 6.

[0072] A control circuit board 10 (a control circuit board 10) is disposed in proximity to the liquid crystal display panel 1 on which the gate driver circuits 5 and the drain driver circuits 6 are mounted in the above described manner, and a control circuit 12 for supplying input signals to the gate driver circuits 5 and the drain driver circuits 6 is mounted on the control circuit board 10 in addition to a power supply circuit 11 and others.

[0073] Signals from the control circuit 12 are supplied to the gate driver circuits 5 and the drain driver circuits 6 via flexible printed wiring boards (a gate circuit board 15, a drain circuit board 16A and a drain circuit board 16B).

[0074] Specifically, a flexible printed wiring board (the gate circuit board 15) which is provided with terminals oppositely connected to the input terminals of the respective gate driver circuits 5 is arranged on the side of the gate driver circuits 5.

[0075] A portion of the gate circuit board 15 is formed to be extended to the control circuit board 10, and the gate circuit board 15 is connected to the control circuit board 10 via a connecting part 18 at the extended portion.

[0076] The output signals from the control circuit 12 mounted on the control circuit board 10 are inputted to the respective gate driver circuits 5 via interconnection layers on the control circuit board 10, the connecting part 18 and interconnection layers on the gate circuit board 15.

[0077] The drain circuit boards 16A and 16B each of which is provided with terminals oppositely connected to the

input terminals of the respective drain driver circuits **6** are disposed on the side of the drain driver circuits **6**.

[0078] Portions of the drain circuit boards **16A** and **16B** are formed to be extended to the control circuit board **10**, and are connected to the control circuit board **10** via connecting parts **19A** and **19B** at the extended portions, respectively.

[0079] The output signals from the control circuit **12** mounted on the control circuit board **10** are inputted to the drain circuit boards **16A** and **16B** via the interconnection layers on the control circuit board **10**, the respective connecting parts **19A** and **19B**, and inter connection layers on the respective drain circuit boards **16A** and **16B**.

[0080] The drain circuit boards **16A** and **16B** on the side of the drain driver circuits **6** are provided as two separate circuit boards, as shown in **FIG. 1**. This is intended to prevent, for example, harmful effects caused by thermal expansion due to an increase in the x direction of **FIG. 1** in the length of either of the drain circuit boards **16A** or **16B** which accompanies an increase in the size of the liquid crystal display panel **1**.

[0081] The out put signals from the control circuit **12** mounted on the control circuit board **10** are inputted to the corresponding drain driver circuits **6** via the connecting part **19A** of the drain circuit board **16A** and the connecting part **19B** of the drain circuit board **16B**.

[0082] In addition, a video signal is supplied from a video signal source **22** to the control circuit board **10** through a cable **23** via an interface circuit board **24**, and is inputted to the control circuit **12** mounted on the control circuit board **10**.

[0083] In **FIG. 1**, the liquid crystal display panel **1**, the gate circuit board **15**, the drain circuit boards **16A** and **16B** and the control circuit board **10** are shown to be positioned in approximately the same plane. Actually, the control circuit board **10** is bent at a portion where the gate circuit board **15** and the drain circuit boards **16A** and **16B** are mounted, and is positioned at approximately right angles to the liquid crystal display panel **1**.

[0084] This construction is intended to reduce the area of a so-called frame. The term frame used herein means the area between the outline of the outer frame of the liquid crystal display device and the outline of its display part, and by reducing this area, it is possible to obtain the advantage of increasing the area of the display part with respect to the outer frame.

Module of Liquid Crystal Display Device

[0085] **FIG. 2** is an exploded perspective view showing one embodiment of a module of a liquid crystal display device according to the invention.

[0086] The liquid crystal display device shown in **FIG. 2** includes major parts such as a liquid crystal display panel module **400**, a backlight unit **300**, a resin frame **500**, an inside frame **700** and an upper frame **800**, all of which are assembled in a module form.

[0087] Incidentally, in this embodiment, a reflector which constitutes part of the backlight unit **300** is formed at the bottom of the resin frame **500**. The resin frame **500** and the

backlight unit **300** are difficult to physically distinguish from each other, but can be functionally distinguished as described above.

[0088] These members will be described below in order

Liquid Crystal Display Panel Module

[0089] This liquid crystal display panel module **400** includes the liquid crystal display panel **1**, the gate driver ICs **5** and the drain driver ICs **6** which are respectively made of plural semiconductor ICs mounted on the periphery of the liquid crystal display panel **1**, and the flexible gate circuit board **15** and drain circuit boards **16** (**16A** and **16B**) which are connected to the corresponding ones of the driver ICs **5** and **6**.

[0090] Specifically, the output from the control circuit board **10** to be described later in detail is inputted to the gate driver ICs **5** and the drain driver ICs **6** on the liquid crystal display panel **1** via the gate circuit board **15** and the drain circuit boards **16A** and **16B**, respectively, and the outputs from the gate driver ICs **5** and the drain driver ICs **6** are inputted to the corresponding ones of the scanning signal lines **2** and the video signal lines **3** of the liquid crystal display panel **1**.

[0091] The liquid crystal display panel **1** has a display area part which is made of multiple pixels disposed in matrix form, as described above, and one of pixels is shown in **FIG. 3**.

[0092] Referring to **FIG. 3**, the scanning signal lines **3** and counter voltage signal lines **50** are formed to be extended in the x direction on the main surface of the matrix substrate **1A**. As shown in **FIG. 3**, the area which is surrounded by the signal lines **3** and **50** as well as the video signal lines **4** which are formed to be extended in the y direction as will be described later, is formed as a pixel area.

[0093] In other words, in this embodiment, the counter voltage signal line **50** is formed to run between the adjacent scanning signal lines **3**, and pixel areas are respectively formed to extend in the $\pm y$ directions from the counter voltage signal line **50**.

[0094] With this construction, it is possible to reduce the number of the counter voltage signal lines **50** juxtaposed in the y direction to approximately half of the conventionally required number, where by it is possible to assign the areas occupied by the counter voltage signal lines **50** to the pixel areas and increase the total area of the pixel areas.

[0095] In each of the pixel areas, for example, three counter electrodes **50A** which are disposed to be extended in the y direction are formed at equal intervals integrally with the counter voltage signal line **50**. These counter electrodes **50A** are not connected to but extended to positions close to the scanning signal line **3**, and two outside ones of the counter electrodes **50A** are disposed adjacently to the respective video signal lines **3** and the remaining one is positioned in the center between the two outside ones.

[0096] Furthermore, an insulating film made of, for example, silicon nitride film is formed to cover the scanning signal line lines **3**, the counter voltage signal lines **50** and the counter electrodes **50A** on the main surface of the transparent substrate **1A** on which scanning signal lines **3** and the like are formed in the above-described manner. This insu-

lating film functions as an interlayer insulating film for insulating the video signal lines **2** (to be described later) from the scanning signal lines **3** and the counter voltage signal line **50**, and also functions as a gate insulating film for the thin film transistor TFT and as a dielectric film for a storage capacitor Cstg.

[0097] On the surface of the insulating film, a semiconductor layer **51** is formed in an area in which the thin film transistor TFT is formed. This semiconductor layer **51** is made of, for example, amorphous Si, and is formed to be superposed on the scanning signal line **3** in a portion close to one of the video signal lines **2** which will be described later. Thus, part of the scanning signal line **3** serves as the gate electrode of the thin film transistor TFT.

[0098] The video signal lines **2** which are extended in the y direction and juxtaposed in the x direction are formed on the surface of the insulating film. Each of the video signal lines **2** is integrally provided with a drain electrode **2A** which is formed to be extended to a portion of the surface of the semiconductor layer **51** which constitutes the thin film transistor TFT.

[0099] Furthermore, a pixel electrode **53** which is connected to a source electrode **53A** of the thin film transistor TFT is formed on the surface of the insulating film in the pixel area. This pixel electrode **53** is formed to extend in the y direction in the center between each of the counter electrodes **50A**. Specifically, one end of the pixel electrode **53** also serves as the source electrode **53A** of the thin film transistor TFT, and the pixel electrode **53** is extended in the y direction toward the counter voltage signal line **50** and is further extended in the x direction along the counter voltage signal line **50**, and is again extended in the y direction so as to form a C-like shape.

[0100] The portion of the pixel electrode **53** which is superposed on the counter voltage signal line **50** constitutes the storage capacitor Cstg which uses the above-described insulating film as its dielectric film, in the region between the pixel electrode **53** and the counter voltage signal line **50**. The storage capacitor Cstg serves the effect of storing video information in the pixel electrode **53** for a long time, for example, when the thin film transistor TFT is off.

[0101] The surface of the semiconductor layer **51** which corresponds to the interface between the drain electrode **2A** and the source electrode **53A** of the thin film transistor TFT is doped with phosphorus (P) to form a high-concentration layer, thereby providing ohmic contact at each of the drain electrode **2A** and the source electrode **53A**. The high-concentration layer is formed on the entire surface of the semiconductor layer **51**, and after the drain electrodes **2A** and the source electrodes **53A** have been formed, electrodes **2A** and **53A** are used as a mask to etch the high-concentration layer except the area in which the electrodes **2A** and **53A** are formed, thereby forming the above-described construction.

[0102] Then, a protective film made of, for example, silicon nitride film is formed on the upper surface of the insulating film on which the thin film transistors TFT, the video signal lines **2**, the pixel electrodes **53** and the storage capacitors Cstg are formed in the above-described manner, and an alignment film is formed on the upper surface of the protective film, to constitute a so-called lower substrate of the liquid crystal display panel **1**.

[0103] although not shown, a black matrix (denoted by reference numeral **54** in FIG. 3) which has apertures in portions corresponding to the respective pixel areas is formed in a liquid-crystal-side portion of the transparent substrate (color filter substrate) **11B** which constitutes a so-called upper substrate.

[0104] Furthermore, color filters are formed to cover the apertures formed in the portions of the black matrix **54** which correspond to the respective pixel areas. These color filters have colors which differ between adjacent pixel areas in the x direction, and the respective color filters have boundaries on the black matrix **54**.

[0105] A flat film made of resin film or the like is formed over the surface on which the black matrix **54** and the color filters are formed in this manner, and an alignment film is formed on the surface of the flat film

Backlight

[0106] The backlight unit **300** is disposed on the back side of the liquid crystal display panel module **400**.

[0107] This backlight unit **300** is a so-called direct backlight and includes, as shown in detail in FIG. 4, plural (FIG. 4, eight) linear light sources **35** disposed to be extended in the x direction and to be juxtaposed in the y direction in such a manner as to be spaced equally apart from one another, and a reflector **36** for irradiating the liquid crystal display panel module **400** with light from light sources **35**.

[0108] This reflector **36** is formed in a shape which is wavy in the juxtaposition direction (y direction) of the light sources **35**. Specifically, the reflector **36** has concave portions each of which is arc-shaped in cross section, at locations where the respective light sources **35** are disposed, and convex portions each of which is slightly acute between adjacent ones of the light sources **35**, whereby the reflector **36** has a shape capable of efficiently irradiating the liquid crystal display panel module **400** with light from all the light sources **35**.

[0109] In this case, the reflector **36** has side walls **37** provided along opposite sides perpendicular to the longitudinal direction of the light sources **35**, and the opposite ends of each of the light sources **35** are fitted in the corresponding ones of slits **38** which are formed in the side walls **37**, whereby the travels of the light sources **35** in the juxtaposition direction thereof are restricted.

[0110] Each of the light sources **35** includes a discharge tube **35a** and, for example, six electrodes fitted on the periphery of the discharge tube **35a**, and these electrodes are spaced a predetermined distance apart from one another along the axial direction of the discharge tube **35a**.

[0111] Each of the electrodes is made of, for example, a ring-shaped aluminum foil, and the discharge tube **35a** is inserted through the rings of the respective electrodes. In Embodiment 1, means for securing each of the electrodes to the discharge tube **35a** is absent, whereby the position of each of the electrodes with respect to the discharge tube **35a** can be corrected to a small extent in the axial direction thereof. The advantage of this construction will be described later in detail.

[0112] The electrodes of each of the light sources **35** are respectively connected to the corresponding electrodes of the adjacent one by conductive lines so that some of the electrodes are grounded and the other ones are supplied with electricity. In other words, the light sources **35** are connected in parallel with one another so that they are supplied with electricity.

[0113] FIG. 5 is a perspective view showing the detailed construction of one of the light sources **35**. As shown in FIG. 5, ground-side electrodes **35d** are provided at approximately the middle of the discharge tube **35a** and at the opposite ends thereof, and high-voltage-side electrodes **35c** are provided between those ground-side electrodes **35d**.

[0114] The ground-side electrode **35d** which is positioned at the middle of the discharge tube **35a** is made of two electrodes which are electrically separated from each other, and the two electrodes of each of the discharge tubes **35a** are respectively connected to the corresponding electrodes of the adjacent one by conductive lines, and the conductive lines are connected to each other and are grounded.

[0115] FIG. 6A is a cross-sectional view showing the construction of the discharge tube **35a**, and FIG. 6B is a cross-sectional view taken a long line b-b of FIG. 6A. A glass tube **35p** has a cylindrical shape closed at its opposite ends (for example, 2.6 mm in outer diameter, 2.0 mm in inner diameter, and 390 mm in length), and the inner wall surface of the glass tube **35p** is coated with a phosphor **35q**. A Ne+Ar (5%) mixed gas having a gas pressure of 60 Torr and mercury are sealed in the glass tube **35p**.

[0116] In the case of the light source **35** having the above-described construction as shown in FIG. 5, when, for example, a sinusoidal high-frequency voltage of several MHz (1.5 MHz or more) and approximately 800 Vp-p is applied to the high-voltage-side electrodes **35c**, discharge is generated in the discharge tube **35a**, and ultraviolet rays generated from the discharge strike the phosphor **35q** to generate visible light

[0117] In this case, the discharge is generated between the ground-side electrode **35d** (1) and the high-pressure-side electrode **35c** (1) as well as between the high-pressure-side electrode **35c** (1) and the ground-side electrode **35d** (2) as viewed from one end of the discharge tube **35a**, and between the ground-side electrodes **35d** (3) and the high-pressure-side electrode **35c** (2) as well as between the high-pressure-side electrode **35c** (2) and the ground-side electrodes **35d** (3) as viewed from the other end of the discharge tube **35a**.

[0118] In this case, since not the high-voltage-side electrodes **35c** but the ground-side electrodes **35d** are respectively disposed at the opposite ends of the discharge tube **35a**, the efficiency of discharge can be increased. The reason for this is that if the high-voltage-side electrodes **35c** are respectively disposed at the opposite ends of the discharge tube **35a**, only high-frequency electric fields generated on one side (on a side adjacent to the ground-side electrode) contribute to discharge, and high-frequency electric fields generated on the other sides (on the opposite end sides of the discharge tube **35a**) are wasted. In other words, the waste of energy can be prevented by disposing the ground-side electrodes **35d** on the opposite sides of each of the high-voltage-side electrodes **35c**, whereby it is natural to adopt the construction in which the respective ground-side electrodes **35d** are disposed at the opposite ends of the discharge tube **35a**.

[0119] As described above, the ground-side electrode **35d** disposed in the middle of the discharge tube **35a** is made of the two electrodes **35d** (2) and **35d** (3) which are electrically separated from each other.

[0120] The reason for this is that if the ground-side electrode **35d** is made of one electrode instead of two electrodes which are electrically separated from each other, there may occur the phenomenon that a strong discharge is generated between the ground-side electrode **35d** and either one of the high-voltage-side electrodes **35c** (1) and **35c** (2) which are disposed adjacently to the ground-side electrode **35d**.

[0121] For this reason, the ground-side electrode disposed between the high-voltage-side electrodes is constituted by separate electrodes which are respectively paired with the high-voltage-side electrodes, whereby uniform discharge can be effected.

[0122] FIGS. 7A to 7C show data indicative of the axial distribution of the illuminance of the light source **35** constructed in the above-described manner.

[0123] By way of example, FIGS. 7A to 7C show the case of a 390-mm-long discharge tube **390** having electrodes disposed as shown in FIG. 5.

[0124] FIGS. 7A, 7B and 7C show the case of 800 Vp-p, the case of 900 Vp-p and the case of 1,000 Vp-p, respectively.

[0125] As is apparent from graphs, approximately uniform illuminance can be obtained except portions close to the respective electrodes.

[0126] FIG. 8A is a plan view showing the backlight unit **300** observed from the side where the liquid crystal display unit **400** is disposed. FIG. 8B is a cross-sectional view taken along line b-b of FIG. 8A.

[0127] In the area of the backlight unit **300** that is opposed to at least the liquid crystal display unit **400**, eight light sources **35** which are linearly extended in the x direction as viewed in FIG. 8A are juxtaposed to be spaced at nearly equal intervals in the y direction as viewed in FIG. 8A. Light from the light sources **35** is irradiated onto the liquid crystal display unit **400** directly or by being reflected by the reflector **36**, whereby the backlight unit **300** serves the function of a surface light source.

[0128] In this case, there may be a risk that light irradiation becomes non-uniform in the region between each of the adjacent light sources **35** and in the regions where the respective light sources **35** are formed. This disadvantage can be fully solved by a reflector **60** disposed to be interposed between the backlight unit **300** and the liquid crystal display unit **400**.

[0129] In this case, the reflector **60** need not necessarily be limited to the aforesaid type of reflector, and may use any kind of means that can make uniform the illuminance of light irradiated onto the liquid crystal display panel **1** from the backlight unit **300**.

[0130] FIG. 9 is a graph showing the relationships between the frequency of a power source and the average illuminance obtained through the reflector **60** in each of the

examples shown in **FIGS. 7A, 7B** and **7C**. As is apparent from this graph, as the frequency is increased, the average illuminance is improved.

[0131] As described above, according to the backlight unit **300** constructed in this manner, in each of the light sources **35**, its electrodes are disposed to be fitted on the periphery of its discharge tube, that is to say, the electrodes are not formed in the discharge tube, whereby the mercury inside the tube can be prevented from being consumed owing to electrodes.

[0132] Accordingly, it is possible to lengthen the life of the light sources **35** and it is, therefore, possible to improve the life of the liquid crystal display device.

[0133] In addition, as described above, the ground-side electrodes **35d** and the high-voltage-side electrodes **35c** of each of the light sources **35** can be moved with respect to the discharge tube **35a** in the axial direction thereof, whereby by moving those electrodes **35d** and **35c** to a slight extent, it is possible to make the adjustment of making uniform the illuminances between the high-voltage-side electrodes **35c** and the ground-side electrodes **35d** of each of the light sources **35** and it is, therefore, possible to obtain the backlight unit **300** having a uniform surface illuminance.

Resin Frame

[0134] This resin frame **500** constitutes part of the outer frame of the liquid crystal display device assembled in a module form, and is constructed to accommodate the backlight unit **300**.

[0135] The resin frame **500** has the shape of a box having a bottom and sides, and a diffusing sheet (not shown) disposed to cover the backlight unit **300** can be placed on the upper ends of the sides.

[0136] This reflect or has the function of diffusing light from each of the light sources **35** of the backlight unit **300**, whereby uniform light having even brightness can be irradiated onto the liquid crystal display unit **400**.

[0137] In this construction, the resin frame **500** is formed to be comparatively small in wall thickness. This is because the resultant decrease in the mechanical strength of the resin frame **500** can be compensated for by the inside frame **700** which will be described later.

[0138] Incidentally, a high-frequency power source board (for example, an AC/AC inverter) **40** for supplying a high-frequency voltage to the light sources **35** can be secured to the back side of the resin frame **500**.

[0139] Connecting lines extended from the high-frequency power source board **40** are connected to the high-voltage-side electrodes **35c** and the ground-side electrodes **35d** of each of the light sources **35**.

[0140] **FIG. 10** is a view showing the reverse side of the resin frame **500**, that is, the side of the resin frame **500** opposite to the side where the backlight unit **300** is disposed.

[0141] As is apparent from **FIG. 10**, the resin frame **500** has projecting parts **500A** which are formed to extend along the sides of the resin frame **500** that are parallel to the x direction as viewed in **FIG. 10**.

[0142] Specifically, the resin frame **500** is formed so that each of a pair of opposite sides (the sides parallel to the x direction) has a side portion **500B** which extends to the back side of the resin frame **500** as viewed from the observation side of the liquid crystal display device.

[0143] The reason for this is that it is possible to obtain the advantage that the resin frame **500** can be imparted a strength against twists due to reverse rotational forces on the diagonal lines of the resin frame **500**, and it is also possible to impart sufficient strength to a case constituted by the combination of the resin frame **500** and the inside frame **700** which will be described later.

[0144] As will be apparent from a later description, each of the projecting parts **500A** is formed to be larger in height than the high-frequency power source board **40**, so that the projecting parts **500A** are comparatively large. As described above, the control circuit board **10** is disposed to be closely opposed to one of the side portions **500B** (actually, with the inside frame **700** interposed there between).

[0145] Accordingly, it is possible to provide the advantage that the control circuit board **10** which is complicated in circuit construction may be constructed as a large-sized circuit board.

[0146] In this case, the control circuit board **10** also has the advantage of having an electromagnetic-wave shielding function, because the inside frame **700** is present between the liquid crystal display unit **400** and the control circuit board **10**.

[0147] Incidentally, in this embodiment, the respective projecting parts **500A** are provided on the sides parallel to the x direction, but are not limited to this arrangement. It goes without saying that even if the projecting parts **500A** are provided on the other sides parallel to the y direction, it is possible to obtain similar advantages.

High-Frequency Power Source Board

[0148] **FIG. 11** is a view showing the high-frequency power source board **40** disposed on the reverse side of the resin frame **500**.

[0149] This high-frequency power source board **40** is provided with transformers **71** the number of which is equivalent to the number (in this embodiment, eight) of the light sources **35** of the backlight unit **300**.

[0150] However, the transformers **71** need not necessarily be disposed so that the number of the transformers **71** is equivalent to that of the light sources **35**. It goes without saying that one transformer may be allocated to a set of two, four or eight light sources.

[0151] The high-frequency power source board **40** is disposed via the shield sheet **72** which is made of a metal and secured to the reverse side of the resin frame **500**, and an aperture **72A** is provided in a portion of the shield sheet **72** (a portion approximately equivalent to the area in which the high-frequency power source board **40** is mounted). This is because it is necessary to prevent eddy currents from occurring in the shield sheet **72** owing to the transformers **71**, and also because interconnection layers are formed on the high-frequency power source board **40** and the high-frequency power source board **40** itself has a shielding function.

[0152] The DC/AC inverter board **40** secured in this manner, inclusive of its mounted components, has a height which does not allow any of them to project from the projecting parts **500A** of the resin frame **500**.

[0153] In other words, the projecting parts **500A** of the resin frame **500** are set to be so high as not to allow the high-frequency power source board **40** including the mounted components to project from the projecting parts **500A** of the resin frame **500**.

Inside Frame

[0154] The inside frame **700** is disposed between the liquid crystal display unit **400** and the diffusing sheet (not shown).

[0155] This inside frame **700** is made of a metal plate which is comparatively thin in wall thickness and has an aperture **42** formed in a portion equivalent to the display area part of the liquid crystal display unit **400**.

[0156] The inside frame **700** has the function of pressing the diffusing sheet against the resin frame **500** and the function of enabling the liquid crystal display unit **400** to be mounted on the inside frame **700**.

[0157] Spacers **44** for positioning a liquid crystal display panel **100** are secured to part of the upper surface of the inside frame **700** on which the liquid crystal display unit **400** is to be mounted. Owing to spacers **44**, the liquid crystal display panel **100** can be accurately positioned with respect to the inside frame **700**.

[0158] The inside frame **700** has the shape of being formed integrally with sides **46**, that is, the shape in which the aperture **42** is formed in the bottom of the metal plate having an approximately box-like shape.

[0159] The inside frame **700** having this shape is fitted in to the resin frame **500** with the diffusing sheet interposed therebetween. In other words, the inside frame **700** is placed in the resin frame **500** so that the inside walls of the sides **46** are respectively opposed to the outside walls of the sides of the resin frame **500**.

[0160] The metal-plate inside frame **700** constructed in this manner constitutes one frame (case) together with the resin frame **500**, and can improve the mechanical strength of the resin frame **500** without increasing the wall thickness thereof.

[0161] That is to say, even if the inside frame **700** and the resin frame **500** are not sufficient in mechanical strength, their mechanical strength is improved by fitting the inside frame **700** into the resin frame **500** in the above-described manner, whereby the case has a strength against twists about the diagonal lines.

[0162] In addition, the projecting parts **500A** formed on the resin frame **500** serve to increase the mechanical strength against twists about the diagonal lines of the case.

[0163] Accordingly, it is possible to obtain the advantage of ensuring a sufficient strength without enlarging a so-called picture frame in the module of the liquid crystal display device.

[0164] In addition, as compared with an approximately planar frame having no sides, the inside frame **700** in itself

becomes large in mechanical strength, and has the advantage of becoming easy to handle during a process prior to the assembling of the module.

[0165] Incidentally, in this embodiment, the control circuit board **10** and the DC/DC converter board **11** are disposed on part of the sides **46** of the inside frame **700** in the state of being opposed to each other. In other words, the control circuit board **10** and the DC/DC converter board **11** are disposed perpendicularly to the liquid crystal display panel module **400**, whereby the picture frame can be reduced in size.

[0166] In this case, the control circuit board **10** is connected via the connecting parts **18**, **19A** and **19B**, respectively, to the flexible gate circuit board **15**, drain circuit board **16A** and drain circuit board **16B** secured to the liquid crystal display panel module **400**, and the drain circuit board **16A** and drain circuit board **16B** are bent to form the above-described arrangement.

[0167] Incidentally, in this construction, as described previously, the influence of electromagnetic waves generated from the control circuit board **10** on other members can be prevented by the sides **46** of the inside frame **700**.

[0168] In the above description of Embodiment 1, reference has been made to a box-like shape as the shape of the inside frame **700**, but the shape of the inside frame **700** need not be a perfect box-like shape and may also be a shape having a side formed on at least one side.

[0169] This is because the inside frame **700** is not planar, but has bent portions to constitute a structure which has a mechanical strength improved by the bent portions.

Upper Frame

[0170] The upper frame **800** has the function of pressing the liquid crystal display panel module **400**, the inside frame **700** and the diffusing sheet against the resin frame **500**, and constitutes the outer frame of the module of the liquid crystal display device together with the resin frame **500**.

[0171] The upper frame **800** is made of a metal plate having an approximately box-like shape, and an aperture (display window) **48** is formed in the portion of the metal plate that is equivalent to the display area part of the liquid crystal display panel module **400**. The upper frame **800** is secured to the resin frame **500**, as by engagement.

[0172] The upper frame **800** also has the function of a shielding material.

Assembly of the Above-describe Components

[0173] FIG. 12 shows an assembly of the components shown in FIG. 2. The central view of FIG. 12 is a plan view showing the assembly viewed from the side where the upper frame **800** is disposed, while the right, left, top and bottom views of FIG. 12 are side views seen from the respective directions.

[0174] As is apparent from the right and left views of FIG. 12, the high-frequency power source board **40** disposed on the reverse side of the resin frame **500** is disposed without projecting from the sides of the upper frame **800** (that is, in an unobservable state).

[0175] As is also apparent from the right and left views of FIG. 12, the resin frame 500 has a C-like cross-sectional shape owing to the projecting parts 500A.

[0176] As described previously, the resin frame 500 has a large resisting strength against twists due to reverse rotational forces on the diagonal lines of the resin frame 500.

Embodiment 2

[0177] FIG. 13 is a cross-sectional view showing another embodiment of the liquid crystal display device according to the invention, which is improved on the basis of, for example, the construction of Embodiment 1.

[0178] FIG. 13 is a cross-sectional view of the assembly of the liquid crystal display device, taken a long the y direction (the direction perpendicular to the longitudinal direction of the light sources 35).

[0179] The construction of Embodiment 2 differs from that of Embodiment 1 in that on the side of the backlight unit 300 that faces the liquid crystal display panel unit 400, a diffusing sheet 50 is disposed to cover the backlight unit 300, and an electromagnetic shield sheet 51 is disposed on the side of the diffusing sheet 50 that faces the liquid crystal display panel unit 400.

[0180] This electromagnetic shield sheet 51 is a shield sheet for blocking electromagnetic waves generated from the light sources 35 of the backlight unit 300, and is made of, for example, a transparent conductive sheet or a metal mesh.

[0181] With this construction, it is possible to solve disadvantages offered by the light sources 35 driven by a high-frequency voltage.

[0182] Incidentally, in this case, the reflector 36 of the backlight unit 300 may, of course, be formed of a metal material so that the reflector 36 can be given the function of the electromagnetic shield sheet 51 against the light sources 35.

[0183] In this embodiment, another diffusing sheet 52 is disposed on the side of the electromagnetic shield sheet 51 that faces the liquid crystal display panel unit 400, and realizes together with the diffusing sheet 50 a structure which can make uniform the irradiation of light onto the liquid crystal display panel unit 400 from the backlight unit 300.

[0184] The reason for this is that, as described previously, each of the light sources 35 has plural electrodes spaced apart from one another along its longitudinal direction and light irradiation is not effected in the portions of electrodes, and furthermore, there exist lines which connect the electrodes of each of the light sources 35 to the corresponding electrodes of the adjacent one, so that this fact becomes the cause of slightly impairing the uniformity of light irradiation.

[0185] As shown in FIG. 13, the resin frame 500 is made of a metal material and the electromagnetic shield sheet 51 is disposed in direct contact with the resin frame 500, whereby the light sources 35 can be completely shielded.

[0186] For similar purposes, the reflector 36 may be made of a metal material and the electromagnetic shield sheet 51 may be disposed in direct contact with the reflector 36.

[0187] Embodiment 3

[0188] FIGS. 14A to 14C are views showing the constructions of different modifications of each of the light sources 35 used in each of the above-described embodiments.

[0189] FIG. 14A is a view showing a modification similar to each of the light sources 35 used in each of the above-described embodiments. In the light source shown in FIG. 14A, the electrodes have ring-like shapes, and a discharge tube is inserted through electrodes. FIG. 14A is a cross-sectional view taken a long line a-a of FIG. 14A.

[0190] In the light source shown in FIG. 14B, each of the electrodes is formed on part of the circumference of the discharge tube. Even with this construction, the function of the light source 35 can be similarly realized. FIG. 14B is a cross-sectional view taken along line b-b of FIG. 14B.

[0191] In the light source shown in FIG. 14C, the electrodes have ring-like shapes similarly to the case shown in FIG. 14A, but a gap is formed between each of the electrodes and the discharge tube. Even with this construction, the function of the light source 35 can be similarly realized. FIG. 14C is a cross-sectional view taken along line c-c of FIG. 14C.

[0192] Embodiment 4

[0193] FIGS. 15A and 15B are views showing the construction of another embodiment of the liquid crystal display device according to the invention. Specifically, FIGS. 15A and 15B are a plan view and a side view showing the backlight unit 300, respectively.

[0194] As shown in FIGS. 15A and 15B, the portions of the electrodes 35d (1) and 35d (3) disposed at the opposite ends of each of the discharge tubes 35a provided in the backlight unit 300 are bent.

[0195] Stated in detail, the opposite end portions of each of the discharge tubes 35a in which the respective electrodes 35d (1) and 35d (3) are formed are bent in the direction of 90° with respect to the central axis (or the extending direction) of the discharge tube 35a, and all the bending directions are made coincident with the upward direction as viewed in FIG. 15A.

[0196] Incidentally, each of the discharge tubes 35a has electrodes disposed not only at the opposite ends but also in the intermediate portion between the opposite ends as described previously, but FIGS. 15A and 15B show only the electrodes 35d (1) and 35d (3) disposed at the opposite ends and do not show any of the electrodes disposed in the intermediate portion. However, it goes without saying that the invention can also be applied to a construction in which the electrodes 35d (1) and 35d (3) are disposed at only the opposite ends of each of the discharge tubes 35a.

[0197] Even if the bent portions are formed in part of the discharge tube 35a constructed in this manner, the bent portions do not impair the emission of the discharge tube 35a and the discharge tube 35a can emit a sufficient amount of light similarly to each of the discharge tubes 35a used in each of the above-described embodiments.

[0198] In Embodiment 4, the area of each of the discharge tubes 35a which is occupied by the portion other than the

portions bent at the opposite ends of the discharge tube **35a** is used as an effective emission area.

[0199] Specifically, the display part other than the periphery of the liquid crystal display panel module **400** (an effective display area : an area corresponding to the outer outline of the aggregation of pixels) is disposed to coincide with the above-described effective emission area, whereby the electrodes **35d (1)** and **35d (3)** of each of the discharge tubes **35a** disposed at the opposite ends thereof are positioned in an area outside the display part of the liquid crystal display panel module **400**.

[0200] FIGS. 16A to 16C are construction views showing the positional relationships between the discharge tubes **35a** disposed in this manner and the liquid crystal display panel module **400**.

[0201] FIG. 16A, 16B and 16C are a plan view, a left side view and a bottom side view, respectively.

[0202] In an area Q between the outline of the display part of the liquid crystal display panel module **400** and the outer outline of the upper frame **800**, the opposite ends of each of the discharge tubes **35a** at which the respective electrodes are disposed are positioned, and the opposite ends are bent with respect to the axial direction of each of the discharge tubes **35a**, whereby the width of the area Q can be made smaller than the length of each of the opposite ends.

[0203] In the case of this embodiment, the bending direction of each of the opposite ends of each of the discharge tubes **35a** is contained in a plane parallel to the liquid crystal display panel module **400**, whereby it is possible to provide the advantage that it is not necessary to increase the depthwise thickness of the liquid crystal display device.

[0204] Accordingly, it is possible to decrease the area occupied by the picture frame (the area Q shown in FIG. 16A) of the liquid crystal display device without the need to increase the depthwise thickness of the liquid crystal display device.

[0205] It has been confirmed that the efficiency of emission of this kind of discharge tube **35a** can be improved particularly by increasing the width of each of the electrodes **35d** provided on the discharge tube **35a**.

[0206] FIG. 17 is a graph showing the relationship between electrode width and lamp current flowing in the discharge tube **35a**. FIG. 17 shows lamp current (mA) with respect to applied voltage (Vrms) for each of electrode widths of 10 mm, 20 mm and 40 mm, and it can be seen from FIG. 17 that as the electrode width is larger, a larger lamp current flows even in the case of the same applied voltage.

[0207] In addition, as shown in FIG. 18, it can be seen that as the electrode width is made larger, the lamp current becomes larger irrespective of, for example, the length of the discharge tube (in FIG. 18, 100 mm, 200 mm and 300 mm).

[0208] Each of the discharge tubes **35a** which causes a discharge when a voltage is applied can be represented by the equivalent circuit shown in FIG. 19. In FIG. 19, symbol R denotes the resistance of the positive column of a discharge portion, and symbol Cd denotes the electrostatic capacity of glass (dielectric) interposed between the positive column and electrodes.

[0209] In this case, letting V1 be the applied voltage, a lamp current I1 is expressed by the following equation (1):

$$\text{LAMP CURRENT } I_1 = \frac{V_1}{\sqrt{R^2 + \left(\frac{1}{\omega C}\right)^2}} \quad (1)$$

[0210] As is apparent from this equation (1), if a larger current is to be supplied with a smaller voltage, the value of Cd of the electrode portion needs only to be increased; specifically, the width of each of the electrodes may be increased or the area in which the electrodes and the discharge tube are opposed to each other may be increased.

[0211] Therefore, in the case where the widths of the respective electrodes **35d (1)** and **35d (3)** are made large and the portions of the respective electrodes **35d (1)** and **35d (3)** of each of the discharge tubes **35a** are positioned to be superposed on the area other than the display part of the liquid crystal display panel module **400**, without the portions of electrodes **35d (1)** and **35d (3)** being bent, the width occupied of an area called a picture frame becomes extremely large, but by adopting the above-described construction, it is possible to narrow the width to a great extent.

[0212] Contrarily, in the case where the width of the area of the picture frame needs not be narrowed, the length of each of the opposite ends of the discharge tube at which the respective electrodes are disposed can be made large by bending the opposite ends of the discharge tube, whereby the widths of the electrodes can be made large so that the efficiency of emission of the discharge tube can be increased to a great extent.

Embodiment 5

[0213] FIG. 20 is a view showing another embodiment of the liquid crystal display device according to the invention, and corresponds to FIGS. 15A and 15B.

[0214] The electrode **35d (3)** disposed at one end of each of the discharge tubes **35a** shown in FIG. 20 is bent in the upward direction as viewed in FIG. 20, while the electrode **35d (1)** disposed at the other end is bent in the downward direction as viewed in FIG. 20.

[0215] It goes without saying that even in this case, it is possible to obtain similar advantages.

Embodiment 6

[0216] FIG. 21 is a view showing another embodiment of the liquid crystal display device according to the invention, and corresponds to FIG. 20.

[0217] Each of the discharge tubes **35a** shown in FIG. 21 has a U-like shape with a turning portion, whereby with a single discharge tube, it is possible to realize substantially the same effect as two discharge tubes.

[0218] The electrodes **35d (1)** and **35d (3)** disposed at the opposite ends of each of the discharge tubes **35a** are positioned close to each other on one side, while the turning portion is positioned on the other side.

[0219] Accordingly, the electrodes **35d (1)** and **35d (3)** are disposed to be superposed on one side in the periphery

(picture frame) of the display part, while the turning portion is disposed to be superposed on the other side in the periphery of the display part. Incidentally, it is a matter of course that if an electrode is not disposed in the turning portion, the turning portion may also be disposed in the display part without being superposed on the periphery of the display part.

[0220] In this case, each of the electrodes **35d (1)** and **35d (3)** is bent in the upward or downward direction as viewed in **FIG. 21**, whereby it is possible to narrow the width of the periphery of the display part and reduce the area occupied by the so-called picture frame (denoted by Q in **FIG. 21**).

[0221] Embodiment 7

[0222] **FIG. 22** is a view showing another embodiment of the liquid crystal display device according to the invention, and corresponds to **FIG. 21**.

[0223] Similarly to the case shown in **FIG. 21**, the discharge tubes **35a** each having a U-like shape with a turning portion are used, but the entire length of each of the discharge tubes **35a** is about half that of each of those shown in **FIG. 21**.

[0224] The discharge tubes **35a** are disposed in the right-half and left-half are as of the backlight unit **300**.

[0225] In this case, each of the discharge tubes **35a** is disposed so that the turning portion is positioned in the middle of the backlight unit **300** and the electrodes **35d (1)** and **35d (3)** are positioned in the periphery of the display part.

[0226] Each of the electrodes **35d (1)** and **35d (3)** is bent in the downward (or upward) direction as viewed in **FIG. 22**, whereby it is possible to narrow the width of the periphery of the display part and reduce the area occupied by the so-called picture frame (denoted by Q in **FIG. 22**).

[0227] In addition, in this case, it goes without saying that it is possible to obtain similar advantages even if the direction indicated by the bent portion of each of the electrodes **35d (1)** and **35d (3)** is toward the bottom of the backlight unit **300** as shown in **FIG. 23**.

[0228] In this case, in each of the discharge tubes **35a** which are positioned in the area of the display part, the portions where the respective electrodes **35d (1)** and **35d (3)** are disposed become portions which do not emit light. Accordingly, portions are bent in the direction of the bottom of the backlight unit **300** so that they can be hidden behind the light-emitting portion of the same discharge tube **35a**.

Embodiment 8

[0229] **FIG. 24** is a view showing another embodiment of the liquid crystal display device according to the invention, and corresponds to **FIG. 21**.

[0230] Each of the discharge tubes **35a** shown in **FIG. 24** is constructed as a rectangular ring-shaped tube, and the electrodes **35d (1)** and **35d (3)** are respectively disposed in portions corresponding to the opposite ends of each of the discharge tubes **35a**.

[0231] The construction of each of the discharge tubes **35a** is similar to a construction in which two discharge tubes are

integrally formed, and in this case, the portions where the respective electrodes **35d (1)** and **35d (3)** are disposed become bent portions with respect to the other portion. Accordingly, bent portions are positioned to be superposed on the periphery (non-display portion) of the display part, whereby the area occupied by the picture frame (the area denoted by Q in **FIG. 24**) can be narrowed.

[0232] **FIG. 25** shows a far more improved construction in which all the discharge tubes are integrally formed.

Embodiment 9

[0233] **FIG. 26** is a view showing another embodiment of the liquid crystal display device according to the invention, and corresponds to **FIG. 21**. Unlike the case shown in **FIG. 21**, the directions of individual bendings of the portions where the respective electrodes are disposed are not limited to a particular direction, and can be freely determined.

[0234] From this fact, as shown in **FIG. 27**, part of the portions where the respective electrodes are disposed may be bent in the direction of the bottom of the backlight unit **300**.

[0235] **FIG. 28** shows another construction having a similar feature.

Embodiment 10

[0236] In the above-described embodiments, the directions of bendings of the portions where the respective electrodes are disposed are 90° or 180°. However, it goes without saying that even within the range between 0° and 180°, it is possible to obtain similar advantages.

[0237] For example, **FIG. 29** shows an embodiment in which the directions of bendings of the portions where the respective electrodes are disposed are made about 45° with respect to the axial direction (extending direction) of each of the discharge tubes **35a**. Even in this case, it is apparent that it is possible to narrow the width of the picture frame (the area denoted by Q in **FIG. 29**) as compared with the case in which the portions where the respective electrodes are disposed are not at all bent.

Embodiment 11

[0238] **FIG. 30** is a view showing another embodiment of the liquid crystal display device according to the invention. The embodiment shown in **FIG. 30** differs from the other embodiments in that the portions of each of the discharge tubes **35a** of where the respective electrodes **35d (1)** and **35d (3)** are disposed are made helical and the electrodes **35d (1)** and **35d (3)** are also made helical according to the helical portions of each of the discharge tubes **35a**.

[0239] In this case, the lengths of the respective electrodes **35d (1)** and **35d (3)** (the lengths along the axial direction of the discharge tube) that are formed at the opposite ends of each of the discharge tubes **35a** can be increased to a great extent, and the portions where the respective electrodes **35d (1)** and **35d (3)** are disposed can be made helical so that the width occupied by each of the portions can be reduced to a great extent.

Embodiment 12

[0240] In each of the above-described embodiments, the backlight unit is a so-called direct backlight and includes plural linear light sources **35** disposed on the back side of the liquid crystal display panel.

[0241] However, the backlight may, of course, be provided with a light guide plate.

[0242] Specifically, the liquid crystal display panel module 400 may be of the type which includes a light guide plate disposed to be opposed to at least one side of the display part and a linear light source disposed on at least one side of the light guide plate. In the liquid crystal display panel module 400 after light from the light source has been guided into the interior of the light guide plate, the light is irradiated from the surface of the light guide plate which is opposed to the liquid crystal display panel.

[0243] In this case, the discharge tube 35a shown in FIG. 5 is used as the light source, and as shown in FIG. 31, the opposite end portions of the discharge tube 35a where the respective electrodes 35d (1) and 35d (3) are disposed are bent, and the respective bent portions are disposed in parallel with and in proximity to the side surfaces of a light guide plate IL perpendicular to one side surface of the light guide plate IL (the surface of the light guide plate IL that is located on the side where the discharge tube 35a is disposed).

[0244] According to this construction, the discharge tube 35a disposed on one side of the light guide plate IL enables the electrodes 35d (1) and 35d (3) provided in the opposite end portions (portions which do not irradiate light) to be positioned externally of the one side, whereby a far more amount of light can be guided into the interior of the light guide plate IL.

[0245] In addition, since the portions of the electrodes 35d (1) and 35d (3) are respectively bent in the opposite end portions of the discharge tube 35a, there is the advantage that the width of the picture frame (the area denoted by Q in FIG. 31) on each of the sides of the light guide plate IL perpendicular to the discharge tube 35a can be made narrow compared to the case where the portions of the electrodes 35d (1) and 35d (3) are extended along the extending direction of the discharge tube 35a.

[0246] In the case of this embodiment, since the opposite-end electrode portions of the discharge tube 35a are 90° bent with respect to the extending direction of the discharge tube 35a, the width of the picture frame on each of the sides of the light guide plate IL perpendicular to the discharge tube 35a can also be made a value approximately equal to the diameter of each of the electrodes 35d (1) and 35d (3).

Embodiment 13

[0247] FIG. 32 is a view showing another embodiment of the liquid crystal display device according to the invention, and corresponds to FIG. 31.

[0248] The embodiment shown in FIG. 32 is the same as the case shown in FIG. 31 in that the opposite end portions of the discharge tube 35a where the respective electrodes 35d (1) and 35d (3) are disposed are bent, but in the embodiment shown in FIG. 32, such opposite end portions are bent at an angle of 180° on the side of the discharge tube 35a opposite to the light guide plate IL.

[0249] As is apparent from FIG. 32, the opposite end portions of the discharge tube 35a where the respective electrodes 35d (1) and 35d (3) are disposed are opposed to one side of the light guide plate IL, but this construction does not particularly become a problem, because the electrodes

35d (1) and 35d (3) are hidden behind the portion of the discharge tube 35a where the electrodes 35d (1) and 35d (3) are not disposed.

Embodiment 14

[0250] FIG. 33 is a view showing another embodiment of the liquid crystal display device according to the invention, and corresponds to FIG. 32.

[0251] The embodiment shown in FIG. 33 differs from the construction shown in FIG. 32 in that the opposite end portions of the discharge tube 35a where the respective electrodes 35d (1) and 35d (3) are disposed are bent at an angle of 180° in the direction of the bottom of the light guide plate IL (toward the bottom of the backlight unit 300).

Embodiment 15

[0252] In each of the above-described embodiments, the discharge tube 35a has a cylindrical shape which is the same in diameter from its center to each of its opposite ends, and has the structure in which the opposite end portions of the discharge tube 35a where the respective electrodes 35d (1) and 35d (3) are disposed are bent.

[0253] In this case, the lengths of the respective electrodes 35d (1) and 35d (3) (the lengths along the axial direction of the discharge tube 35) can be increased without the need to prepare a large space for the portions where the respective electrodes 35d (1) and 35d (3) are disposed, whereby it is possible to improve the efficiency of emission of the discharge tube 35a.

[0254] However, as shown in FIG. 34, if the radius of each of the opposite end portions of the discharge tube 35a where the electrodes 35d (1) and 35d (3) are disposed is made larger than the radius of the other portion of the discharge tube 35a (without the need to change the wall thickness of the discharge tube 35a), it is possible to improve the efficiency of emission of the discharge tube 35a. This is because the area of the portion of each of the electrodes 35d (1) and 35d (3) that is opposed to the glass tube can be made large to enlarge electrostatic capacity.

[0255] Accordingly, by making fully large the diameter of each of the opposite end portions of the discharge tube 35a where the respective electrodes 35d (1) and 35d (3) are disposed, it is possible to reduce the lengths of the respective electrodes 35d (1) and 35d (3) (the lengths along the axial direction of the discharge tube 35).

[0256] This fact means that if the opposite end portions of the discharge tube 35a where the respective electrodes 35d (1) and 35d (3) are disposed are positioned outside the display area as shown in FIG. 35, the area occupied by the so-called picture frame (the area denoted by Q in FIG. 35) can be reduced.

[0257] Incidentally, the embodiment shown in FIG. 35 is applied to the so-called direct backlight type of backlight unit 300 but it goes without saying that the invention can also be applied to a backlight using the light guide plate IL. This feature also applies to embodiments which will be described below.

[0258] FIG. 36 is a view corresponding to FIG. 35. The electrodes 35d (1) and 35d (3) provided at the opposite ends of each of the discharge tubes 35a have shapes formed to

extend to the respective end surfaces of each of the discharge tubes **35a**. In other words, the respective electrodes **35d (1)** and the **35d (3)** are formed to cover the end surfaces of each of the discharge tubes **35a**, whereby the area of each of the electrodes **35d (1)** and **35d (3)** that is opposed to the discharge tube **35a** can be made large.

[0259] In this case, it is possible to make far smaller the lengths of the respective electrodes (the lengths along the axial directions of the discharge tube).

Embodiment 16

[0260] FIGS. 37 and 38 are views showing further improvements in Embodiment 15, and correspond to FIGS. 35 and 36, respectively.

[0261] In this case, the opposite end portions of each of the discharge tubes **35a** where the respective electrodes **35d (1)** and **35d (3)** are disposed have cubic shapes, respectively, and the length of one side of each of the cubic portions is formed to be larger than the diameter of the other portion of the discharge tube **35a**. Incidentally, the detailed construction of one of portions is shown in FIG. 39A.

[0262] In this case as well, it is possible to obtain similar advantages to those of Embodiment 15.

[0263] Incidentally, as shown in FIG. 39B by way of example, such a discharge tube having the above-described shape can easily be formed by independently forming portions corresponding to the opposite end portions of the discharge tube **35a** and the other portion of the discharge tube **35a** and then fusing the portions to the other portion.

Embodiment 17

[0264] FIG. 40 is a view showing a further improvement in Embodiments b 15 and 16 and showing particularly a cross section of one of the opposite end portions of one discharge tube **35a** where the respective electrodes **35d (1)** and **35d (3)** are disposed.

[0265] The outer diameter of the discharge tube **35a** is uniform along the axis direction there of, but the inner diameter of the discharge tube **35a** is made larger in the opposite end portions where the respective electrodes **35d (1)** and **35d (3)** are disposed, than in the other portion of the discharge tube **35a**. In other words, the wall thickness of the discharge tube **35a** is made thin in the opposite end portions where the respective electrodes **35d (1)** and **35d (3)** are disposed.

[0266] In this case as well, it is possible to obtain similar advantages to those of Embodiments 15 and 16.

[0267] Incidentally, it goes without saying that if Embodiments 15 to 17 are applied to a construction in which the portions of the electrodes are bent, it is possible to obtain far more advantage

Embodiment 18

[0268] FIG. 41 shows a construction in which at least one discharge tube **35a** together with its electrodes **35d (1)** and **35d (3)** is disposed in the effective emission area of the backlight unit **300**.

[0269] In other words, there are other discharge tubes **35a** each of which is positioned with either of the electrodes **35d (1)** or **35d (3)** superposed on the picture frame (the area denoted by Q in FIG. 41).

[0270] In this case, some of the electrodes are positioned in the effective emission area, but since at least electrodes are 180° bent toward the bottom of the backlight unit **300**, disadvantages due to the electrodes disposed in the effective emission area are resolved.

[0271] In addition, Embodiment 18 has the advantage that since a plurality of short discharge tubes are arranged in the axial direction, the backlight unit **300** can cope with far larger picture screens. In this case, since the individual discharge tubes are short, their discharge starting voltage and discharge voltage can be suppressed.

[0272] At present, in the case of a picture screen of, for example, 18 inches or less, if only one discharge tube is disposed in the axial direction there of, the discharge tube can fully cover the display area of the picture screen in that direction, but in the case of a large picture screen exceeding 18 inches, it is extremely effective to array a plurality of discharge tubes in the axial direction there of

[0273] As is apparent from the foregoing description, in accordance with the liquid crystal display device according to the invention, it is possible to achieve the lengthening of the life of the liquid crystal display device.

[0274] In addition, in accordance with the liquid crystal display device according to the invention, it is possible to narrow an area called a picture frame (the area between the outline of the outer frame of the liquid crystal display device and the outline of the display area there of).

What is claimed is:

1. A liquid crystal display device comprising

a liquid crystal display panel having a display part in its central portion except its periphery; and

a backlight disposed on a back side of the liquid crystal display panel,

the backlight including a discharge tube having electrodes at at least its opposite ends, the electrodes being disposed at the exterior of the discharge tube, at least one of the opposite end portions of the discharge tube where the respective electrodes are disposed being positioned to be superposed on the periphery of the liquid crystal display panel and being bent with an angle with respect to the central axis of the discharge tube.

2. A liquid crystal display device comprising:

a liquid crystal display panel having a display part in its central portion except its periphery; and

a backlight disposed on a back side of the liquid crystal display panel,

the backlight including a discharge tube having electrodes at at least its opposite ends, the electrodes being disposed at the exterior of the discharge tube, at least one of the opposite end portions of the discharge tube where the respective electrodes are disposed being positioned to be superposed on the periphery of the liquid crystal display panel and being bent with an angle with respect to the central axis of the discharge tube in a plane parallel to the liquid crystal display panel.

3. A liquid crystal display device according to either of claims 1 or 2, wherein the angle with respect to the central axis of the discharge tube is greater than 0° and not greater than 90°.

4. A liquid crystal display device according to claim 3, wherein the angle with respect to the central axis of the discharge tube is 90°.

5. A liquid crystal display device comprising:

a liquid crystal display panel having a display part in its central portion except its periphery; and

a backlight disposed on a back side of the liquid crystal display panel,

the backlight including a discharge tube having electrodes at at least its opposite ends, the electrodes being disposed at the exterior of the discharge tube, at least one of the opposite end portions of the discharge tube where the respective electrodes are constructed as a bent portion which is bent with an angle with respect to the central axis of the discharge tube, at least the portion of the bent portion where the electrode is formed being superposed in the area of the display part of the liquid crystal display panel.

6. A liquid crystal display device according to either of claim 5, wherein at least one of the opposite end portions of the discharge tube where the respective electrodes are disposed is bent at greater than 90° and not greater than 180° with respect to the central axis of the discharge tube.

7. A liquid crystal display device according to claim 5, wherein at least one of the opposite end portions of the discharge tube where the respective electrodes are disposed is bent at 180° with respect to the central axis of the discharge tube toward the opposite side to the liquid crystal display panel.

8. A liquid crystal display device comprising:

a liquid crystal display panel having a display part in its central portion except its periphery; and

a backlight disposed on a back side of the liquid crystal display panel,

the backlight including a light source made of a discharge tube having an endless-ring-like shape and electrodes disposed in a portion of the exterior of the discharge tube,

the electrodes being disposed to be positioned on an area outside the display part of the liquid crystal display panel.

9. A liquid crystal display device comprising:

a liquid crystal display panel having a display part in its central portion except its periphery; and

a backlight disposed on a back side of the liquid crystal display panel,

the backlight including a discharge tube having electrodes at at least its opposite ends, the electrodes being disposed at the exterior of the discharge tube, at least one of the opposite end portions of the discharge tube where the respective electrodes are disposed being positioned to be superposed on the periphery of the liquid crystal display panel and being formed in a helical shape.

10. A liquid crystal display device comprising:

a liquid crystal display panel having a display part in its central portion except its periphery; and

a backlight disposed on a back side of the liquid crystal display panel,

the backlight including a discharge tube having electrodes at at least its opposite ends, the electrodes being disposed at the exterior of the discharge tube, at least one of the opposite end portions of the discharge tube where the respective electrodes are disposed being positioned to be superposed on the periphery of the liquid crystal display panel and being formed to have an inner diameter greater than that of the other portion.

* * * * *

专利名称(译)	液晶显示器		
公开(公告)号	US20020041268A1	公开(公告)日	2002-04-11
申请号	US09/942618	申请日	2001-08-31
[标]申请(专利权)人(译)	矢岛俊 西山SEIICHI 高久SHIGETAKE 野口川昭一 武田良治		
申请(专利权)人(译)	矢岛俊 西山SEIICHI 高久SHIGETAKE 野口正一 武田良治		
当前申请(专利权)人(译)	松下液晶显示CO., LTD. 日立显示器有限公司.		
[标]发明人	YAJIMA TOSHIHIRO NISHIYAMA SEIICHI TAKAKU SHIGETAKE NOGUCHI SHOICHI TAKEDA YOSHIHARU		
发明人	YAJIMA, TOSHIHIRO NISHIYAMA, SEIICHI TAKAKU, SHIGETAKE NOGUCHI, SHOICHI TAKEDA, YOSHIHARU		
IPC分类号	G02F1/1335 F21V8/00 G02F1/13357 G09F9/00 G09G3/36		
CPC分类号	G02B6/0071 G02B6/0083 G02B6/009 H01J65/046 G02F1/133605 G02F2001/133613 G02F1/133604		
优先权	2000266619 2000-09-04 JP		
其他公开文献	US7061465		
外部链接	Espacenet USPTO		

摘要(译)

本发明提供一种液晶显示装置，其可以延长寿命，并且可以缩小其所谓的相框的面积。液晶显示装置包括液晶显示板，该液晶显示板在其外围的中央部分具有显示部分；背光设置在液晶显示面板的背面。背光源包括放电管，该放电管至少在其相对的两端具有电极，并且电极设置在放电管的外部。设置各个电极的放电管的相对端部定位成叠置在液晶显示板的周边上，并相对于放电管的中心轴弯曲一角度。

