



US 20080158119A1

(19) **United States**(12) **Patent Application Publication**
Park et al.(10) **Pub. No.: US 2008/0158119 A1**(43) **Pub. Date: Jul. 3, 2008**(54) **LIQUID CRYSTAL DISPLAY APPARATUS
AND DRIVING METHOD THEREFOR**(30) **Foreign Application Priority Data**

Dec. 27, 2006 (KR) 10-2006-0134419

(75) Inventors: **Dong-Joon Park,**
Chungcheongnam-do (KR);
Jung-Mok Han,
Chungcheongnam-do (KR);
Jeong-Hyun Kim,
Chungcheongnam-do (KR)**Publication Classification**(51) **Int. Cl.**
G09G 3/36 (2006.01)(52) **U.S. Cl.** **345/87**(57) **ABSTRACT**

A liquid crystal display (LCD) apparatus includes an LCD section and a driving section. The driving section provides the LCD section with a compensated gradation datum based on a first gradation datum of an (n)-th frame, a second gradation datum of an (n+1)-th frame and a third gradation datum of an (n-1)-th frame. The driving section provides the LCD section with a sum total of a pre-tilt value that is varied in accordance with the gradation and the first gradation datum when the gradation of the second gradation datum is higher than that of the first gradation datum. The driving section provides the LCD section with the first gradation datum when a gradation of the second gradation datum is lower than that of the first gradation datum.

Correspondence Address:
MACPHERSON KWOK CHEN & HEID LLP
2033 GATEWAY PLACE, SUITE 400
SAN JOSE, CA 95110

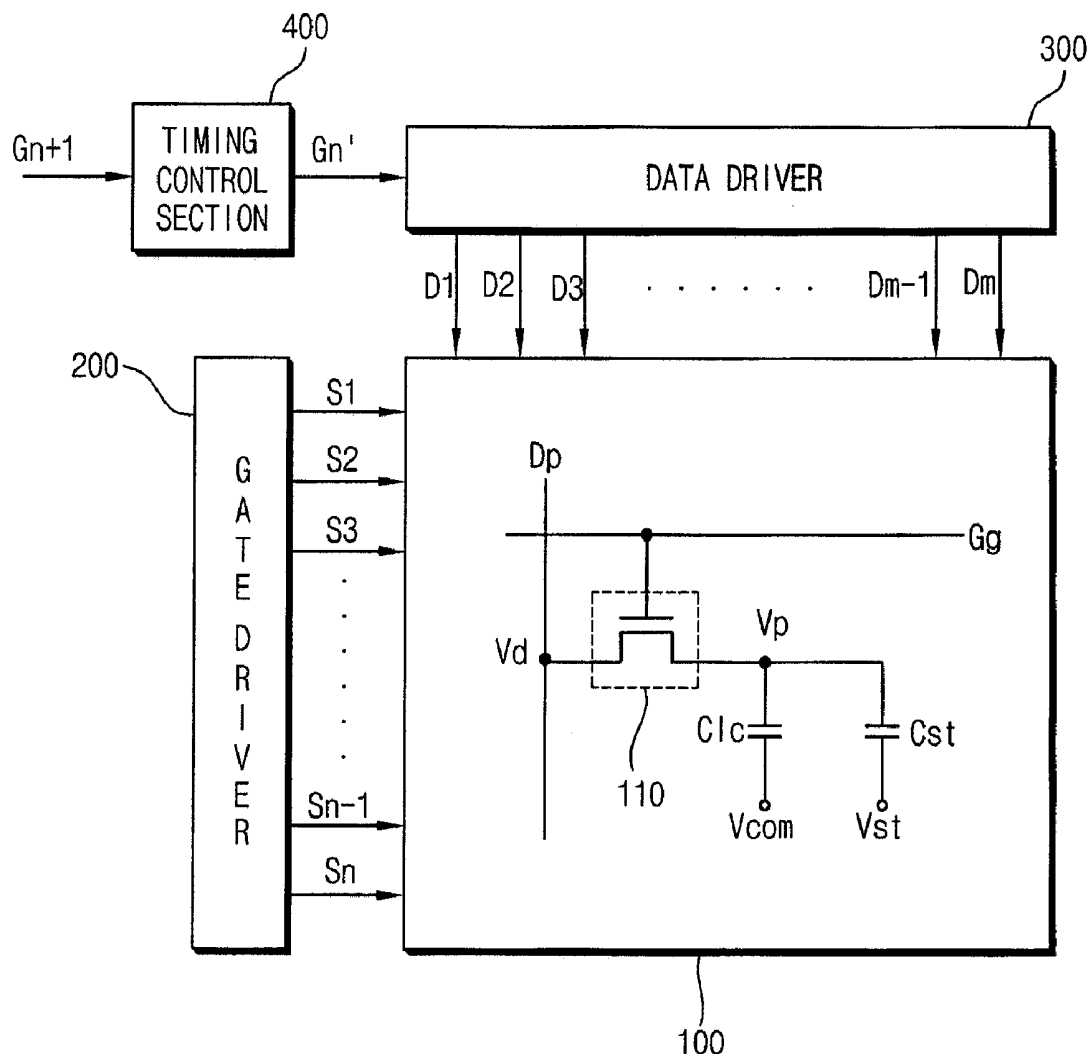
(73) Assignee: **Samsung Electronics Co., Ltd.**(21) Appl. No.: **11/932,930**(22) Filed: **Oct. 31, 2007**

FIG. 1

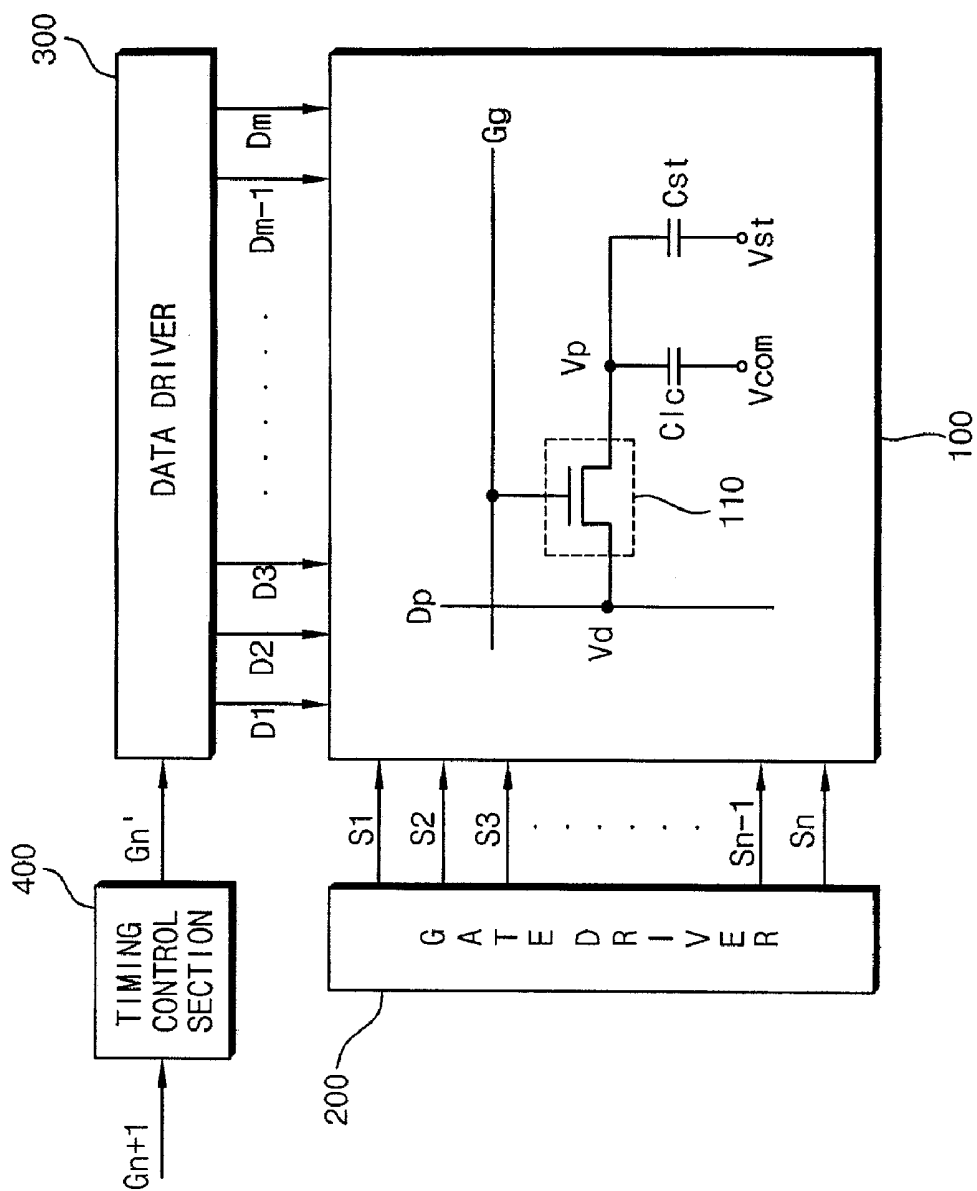


FIG. 2

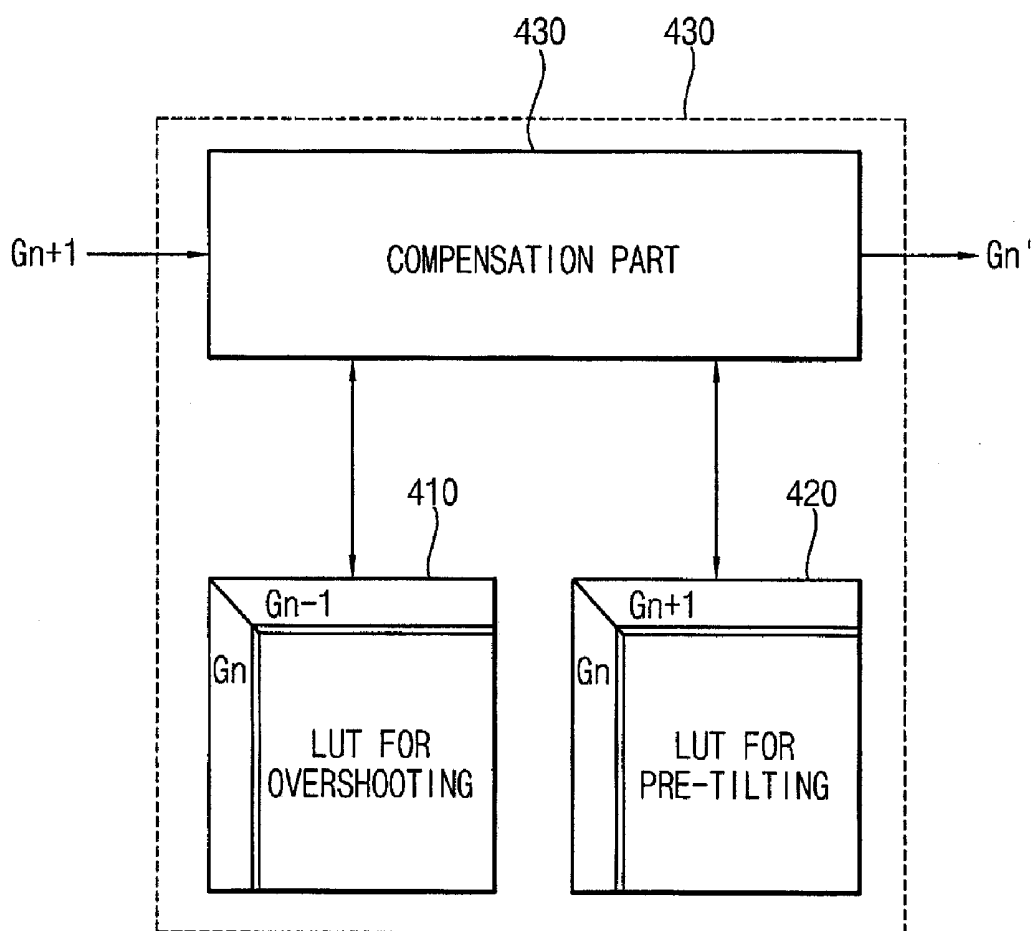


FIG. 3

410

		Gn-1																			
	0	16	32	48	64	80	96	112	128	144	160	176	192	208	224	240	255				
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
16	20	16	8	8	8	7	7	7	6	6	5	5	4	4	3	3	2				
32	46	42	32	16	15	14	11	11	11	9	9	9	7	7	7	7	5				
48	98	79	64	48	32	29	25	22	19	18	17	16	14	14	11	11	7				
64	134	116	96	85	64	50	43	34	28	24	22	21	19	18	17	16	5				
80	155	144	121	107	92	80	71	63	54	46	43	38	36	34	29	24	13				
96	176	159	141	133	115	106	96	86	81	74	69	66	60	55	49	42	32				
112	188	172	157	147	136	129	120	112	104	100	94	90	85	77	71	62	55				
128	196	183	170	163	154	147	141	134	128	118	144	106	101	99	91	84	77				
144	206	194	182	176	171	164	158	153	149	144	134	130	123	117	442	105	99				
160	215	205	200	188	184	181	178	174	170	166	160	156	151	144	139	134	129				
176	223	214	211	199	197	195	192	189	186	183	180	176	170	164	159	154	150				
192	231	224	222	217	215	213	210	208	205	202	199	195	192	188	184	179	174				
208	240	237	234	229	288	226	225	222	219	217	215	214	211	208	203	199	199				
224	246	245	243	238	238	238	238	238	237	235	233	231	229	227	224	222	222				
240	255	255	255	252	250	250	249	248	248	246	245	244	243	242	242	240	240				
256	256	256	256	256	256	256	256	256	256	256	256	256	256	256	256	256	256				

Gn

FIG. 4

420

Gn+1																	
	0	16	32	48	64	80	96	112	128	144	160	176	192	208	224	240	255
0	0	6	12	19	26	33	40	47	54	61	68	75	82	88	94	98	100
16	0	0	6	12	19	26	33	40	47	54	61	68	75	82	88	94	98
32	0	0	0	6	12	19	26	33	40	47	54	61	68	75	82	88	94
48	0	0	0	0	6	12	19	26	33	40	47	54	61	68	75	82	88
64	0	0	0	0	0	6	12	19	26	33	40	47	54	61	68	75	82
80	0	0	0	0	0	0	6	12	19	26	33	40	47	54	61	68	75
96	0	0	0	0	0	0	0	6	12	19	26	33	40	47	54	61	68
112	0	0	0	0	0	0	0	0	6	12	19	26	33	40	47	54	61
128	0	0	0	0	0	0	0	0	0	6	12	19	26	33	40	47	54
144	0	0	0	0	0	0	0	0	0	0	6	12	19	26	33	40	47
160	0	0	0	0	0	0	0	0	0	0	0	6	12	19	26	33	40
176	0	0	0	0	0	0	0	0	0	0	0	0	6	12	19	26	33
192	0	0	0	0	0	0	0	0	0	0	0	0	0	6	12	19	26
208	0	0	0	0	0	0	0	0	0	0	0	0	0	0	6	12	19
224	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	6	12
240	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	6
256	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

FIG. 5

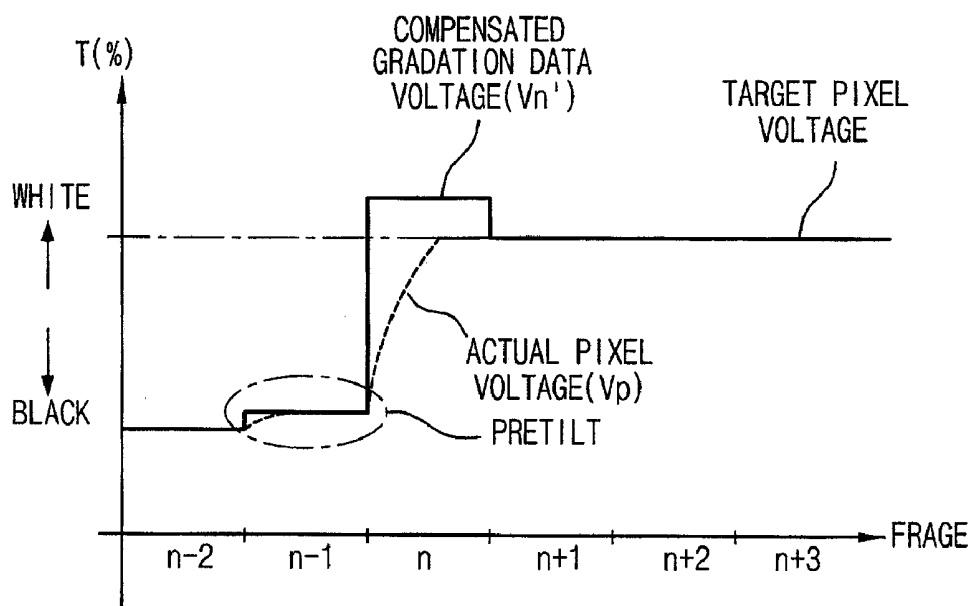


FIG. 6

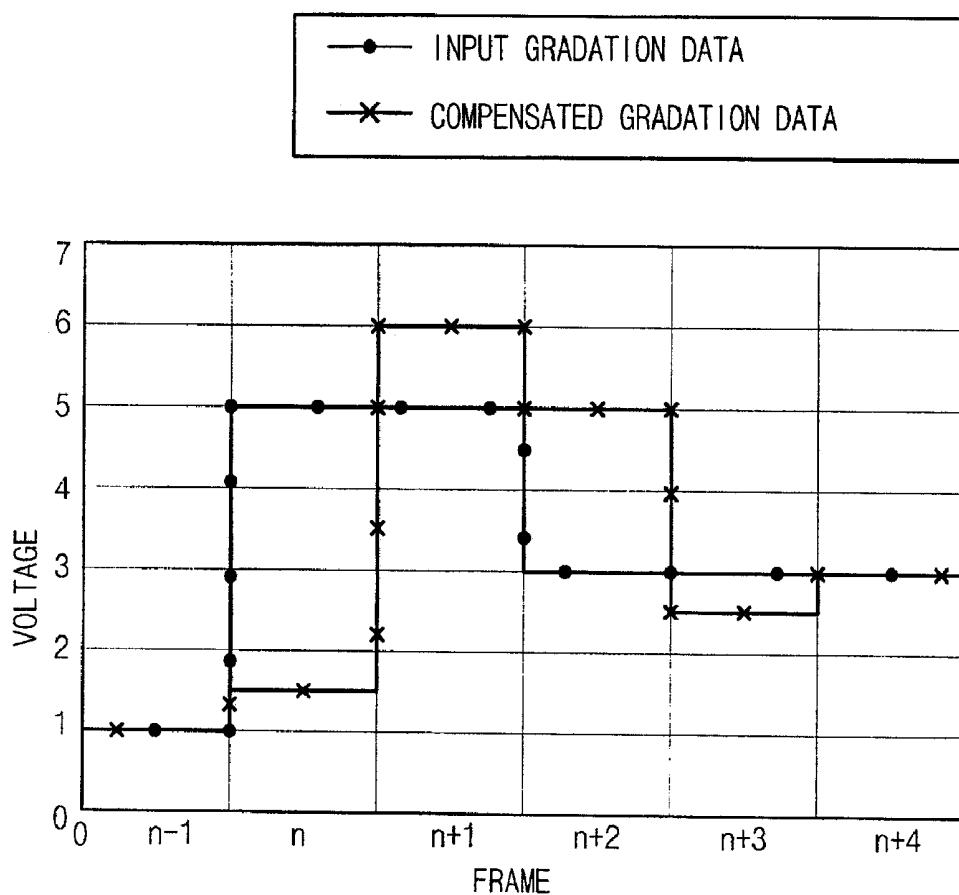


FIG. 7A

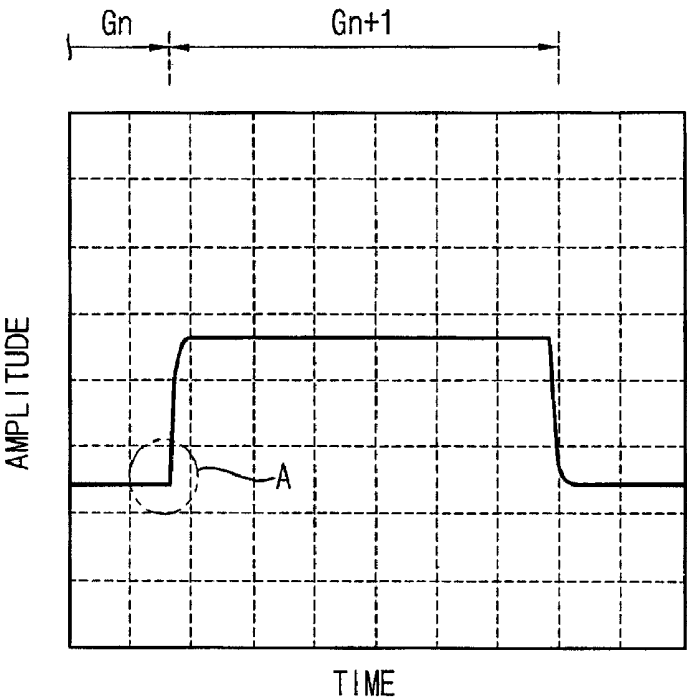


FIG. 7B


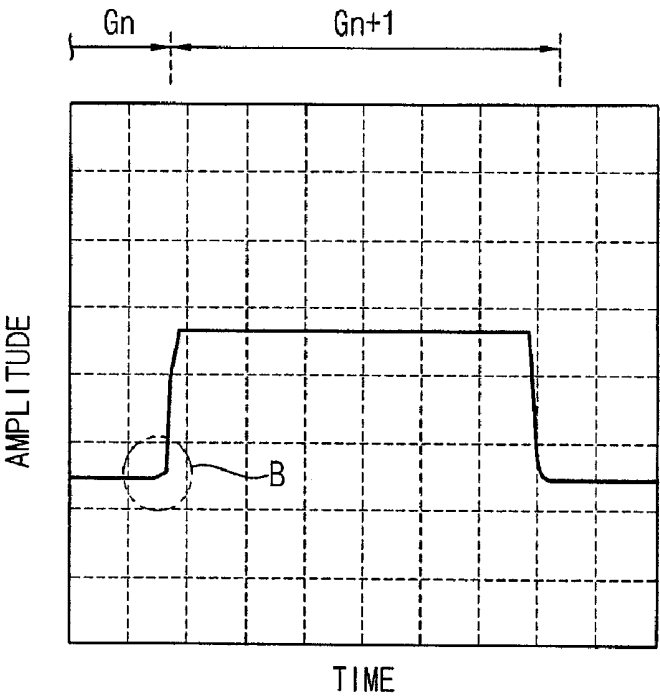


FIG. 7C

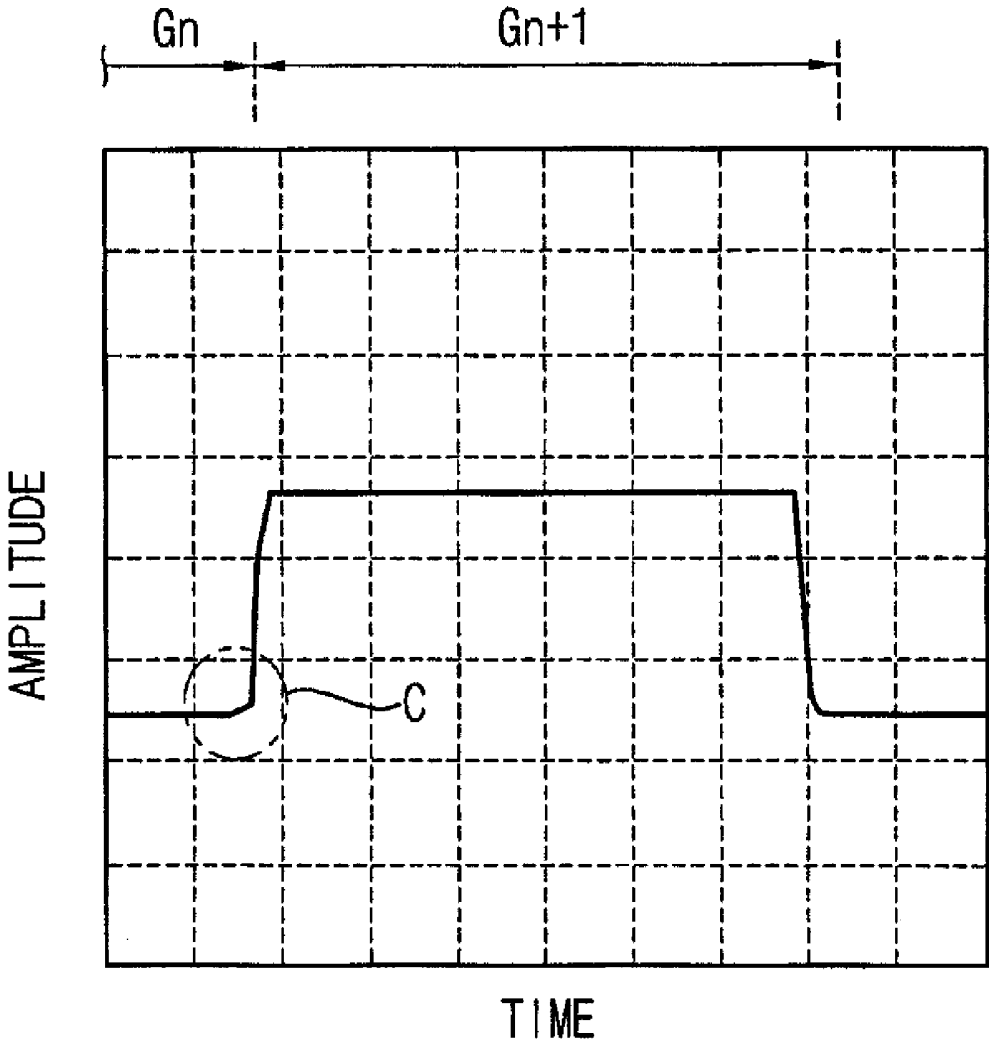

LIQUID CRYSTAL DISPLAY APPARATUS AND DRIVING METHOD THEREFOR

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority under 35 U.S.C. § 119 to Korean Patent Application No. 2006-134419 filed on Dec. 27, 2006 in the Korean Intellectual Property Office (KIPO), the contents of which are herein incorporated by reference in their entirety.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display (LCD) apparatus and, more particularly, to an LCD apparatus capable of optimizing the response speed of the liquid crystal molecules and a driving method for the LCD apparatus.

[0004] 2. Description of the Related Art

[0005] Generally, an LCD apparatus includes a color filter substrate having a common electrode, an array substrate having a pixel electrode and liquid crystal disposed between the color filter substrate and the array substrate. When an electric field is applied between the common electrode and the pixel electrode, the arrangement of liquid crystal molecules interposed between the common electrode and the pixel electrode is changed. When the arrangement of the liquid crystal molecule is changed, the transmittance of light is changed in accordance with the arrangement of the liquid crystal molecule, so that an image may be displayed. s tend to exhibit moving pictures poorly because the response speed of the liquid crystal is slower than the period one of a motion picture frame, causing a moving image to become blurred. Therefore, it would be desirable to optimize the response speed of the liquid crystal to improve the display quality of moving pictures.

[0006] To optimize the response speed of a liquid crystal of the LCD device, a controller of the display device may operate in an overdrive mode in which over-compensated or under-compensated (higher or lower) drive current is provided to speed up the time to reach a desired brightness. To perform the overdrive mode, a dynamic capacitance compensation (referred to as DCC) may be used.

[0007] When the DCC is used, an overdriving value of a gradation datum may be determined based on comparison between the gradation datum corresponding to the preceding frame and a gradation datum corresponding to a current frame.

[0008] When using an overdrive circuit, a look-up table (LUT) that stores measured overdrive values is typically used since the overdrive value determined according to the comparison between current and previous gradation data does not change linearly with gray level owing to liquid crystal properties. In general, measurement of a compensation value (or overdrive value) stored in the LUT is carried out under the conditions that the vertical frequency is 60 Hz and the temperature is normal temperature.

[0009] A pre-tilting method may be used to optimize the response speed of the liquid crystal molecules. In the pre-tilting method, when images are quickly changed from a black gradation of a low voltage into a white gradation of a high voltage, the pre-tilt forming signal for pre-tilting the

liquid crystal molecules is output, and then a high gradation signal that is higher than a target pixel voltage is output during a following frame interval.

[0010] In the pre-tilting method, an LUT is used, which has a plurality of pre-tilting values mapped therein corresponding to a current frame gradation datum and a following frame gradation datum. However, the LUT has a plurality of fixed pre-tilting values, so that the response speed of liquid crystal molecules between detail gradations is not optimized.

SUMMARY OF THE INVENTION

[0011] According to an aspect of the present invention, a liquid crystal display (LCD) apparatus having better response speed includes an LCD section and a driving section. The driving section provides the LCD section with a compensated gradation datum on the basis of a first gradation datum of an (n)-th frame and a second gradation datum of an (n+1)-th frame, where, 'n' denotes a natural number greater than two. The driving section provides the LCD section with a sum of a pre-tilt value that is varied in accordance with the first gradation datum and the second gradation datum.

[0012] In an exemplary embodiment, the driving section may further include a second memory that stores a plurality of pre-tilt values of a look-up table (LUT) type in correspondence with the first gradation datum and the third gradation datum.

[0013] In an exemplary embodiment, the driving section may provide the LCD section with a compensated gradation datum based on the first gradation datum, the second gradation datum and a third gradation datum of an (n-1)-th frame. The driving section may include a first memory that stores a plurality of overdriving gradation data of an LUT type in correspondence with the first gradation datum and the third gradation datum.

[0014] In an exemplary embodiment, the driving section may determine the overdriving quantity of the (n)-th frame based on a first gradation datum of the (n)-th frame and a third gradation datum of the (n-1)-th frame.

[0015] In an exemplary embodiment, the driving section may include a timing control section, a data driver and a gate driver. The timing control section receives a gradation datum from an image signal source, and compares a first gradation datum of the (n)-th frame with a second gradation datum of the (n+1)-th frame to generate a compensated gradation datum of the (n)-th frame that is reflected in a varying pre-tilt value. The data driver converts the compensated gradation datum into a data voltage to provide the LCD section with an image signal. The gate driver sequentially provides the LCD section with scan signals

[0016] In an exemplary embodiment, the timing control section may include the first memory, the second memory and a compensation part. The compensation part receives the second gradation datum of the (n+1)-th frame, extracts a pre-tilt value stored in the second memory, and reflects the pre-tilt value to the first gradation datum to provide the data driver with a compensated gradation datum of the (n)-th frame.

[0017] In an exemplary embodiment, the compensation part may output a compensation gradation data for an overdriving waveform that is higher than the target voltage of the (n)-th frame when the first gradation datum of the (n)-th frame and the second gradation datum of the (n+1)-th frame are different from each other. The compensated gradation datum is a signal for forming an overshooting waveform when a

gradation of the first gradation datum is smaller than that of the second gradation datum. The compensated gradation datum is a signal for forming an undershoot waveform when a gradation of the first gradation datum is greater than that of the second gradation datum.

[0018] In an exemplary embodiment, the driving section may determine a pre-tilt quantity of the (n)-th frame based on a first gradation datum of the (n)-th frame and a second gradation datum of the (n+1)-th frame, wherein the determined pre-tilt quantity is reflected in the compensated gradation datum.

[0019] In an exemplary embodiment, the driving section may determine an overdriving quantity of the (n)-th frame based on a first gradation datum of the (n)-th frame and a third gradation datum of the (n-1)-th frame. Here, the determined overdriving quantity may be reflected in the compensated gradation datum.

[0020] In an exemplary embodiment, the amplitude of the pre-tilt value may be increased as the difference between the gradation of the first gradation datum and that of the second gradation datum is increased.

[0021] In an exemplary embodiment, the compensated gradation datum may be delayed by one frame interval and then output to the LCD section.

[0022] In an exemplary embodiment, a full-gradation number of the images may be 256, and the maximum value of the pre-tilt value may be a gradation datum corresponding to a 100th-gradation.

[0023] In an exemplary embodiment, the minimum value of the pre-tilt value may be a gradation datum that corresponds to a 6th-gradation.

[0024] In an exemplary embodiment, the driving section may provide the LCD section with the sum of the pre-tilt value and the first gradation datum when the gradation of the second gradation datum is higher than that of the first gradation datum. The driving section may provide the LCD section with the first gradation datum when the gradation of the second gradation datum is lower or substantially equal to that of the first gradation datum.

[0025] In another aspect of the present invention, an LCD apparatus includes a plurality of gate lines, a plurality of data lines electrically insulated from the gate lines and being extended along a different direction from that of the gate lines to define a plurality of pixel areas arranged in a matrix shape, and a plurality of pixels formed in the pixel areas. According to the method of driving the LCD apparatus, scan signals are sequentially provided to the gate lines. A gradation datum is received from an image signal source, and then a first gradation datum of the (n)-th frame is compared with the second gradation datum of the (n+1)-th frame to generate a compensated gradation datum of the (n)-th frame having a varied pre-tilt value reflected therein. Here, 'n' denotes a natural number greater than two. Then, a data voltage that corresponds to the compensated gradation datum is provided to the data line.

[0026] In an exemplary embodiment, in receiving a gradation datum, the varied pre-tilt value is added to the first gradation datum to generate the compensated gradation datum when the gradation of the second gradation datum is higher than that of the first gradation datum. Moreover, the first gradation datum is generated as the compensated gradation datum when the gradation of the second gradation datum is lower than that of the first gradation datum.

[0027] In an exemplary embodiment, a full-gradation number of the images is 256, and the maximum value of the pre-tilt value is a gradation datum that corresponds to the 100th-gradation. The minimum value of the pre-tilt value is a gradation datum that corresponds to the 6th-gradation.

[0028] According to the LCD apparatus and the method for driving the LCD apparatus, the compensated gradation datum has a variable pre-tilt value determined in accordance with the variation of the gradation, to optimize the response speed of the liquid crystal molecules between detail gradations.

BRIEF DESCRIPTION OF THE DRAWINGS

[0029] The above and other advantages of the present invention will become readily apparent by reference to the following detailed description when considered in conjunction with the accompanying drawings wherein:

[0030] FIG. 1 is a block diagram showing a liquid crystal display (LCD) apparatus according to an exemplary embodiment of the present invention;

[0031] FIG. 2 is a block diagram showing a timing control section according to an exemplary embodiment of the present invention;

[0032] FIG. 3 is a table showing an example of a first look-up table (LUT) that is stored in the first memory of FIG. 2;

[0033] FIG. 4 is a table showing an example of a second LUT that is stored in the second memory of FIG. 2;

[0034] FIG. 5 is a graph showing a method of applying voltage according to an exemplary embodiment of the present invention;

[0035] FIG. 6 is waveforms showing an outputted compensated gradation datum with respect to an inputted gradation datum according to an exemplary embodiment of the present invention; and

[0036] FIGS. 7A and 7C are graphs showing a distortion of a waveform when a pre-tilt value is varied.

DESCRIPTION OF THE EMBODIMENTS

[0037] It will be understood that when an element or layer is referred to as being "on," "connected to" or "coupled to" another element or layer, it can be directly on, connected or coupled to the other element or layer or intervening elements or layers may be present. In contrast, when an element is referred to as being "directly on," "directly connected to" or "directly coupled to" another element or layer, there are no intervening elements or layers present.

[0038] Hereinafter, the present invention will be described in detail with reference to the accompanying drawings.

[0039] FIG. 1 is a block diagram showing a liquid crystal display (LCD) apparatus according to an exemplary embodiment of the present invention.

[0040] Referring to FIG. 1, an LCD apparatus according to the present invention includes an LCD panel 100, a gate driver 200, a data driver 300 and a timing control section 400. The gate and data drivers 200 and 300, and the timing control section 400 operate as a driving device that converts a signal provided from an external host system such as a graphic controller to a signal that is adequate to the LCD panel 100.

[0041] The LCD panel 100 includes a plurality of gate lines (or scan lines) for transferring a gate-on signal and a plurality of data lines (or source lines) for transferring a compensated gradation data signal. Each of the data lines and each of the gate lines define a pixel. The pixel includes a thin-film tran-

sistor (TFT) **110**, a liquid crystal capacitor C_{lc} and a storage capacitor C_{st} . The TFT **110** includes a gate electrode that is electrically connected to one of the gate lines, and a source electrode that is electrically connected to one of the data lines.

[0042] When a gate ON signal is supplied to the gate line S_n to turn on the TFT **10**, the data voltage V_d supplied to the data line DL is supplied to each pixel electrode (not shown) via the TFT **10**. An electric field corresponding to a difference between the pixel voltage V_p supplied to the pixel electrode and the common voltage V_{com} is supplied to the liquid crystal (shown as the liquid crystal capacitor in FIG. 1) so that the light permeates the TFT **110** corresponding to the strength of the electric field. The pixel voltage V_p is maintained during one frame period. In FIG. 1, a storage capacitor C_{st} may be used in an auxiliary manner so as to maintain the pixel voltage V_p supplied to the pixel electrode.

[0043] The liquid crystal molecules have anisotropic permittivity, meaning that the permittivity depends on the directions of the liquid crystal molecules. When the direction of the liquid crystal molecules is changed by the voltage supplied to the liquid crystal, its permittivity is also changed, and accordingly, the capacitance of the liquid crystal capacitor (hereinafter, referred to as the liquid crystal capacitance) is also changed. The liquid crystal capacitor is charged while the TFT **110** is turned-on, after which the TFT **110** is turned-off. When the liquid crystal capacitance is changed, the pixel voltage V_p at the liquid crystal molecules is also changed, since $Q=CV$.

[0044] The liquid crystal layer of the LCD panel **100** includes a twist nematic (TN) mode, an in plane switching (IPS) mode, a vertical alignment (VA) mode, etc. The liquid crystal layer of the VA mode has rapid response speed, and has been widely used. In order to increase the viewing angle of the LCD panel having the VA mode, a patterned vertical alignment (PVA) mode, a multi-domain vertical alignment (MVA) mode, etc., have been devised. The VA mode is a liquid crystal mode in which the rubbing direction of the array substrate is substantially parallel to that of the color filter substrate and the rubbing directions of the array substrate and color filter substrate are opposite to each other. The MVA mode is a liquid crystal mode in which the rubbing direction of the array substrate crosses the rubbing direction of the color filter substrate with an angle of about 0 degree to about 90 degree and the rubbing directions of the array substrate and color filter substrate are opposite to each other.

[0045] The gate driver **200** sequentially applies gate on voltages $S_1, S_2, S_3, \dots, S_n$ to the gate lines, thereby turning-on the TFT **110** electrically connected to the gate line.

[0046] The data driver **300** receives the compensated gradation data G_n' from the timing controlling section **400**, converts the compensated gradation datum G_n' into a plurality of data signals $D_1, D_2, \dots, D_m$ of gradation voltages (data voltages), and applies the data signals $D_1, D_2, \dots, D_m$ to each data line.

[0047] The timing controlling section **400** receives a gradation datum G_{n+1} of a following frame (i.e., the $(n+1)$ -th frame) from a gradation data source, for example, a graphic controller (not shown), and outputs a compensated gradation datum G_n' of the current frame on the basis of the current frame (i.e., the (n) -th frame) gradation datum G_n , a previous frame (i.e., the $(n-1)$ -th frame) gradation datum G_{n-1} , and a following frame (i.e., the $(n+1)$ -th frame) gradation datum G_{n+1} , where, 'n' denotes a natural number greater than two.

[0048] When the (n) -th frame gradation datum G_n is equal to the $(n+1)$ -th frame gradation datum G_{n+1} , the timing controlling section **400** does not compensate the (n) -th frame gradation datum G_n and provides the data driver **300** with the (n) -th frame gradation datum G_n .

[0049] However, when the (n) -th frame gradation datum G_n corresponds to a black gradation and the $(n+1)$ -th frame gradation datum G_{n+1} corresponds to a bright gradation or a white gradation, the timing controlling section **400** provides the data driver **300** with a compensated gradation datum to form a higher gradation than the black gradation in correspondence with the (n) -th frame.

[0050] The timing controlling section **400** provides the data driver **300** with the compensated gradation datum G_n' for overdriving the liquid crystal molecules in correspondence with the (n) -th frame by comparing the (n) -th frame gradation datum G_n with the $(n-1)$ -th frame gradation datum G_{n-1} .

[0051] The timing controlling section **400** provides the data driver **300** with the compensated gradation datum G_n' for pre-tilting liquid crystal molecules in correspondence with the (n) -th frame by comparing the (n) -th frame gradation datum G_n with the $(n+1)$ -th gradation datum G_{n+1} .

[0052] Although FIG. 1 shows the timing controlling section **400** is a stand-alone unit, it may be integrated in a graphic card, an LCD module, a timing controller or a data driver.

[0053] According to the above, the data voltage is compensated and the compensated data voltage is applied to the pixel, so that the pixel voltage achieves the target voltage level. Therefore, though the structure of the LCD panel is not changed and the liquid crystal molecules are not changed, the response speed of the liquid crystal molecules is optimized so that a moving picture, etc may be clearly displayed.

[0054] FIG. 2 is a block diagram showing a timing control section according to an exemplary embodiment of the present invention.

[0055] Referring to FIGS. 1 and 2, timing control section **400** according to an exemplary embodiment of the present invention includes a first memory **410**, a second memory **420** and a compensation part **430**.

[0056] The first memory **410** stores gradation data having an overdriving value reflected therein, which corresponds to an (n) -th frame gradation datum G_n and an $(n+1)$ -th frame gradation datum G_{n+1} . The overdriving value includes an overshooting value that is greater than the target pixel voltage and an undershooting value that is smaller than the target value. In FIG. 2, the first memory **410** stores an LUT for overshooting.

[0057] The second memory **420** stores a pre-tilt value according to the (n) -th frame gradation datum G_n and the $(n+1)$ -th frame gradation datum G_{n+1} . In FIG. 2, the second memory **420** stores an LUT for pre-tilting.

[0058] The compensation part **430** provides a compensated gradation datum for forming a different target voltage of the (n) -th frame to the data driver **300** when the target voltage of the $(n-1)$ -th frame is different from the (n) -th frame gradation datum G_n . The compensated gradation datum that is provided to the data driver **300** is delayed about one frame.

[0059] For example, when a gradation datum G_{n-1} corresponding to the $(n-1)$ -th frame is smaller than that of a gradation datum G_n corresponding to the (n) -th frame, the compensation part **430** provides the data driver **300** with a compensated gradation datum for forming an overshooting waveform that is greater than a target voltage of the (n) -th frame.

[0060] When a gradation datum G_{n-1} corresponding to the $(n-1)$ -th frame is greater than that of the gradation datum G_n corresponding to the (n) -th frame, the compensation part 430 provides the data driver 300 with a compensated gradation datum for forming an undershoot waveform that is lower than the target voltage of the (n) -th frame.

[0061] When a datum G_{n-1} corresponding to the $(n-1)$ -th frame is equal to that of the gradation datum G_n corresponding to the (n) -th frame, the compensation part 430 provides the data driver 300 with the gradation datum corresponding to the target voltage of the (n) -th frame.

[0062] The compensation part 430 receives the $(n+1)$ -th frame gradation datum G_{n+1} , extracts a pre-tilt value stored in the second memory 420, and provides the data driver 300 with the compensated gradation datum G_n' of the (n) -th frame by reflecting the pre-tilt value to the gradation datum corresponding to the (n) -th frame.

[0063] For example, when the gradation datum G_n corresponding to the (n) -th frame is lower than that of the gradation datum G_{n+1} corresponding to the $(n+1)$ -th frame, the compensation part 430 provides the data driver 300 with the gradation datum corresponding to the target voltage of the (n) -th frame.

[0064] When a gradation datum G_n corresponding to the (n) -th frame is greater than or equal to that of the gradation datum G_{n+1} corresponding to the $(n+1)$ -th frame, the compensation part 430 adds the pre-tilt value that varies according to the gradation to the target voltage of the (n) -th frame, and provides the data driver 300 with the gradation datum corresponding to the added voltage.

[0065] FIG. 3 is a table showing an example of a first look-up table (LUT) that is stored in the first memory of FIG. 2. Particularly, FIG. 3 shows an example of a gradation datum having overdriving values reflected therein.

[0066] Referring to FIG. 3, when the $(n-1)$ -th frame gradation datum G_{n-1} is a relatively high gradation and the (n) -th frame gradation datum G_n is a relatively low gradation, gradation datum for forming an undershooting waveform are stored in the first LUT 410.

[0067] When the $(n-1)$ -th frame gradation datum G_{n-1} is a relatively low gradation and the (n) -th frame gradation datum G_n is a relatively high gradation, gradation datum for forming an overshooting waveform are stored in the first LUT 410.

[0068] For example, when the $(n-1)$ -th frame gradation datum G_{n-1} is an 80th-gradation and the (n) -th frame gradation datum G_n is a 32nd-gradation, the overdriving value may be a gradation datum corresponding to the 14th-gradation. The gradation datum corresponding to 14th-gradation may be a gradation datum having an undershooting value reflected thereto.

[0069] When the $(n-1)$ -th frame gradation datum G_{n-1} is an 80th-gradation and the (n) -th frame gradation datum G_n is a 208th-gradation, the overdriving value may be a gradation datum corresponding to the 226th-gradation. The gradation datum corresponding to the 226th-gradation may be a gradation datum having an overshooting value reflected therein.

[0070] FIG. 4 is a table showing an example of a second LUT that is stored in the second memory of FIG. 2. Particularly, FIG. 4 shows an example of the second LUT that is stored in the second memory.

[0071] Referring to FIG. 4, when the (n) -th frame gradation datum G_n is a relatively high gradation and the $(n+1)$ -th frame gradation datum G_{n+1} is a relatively low gradation, a pre-tilt value of zero level is stored in the second LUT 420.

[0072] When the (n) -th frame gradation datum G_n is a relatively low gradation and the $(n+1)$ -th frame gradation datum G_{n+1} is a relatively high gradation, a plurality of pre-tilt values that vary in accordance with a gradation is stored in the second LUT 420.

[0073] For example, when the (n) -th frame gradation datum G_n is a 32nd-gradation and the $(n+1)$ -th frame gradation datum G_{n+1} is a 80th-gradation, respectively, the pre-tilt value may be a gradation datum corresponding to the 19th-gradation.

[0074] When the (n) -th frame gradation datum G_n and the $(n+1)$ -th frame gradation datum G_{n+1} are a 208th-gradation and an 80th-gradation, respectively, the pre-tilt value may have a zero level. The pre-tilt value of a zero level is stored because the loss of response speed of the liquid crystal molecules does not occur even though the direction of the liquid crystal molecules is not changed when images are changed from high gradation to low gradation.

[0075] As described above, in order to optimize a response speed of liquid crystal molecules, when a gradation datum is changed from a black gradation to a white gradation in the (n) -th frame, a pre-tilt voltage, for example, about 2 V to about 3.5 V is applied to a pixel electrode so as to pre-tilt the liquid crystal molecule in the $(n-1)$ -th frame, in accordance with following FIG. 5. Therefore, when a gradation datum is changed to a white gradation in the (n) -th frame, the response speed of liquid crystal molecules may be optimized.

[0076] FIG. 5 is a graph showing a method of applying voltage according to an exemplary embodiment of the present invention.

[0077] Referring to FIG. 5, according to an exemplary embodiment of the present invention, in a consideration of an (n) -th frame target pixel voltage, an $(n-1)$ -th frame pixel voltage (or a data voltage) and an $(n+1)$ -th frame pixel voltage, a compensated gradation data voltage V_n' is applied to an LCD panel, so that an (n) -th frame actual pixel voltage V_p may quickly approach the target pixel voltage.

[0078] That is, when images are changed from a black gradation to a white gradation, a relatively higher voltage than the voltage corresponding to the black gradation is applied to the LCD panel before one frame of the white gradation, so that the liquid crystal molecules is pre-tilted. Considering that the black voltage is about 0.5 V to about 1.5 V, the high voltage for pre-tilting the liquid crystal molecules may be about 2 V to about 3.5 V.

[0079] When the full-gradation number is 256, the 0th-gradation to 50th-gradation may be defined as the black gradation and 200th-gradation to 255th-gradation may be defined as the white gradation. A range of the black or white gradation may be set by the designer of the LCD device. Alternatively, the voltage for pre-tilting the liquid crystal molecules may be set to have different values in correspondence with each gradation.

[0080] When the images are changed to a white gradation at the next following frame, the response speed of the liquid crystal molecules may be optimized from a black gradation to a white gradation.

[0081] Particularly, when the (n) -th frame is black gradation, it may be known what kind of a gradation signal of the $(n+1)$ -th frame would follow. When the gradation signal of the $(n+1)$ -th frame is white gradation or bright gradation, a gradation signal that is greater than a black gradation is applied to the data driver during the (n) -th frame.

[0082] Accordingly, a compensated gradation datum for pre-tilting and a compensated gradation datum for overdriving is output so that the response speed of the liquid crystal molecules may be optimized when the gradation datum is changed from a black gradation to a white gradation.

[0083] FIG. 6 is waveforms showing the output compensated gradation datum with respect to an input gradation datum according to an exemplary embodiment of the present invention.

[0084] Referring to FIG. 6, when an input gradation data signal is about 1 V during the (n-1)-th frame, about 5 V during the (n)-th frame and the (n+1)-th frame and 3 V during and after the (n+2)-th frame, the compensated gradation datum according to an exemplary embodiment of the present invention is output as following.

[0085] In response, the compensated gradation data signal of 1.5 V corresponding to the input gradation data signal for the (n-1)-th frame is applied for the (n)-th frame to pre-tilt the liquid crystal molecule. Then, the compensated gradation data signal of 6 V corresponding to the input gradation data signal for the (n)-th frame is applied for the (n+1)-th frame and the compensated gradation data signal of 5 V corresponding to the input gradation data signal for the (n+1)-th frame is applied for the (n+2)-th frame. The compensated gradation data signal of 2.5 V corresponding to the input gradation data signal for the (n+2)-th frame is applied for the (n+3)-th frame and the compensated gradation data signal of 3 V corresponding to the input gradation data signal for the (n+3)-th frame is applied for the (n+4)-th frame and the frame thereafter.

[0086] Therefore, the compensated gradation datum according to an exemplary embodiment of the present invention is delayed one frame with respect to a gradation datum input from an external device such as a graphic controller. When the image quickly changes from the black gradation of the low voltage to the white gradation of the high voltage, a signal for pre-tilting a liquid crystal molecule is output at (n)-th frame, and then a relatively higher gradation signal than the target pixel voltage is output at the (n+1)-th frame, so that the response speed of the liquid crystal molecules may be optimized.

[0087] As described above, when a gradation datum is transient from a low gradation such as a black gradation to a high gradation such as a white gradation, the pre-tilt values that varies in accordance with gradation is applied to the data driver corresponding to the low gradation, so that the response speed of the liquid crystal molecules may be optimized. The pre-tilt value is represented as a gradation value that corresponds to a voltage level. For example, when the pre-tilt value is about 80, the pre-tilt value is a voltage value corresponding to 80th-gradation.

[0088] When a full-gradation number of the image is 256, the maximum value of the pre-tilt value corresponds to the 100th-gradation and the minimum value of the pre-tilt value corresponds to the 6th-gradation.

[0089] When the maximum value of the pre-tilt value is more than about 100, a distortion is generated in the voltage waveform and the square wave of the voltage waveform is slanted. Therefore, the response speed of the liquid crystal molecules may not be optimized.

[0090] FIGS. 7A and 7C are graphs showing distortion of the waveform when a pre-tilt value is varied.

[0091] Referring to FIG. 7A, when the (n)-th frame gradation datum G_n is a relatively low gradation, the (n+1)-th frame gradation datum G_{n+1} is a relatively high gradation, and the pre-tilt value corresponds to about 80 (i.e., a voltage value corresponding to 80th-gradation), a distortion is not generated in the square waveform.

[0092] That is, when the (n)-th frame gradation datum G_n corresponding to a relatively low gradation is transient to the (n+1)-th frame gradation datum G_{n+1} corresponding to a relatively high gradation, a voltage value corresponding to 80th-gradation datum as the pre-tilt value is applied to the data driver. A waveform distortion is not generated in a portion 'A' where a gradation datum corresponding to a relatively low gradation is transient to a gradation datum corresponding to a relatively high gradation. Therefore, the response speed of the liquid crystal molecules may be optimized.

[0093] Referring to FIG. 7B, when the (n)-th frame gradation datum G_n is a relatively low gradation, the (n+1)-th frame gradation datum G_{n+1} is a relatively high gradation, and the pre-tilt value corresponds to about 120 (i.e., a voltage value corresponding to 120th-gradation), a distortion is generated in the square waveform.

[0094] That is, when the (n)-th frame gradation datum G_n corresponding to a relatively low gradation is transient to the (n+1)-th frame gradation datum G_{n+1} corresponding to a relatively high gradation, a voltage value corresponding to an 120th-gradation datum as the pre-tilt value is applied to the data driver. A waveform distortion is generated in a portion 'B' where a gradation datum corresponding to a relatively low gradation is transient to a gradation datum corresponding to a relatively high gradation. Therefore, the response speed of the liquid crystal molecules may not be optimized by the waveform distortion generated in the portion 'B'.

[0095] Referring to FIG. 7C, when the (n)-th frame gradation datum G_n is a relatively low gradation, the (n+1)-th frame gradation datum G_{n+1} is a relatively high gradation, and the pre-tilt value corresponds to about 150 (i.e., a voltage value corresponding to 150th-gradation), a serious distortion is generated in the square waveform.

[0096] That is, when the (n)-th frame gradation datum G_n corresponding to a relatively low gradation is transient to the (n+1)-th frame gradation datum G_{n+1} corresponding to a relatively high gradation, a voltage value corresponding to an 150th-gradation datum as the pre-tilt value is applied to the data driver. Here, a waveform distortion is greatly generated in a portion 'C' where a gradation datum corresponding to a relatively low gradation is transient to a gradation datum corresponding to a relatively high gradation. That is, the waveform distortion with a slope of about 45 degrees is generated in the portion 'C'. Therefore, the response speed of the liquid crystal molecules may not be optimized by the waveform distortion generated in the portion 'C'.

[0097] As described above, according to the present invention, the pre-tilt value that varies in accordance to a gradation variation is applied to the LCD panel, the response speed of liquid crystal molecules may be optimized not only for transient images from a full-low gradation (i.e., a black gradation) into a full-high gradation (i.e., a white gradation), but also for overall variation of gradation.

[0098] Although the exemplary embodiments of the present invention have been described, it is understood that the present invention should not be limited to these exemplary embodiments but various changes and modifications can be made by one ordinary skilled in the art within the spirit and scope of the present invention as hereinafter claimed.

What is claimed is:

1. A liquid crystal display (LCD) apparatus comprising:
 - an LCD section displaying images by using liquid crystal molecules; and
 - a driving section providing the LCD section with a compensated gradation datum based on a first gradation

datum of an (n)-th frame and a second gradation datum of an (n+1)-th frame, wherein 'n' denotes a natural number greater than two,

the driving section providing the LCD section with the sum of a pre-tilt value that is varied in accordance with the first gradation datum and the second gradation datum.

2. The LCD apparatus of claim 1, wherein the driving section further comprises a second memory that stores a plurality of pre-tilt values of an LUT type in correspondence with the first gradation datum and the second gradation datum.

3. The LCD apparatus of claim 2, wherein the driving section comprises:

a timing control section receiving a gradation datum from an image signal source, and comparing a first gradation datum of the (n)-th frame with a second gradation datum of the (n+1)-th frame to generate a compensated gradation datum of the (n)-th frame that is reflected in a varying pre-tilt value;

a data driver converting the compensated gradation datum into a data voltage to provide the LCD section with an image signal; and

a gate driver sequentially providing the LCD section with scan signals.

4. The LCD apparatus of claim 3, wherein the timing control section comprises:

a compensation part receiving the second gradation datum of the (n+1)-th frame, extracting a pre-tilt value stored in the second memory, and reflecting the pre-tilt value to the first gradation datum to provide the data driver with a compensated gradation datum of the (n)-th frame.

5. The LCD apparatus of claim 4, wherein the compensation part outputs a compensation gradation datum for an overdriving waveform that is higher than the target voltage of the (n)-th frame when the first gradation datum of the (n)-th frame and the second gradation datum of the (n+1)-th frame are different from each other.

6. The LCD apparatus of claim 5, wherein the compensated gradation datum is a signal for forming an overshooting waveform when a gradation of the first gradation datum is smaller than that of the second gradation datum.

7. The LCD apparatus of claim 5, wherein the compensated gradation datum is a signal for forming an undershoot waveform when a gradation of the first gradation datum is greater than that of the second gradation datum.

8. The LCD apparatus of claim 2, wherein the driving section providing the LCD section with a compensated gradation datum based on the first gradation datum and a third gradation datum of an (n-1)-th frame,

the driving section further comprises a first memory that stores a plurality of overdriving gradation data of a look-up table (LUT) type in correspondence with the first gradation datum and the third gradation datum.

9. The LCD apparatus of claim 8, wherein the driving section determines the overdriving quantity of the (n)-th frame based on a first gradation datum of the (n)-th frame and a third gradation datum of the (n-1)-th frame.

10. The LCD apparatus of claim 2, wherein the driving section determines a pre-tilt quantity of the (n)-th frame based on a first gradation datum of the (n)-th frame and a second gradation datum of the (n+1)-th frame, wherein the determined pre-tilt quantity is reflected in the compensated gradation datum.

11. The LCD apparatus of claim 10, wherein the driving section determines an overdriving quantity of the (n)-th frame based on a first gradation datum of the (n)-th frame and a third gradation datum of the (n-1)-th frame, wherein the determined overdriving quantity is reflected in the compensated gradation datum.

12. The LCD apparatus of claim 1, wherein the amplitude of the pre-tilt value is increased as the difference between the gradation of the first gradation datum and that of the second gradation datum is increased.

13. The LCD apparatus of claim 1, wherein the compensated gradation datum is delayed by one frame interval and then output to the LCD section.

14. The LCD apparatus of claim 1, wherein a full-gradation number of the images is 256, and

the maximum value of the pre-tilt value is a gradation datum corresponding to a 100th-gradation.

15. The LCD apparatus of claim 15, wherein the minimum value of the pre-tilt value is a gradation datum that corresponds to a 6th-gradation.

16. The LCD apparatus of claim 1, wherein the driving section provides the LCD section with the sum of the pre-tilt value and the first gradation datum when the gradation of the second gradation datum is higher than that of the first gradation datum, and provides the LCD section with the first gradation datum when the gradation of the second gradation datum is lower or substantially equal to that of the first gradation datum.

17. A method for driving a liquid crystal display apparatus including a plurality of gate lines, a plurality of data lines electrically insulated from the gate lines and which extend along a different direction from that of the gate lines to define a plurality of pixel areas arranged in a matrix shape, and a plurality of pixels being formed in the pixel areas, the method comprising:

providing the gate lines with scan signals, sequentially;
comparing a first gradation datum of an (n)-th frame received from an image signal source with a second gradation datum of an (n+1)-th frame received from the image signal source to generate a compensated gradation datum of the (n)-th frame having a varied pre-tilt value reflected therein (wherein 'n' denotes a natural number greater than two); and

providing the data lines with a data voltage that corresponds to the compensated gradation datum.

18. The method of claim 17, wherein receiving a gradation datum comprises:

adding the varied pre-tilt value to the first gradation datum to generate the compensated gradation datum when a gradation of the second gradation datum is higher than that of the first gradation datum; and

generating the first gradation datum as the compensated gradation datum when a gradation of the second gradation datum is lower than that of the first gradation datum.

19. The method of claim 17, wherein a full-gradation number of the images is 256, and the maximum value of the pre-tilt value is a gradation datum corresponding to a 100th-gradation.

20. The method of claim 19, wherein the minimum value of the pre-tilt value is a gradation datum that corresponds to a 6th-gradation.

专利名称(译)	液晶显示装置及其驱动方法		
公开(公告)号	US20080158119A1	公开(公告)日	2008-07-03
申请号	US11/932930	申请日	2007-10-31
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	PARK DONG JOON HAN JUNG MOK KIM JEONG HYUN		
发明人	PARK, DONG-JOON HAN, JUNG-MOK KIM, JEONG-HYUN		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3648 G09G2320/0252 G09G2320/103 G09G2320/0673 G09G2320/0276		
优先权	1020060134419 2006-12-27 KR		
其他公开文献	US8411005		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示 (LCD) 设备包括LCD部分和驱动部分。驱动部分基于第 (n) 帧的第一灰度数据，第 (n + 1) 帧的第二灰度数据和 (n 的第三灰度数据) 向LCD部分提供补偿的灰度数据。 -1) - 第一帧。当第二灰度数据的灰度高于第一灰度数据的灰度时，驱动部分向LCD部分提供根据灰度和第一灰度数据而变化的预倾斜值的总和。当第二灰度数据的灰度低于第一灰度数据的灰度时，驱动部分为LCD部分提供第一灰度数据。

