



US 20100073913A1

(19) **United States**(12) **Patent Application Publication**
Yeh(10) **Pub. No.: US 2010/0073913 A1**(43) **Pub. Date: Mar. 25, 2010**(54) **LIGHT GUIDE PLATE, BACKLIGHT
MODULE AND LIQUID CRYSTAL DISPLAY**(30) **Foreign Application Priority Data**


Sep. 22, 2008 (TW) 97136370

(75) Inventor: **Yao-Chung Yeh, Hsin-Chu (TW)****Publication Classification**

Correspondence Address:

BACON & THOMAS, PLLC**625 SLATERS LANE, FOURTH FLOOR
ALEXANDRIA, VA 22314-1176 (US)**(51) **Int. Cl.****G02F 1/13357** (2006.01)**G02B 6/10** (2006.01)**G09F 13/04** (2006.01)(52) **U.S. Cl. 362/97.2; 385/146; 362/97.1**(57) **ABSTRACT**

A light guide plate, a backlight module and a liquid crystal display are provided. The light guide plate has a first surface at least having one first structure and one second structure formed thereon. The first structure and the second structure are adjacent arranged and are mirror reflection with each other. Each of the first structure and the second structure has a first protrusion having a cross section of eccentric triangle.

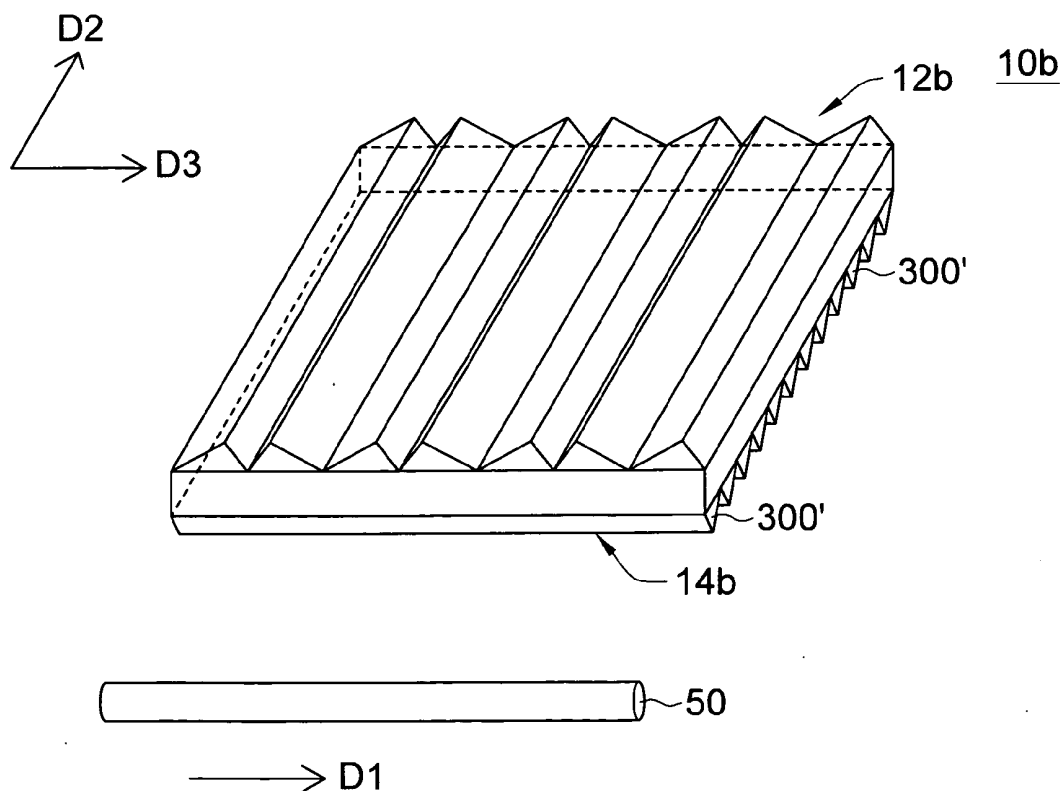(73) Assignee: **AU OPTRONICS CORP.,
Hsin-Chu (TW)**(21) Appl. No.: **12/318,547**(22) Filed: **Dec. 31, 2008**

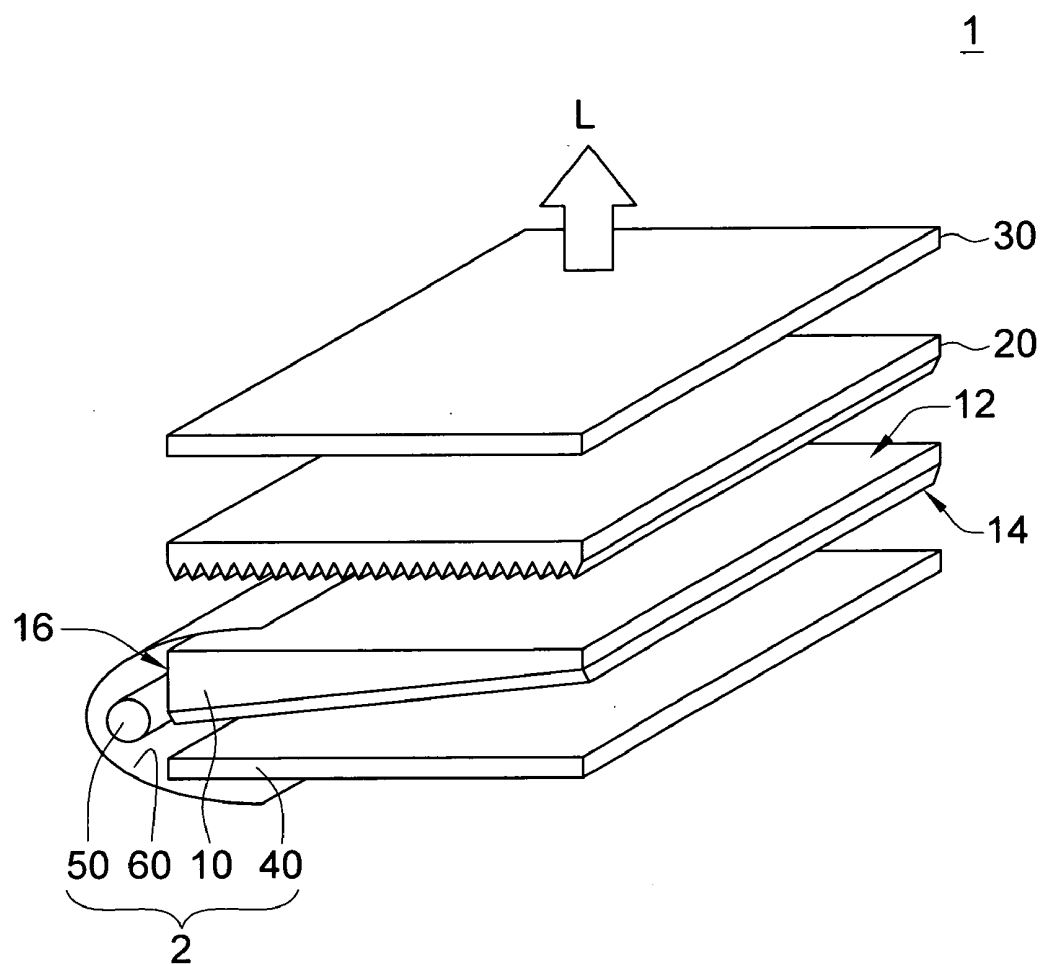


FIG. 1(RELATED ART)

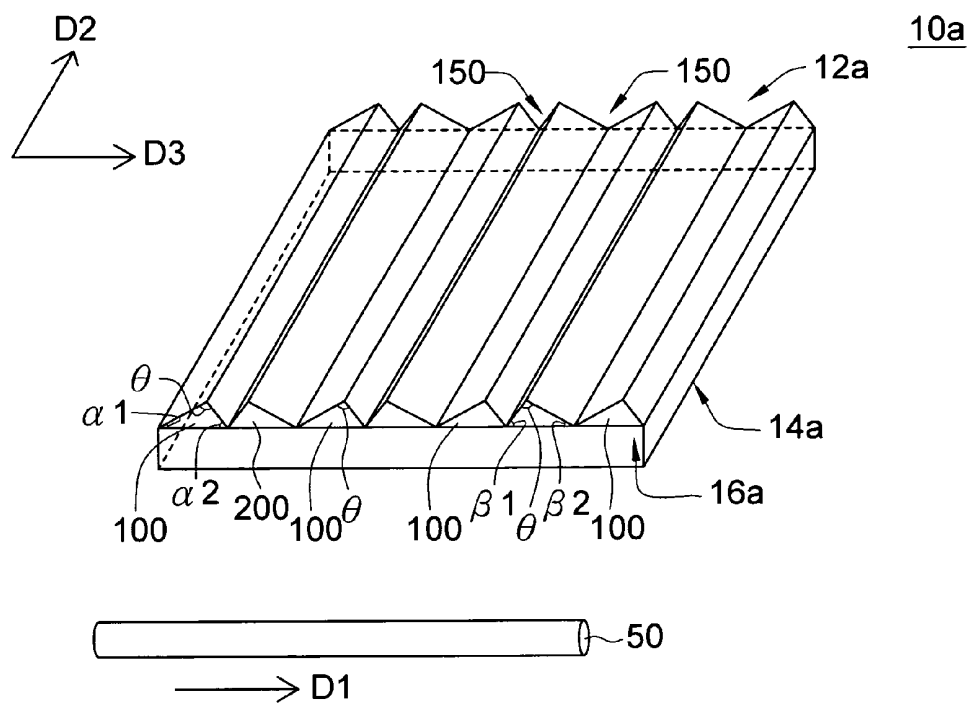


FIG. 2A

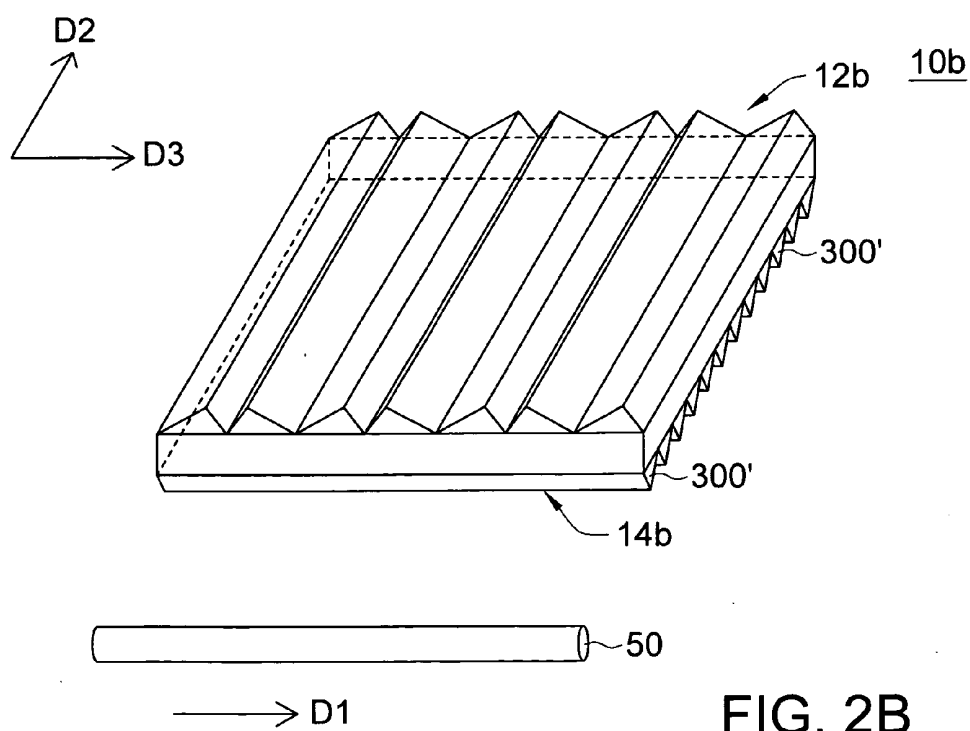


FIG. 2B

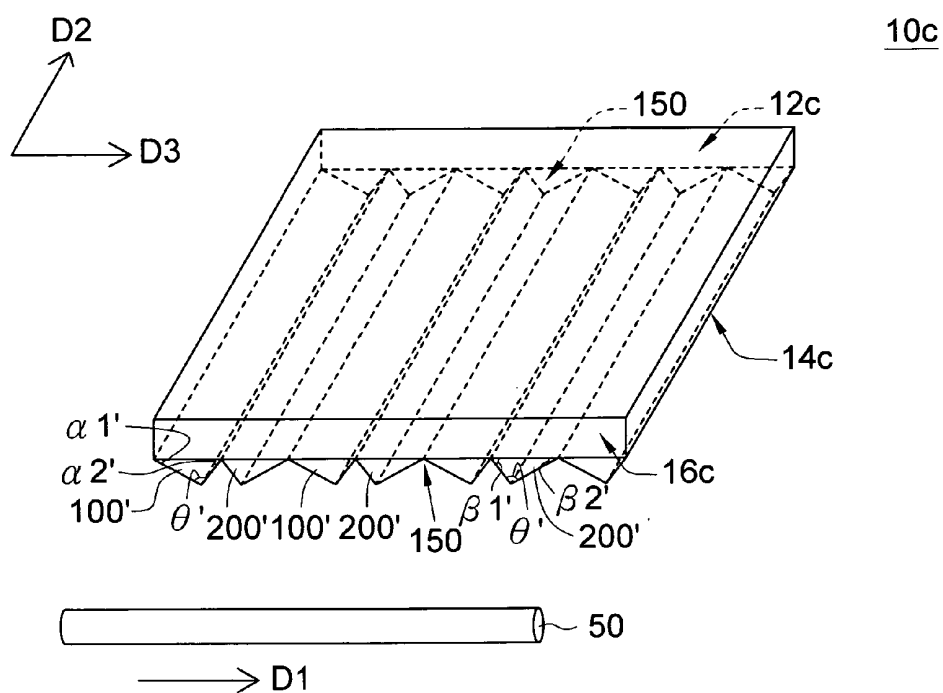


FIG. 3A

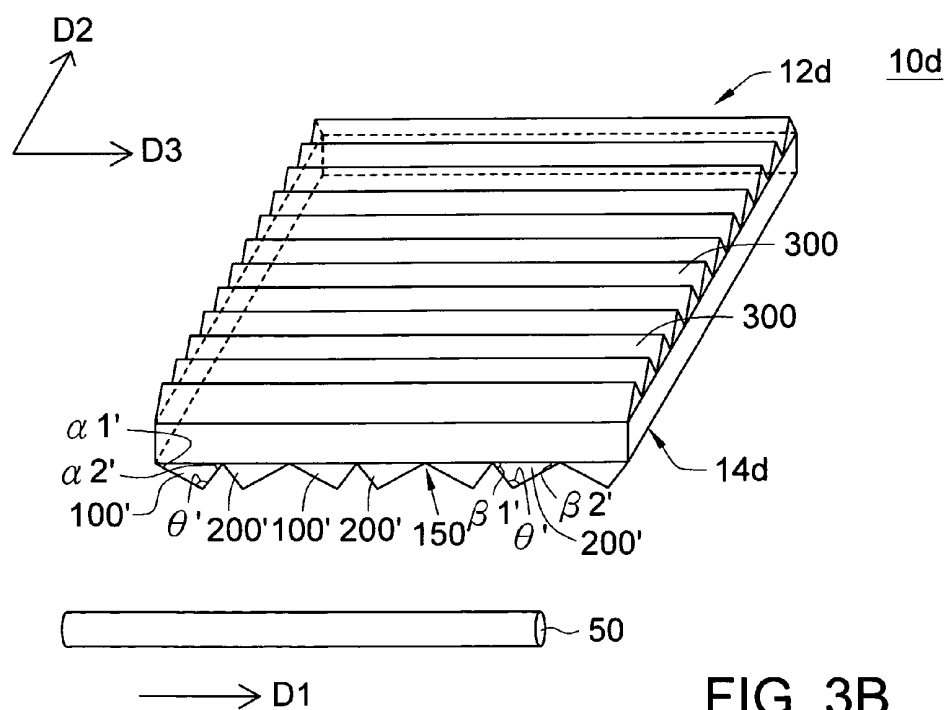
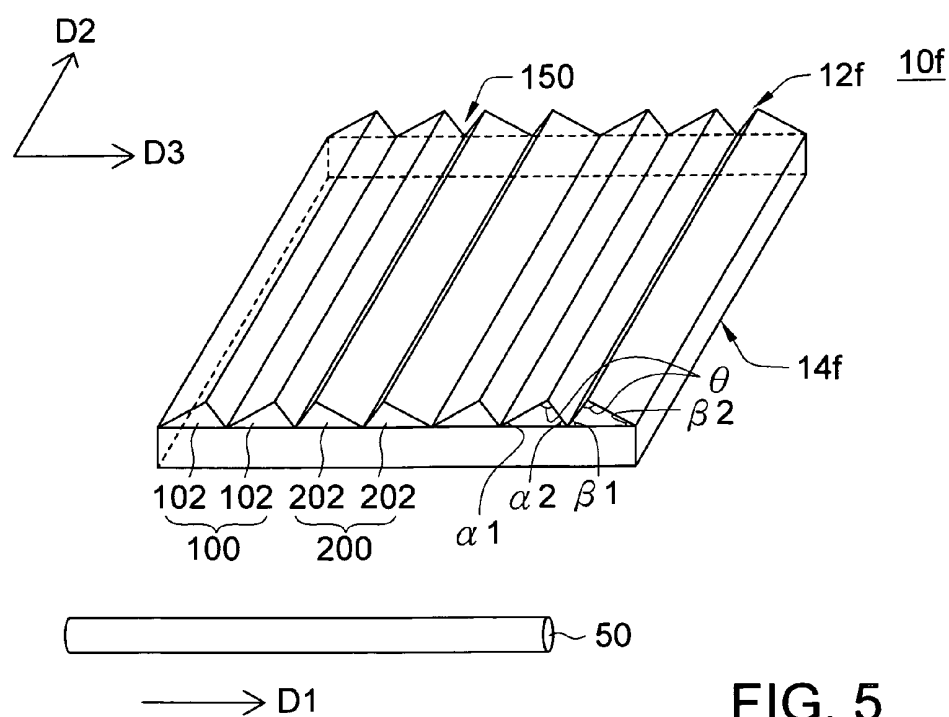
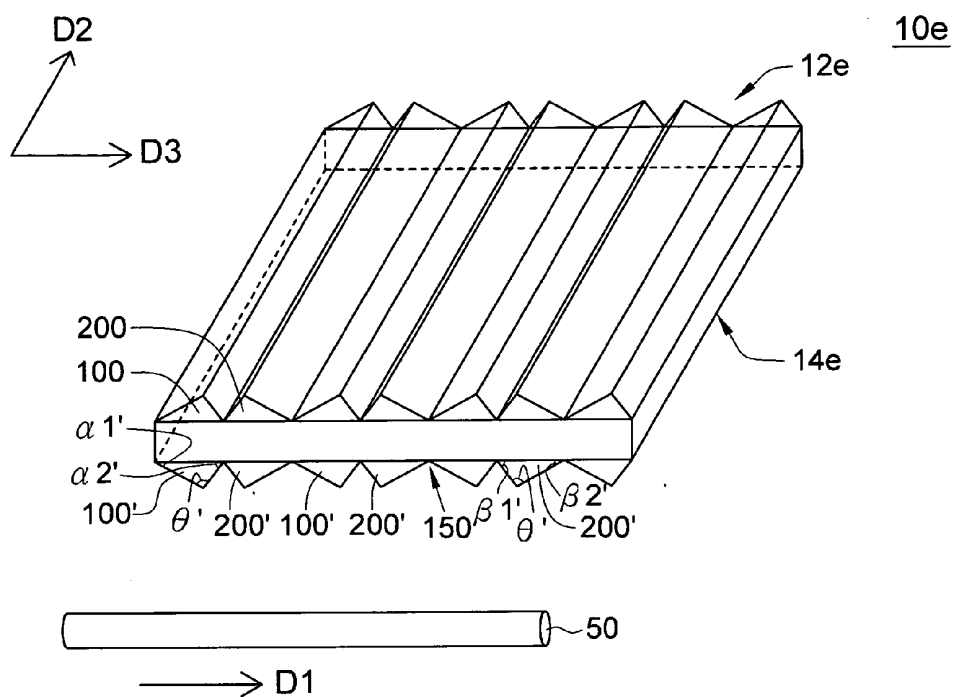


FIG. 3B



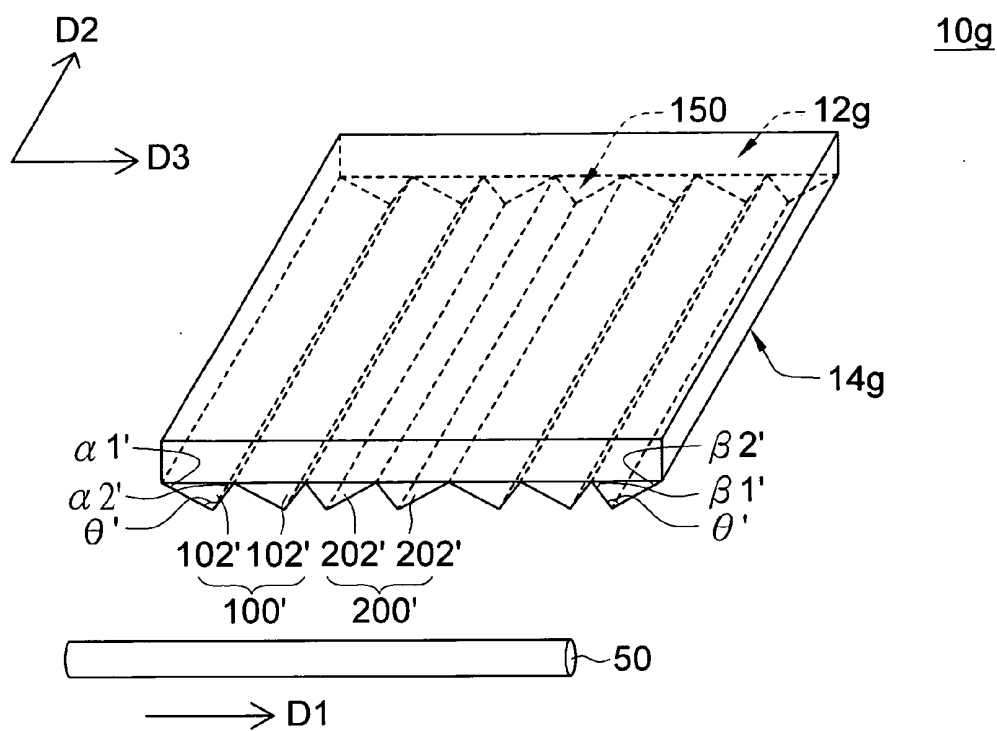


FIG. 6

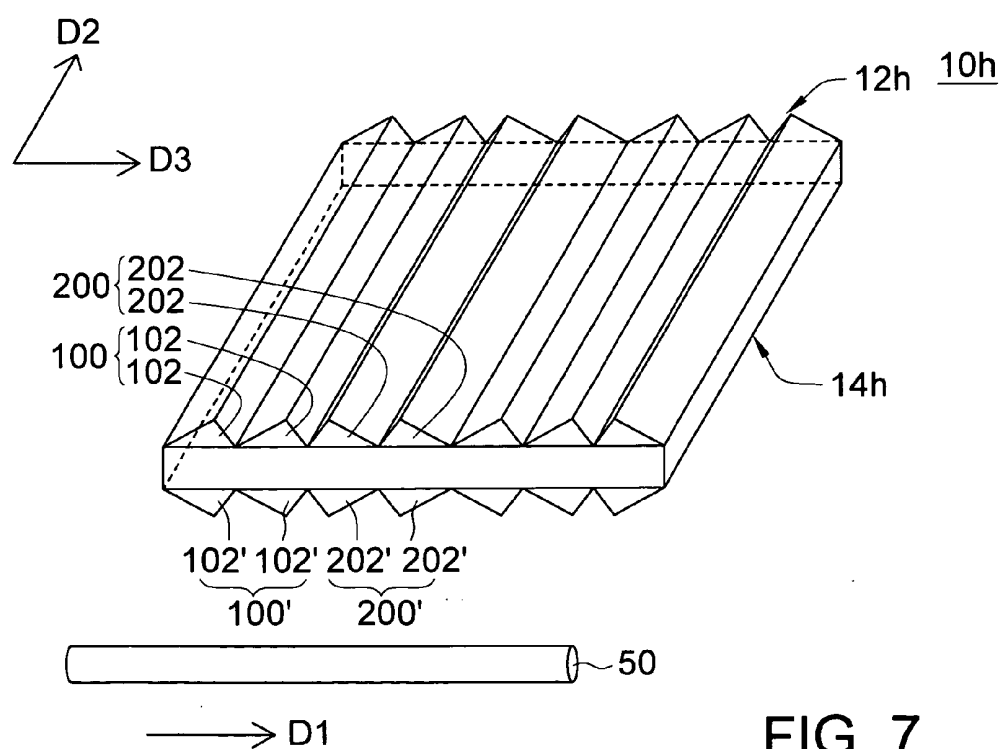


FIG. 7

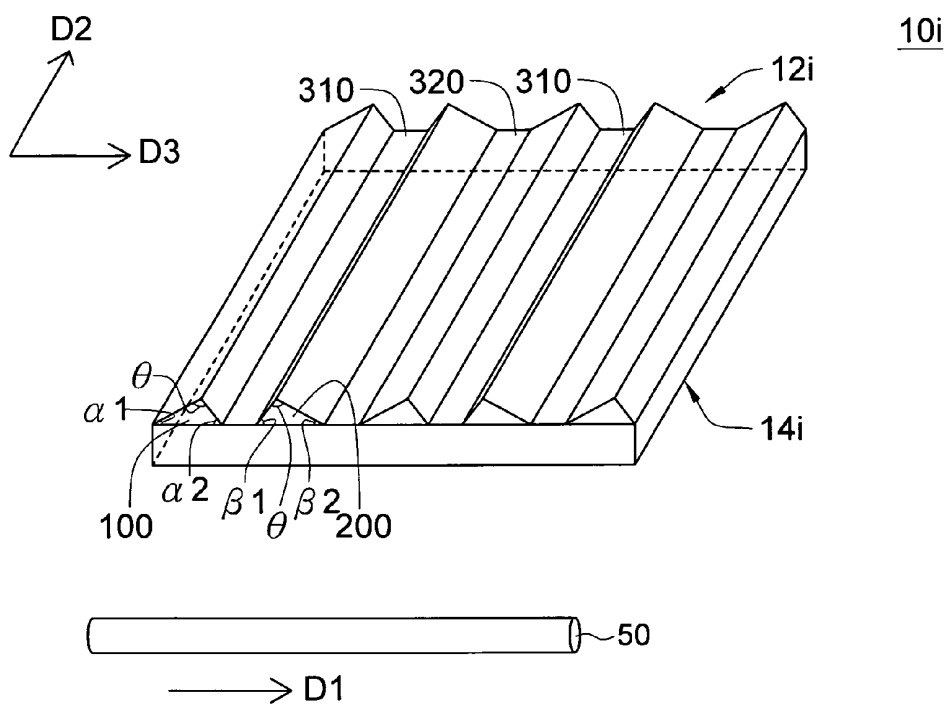


FIG. 8

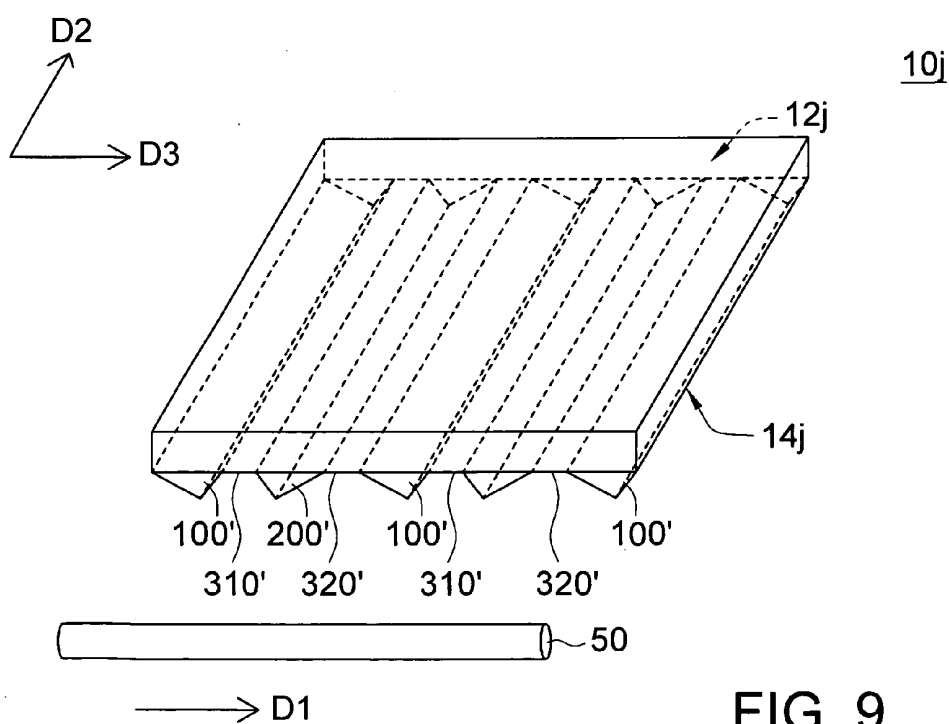


FIG. 9

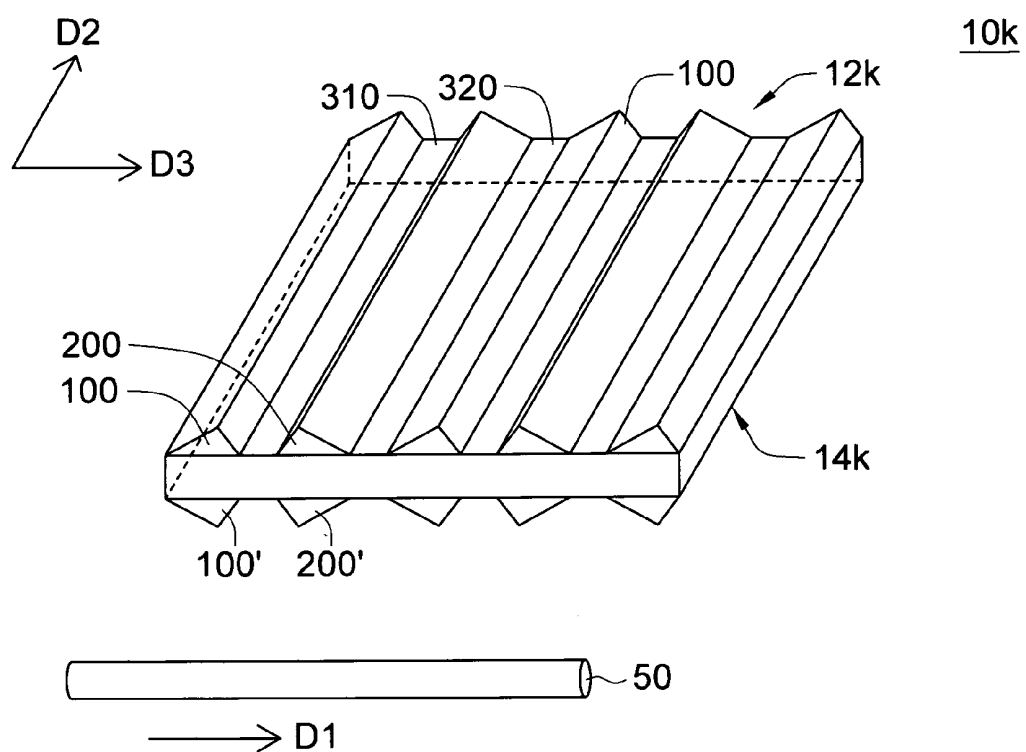


FIG. 10

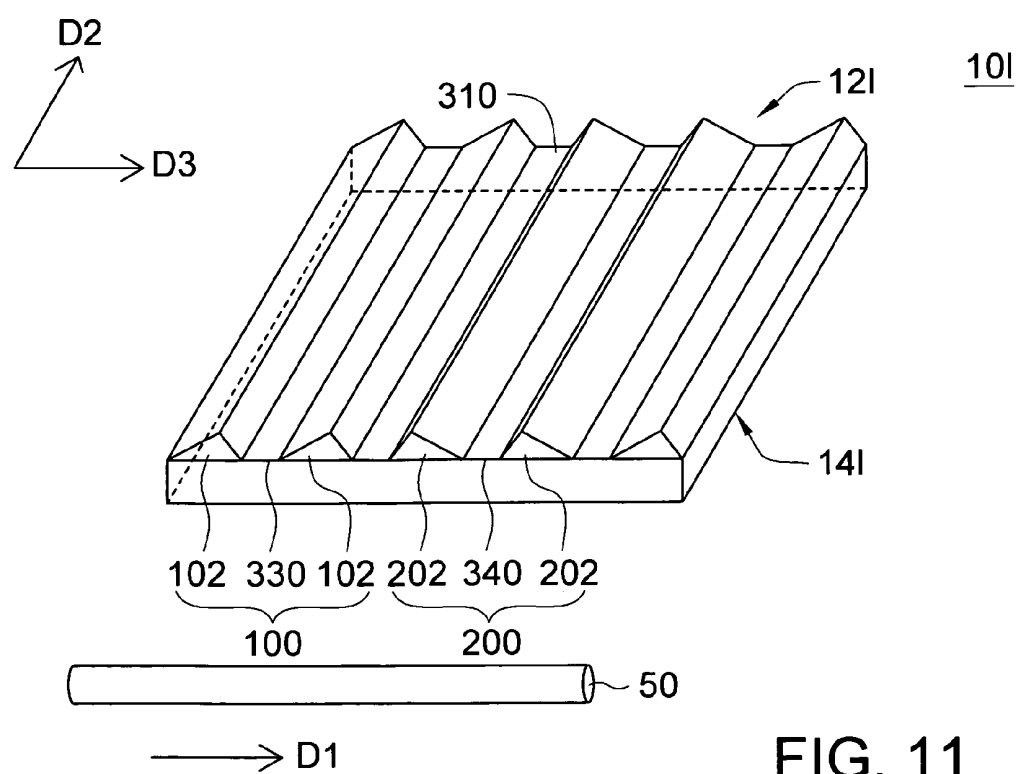


FIG. 11

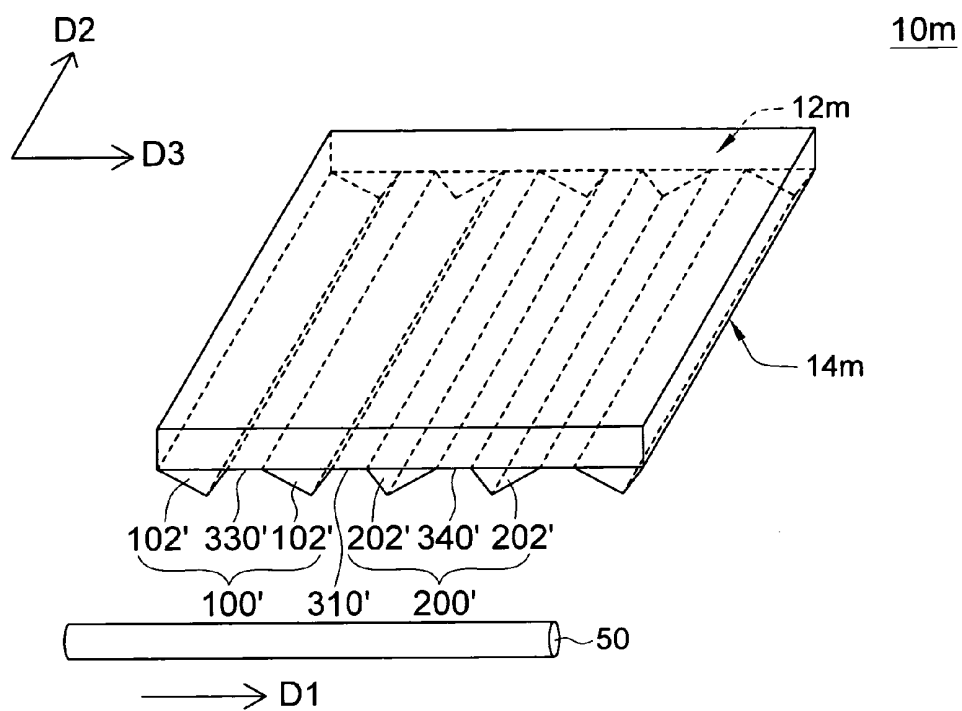


FIG. 12

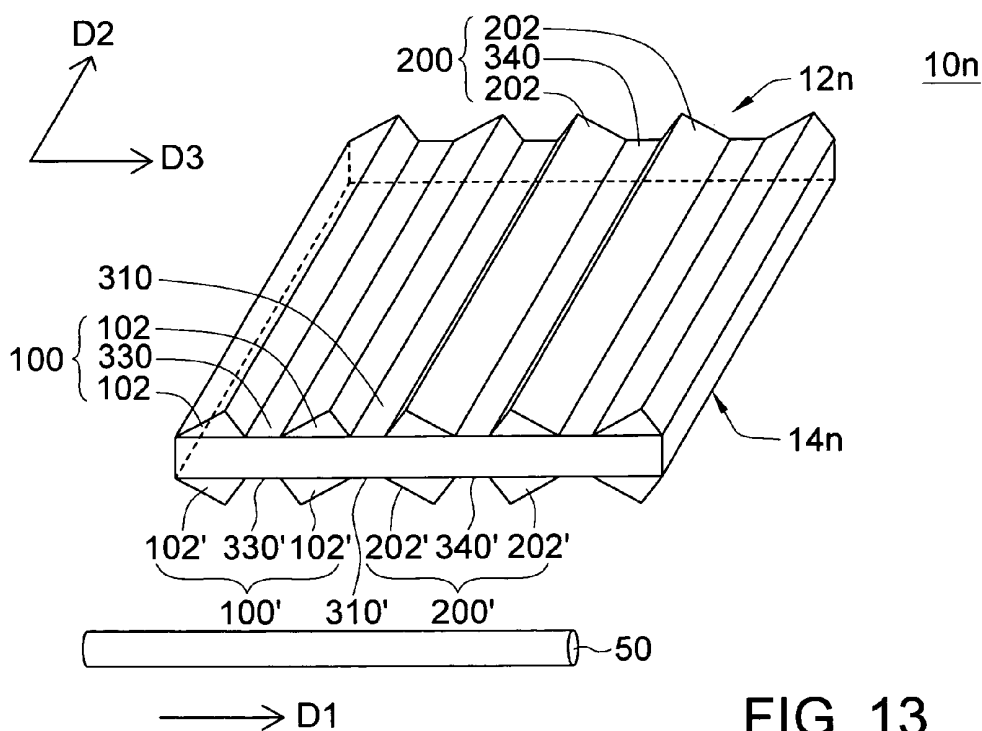


FIG. 13

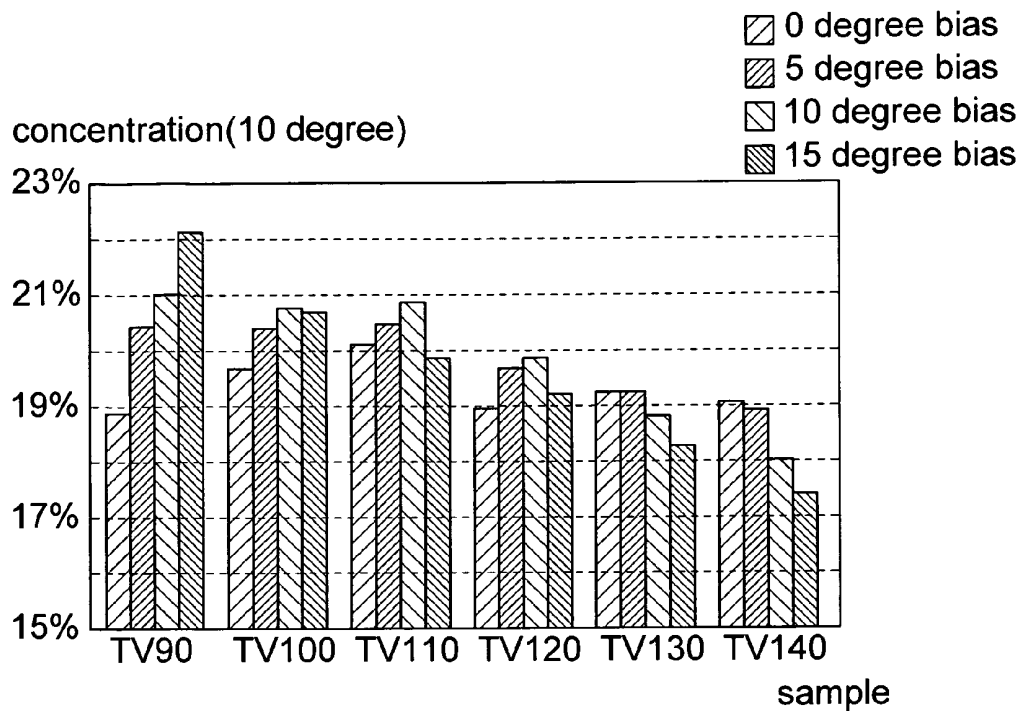


FIG. 14

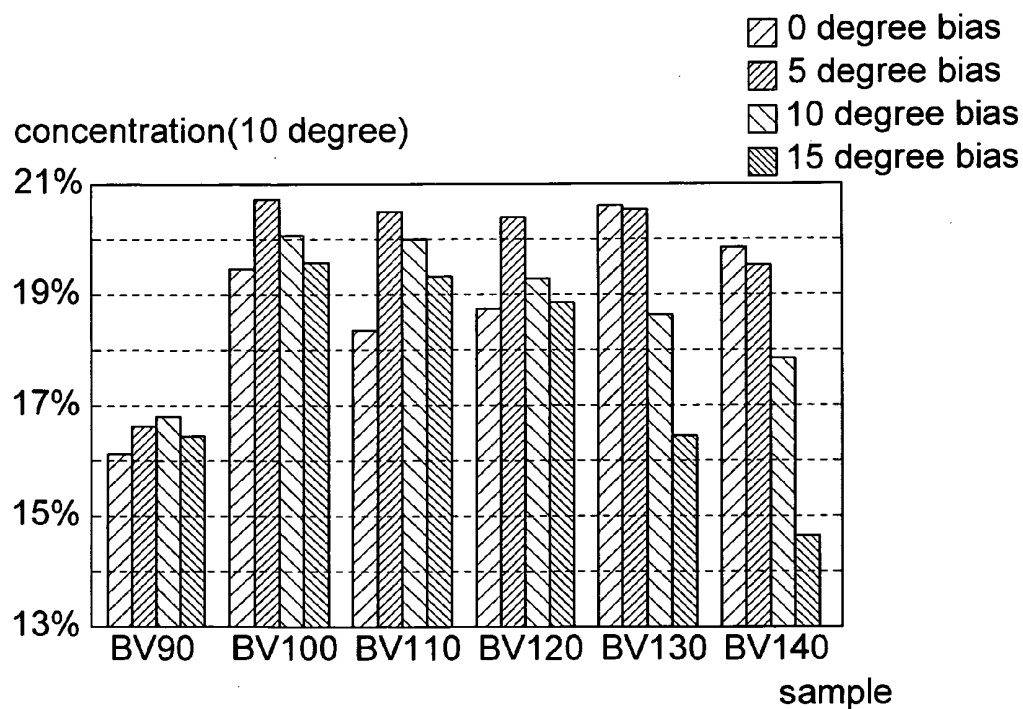


FIG. 15

LIGHT GUIDE PLATE, BACKLIGHT MODULE AND LIQUID CRYSTAL DISPLAY

[0001] This application claims the benefit of Taiwan Patent Application Serial No. 97136370, filed Sep. 22, 2008, the subject matter of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention generally relates to a light guide plate, backlight module and a liquid crystal display, and especially relates to a light guide plate, a backlight module and a liquid crystal display using the same with higher luminance, light outputting efficiency and light concentration.

[0004] 2. Description of Related Art

[0005] A liquid crystal display which can produce colorful image has been applied broadly to notebook computer, personal digital assistant and desktop and replaced traditional cathode ray tube display, because of its lightweight, lower power consumer and low radiation pollution.

[0006] FIG. 1 shows a conventional liquid crystal display (LCD). LCD 1 comprises backlight module 2, optical film 20 and liquid crystal display panel 30. Image L can be displayed successfully via the light produced by backlight module 2. Backlight module 2 comprises light guide plate 10, light source 50, cover 60 and reflector 40. Light guide plate 40 has upper surface 12, bottom surface 14 and light input surface 16. Light source 50 for providing light is disposed adjacent to the light input surface 16 of the light guide plate 10. Cover 60 protects light source 50. Light source 50 is a cold cathode fluorescent lamp (CCFL), disposed on the lamp holder (not shown), and lamp wire (not shown) extends from the lamp holder and is electrically connected with a connector. Alternatively, a plurality of light-emitting diodes (LEDs) or external electrode fluorescent lamp (EEFL).

[0007] Light guide plate 10 is for changing the path of the light. Light from the light source 50 can reach to the liquid crystal display panel 30 through light guide plate 10. Reflector 40 located under the light guide plate 10 is for reflecting light leaked out of the light guide plate 10, in order to increase reflective efficiency of light.

[0008] Optical film 20 above the light guide plate 10 is for further treatment of light, for example, light concentration, diffusion or uniformity. Optical film 20 may be prism lens and/or diffuser. Number of optical film can be one or more. However, because of the optical film 20, it is difficult to control the brightness and uniformity of the light from the backlight module 2.

SUMMARY OF THE INVENTION

[0009] Accordingly, the present invention is directed to a light guide plate which has better ability of light concentration.

[0010] An objective of the present invention is to provide a backlight module which provides brighter light, higher light output efficiency and better ability of light concentration.

[0011] An objective of the present invention is to provide a light guide plate which keeps symmetry of light output at parallel viewing angles.

[0012] An objective of the present invention is to provide a light guide plate which can reduce the usage number of optical films.

[0013] In accordance with the above objectives and other objectives, the present invention provides a light guide plate, having a first surface with at least one first structure and at least one second structure, wherein: the first structure and the second structure are adjacent arranged and are mirror reflection with each other; the first structure includes at least one first protrusion having a cross section of a eccentric triangle; and the second structure includes at least one second protrusion having a cross section of a eccentric triangle.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

[0015] FIG. 1 shows a perspective view of a conventional liquid crystal display;

[0016] FIGS. 2A to 13 show light guide plates according to the embodiments of the present invention;

[0017] FIG. 14 shows the concentration of the direct view divided by that of 10 degree bias the direct view according to the light guide plate 10a of FIG. 2A with different top angles θ , bottom angles α_1 and bottom angles α_2 of the present invention; and

[0018] FIG. 15 shows the concentration of the direct view divided by that of 10 degree bias the direct view according to the light guide plate 10c of FIG. 3A with different top angles θ' , bottom angles α_1' and bottom angles α_2' of the present invention.

DESCRIPTION OF THE EMBODIMENTS

[0019] Reference will now be made in detail to the present preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers are used in the drawings and the description to refer to the same or like parts.

[0020] FIGS. 2A to 13 show light guide plates according to the embodiments of the present invention. For easy to understand and explanation, light source 50 is added therein to show the location relationship with the light guide plate. Location relationships among the light guide plate, the reflector, the optical films and the liquid crystal display panel can be referred to FIG. 1, which people of ordinary skill in the art can understand, but not limited thereto.

[0021] As shown in FIG. 2A, light guide plate 10a has upper surface 12a at least with first structure 100 and second structure 200. In the present embodiment, first structures 100 and second structures 200 are plural, for example, but not limited thereto. First structure 100 and second structure 200 are adjacent arranged and are mirror reflection with each other. First structure 100 and second structure 200 have first protrusion (not shown) and second protrusion (not shown), respectively. First protrusion and second protrusion have a cross section of an eccentric triangle. Specifically, first protrusion and second protrusion are V-shaped (V-cut). The eccentric triangle has a top angle θ of about 80 degree to 140 degree, a bottom angle $\alpha_1(\beta_1)$ and a bottom angle $\alpha_2(\beta_2)$, wherein the bottom angles α_1 and α_2 (β_1 and β_2) are with difference of about 2 degree to 30 degree. The bottom angle α_1 is about equal to bottom angle β_2 , the bottom angle α_2 is

about equal to bottom angle $\beta 1$, and the bottom angle $\alpha 1$ is substantially connected with bottom angle $\beta 2$.

[0022] Light guide plate **10a** has bottom surface **14a** opposite to the upper surface **12a**. The bottom surface **14a** is with a flat, a sand-blasting pattern or a dots pattern, for example.

[0023] More specifically, light source **50** is located adjacent to the light input surface **14a**. Because of the light provided by the light source **50** and the function of guiding light and concentration of the light guide plate **10a**, light can pass in the liquid crystal display panel **30** from the upper surface **12a**. Light source **50** can be LEDs, CCFLs, EEFLs or the combinations thereof, for example. Extension direction **D1** of the light source **50** and extension direction **D2** of the first protrusion (and the second protrusion) form an angle of about 75 degree to 105 degree. In the present embodiment, the said angle is about 90 degree, for example, but not limited thereto. First structure **100** and second structure **200** are interlaced along the third direction **D3** as shown in the FIG. 2A. Because of the first structure **100** and second structure **200**, backlight module **2** has higher brightness, light output efficiency and light concentration.

[0024] As shown in FIG. 2B, light guide plate **10b** according to another embodiment of the present invention is similar to the light guide plate **10a**. Upper surface **12b** of the light guide plate **10b** is the same as the upper surface **12a** of the light guide plate **10a**. The difference is that the bottom surface **14b** of the light guide plate **10b** is with V-shaped protrusions **300'**. V-shaped protrusions **300'** have a cross-section of an equilateral triangle, an isosceles triangle or an eccentric triangle. Each V-shaped protrusion are of same structure. Extension direction **D3** of the V-shaped protrusions **300'** is substantially parallel to the extension direction **D1** of the light source **50**, for example.

[0025] As shown in FIG. 3A, according to the present embodiment of the present invention, light guide plate **10c** has bottom surface **14c** with at least one first structure **100'** and second structure **200'**. In the present embodiment, first structures **100'** and second structures **200'** are plural, for example. First structure **100'** and second structure **200'** are adjacent arranged and are mirror reflection with each other. First structure **100'** and second structure **200'** have first protrusion (not shown) and second protrusion (not shown), respectively. First protrusion and second protrusion have a cross section of an eccentric triangle. Specifically, first protrusion and second protrusion are V-shaped (V-cut). The eccentric triangle has a top angle θ' of about 80 degree to 140 degree, a bottom angle $\alpha 1'$ ($\beta 1'$) and a bottom angle $\alpha 2'$ ($\beta 2'$), wherein the bottom angles $\alpha 1'$ and $\alpha 2'$ ($\beta 1'$ and $\beta 2'$) are with difference of about 2 degree to 30 degree. The bottom angle $\alpha 1'$ is about equal to bottom angle $\beta 2'$, the bottom angle $\alpha 2'$ is about equal to bottom angle $\beta 1'$, and the bottom angle $\alpha 1'$ is substantially connected with bottom angle $\beta 2'$.

[0026] Light guide plate **10c** has upper surface **12c** opposite to the bottom surface **14c**. The upper surface **12c** is with a flat, a sand-blasting pattern or a dots pattern, for example.

[0027] More specifically, light source **50** is located adjacent to the light input surface **14c** of the light guide plate **10c**. Because of the light provided by the light source **50** and the function of guiding light and concentration of the light guide plate **10c**, light can pass in the liquid crystal display panel **30** from the upper surface **12c**. Extension direction **D1** of the light source **50** and extension direction **D2** of the first protrusion (and the second protrusion) form an angle of about 75 degree to 105 degree. In the present embodiment, the said

angle is about 90 degree, for example, but not limited thereto. First structure **100'** and second structure **200'** are interlaced along the third direction **D3** as shown in the FIG. 3A. Because of the first structure **100'** and second structure **200'**, backlight module **2** has higher brightness, light output efficiency and light concentration.

[0028] As shown in FIG. 3B, light guide plate **10d** according to still another embodiment of the present invention is similar to the light guide plate **10c**. Bottom surface **14d** of the light guide plate **10d** is the same as the bottom surface **14c** of the light guide plate **10c**. The difference is that the upper surface **12d** of the light guide plate **10d** is with V-shaped protrusions **300**. V-shaped protrusions **300** have a cross-section of an equilateral triangle, an isosceles triangle or an eccentric triangle. Each V-shaped protrusion are of same structure. Extension direction **D3** of the V-shaped protrusions **300'** is substantially parallel to the extension direction **D1** of the light source **50**, for example.

[0029] As shown in FIG. 4, according to the present embodiment of the present invention, light guide plate **10e** has upper surface **12e** as the same as the upper surface **12a** of light guide plate **10a**, and the light guide plate **10e** further has lower surface **14e** as the same as the bottom surface **14c** of light guide plate **10c**. In the present embodiment, extension direction of first structure **100** of the upper surface **12e** and that of the first structure **100'** of the bottom surface **14e** are parallel to each other or totally overlapped, for example, but not limited thereto. Extension direction of the first structure **100** of the upper surface **12e** and that of the first structure **100'** of the bottom surface **14e** may form an acute angle or a right angle. Furthermore, at least one of the extension directions of the first structure **100** of the upper surface **12e** and that of the first structure **100'** of the bottom surface **14e** may be perpendicular to the extension direction **D1** of the light source **50**.

[0030] Referring to FIG. 5, light guide plate **10f** of the present embodiment of the present invention has upper surface **12f** with first protrusions **102** and second protrusions **202**, wherein the first protrusions **102** constitute first structure **100**, and the second protrusions **202** constitute second structure **200**. In the first structure **100**, first protrusions **102** are sequentially connected and have same structure. In the second structure **200**, second protrusions **202** are sequentially connected and have same structure. In the present embodiment, first structure **100** and second structure **200** have two protrusions, respectively, for example. However, there is not limited, more than two (three or more, for example) protrusions may constitute a single first (or second) structure depending on the design demand. First structure **100** and second structure **200** are adjacent arranged and are mirror reflection with each other. First protrusion **102** and second protrusion **202** have a cross section of an eccentric triangle as shown in FIG. 5. More specifically, first protrusion **102** and second protrusion **202** are V-shaped (V-cut). The eccentric triangle has a top angle θ of about 80 degree to 140 degree, a bottom angle $\alpha 1$ ($\beta 1$) and a bottom angle $\alpha 2$ ($\beta 2$), wherein the bottom angles $\alpha 1$ and $\alpha 2$ ($\beta 1$ and $\beta 2$) are with difference of about 2 degree to 30 degree. The bottom angle $\alpha 1$ is about equal to bottom angle $\beta 2$, the bottom angle $\alpha 2$ is about equal to bottom angle $\beta 1$, and the bottom angle $\alpha 1$ is substantially connected with bottom angle $\beta 2$.

[0031] Light guide plate **10f** has a bottom surface **14f** opposite to the upper surface **12f**. The bottom surface **14f** is with a flat, a sand-blasting pattern or a dots pattern, for example.

[0032] More specifically, light source 50 is located adjacent to the light input surface 16f of the light guide plate 10f. Because of the light provided by the light source 50 and the function of guiding light and concentration of the light guide plate 10f, light can pass in the liquid crystal display panel 30 from the upper surface 12f. Extension direction D1 of the light source 50 and extension direction D2 of the first protrusion 102 (and the second protrusion 202) form an angle of about 75 degree to 105 degree. In the present embodiment, the said angle is about 90 degree, for example, but not limited thereto. First structure 100 and second structure 200 are interlaced along the third direction D3 as shown in the FIG. 5. Because of the first structure 100 and second structure 200, backlight module 2 has higher brightness, light output efficiency and light concentration.

[0033] As shown in FIG. 6, light guide plate 10g of the present embodiment of the present invention has bottom surface 14f with first protrusions 102' and second protrusions 202', wherein the first protrusions 102' constitute first structure 100', and the second protrusions 202' constitute second structure 200'. In the first structure 100', first protrusions 102' are sequentially connected and have same structure. In the second structure 200', second protrusions 202' are sequentially connected and have same structure. In the present embodiment, first structure 100' and second structure 200' have two protrusions, respectively, for example. However, there is not limited, more than two (three or more, for example) protrusions may constitute a single first (or second) structure depending on the design demand. First structure 100' and second structure 200' are adjacent arranged and are mirror reflection with each other. First protrusion 102' and second protrusion 202' have a cross section of an eccentric triangle as shown in FIG. 6. More specifically, first protrusion 102' and second protrusion 202' are V-shaped (V-cut). The eccentric triangle has a top angle θ' of about 80 degree to 140 degree, a bottom angle $\alpha 1'$ ($\beta 1'$) and a bottom angle $\alpha 2'$ ($\beta 2'$), wherein the bottom angles $\alpha 1'$ and $\alpha 2'$ ($\beta 1'$ and $\beta 2'$) are with difference of about 2 degree to 30 degree. The bottom angle $\alpha 1'$ is about equal to bottom angle $\beta 2'$, the bottom angle $\alpha 2'$ is about equal to bottom angle $\beta 1'$, and the bottom angle $\alpha 1'$ is substantially connected with bottom angle $\beta 2'$.

[0034] Light guide plate 10g has upper surface 12g opposite to the bottom surface 14g. The upper surface 12g is with a flat, a sand-blasting pattern or a dots pattern, for example.

[0035] More specifically, light source 50 is located adjacent to the light input surface 16g of the light guide plate 10g. Because of the light provided by the light source 50 and the function of guiding light and concentration of the light guide plate 10g, light can pass in the liquid crystal display panel 30 from the upper surface 12g. Extension direction D1 of the light source 50 and extension direction D2 of the first protrusion 102' (and the second protrusion 202') form an angle of about 75 degree to 105 degree. In the present embodiment, the said angle is about 90 degree, for example, but not limited thereto. First structure 100' and second structure 200' are interlaced along the third direction D3 as shown in the FIG. 6. Because of the first structure 100' and second structure 200', backlight module 2 has higher brightness, light output efficiency and light concentration.

[0036] As shown in FIG. 7, according to the present embodiment of the present invention, light guide plate 10h has upper surface 12h as the same as the upper surface 12f of light guide plate 10f, and the light guide plate 10h further has lower surface 14h as the same as the bottom surface 14g of

light guide plate 10g. In the present embodiment, extension direction of the first protrusion 102 of the upper surface 12h and that of the first protrusion 102' of the bottom surface 14h are parallel to each other or totally overlapped, for example, but not limited thereto. Extension direction of the first structure 100 of the upper surface 12h and that of the first structure 100' of the bottom surface 14h may form an acute angle or a right angle. Furthermore, at least one of the extension directions of the first structure 100 of the upper surface 12h and that of the first structure 100' of the bottom surface 14h may be perpendicular to the extension direction D1 of the light source 50.

[0037] As shown in FIG. 8, light guide plate 10i according to still another embodiment of the present invention is similar to the light guide plate 10a. The difference is that connection flat 310 or 320 is located between first structure 100 and second structure 200. The connection flats 310, 320 are with a planar surface, a sand-blasting pattern or a dots pattern, for example. First structure 100 and second structure 200 are adjacent arranged and mirror reflection accordance with the connection flat 310 (320).

[0038] As shown in FIG. 9, light guide plate 10j according to still another embodiment of the present invention is similar to the light guide plate 10c. The difference is that connection flat 310' or 320' is located between first structure 100' and second structure 200'. The connection flats 310', 320' are with a planar surface, a sand-blasting pattern or a dots pattern, for example. First structure 100' and second structure 200' are adjacent arranged and mirror reflection accordance with the connection flat 310' (320').

[0039] As shown in FIG. 10, in the present embodiment of the present invention, the upper surface 12k of light guide plate 10k is the same as the upper surface 12i of light guide plate 10i, and the bottom surface 14k is the same as the bottom surface 14j of the light guide plate 10j. In the present embodiment, extension direction of the first structure 100 of the upper surface 12k and that of the first protrusion 100' of the bottom surface 14k are parallel to each other or totally overlapped, for example, but not limited thereto. Extension direction of the first structure 100 of the upper surface 12k and that of the first structure 100' of the bottom surface 14k may form an acute angle or a right angle. Furthermore, at least one of the extension directions of the first structure 100 of the upper surface 12k and that of the first structure 100' of the bottom surface 14k may be perpendicular to the extension direction D1 of the light source 50.

[0040] As shown in FIG. 11, light guide plate 10l according to the present embodiment of the present invention is similar to the light guide plate 10f. The difference is that connection flat 310 is located between first structure 100 and second structure 200. The connection flat 330 is located between two adjacent first protrusions 102. The connection flat 340 is located between two adjacent second protrusions 202. The connection flats 310, 330 and 340 are with a planar surface, a sand-blasting pattern or a dots pattern, for example. First structure 100 and second structure 200 are adjacent arranged and mirror reflection accordance with the connection flat 310.

[0041] As shown in FIG. 12, light guide plate 10m according to the present embodiment of the present invention is similar to the light guide plate 10g. The difference is that connection flat 310' is located between first structure 100' and second structure 200'. The connection flat 330' is located between two adjacent first protrusions 102'. The connection

flat **340'** is located between two adjacent second protrusions **202'**. The connection flats **310'**, **330'** and **340'** are with a planar surface, a sand-blasting pattern or a dots pattern, for example. First structure **100'** and second structure **200'** are adjacent arranged and mirror reflection accordance with the connection flat **310'**.

[0042] As shown in FIG. 13, in the present embodiment of the present invention, the upper surface **12n** of light guide plate **10n** is the same as the upper surface **12l** of light guide plate **10l**, and the bottom surface **14n** is the same as the bottom surface **14m** of the light guide plate **10m**. In the present embodiment, extension direction of the first structure **100** of the upper surface **12n** and that of the first protrusion **100'** of the bottom surface **14n** are parallel to each other or totally overlapped, for example, but not limited thereto. Extension direction of the first structure **100** of the upper surface **12n** and that of the first structure **100'** of the bottom surface **14n** may form an acute angle or a right angle. Furthermore, at least one of the extension directions of the first structure **100** of the upper surface **12n** and that of the first structure **100'** of the bottom surface **14n** may be perpendicular to the extension direction **D1** of the light source **50**.

[0043] FIGS. 14 to 15 are simulation results according to the present invention. FIG. 14 shows the concentration of the direct view divided by that of 10 degree bias the direct view according to the light guide plate **10a** of FIG. 2A with different top angles θ , bottom angles α_1 and bottom angles α_2 of the present invention. FIG. 15 shows the concentration of the direct view divided by that of 10 degree bias the direct view according to the light guide plate **10c** of FIG. 3A with different top angles θ , bottom angles α_1 and bottom angles α_2 of the present invention.

TABLE I

sample	Bottom angles	Luminous flux at direct viewing angle (lm)	Luminous flux at 10 degree bias the direct viewing angle (lm)	Concentration of 10 degree (Luminous flux at 10 degree bias the direct viewing angle/ Luminous flux at direct viewing angle)
TV90	45_45	208.07	39.31	18.89%
	50_40	216.53	44.29	20.45%
	55_35	223.42	47.01	21.04%
	60_30	226.64	50.15	22.13%
TV100	40_40	216.73	42.72	19.71%
	45_35	221.81	45.24	20.40%
	50_30	227.34	47.22	20.77%
	55_25	229.60	47.59	20.73%
TV110	35_35	220.32	44.36	20.14%
	40_30	224.16	45.94	20.49%
	45_25	228.56	47.76	20.90%
	50_20	228.48	45.44	19.89%
TV120	30_30	220.54	41.78	18.94%
	35_25	225.68	44.45	19.69%
	40_20	226.90	45.12	19.88%
	45_15	226.19	43.46	19.21%
TV130	25_25	221.42	42.62	19.25%
	30_20	225.37	43.40	19.26%
	35_15	226.69	42.71	18.84%
	40_10	225.98	41.32	18.29%
TV140	20_20	221.32	42.22	19.07%
	25_15	223.77	42.34	18.92%
	30_10	224.40	40.47	18.04%
	35_5	219.04	38.16	17.42%

[0044] According to Table I and FIG. 14, for sample TV90, comparing (bottom angle α_1 , bottom angle α_2) being (45, 45), (50,40), (55,35) and (60,30), while the top angle θ is 90 degree and the difference between two bottom angles α_1 and α_2 becomes greater, which means the greater the eccentric level is, total luminous fluxs at direct viewing angle are increasing, which are respectively 208 lm, 217 lm, 223 lm and 227 lm. As a result, when the light guide plate according to the present invention is applied to measure at direct viewing angle, the greater the eccentric level is, the more the total luminous fluxs at direct viewing angle is. Similarly, when the light guide plate according to the present invention is applied to measure at 10 degree bias the direct viewing angle, the greater the eccentric level is, the more the total luminous fluxs at direct viewing angle is. The calculation of concentration of 10 degree, which can determine the symmetry of brightness of light at horizontal viewing angle, is that luminous flux at 10 degree bias the direct viewing angle divides by luminous flux at direct viewing angle. For example, as for sample TV110, compare (bottom angle α_1 , bottom angle α_2) are (40,30) and (45,25), while the top angle θ is 110 degree. Concentration (10 degree) of (bottom angle α_1 , bottom angle α_2) being (45,25) is 20.90% which is better than 20.49%, concentration (10 degree) of (bottom angle α_1 , bottom angle α_2) being (40,30). Therefore, by adjusting top angle θ and difference between bottom angle α_1 and bottom angle α_2 properly, the greater the eccentric level is, the better the concentration is.

TABLE II

sample	Bottom angles	Luminous flux at direct viewing angle (lm)	Luminous flux at 10 degree bias the direct viewing angle (lm)	Concentration of 10 degree (Luminous flux at 10 degree bias the direct viewing angle/ Luminous flux at direct viewing angle)
BV90	45_45	214.80	34.67	16.14%
	50_40	217.11	36.09	16.62%
	55_35	219.81	36.95	16.81%
	60_30	220.51	36.30	16.46%
BV100	40_40	222.62	43.39	19.49%
	45_35	223.85	46.39	20.72%
	50_30	224.37	45.08	20.09%
	55_25	222.79	43.59	19.57%
BV110	35_35	222.53	40.84	18.35%
	40_30	225.10	46.16	20.50%
	45_25	225.41	45.05	19.98%
	50_20	224.25	43.38	19.34%
BV120	30_30	223.35	41.88	18.75%
	35_25	226.53	46.22	20.40%
	40_20	225.40	43.45	19.28%
	45_15	224.53	42.39	18.88%
BV130	25_25	222.22	45.82	20.62%
	30_20	224.15	46.03	20.54%
	35_15	223.93	41.74	18.64%
	40_10	222.08	36.51	16.44%
BV140	20_20	219.74	43.64	19.86%
	25_15	222.97	43.54	19.53%
	30_10	222.80	39.70	17.82%
	35_5	218.11	31.94	14.64%

[0045] According to in Table II and FIG. 15, for sample BV130, comparing (bottom angle α_1 , bottom angle α_2) being (25,25) and (30,20), and the top angle θ being 130 degree, luminous flux at direct viewing angle with difference of bottom angles being 10 degree is 224 lm, which is better than 222 lm, luminous flux at direct viewing angle with dif-

ference of bottom angles being 0 degree. When measuring 10 degree bias the direct viewing angle, luminous flux at direct viewing angle with difference of bottom angles being 10 degree is 46 lm, which is better than 45 lm, luminous flux at direct viewing angle with difference of bottom angles being 0 degree. Furthermore, measuring sample BV110 under concentration of 10 degree, comparing (bottom angle α_1 , bottom angle α_2) being (35,35) and (40,30) and top angle being 110 degree, concentration (10 degree) of difference of bottom angles being 10 degree is better than that of difference of bottom angles being 0 degree.

[0046] As a result, mentioned structure formed on the upper surface (light output surface) is better than that formed on the bottom surface of the light guide plate according to the present invention, but not limited thereto.

[0047] It will be apparent to those skilled in the art that various modifications and variations can be made to the structure of the present invention without departing from the scope or spirit of the invention. In view of the foregoing, it is intended that the present invention cover modifications and variations of this invention provided they fall within the scope of the following claims and their equivalents.

What is claimed is:

1. A light guide plate, having a first surface with at least one first structure and at least one second structure, wherein:

the first structure and the second structure are adjacent arranged and are mirror reflection with each other;
the first structure includes at least one first protrusion having a cross section of an eccentric triangle; and
the second structure includes at least one second protrusion having a cross section of an eccentric triangle.

2. The light guide plate according to claim 1, wherein the eccentric triangle of at least one of the first protrusion and the second protrusion has a top angle of about 80 degree to 140 degree.

3. The light guide plate according to claim 1, wherein the eccentric triangle of at least one of the first protrusion and the second protrusion has two bottom angles with difference of about 2 degree to 30 degree.

4. The light guide plate according to claim 1, further having a second surface opposite to the first surface, wherein the second surface is with a flat, a sand-blasting pattern or a dots pattern.

5. The light guide plate according to claim 1, further having a second surface opposite to the first surface, wherein the second surface is with an another first structure and an another second structure, wherein:

the another first structure and the another second structure are adjacent arranged and are mirror reflection with each other;
the another first structure includes an another first protrusion having a cross section of a eccentric triangle; and
the another second structure includes an another second protrusion having a cross section of a eccentric triangle.

6. The light guide plate according to claim 5, wherein the first protrusion of the first surface has an extension direction perpendicular to or parallel to that of the another first protrusion of the second surface.

7. The light guide plate according to claim 5, wherein the first surface and the second surface are mirror reflection.

8. The light guide plate according to claim 1, further having a second surface opposite to the first surface, wherein the second surface is with a plurality of V-shaped protrusions.

9. The light guide plate according to claim 1, wherein the number of the at least one first protrusion of the first structure is plural.

10. The light guide plate according to claim 9, wherein the first structure further includes a first connection flat located between two adjacent first protrusions of the first structure.

11. The light guide plate according to claim 10, wherein the number of the at least one second protrusion of the second structure is plural and wherein the second structure further includes a second connection flat located between two adjacent second protrusions of the second structure.

12. A backlight module, comprising:

a light guide plate, having a light input surface and a first surface with at least one first structure and at least one second structure, wherein:

the first structure and the second structure are adjacent arranged and are mirror reflection with each other;
the first structure includes at least one first protrusion having a cross section of an eccentric triangle; and
the second structure includes at least one second protrusion having a cross section of an eccentric triangle; and
a light source disposed adjacent to the light input surface.

13. The backlight module according to claim 12, wherein the extension direction of the light source and that of the first protrusion of the first structure form an angle of about 75 degree to 105 degree.

14. The backlight module according to claim 12, wherein the extension direction of the light source and that of the first protrusion of the first structure form an angle of about 90 degree.

15. The backlight module according to claim 12, wherein the light source comprises a plurality of light-emitting diodes (LEDs), cold cathode fluorescent lamp (CCFL) or external electrode fluorescent lamp (EEFL).

16. A liquid crystal display, comprising:

a backlight module, comprising:

a light guide plate, having a light input surface and a first surface with at least one first structure and at least one second structure, wherein:

the first structure and the second structure are adjacent arranged and are mirror reflection with each other;
the first structure includes at least one first protrusion having a cross section of a eccentric triangle; and
the second structure includes at least one second protrusion having a cross section of a eccentric triangle; and

a light source disposed adjacent to the light input surface; and

a liquid crystal display panel disposed above the backlight module.

* * * * *

专利名称(译)	导光板，背光模组和液晶显示器		
公开(公告)号	US20100073913A1	公开(公告)日	2010-03-25
申请号	US12/318547	申请日	2008-12-31
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电.		
当前申请(专利权)人(译)	友达光电.		
[标]发明人	YEH YAO CHUNG		
发明人	YEH, YAO-CHUNG		
IPC分类号	G02F1/13357 G02B6/10 G09F13/04		
CPC分类号	G02B6/0036 G02F1/133615 G02B6/0038		
优先权	097136370 2008-09-22 TW		
其他公开文献	US8308337		
外部链接	Espacenet USPTO		

摘要(译)

提供一种导光板，背光模块和液晶显示器。导光板具有第一表面，该第一表面至少具有一个第一结构和一个形成在其上的第二结构。第一结构和第二结构相邻布置并且彼此镜面反射。第一结构和第二结构中的每一个具有第一突起，第一突起具有偏心三角形的横截面。

