



US 20050116921A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0116921 A1**

Kim

(43) **Pub. Date:** **Jun. 2, 2005**

(54) **FIELD SEQUENTIAL LIQUID CRYSTAL DISPLAY**

(52) **U.S. Cl. 345/102**

(76) Inventor: **Tae-Soo Kim**, Busan (KR)

(57) **ABSTRACT**

Correspondence Address:
CHRISTIE, PARKER & HALE, LLP
PO BOX 7068
PASADENA, CA 91109-7068 (US)

(21) Appl. No.: **10/998,448**

(22) Filed: **Nov. 29, 2004**

(30) **Foreign Application Priority Data**

Nov. 27, 2003 (KR) 2003-85292

Publication Classification

(51) **Int. Cl. 7** **G09G 3/36**

A field sequential liquid crystal display (FS-LCD) capable of obtaining desired chromaticity and luminance by setting driving conditions of light emitting diodes (LEDs) having a large driving current distribution per LED product, and driving a backlight including R, G, and B LEDs according to a corresponding driving condition. An LCD driving circuit prestores driving conditions for a liquid crystal and driving conditions for each of a plurality of LEDs. A liquid crystal panel in the FS-LCD is driven based on a corresponding prestored driving condition for the liquid crystal, and the R, G, and B LEDs forming the backlight are driven based on a corresponding driving condition for each LED. The liquid crystal panel also includes a temperature sensor and a luminance and chromaticity sensor. The driving conditions may vary based on sensed temperature, chromaticity, and luminance.

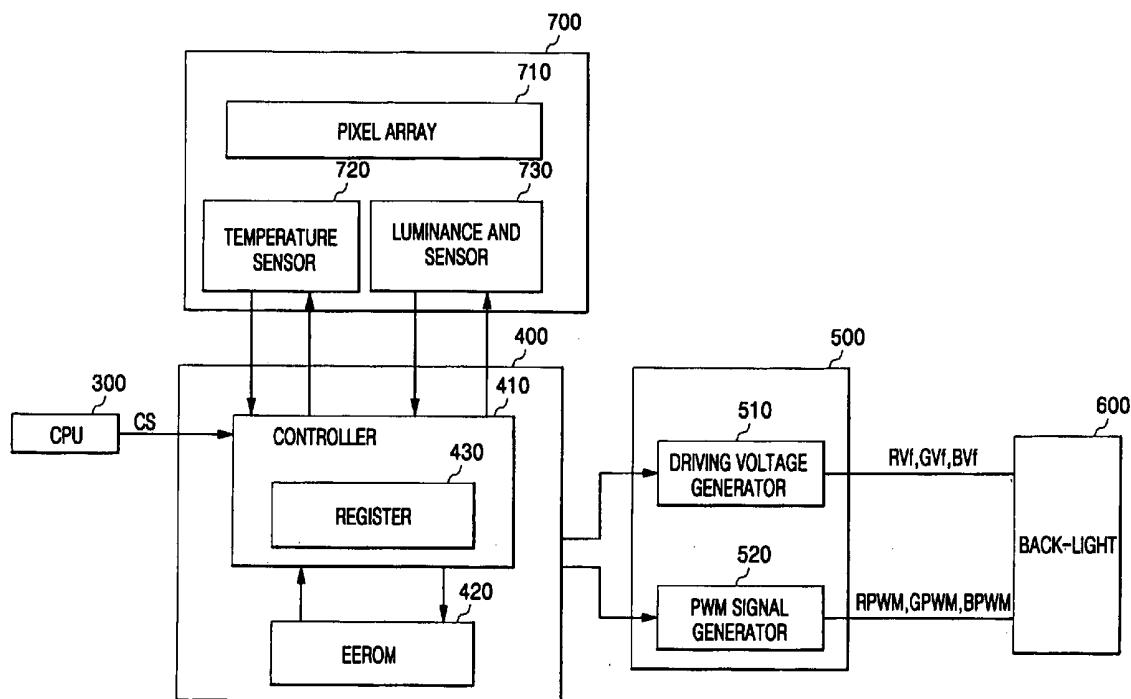


FIG. 1
(PRIOR ART)

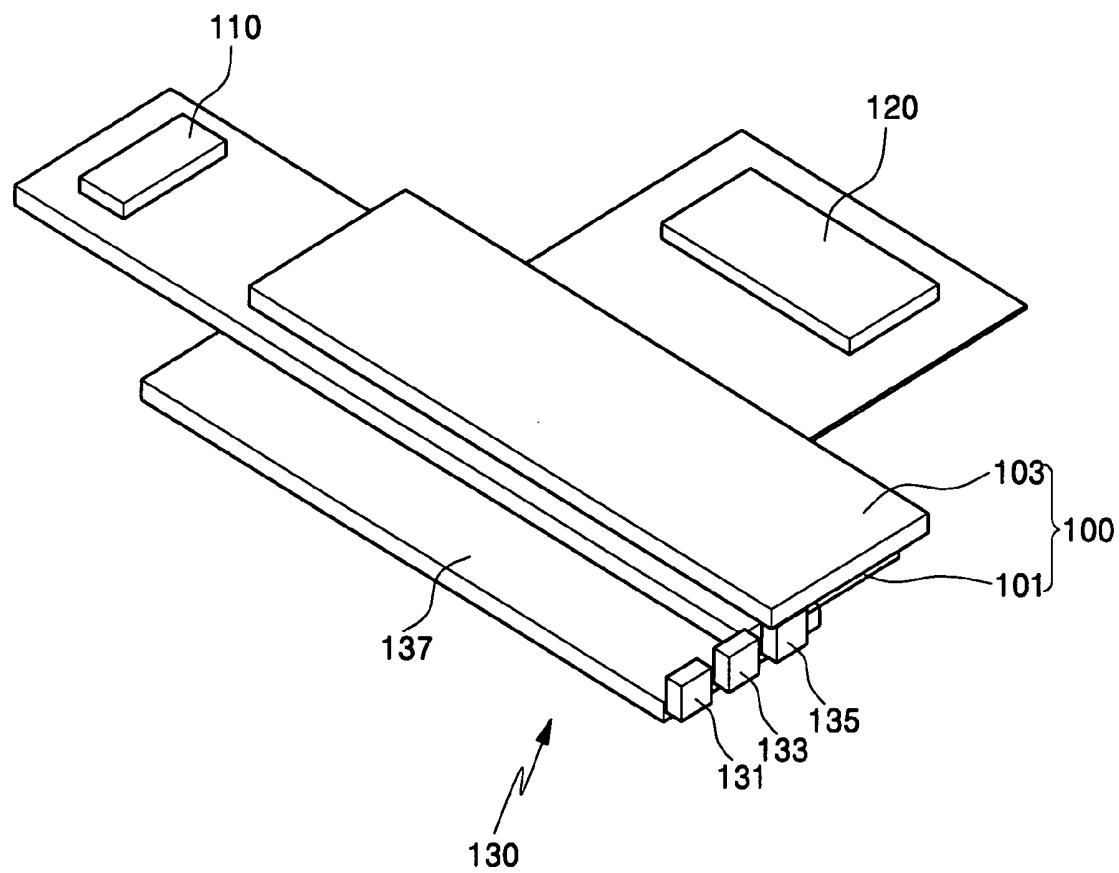


FIG. 2
(PRIOR ART)

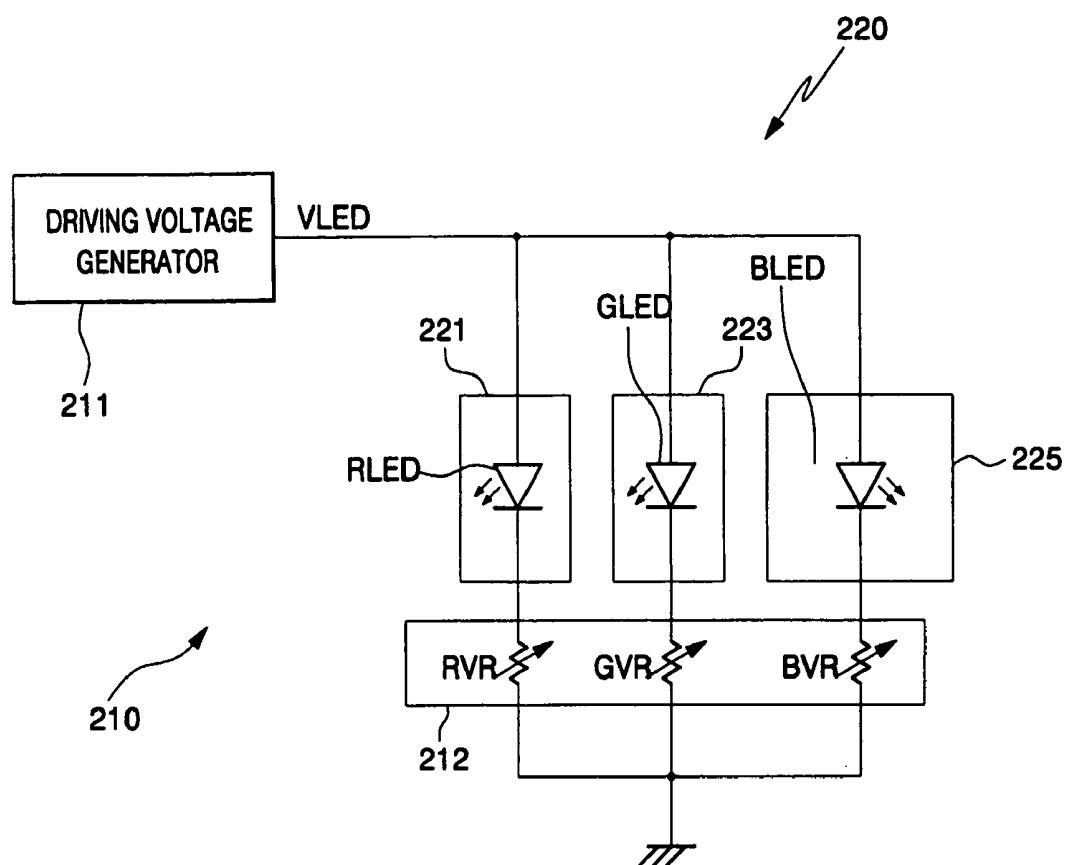


FIG. 3


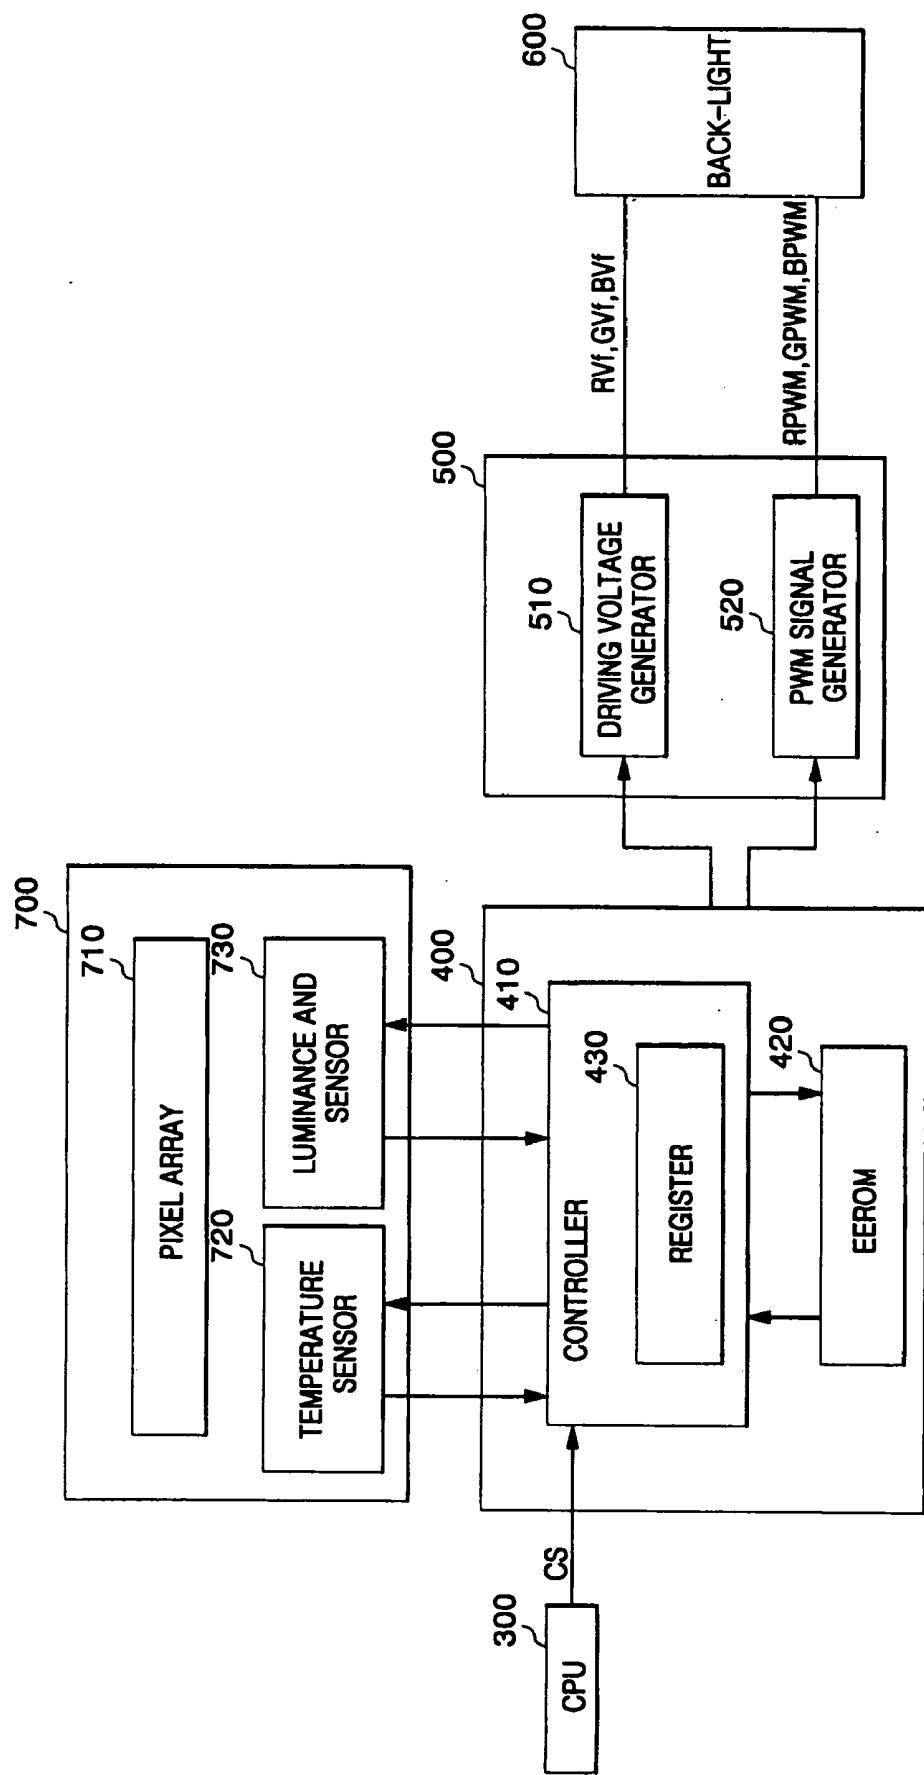


FIG. 4

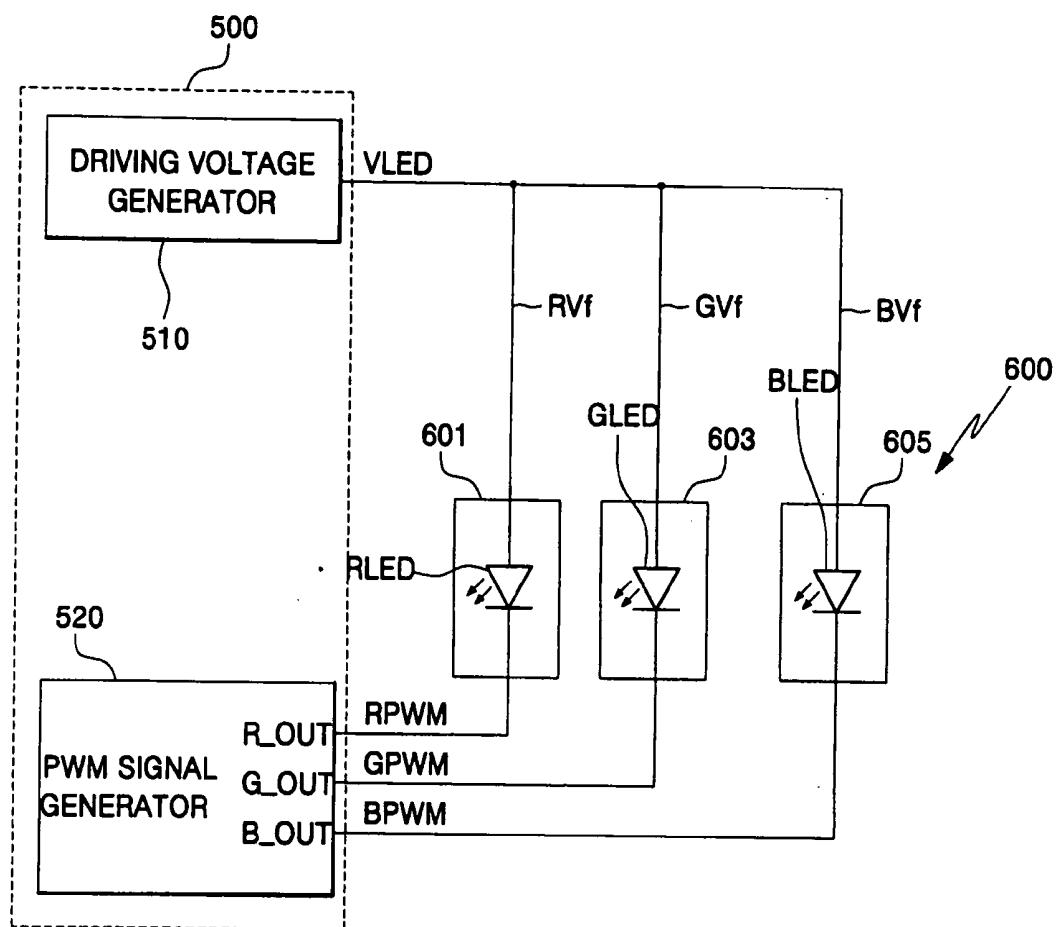

FIELD SEQUENTIAL LIQUID CRYSTAL DISPLAY**CROSS-REFERENCE TO RELATED
APPLICATION**

[0001] This application claims the benefit of Korean Patent Application No. 2003-0085292, filed Nov. 27, 2003, the contents of which are hereby incorporated herein by reference in their entirety.

BACKGROUND OF THE INVENTION**[0002] 1. Field of the Invention**

[0003] The present invention relates to a field sequential liquid crystal display (FS-LCD), and more particularly, to an LCD capable of obtaining desired chromaticity and luminance regardless of a driving current distribution of a light emitting diode (LED).

[0004] 2. Description of Related Art

[0005] A color LCD generally includes a liquid crystal panel having an upper substrate, a lower substrate, and a liquid crystal injected between the upper and lower substrates. The color LCD further includes a driving circuit for driving the liquid crystal panel, and a back-light for providing white light to the liquid crystal. Such an LCD may be mainly classified into a red (R), green (G), blue (B) color filter type or a color field sequential driving type depending on its driving mechanism.

[0006] In the color filter type LCD, a single pixel is divided into R, G, and B subpixels, and R, G, and B color filters are respectively arranged in the R, G, and B subpixels. Light is transmitted from a single back-light to the R, G, and B color filters through the liquid crystal allowing a color image to be displayed.

[0007] On the other hand, a color FS-LCD includes, R, G, and B back-lights that are arranged in a single pixel that is not divided into R, G, and B subpixels. The light of the three primary colors is provided from the R, G, and B back-lights to the single pixel through the liquid crystal so that each of the three primary colors are sequentially displayed in a time-sharing, multiplexed manner, allowing the display of a color image using a residual image effect.

[0008] FIG. 1 is a perspective view of a configuration of a typical color FS-LCD.

[0009] Referring to FIG. 1, the FS-LCD includes a liquid crystal panel 100 having a lower substrate 101 in which a thin film transistor (TFT) array (not shown) for switching is arranged to be connected to a plurality of gate lines, a plurality of data lines, and a plurality of common lines. The liquid crystal panel also includes an upper substrate 103 in which a common electrode (not shown) is formed to provide a common voltage to the common lines. The liquid crystal panel further includes a liquid crystal (not shown) injected between the upper and lower substrates.

[0010] The FS-LCD further includes a gate line driving circuit 110 for providing scan signals to the plurality of gate lines of the liquid crystal panel 100, a data line driving circuit 120 for providing R, G, and B data signals to the data lines, and a back-light system 130 for providing light corresponding to three primary colors, namely, R, G, and B colors, to the liquid crystal panel 100.

[0011] The back-light system 130 includes three back-lights 131, 133, and 135 respectively providing R, G, and B light, and a light guide plate 137 providing the R, G, and B light respectively emitted from the R, G, and B back-lights 131, 133, and 135, to the liquid crystal of the liquid crystal panel 100.

[0012] Typically, a time interval of a single frame driven at 60 Hz is 16.7 ms ($\frac{1}{60}$ s). When the single frame is divided into three subframes, as is the case for the FS-LCD, each subframe has a time interval of 5.56 ms ($\frac{1}{180}$ s). The time interval of one subframe is short enough to prevent its field change to be perceived by the human eye. Accordingly, the human eye sees the three subframes during the time interval of 16.7 ms as a single frame, resulting in the recognition of a composite color formed by the three primary colors to display the image.

[0013] In order to obtain fast operating characteristics of the LCD, the response speed of the liquid crystal should be fast and the corresponding switching speed for turning the R, G, and B back-lights on and off should also be relatively fast. In addition, in order to obtain good image quality of the LCD, light having uniform chromaticity and luminance should be emitted from each of the LEDs.

[0014] FIG. 2 is a schematic block diagram of a back-light driving circuit used in the FS-LCD shown in FIG. 1.

[0015] Referring to FIG. 2, the back-light 220 includes R, G, and B back-lights 221, 223, and 225 for sequentially emitting R, G, and B lights, respectively, per each subframe. A back-light driving circuit 210 includes a driving voltage generator 211 sequentially generating a driving voltage VLED for driving the R, G, and B back-lights 221, 223, and 225.

[0016] Among these back-lights 220, the R back-light 221 emitting the R light includes a red LED (RLED), and the G back-light 223 emitting the G light includes a green LED (GLED), and the B back-light 225 emitting the B light includes a blue LED (BLED).

[0017] The driving voltage generator 211 generates the driving voltage VLED of a same level to the R, G, and B back-lights 221, 223, and 225. The driving voltage VLED provided from the driving voltage generator 211 is supplied to an anode electrode of the RLED of the R back-light 221, an anode electrode of the GLED of the G back-light 223, and an anode electrode of the BLED of the B back-light 225.

[0018] The back-light driving circuit 210 further includes a luminance adjuster 212 that is serially connected between the back-light 220 and a ground, and that adjusts the luminance of light emitted from the back-light 220. The luminance adjuster 212 has a first variable resistor RVR that is connected between the ground and a cathode electrode of the RLED of the R back-light 221 and that adjusts the luminance of light emitted from the R back-light 221, a second variable resistor GVR that is connected between the ground and a cathode electrode of the GLED of the G back-light 223 and that adjusts the luminance of light emitted from the G back-light 223, and a third variable resistor BVR that is connected between the ground and a cathode electrode of the BLED of the B back-light 225 and that adjusts the luminance of light emitted from the B back-light 225.

[0019] In the prior art, when a forward driving voltage VLED of, for example, 4V is sequentially supplied to the R, G, and B back-lights 221, 223, and 225, the variable resistors RVR, GVR, and BVR of the luminance adjuster 212 are used to sequentially provide a driving voltage suitable for the RLED, a driving voltage suitable for the GLED, and a driving voltage suitable for the BLED. Accordingly, a suitable forward driving voltage is supplied to each of the red, green, and blue LEDs per each subframe, so that the R, G, and B back-lights 221, 223, and 225 sequentially emit light having a desired luminance. That is, in the prior art, all of the R, G, and B back-lights 221, 223, 225 are provided with the same driving voltage, such as, 4V, so that the luminance of light emitted from the R back-light 221 is adjusted by applying a forward driving voltage RVf suitable for the RLED using the first variable resistor RVR when the RLED is required to be driven.

[0020] Meanwhile, the luminance of light emitted from the G back-light 223 is adjusted by applying a forward driving voltage GVf suitable for the GLED using the second variable resistor GVR when the GLED is required to be driven. In addition, the luminance of light emitted from the B back-light 225 is adjusted by applying a forward driving voltage BVf suitable for the BLED using the third variable resistor BVR when the BLED is required to be driven.

[0021] As mentioned above, the luminance was properly adjusted in the prior art by adjusting the variable resistor. However, LEDs forming the back-light generally have a very large distribution of driving currents based on the particular LED product. The differing driving currents from LED to LED create luminance non-uniformity that cannot be solved even when the luminance is adjusted using the variable resistor. Furthermore, chromaticity also cannot be adjusted due to the differing driving current distributions from LED to LED.

SUMMARY OF THE INVENTION

[0022] The various embodiments of the present invention provide a back-light driving circuit for driving an LED in an optimized condition that is capable of obtaining uniform luminance and chromaticity despite a driving current distribution of the LED.

[0023] In an exemplary embodiment according to the present invention, a liquid crystal display (LCD) includes: an LCD driving circuit having one or more prestored driving conditions for a liquid crystal and one or more prestored driving conditions for each of a plurality of light emitting diodes (LEDs), the LCD driving circuit selecting and outputting a corresponding driving condition for the liquid crystal and a corresponding driving condition for at least one of the plurality of LEDs from among the one or more prestored driving conditions for the liquid crystal and the plurality of LEDs in response to a control signal. The LCD also includes a liquid crystal panel driven by the corresponding driving condition for the liquid crystal provided by the LCD driving circuit, a back-light including the at least one of the plurality of LEDs, and a back-light driving circuit for driving the at least one of the plurality of LEDs in the back-light based on the corresponding driving condition for the at least one of the plurality of LEDs provided by the LCD driving circuit.

[0024] The LCD driving circuit may output the corresponding driving condition suitable for the at least one of the

plurality of LEDs based on a control signal provided from an external control device. The external control device for providing the control signal to the LCD driving circuit may be a central processing unit (CPU) coupled to the LCD.

[0025] The LCD driving circuit may further include a data store prestoring the one or more driving conditions for the liquid crystal and the one or more driving conditions for each of the plurality of LEDs, and a controller having a temporary storage for temporarily storing data read out from the data store. The temporary storage of the LCD driving circuit may be a register, and the data store of the LCD driving circuit may be an electrically erasable and programmable read only memory (EEPROM).

[0026] The one or more driving conditions for each of the plurality of LEDs prestored in the first storage means may be ones for adjusting chromaticity and luminance of each of the plurality of LEDs, and the LCD driving circuit outputs the corresponding driving condition for the at least one of the plurality of LEDs for adjusting chromaticity and luminance of the at least one of the plurality of LEDs. The back-light driving circuit may provide to the back-light a forward driving voltage corresponding to the corresponding driving condition for the at least one of the plurality of LEDs provided by the LCD driving circuit for adjusting the luminance of the at least one of the plurality of LEDs, and a pulse width modulation (PWM) signal corresponding to the corresponding driving condition for at least one of the plurality of LEDs for adjusting the chromaticity of the at least one of the plurality of LEDs. The corresponding driving condition for the liquid crystal prestored in the first storage means may include at least one of a driving condition based on temperature, a driving condition based on LCD mode, a driving condition based on driving frequency, a driving condition based on driving voltage, and a driving condition based on gray scale to be displayed.

[0027] The back-light driving circuit may further include a driving voltage generator receiving the corresponding driving condition for the at least one of the plurality of LEDs associated with a luminance of the at least one of the plurality of LEDs for generating a forward driving voltage of the at least one of the plurality of LEDs, and pulse width modulation (PWM) signal generator receiving the corresponding driving condition for the at least one of the plurality of LEDs associated with a chromaticity of the at least one of the plurality of LEDs for generating a PWM signal of the at least one of the plurality of LEDs.

[0028] The liquid crystal panel may further include a temperature sensor for sensing temperature of the liquid crystal panel, and a luminance and chromaticity sensor for sensing luminance and chromaticity of light transmitted through the liquid crystal. The LCD driving circuits may receive a temperature sensing signal and a luminance and chromaticity sensing signal, and may select and output an updated corresponding driving condition for the liquid crystal and an updated corresponding driving condition for the at least one of the plurality of LEDs from a data store, and may drive the liquid crystal panel and the at least one of the plurality of LEDs according to the updated corresponding driving conditions.

[0029] In another exemplary embodiment according to the present invention, a method for driving a liquid crystal display (LCD) includes: prestoring one or more driving

conditions for a liquid crystal included in a liquid crystal panel and one or more driving conditions for each of a plurality of LEDs capable of generating light for the liquid crystal panel; selecting a corresponding driving condition for at least one of the plurality of LEDs and a corresponding driving condition for the liquid crystal from among the one or more prestored driving conditions for the liquid crystal and the plurality of LEDs; driving the liquid crystal based on the corresponding driving condition for the liquid crystal; generating a driving signal corresponding to the corresponding driving condition for the at least one of the plurality of LEDs; and driving the at least one of the plurality of LEDs according to the generated driving signal.

[0030] The one or more prestored driving conditions for each of the plurality of LEDs may be ones for adjusting luminance and chromaticity of each of the plurality of LEDs, and may include a PWM signal for adjusting the chromaticity and a forward driving voltage for adjusting the luminance of each of the plurality of LEDs. The one or more prestored driving conditions for the liquid crystal includes at least one of a driving condition based on temperature, a driving condition based on LCD mode, and a driving condition based on driving frequency, a driving condition based on driving voltage, and a driving condition based on gray scale to be displayed.

[0031] The method may further include detecting a temperature of the liquid crystal, and luminance and chromaticity of light transmitted through the liquid crystal; selecting updated driving conditions for the liquid crystal and the at least one of the plurality of LEDs corresponding to the detected temperature, luminance, and chromaticity from among the one or more prestored driving conditions for the liquid crystal and the plurality of LEDs; and driving the liquid crystal panel and the at least one of the plurality of LEDs according to the updated driving conditions for the liquid crystal and the at least one of the plurality of LEDs.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032] The above and exemplary embodiments of the present invention will be described with reference to the attached drawings in which:

[0033] FIG. 1 is a perspective view of a configuration of a typical color field sequential LCD;

[0034] FIG. 2 is a schematic block diagram of a back-light driving circuit used in the conventional field sequential LCD of FIG. 1;

[0035] FIG. 3 is a block diagram illustrating a configuration of a field sequential LCD in accordance with embodiments of the present invention; and

[0036] FIG. 4 is a schematic block diagram of a back-light driving circuit and an LCD driving circuit in a field sequential LCD according to an embodiment of the present invention.

DETAILED DESCRIPTION

[0037] Exemplary embodiments of the present invention will now be described more fully hereinafter with reference to the accompanying drawings

[0038] FIG. 3 is a block diagram illustrating a configuration of an FS-LCD in accordance with exemplary embodiments of the present invention.

[0039] Referring to FIG. 3, the illustrated LCD includes an LCD driving circuit 400, a back-light driving circuit 500, a back-light 600, and an LCD panel 700. A processor 300, such as, for example, a central processing unit (CPU), controls a main system connected to the LCD.

[0040] The LCD driving circuit 400 has a controller 410 and storage unit 420. The storage unit 420, which may be, for example, an electrically erasable and programmable read only memory (EEPROM), stores the driving conditions for driving the LEDs forming the back-light 600 on a per LED basis. The storage unit 420 acts to store the driving conditions for driving the FS-LCD on a per LED product basis, and as such, stores a driving condition for the LED and a driving condition for the LCD panel.

[0041] The driving condition for each LED stored in the storage unit 420 includes a pulse width modulation (PWM) value and a driving voltage for driving the LED. According to one embodiment, the driving voltage and the PWM value are values that are aimed to meet optimized driving conditions per LED product. The LCD driving conditions include, without limitation, driving conditions based on temperature, LCD mode, driving frequency, driving voltage, required gray scale to be displayed, and the like. Other driving conditions required to drive the LED and LCD which will be apparent to those of skill in the art may also be stored. In this manner, one or more driving conditions based on external factors, driving current non-uniformity of the LED, and the like, are set in advance for each LED product and stored in the storage unit 420.

[0042] For example, driving frequency, driving voltage, and turn-on time of the LED per temperature are optimized and the optimized driving condition stored in the storage unit 420 for each temperature. In case of the temperature, the response speed of the liquid crystal becomes slower when the temperature of the LCD panel is lower than a reference temperature, and the response speed of the liquid crystal becomes faster when the temperature of the LCD panel is higher than the reference temperature, calling for an adjustment in the corresponding driving frequency based on the detected temperature. According to one embodiment, the storage unit 420 stores the corresponding driving frequency, driving voltage, and turn-on time of the LED per each stored temperature.

[0043] The controller 410 includes a register 430. The register 430 acts to temporarily store driving data suitable for the LEDs forming the back-light 600 which are read from the storage unit 420 when the LCD is driven.

[0044] The back-light driving circuit 500 includes a driving voltage generator 510 and PWM signal generator 520. The driving voltage generator 510 receives a driving condition associated with the luminance of the back-light from among the driving conditions provided from the LCD driving circuit 400 to sequentially generate driving voltages, RVf, GVf, and BVf respectively suitable for the R, G, and B LEDs of the back-light 600. The PWM signal generator 520 receives a driving condition associated with the chromaticity of the back-light from among the driving conditions provided from the LCD driving circuit 400 to sequentially generate PWM signals RPWM, GPWM, and BPWM respectively suitable for the R, G, and B LEDs of the back-light 600.

[0045] The back-light 600 has R, G, and B back-lights 601, 603, and 605 as shown in FIG. 4. The R, G, and B

back-lights **601**, **603**, and **605** respectively have R, G, and B LEDs referred to as RLED, GLED, and BLED for respectively emitting R, G, and B lights having a predetermined luminance and a predetermined chromaticity which are driven by the PWM signals RPWM, GPWM, and BPWM, and the forward driving voltages RVf, GVf, and BVf provided from the back-light driving circuit **500**.

[0046] The liquid crystal panel **700** includes a pixel array **710** in which pixels are arranged in a matrix form, and gate and source drivers (not shown) for driving the pixels of the pixel array **710**. In addition, the liquid crystal panel **700** further includes a temperature sensor **720** for sensing the temperature of the liquid crystal panel, and a luminance and chromaticity sensor **730** for measuring the luminance and the chromaticity of light transmitted through the liquid crystal of the liquid crystal panel **700**.

[0047] Operation of the LCD having the above-mentioned configuration will be described as follows.

[0048] When the LCD is driven, the processor **300** reads out data from the storage unit **420** within the LCD driving circuit **400**. The processor **300** transmits a control signal CS for reading out a driving condition for the LED and IS a driving condition for the LCD which are prestored in the storage unit **420**, to the LCD driving circuit **400**.

[0049] In the LCD driving circuit **400**, the controller **410** reads out the driving condition suitable for the corresponding LED from among the driving conditions prestored in the storage unit **420** on an LED basis, responsive to the control signal CS, and temporarily stores the read driving condition in the register **430**. In addition, the controller **410** reads out the corresponding driving condition from among the driving conditions for the LCD panel **700** which are prestored in the storage unit **420**, and temporarily stores the read driving condition in the register **430**.

[0050] Accordingly, the LCD driving circuit **400** provides the driving condition stored in the register **430** for driving the liquid crystal to the pixel array of the LCD panel **700**, thereby driving the liquid crystal of the pixels arranged in the pixel array **710** via the driving condition. The LCD driving circuit **400** also provides the driving condition for each LED stored in the register **430** to the back-light driving circuit **500**.

[0051] The back-light driving circuit **500** provides a driving condition for a forward driving voltage from among the driving conditions provided from the LCD driving circuit **400** to the driving voltage generator **510**, and a condition for the PWM signal to the PWM signal generator **520**. Accordingly, the driving voltage generator **510** generates the forward driving voltage of a particular LED, and the PWM signal generator **520** generates the PWM signal, in response to the corresponding driving condition.

[0052] As a result, LEDs forming the back-light **600** are driven by the PWM signals and the driving voltages provided from the back-light driving circuit **500**, so that the back-light **600** emits light having a predetermined chromaticity and a predetermined luminance.

[0053] FIG. 4 is a schematic block diagram of the back-light **600** and the back-light driving circuit **500** according to one embodiment of the invention. The back-light driving

circuit **500** drives the back-light **600** based on driving data provided for the LEDs by the LCD driving circuit **400**.

[0054] In this regard, the driving voltage generator **510** receives the driving conditions for the forward driving voltage of the R, G, and B LEDs from among the driving conditions provided from the LCD driving circuit **400** as its input signal, and the PWM signal generator **520** receives the driving conditions for the PWM signals of the R, G, and B LEDs as its input signal.

[0055] Accordingly, the driving voltage generator **510** receives the driving conditions for the forward driving voltages provided from the back-light driving circuit **400** to sequentially generate the driving voltages, namely, RVf, GVf, and BVf of the R, G, and B LEDs RLED, GLED, and BLED. In addition, the PWM signal generator **520** receives the driving conditions for the PWM signals provided from the back-light driving circuit **400** to sequentially generate PWM signals, namely, RPWM, GPWM, and BPWM of the R, G, and B LEDs RLED, GLED, and BLED. As such, the luminance is adjusted by the driving voltage suitable for each of the R, G, and B LEDs, and the PWM value of each of the R, G, and B LEDs is also adjusted to thereby adjust a white balance of a color to be implemented.

[0056] For example, when one frame is divided into three subframes and the R, G, and B LEDs RLED, GLED, and BLED are sequentially driven per each subframe, the forward driving voltage RVf suitable for the RLED is provided so as to correspond to the driving condition provided from the LCD driving circuit **400** to drive the RLED in the first subframe. The forward driving voltage GVf suitable for the GLED is then provided so as to correspond to the driving condition provided from the LCD driving circuit **400** to drive the GLED in the second subframe, and the forward driving voltage BVf suitable for the BLED is provided so as to correspond to the driving condition provided from the LCD driving circuit **400** to drive the BLED in the third subframe.

[0057] As such, when the driving voltage RVf suitable for the RLED is generated to be driven in the first subframe, the light emitting period of the RLED is optimized to correspond to the driving condition provided from the LCD driving circuit **400** to have the driving current modulated by the PWM, and the light emitting periods of the GLED and BLED are also optimized to have their driving currents modulated by the PWM.

[0058] As a result, light having desired chromaticity and luminance is emitted from the R, G, and B LEDs RLED, GLED, and BLED, and the liquid crystal panel **700** allows light to be emitted and transmitted through the R, G, and B LEDs RLED, GLED, and BLED by driving the liquid crystal of the pixel array to display a desired image.

[0059] According to one embodiment of the invention, the LCD includes the temperature sensor **720** in the liquid crystal panel **700** which may be, for example, a thermistor, that senses the temperature of the liquid crystal panel **700** and provides the temperature to the LCD driving circuit **400** under control of the controller **410**. The controller **410** reads out a corresponding driving condition from the storage unit **420** each time there is a change in the temperature values input from the liquid crystal panel based on temperature sensed by the temperature sensor **720**.

[0060] According to one embodiment of the invention, the LCD also includes the luminance and chromaticity sensor **730** in the liquid crystal panel **700** that senses the luminance and the chromaticity of light transmitted through the liquid crystal according to conventional mechanisms. Data with respect to the sensed chromaticity and luminance is provided to the LCD driving circuit **400** under control of the controller **410**. The controller **410** reads out a driving condition from the storage unit **420** again, corresponding to the chromaticity and luminance data provided from the liquid crystal panel.

[0061] In this manner, the LCD driving circuit **400** provides the driving conditions for driving the liquid crystal and LED based on data associated with the sensed chromaticity, luminance, and temperature of the LCD panel **700** and the back-light driving circuit **500**. As a result, the liquid crystal panel **700** and the back-light driving circuit **500** drive the pixel array **710** and the back-light **600** according to updated driving conditions provided from the LCD driving circuit **400**.

[0062] As such, temperature, luminance, and chromaticity are sensed and driving conditions suitable for them are provided to drive the liquid crystal panel and the back-light, so that the optimized driving condition may allow the liquid crystal and the back-light to be driven despite the driving current distribution of the LED or the temperature of the LCD panel. Accordingly, light having the optimized luminance and chromaticity may be emitted and the resultant image quality may also be enhanced.

[0063] As mentioned above, in accordance with embodiments of the present invention, driving conditions for the liquid crystal and optimized driving conditions are first stored in a memory device on a per LED basis, and desired driving conditions for the liquid crystal and LEDs are read out to drive the liquid crystal panel and the back-light, so that an image having desired luminance and chromaticity may be displayed regardless of the non-uniform driving currents of the LEDs.

[0064] Although the present invention has been described with reference to certain exemplary embodiments, it will be understood by those skilled in the art that a variety of modifications and variations may be made to the present invention without departing from the spirit or scope of the present invention. Of course, the scope of the invention is to be determined by the appended claims and their equivalents.

What is claimed is:

1. A liquid crystal display (LCD) comprising:

an LCD driving circuit having one or more prestored driving conditions for a liquid crystal and one or more prestored driving conditions for each of a plurality of light emitting diodes (LEDs), the LCD driving circuit selecting and outputting a corresponding driving condition for the liquid crystal and a corresponding driving condition for at least one of the plurality of LEDs from among the one or more prestored driving conditions for the liquid crystal and the plurality of LEDs in response to a control signal;

a liquid crystal panel driven by the corresponding driving condition for the liquid crystal provided by the LCD driving circuit;

a back-light including the at least one of the plurality of LEDs; and

a back-light driving circuit for driving the at least one of the plurality of LEDs in the back-light based on the corresponding driving condition for the at least one of the plurality of LEDs provided by the LCD driving circuit.

2. The LCD as recited in claim 1, wherein the LCD driving circuit outputs the corresponding driving condition for the at least one of the plurality of LEDs based on a control signal provided from an external control device.

3. The LCD as recited in claim 2, wherein the external control device for providing the control signal to the LCD driving circuit is a central processing unit (CPU) coupled to the LCD.

4. The LCD as recited in claim 1, wherein the LCD driving circuit further includes:

first storage means for prestoring the one or more driving conditions for the liquid crystal and the one or more driving conditions for each of the plurality of LEDs; and

a controller having second storage means for temporarily storing data read out from the first storage means.

5. The LCD as recited in claim 4, wherein the second storage means includes a register.

6. The LCD as recited in claim 4, wherein the first storage means includes an electrically erasable and programmable read only memory (EEPROM).

7. The LCD as recited in claim 6, wherein the one or more driving conditions for each of the plurality of LEDs prestored in the first storage means are one or more driving conditions for adjusting chromaticity and luminance of each of the plurality of LEDs, and the LCD driving circuit outputs the corresponding driving condition for the at least one of the plurality of LEDs for adjusting chromaticity and luminance of the at least one of the plurality of LEDs.

8. The LCD as recited in claim 7, wherein the back-light driving circuit provides to the back-light a forward driving voltage corresponding to the corresponding driving condition for the at least one of the plurality of LEDs provided by the LCD driving circuit for adjusting the luminance of the at least one of the plurality of LEDs, and a pulse width modulation (PWM) signal corresponding to the corresponding driving condition for the at least one of the plurality of LEDs for adjusting the chromaticity of the at least one of the plurality of LEDs.

9. The LCD as recited in claim 6, wherein the corresponding driving condition for the liquid crystal prestored in the first storage means includes at least one of a driving condition based on temperature, a driving condition based on LCD mode, a driving condition based on driving frequency, a driving condition based on driving voltage, and a driving condition based on gray scale to be displayed.

10. The LCD as recited in claim 1, wherein the back-light driving circuit further includes:

driving voltage generating means receiving the corresponding driving condition for the at least one of the plurality of LEDs associated with a luminance of the at least one of the plurality of LEDs, for generating a forward driving voltage of the at least one of the plurality of LEDs; and

pulse width modulation (PWM) signal generating means receiving the corresponding driving condition for the at least one of the plurality of LEDs associated with a chromaticity of the at least one of the plurality of LEDs for generating a PWM signal of the at least one of the plurality of LEDs.

11. The LCD as recited in claim 1, wherein the LCD is a field sequential LCD.

12. The LCD as recited in claim 1, wherein the liquid crystal panel further includes:

temperature sensing means for sensing temperature of the liquid crystal panel; and

luminance and chromaticity sensing means for sensing luminance and chromaticity of light transmitted through the liquid crystal.

13. The LCD as recited in claim 12, wherein the LCD driving circuit receives a temperature sensing signal and a luminance and chromaticity sensing signal, selects and outputs an updated corresponding driving condition for the liquid crystal and an updated corresponding driving condition for the at least one of the plurality of LEDs from the storage means, and drives the liquid crystal panel and the at least one of the plurality of LEDs according to the updated corresponding driving conditions.

14. A method for driving a liquid crystal display (LCD) comprising:

prestoring one or more driving conditions for a liquid crystal included in a liquid crystal panel and one or more driving conditions for each of a plurality of LEDs capable of generating light for the liquid crystal panel;

selecting a corresponding driving condition for at least one of the plurality LEDs and a corresponding driving condition for the liquid crystal from among the one or more prestored driving conditions for the liquid crystal and the plurality of LEDs;

driving the liquid crystal based on the corresponding driving condition for the liquid crystal;

generating a driving signal corresponding to the corresponding driving condition for the at least one of the plurality of LEDs; and

driving the at least one of the plurality of LEDs according to the generated driving signal.

15. The method as recited in claim 14, wherein the one or more prestored driving conditions for each of the plurality of LEDs are one or more driving conditions for adjusting luminance and chromaticity of each of the plurality of LEDs, and include a pulse width modulation (PWM) signal for adjusting the chromaticity and a forward driving voltage for adjusting the luminance of each of the plurality of LEDs.

16. The method as recited in claim 14, wherein the one or more prestored driving conditions for the liquid crystal include at least one of a driving condition based on temperature, a driving condition based on LCD mode, a driving condition based on driving frequency, a driving condition based on driving voltage, and a driving condition based on gray scale to be displayed.

17. The method as recited in claim 14, further comprising:

detecting a temperature of the liquid crystal, and luminance and chromaticity of light transmitted through the liquid crystal;

selecting updated driving conditions for the liquid crystal and the at least one of the plurality of LEDs corresponding to the detected temperature, luminance, and chromaticity from among the one or more prestored driving conditions for the liquid crystal and the plurality of LEDs; and

driving the liquid crystal panel and the at least one of the plurality of LEDs according to the updated driving conditions for the liquid crystal and the at least one of the plurality of LEDs.

* * * * *

专利名称(译)	场序液晶显示器		
公开(公告)号	US20050116921A1	公开(公告)日	2005-06-02
申请号	US10/998448	申请日	2004-11-29
[标]申请(专利权)人(译)	金泰洙		
申请(专利权)人(译)	金泰SOO		
当前申请(专利权)人(译)	金泰SOO		
[标]发明人	KIM TAE SOO		
发明人	KIM, TAE-SOO		
IPC分类号	G02F1/133 G09G3/20 G09G3/34 G09G3/36 H05B33/08 H05B37/02		
CPC分类号	G09G3/3413 G09G2310/0235 G09G2320/041 G09G2320/064 H05B33/0872 H05B33/0818 H05B33/086 H05B33/0869 G09G2360/145 H05B45/22 H05B45/28 H05B45/20 H05B45/37		
优先权	1020030085292 2003-11-27 KR		
其他公开文献	US7728808		
外部链接	Espacenet USPTO		

摘要(译)

一种场序液晶显示器 (FS-LCD) , 其能够通过设定每个LED产品具有大驱动电流分布的发光二极管 (LED) 的驱动条件来获得期望的色度和亮度 , 并且驱动包括R , G和B的背光。 LED根据相应的驱动条件。 LCD驱动电路预先存储液晶的驱动条件和多个LED中的每一个的驱动条件。 基于用于液晶的相应预存驱动条件来驱动FS-LCD中的液晶面板 , 并且基于每个LED的相应驱动条件来驱动形成背光的R , G和B LED。 液晶面板还包括温度传感器和亮度和色度传感器。 驱动条件可以基于感测的温度 , 色度和亮度而变化。

