



(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2007/0097284 A1**

Ho et al. (43) **Pub. Date: May 3, 2007**

(54) **LIQUID CRYSTAL DISPLAY DEVICE**

(52) **U.S. Cl.** **349/58**

(76) Inventors: **Chung-Hsing Ho**, Kaohsiung County (TW); **Yao-Tung Wang**, Taoyuan (TW)

(57) **ABSTRACT**

Correspondence Address:
JIANQ CHYUN INTELLECTUAL PROPERTY OFFICE
7 FLOOR-1, NO. 100 ROOSEVELT ROAD, SECTION 2 TAIPEI 100 (TW)


A liquid crystal display device including a backlight module, a liquid crystal display device panel and a second frame is provided. The backlight module includes a first frame. The first frame includes a first body, first fasteners and baffles. The first fasteners and the baffles are arranged on a sidewall of the first body. The liquid crystal display device panel is arranged on the backlight module. The second frame is assembled with the first frame for fixing the liquid crystal display device panel, and includes a second body and second fasteners arranged on a sidewall of the second body. The first fasteners fasten with the corresponding second fasteners, to limit the relative displacement between the first and second body along a first direction, and the baffles are adapted for limiting the relative displacement between the first and second body along a second direction.

(21) Appl. No.: **11/163,810**

(22) Filed: **Oct. 31, 2005**

Publication Classification

(51) **Int. Cl.**
G02F 1/1333 (2006.01)

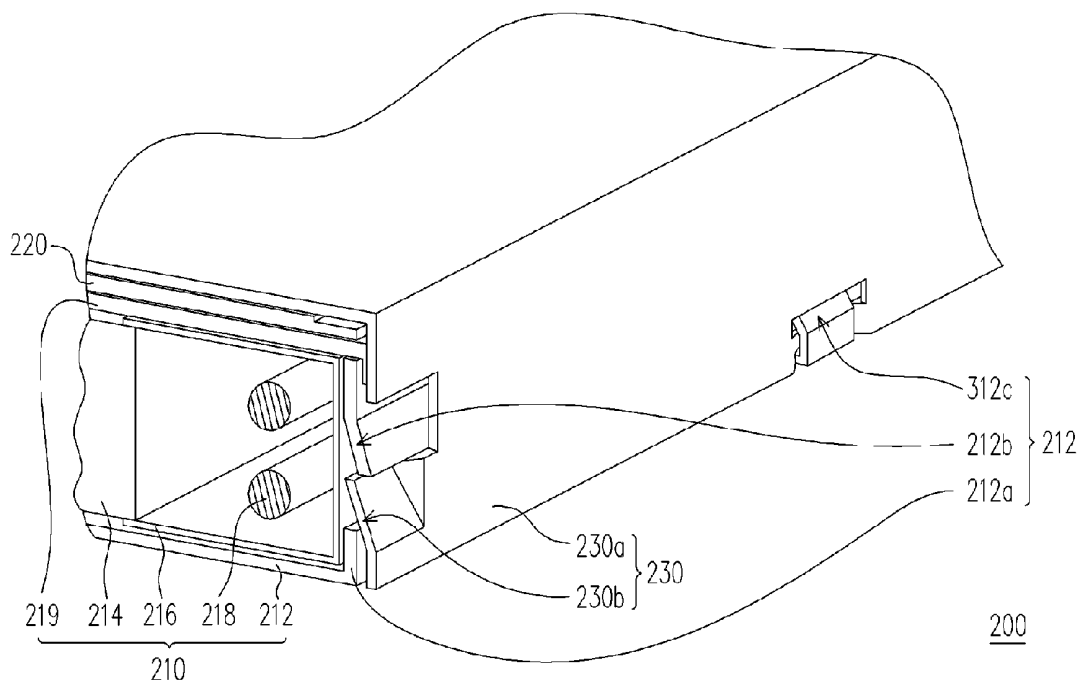

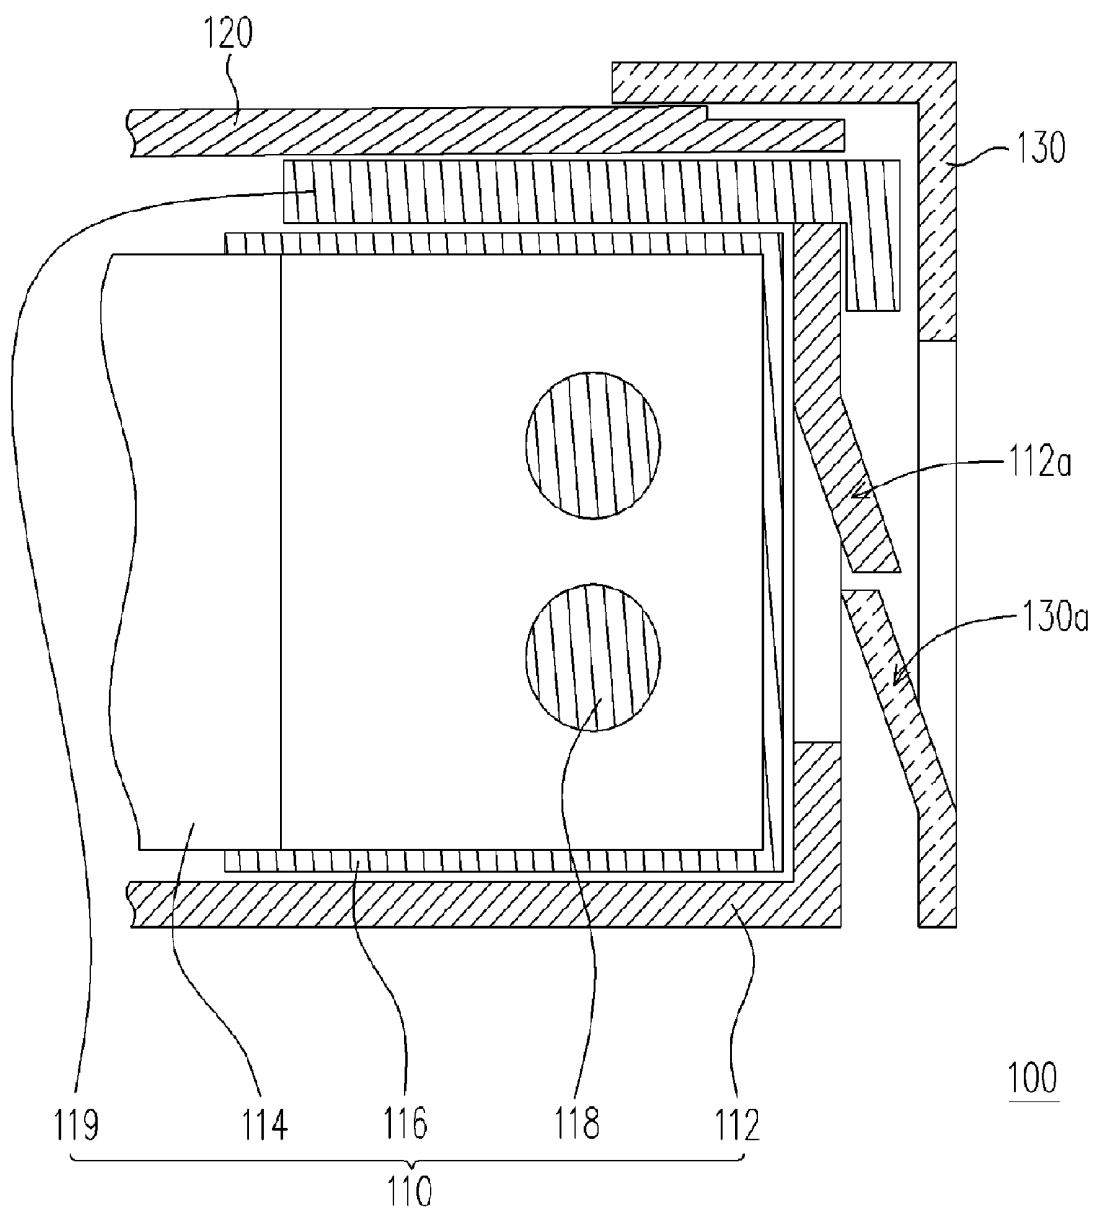


FIG. 1 (PRIOR ART)

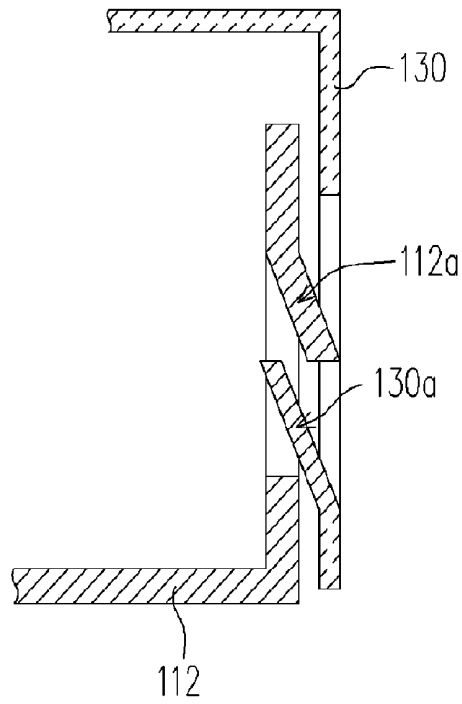


FIG. 2A(PRIOR ART)

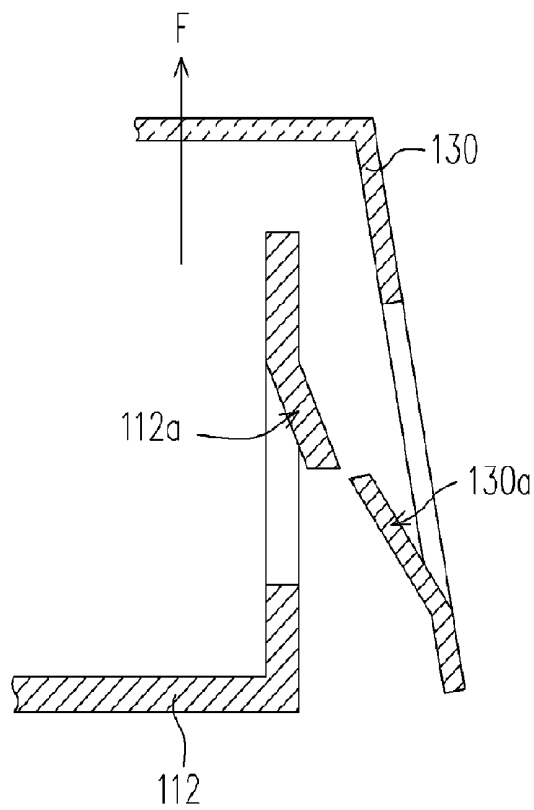


FIG. 2B(PRIOR ART)

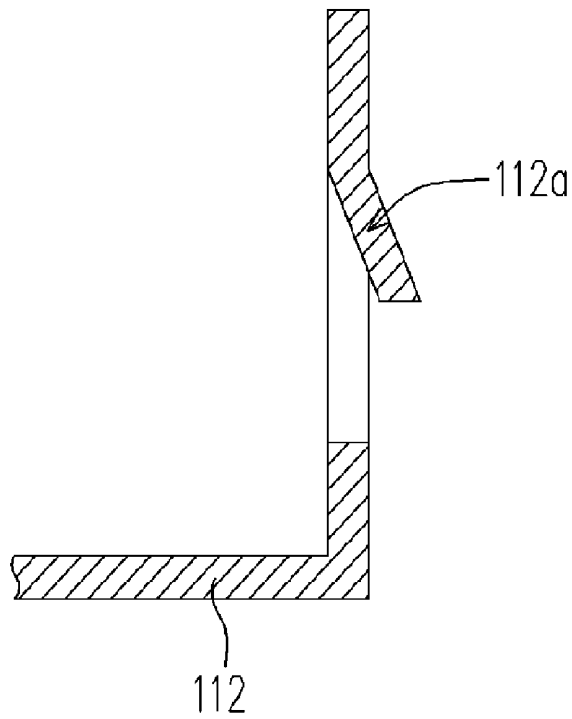
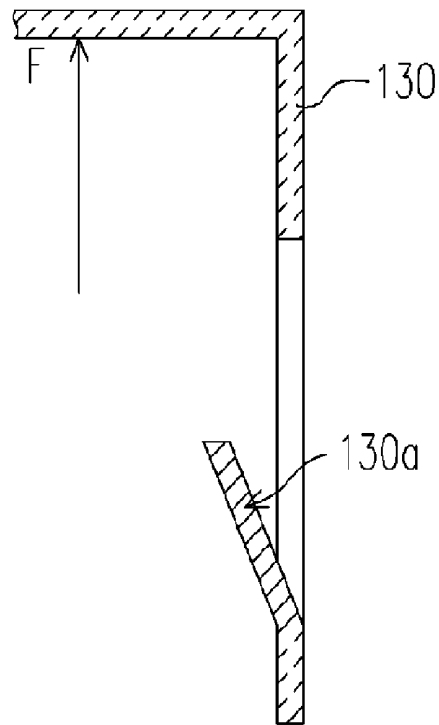


FIG. 2C(PRIOR ART)

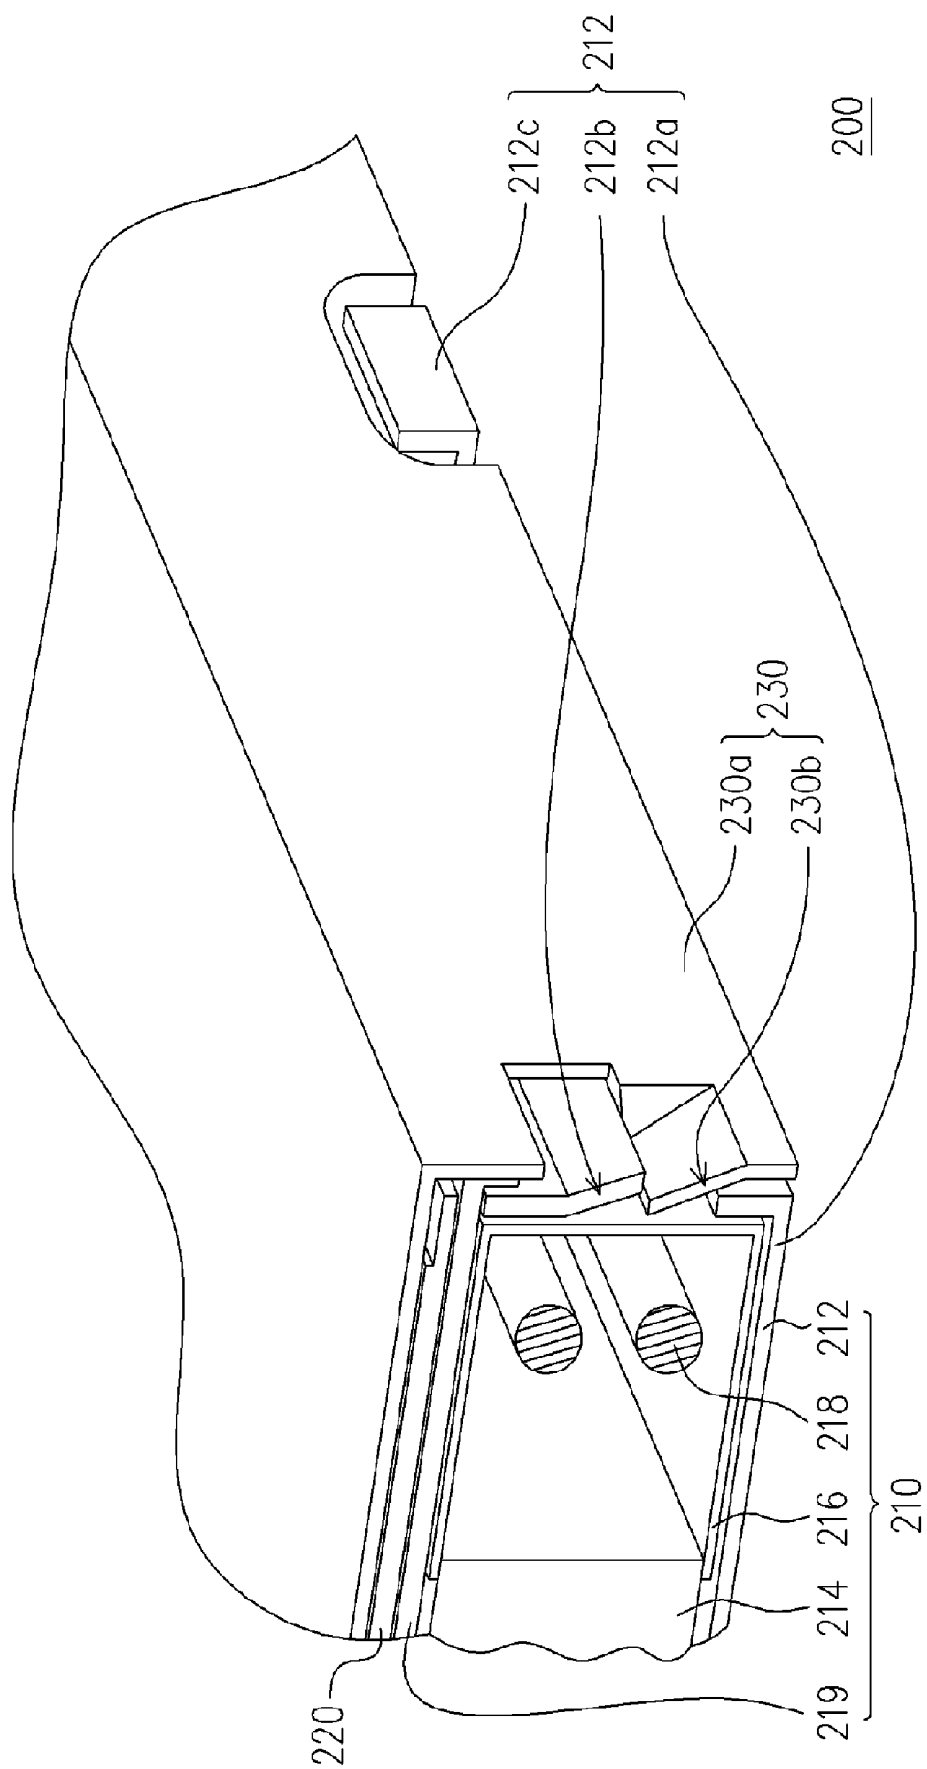
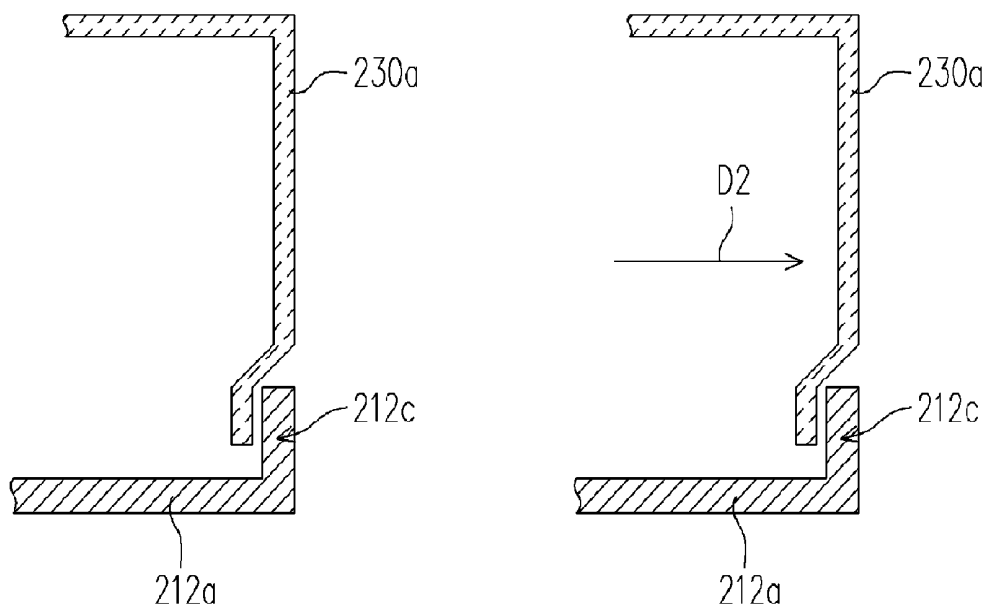
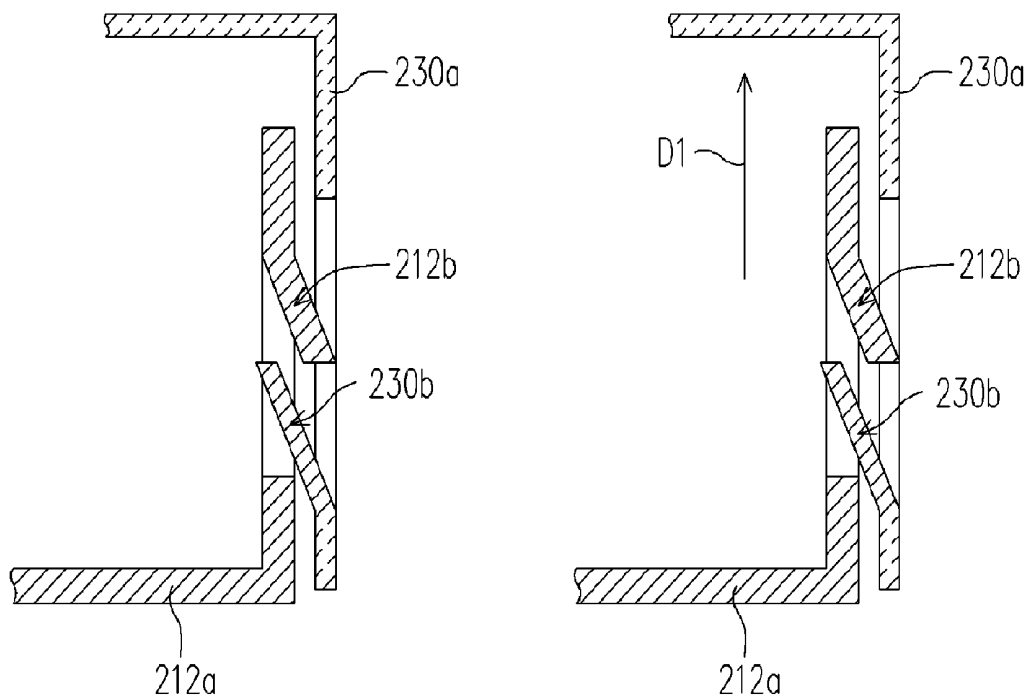


FIG. 3



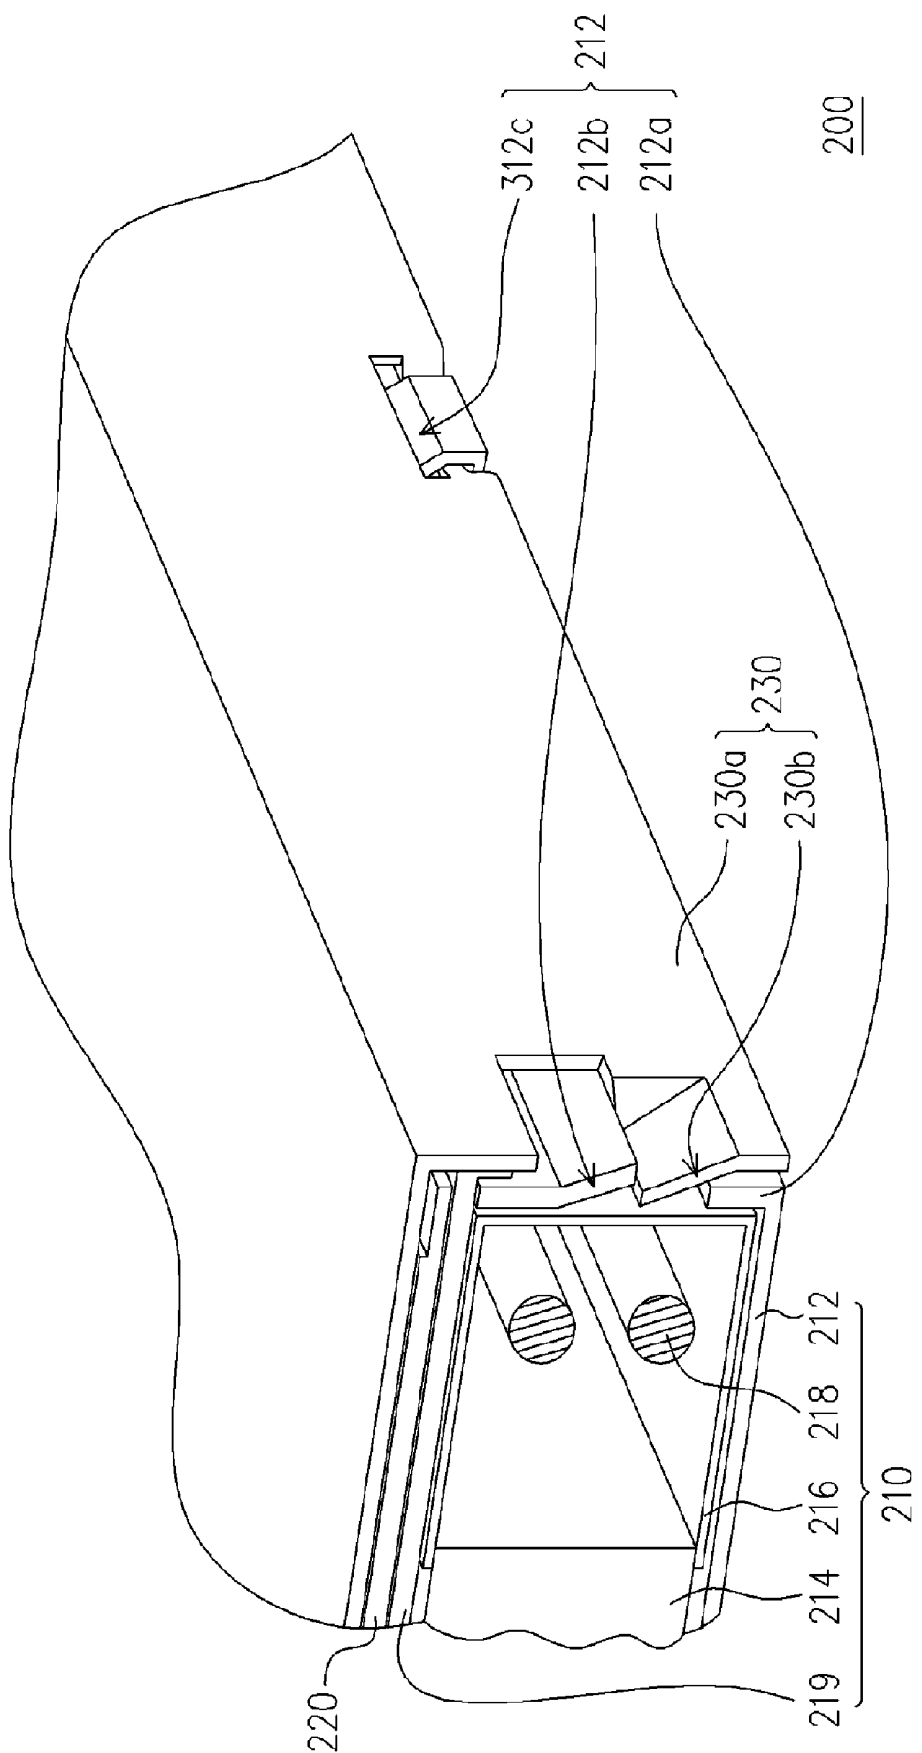


FIG. 5A

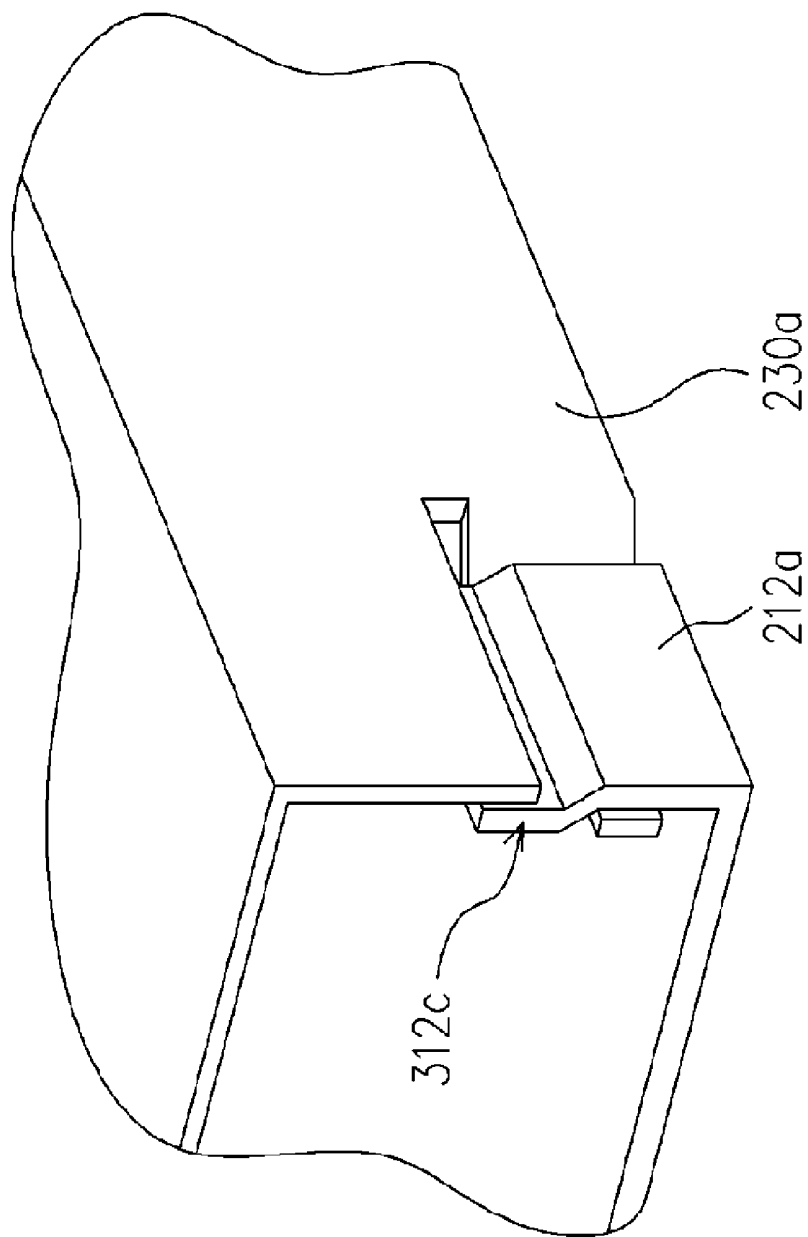


FIG. 5B

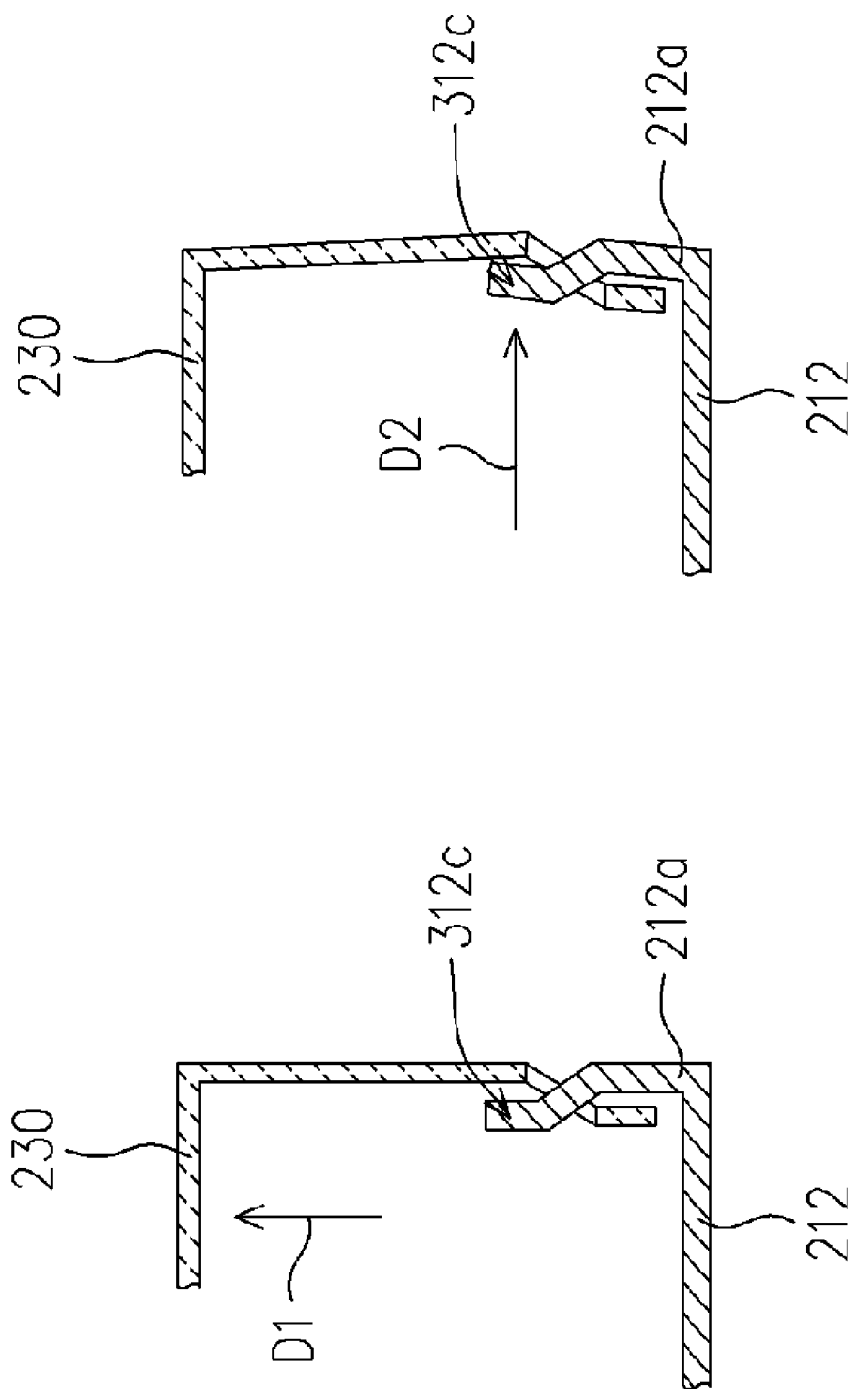


FIG. 5C

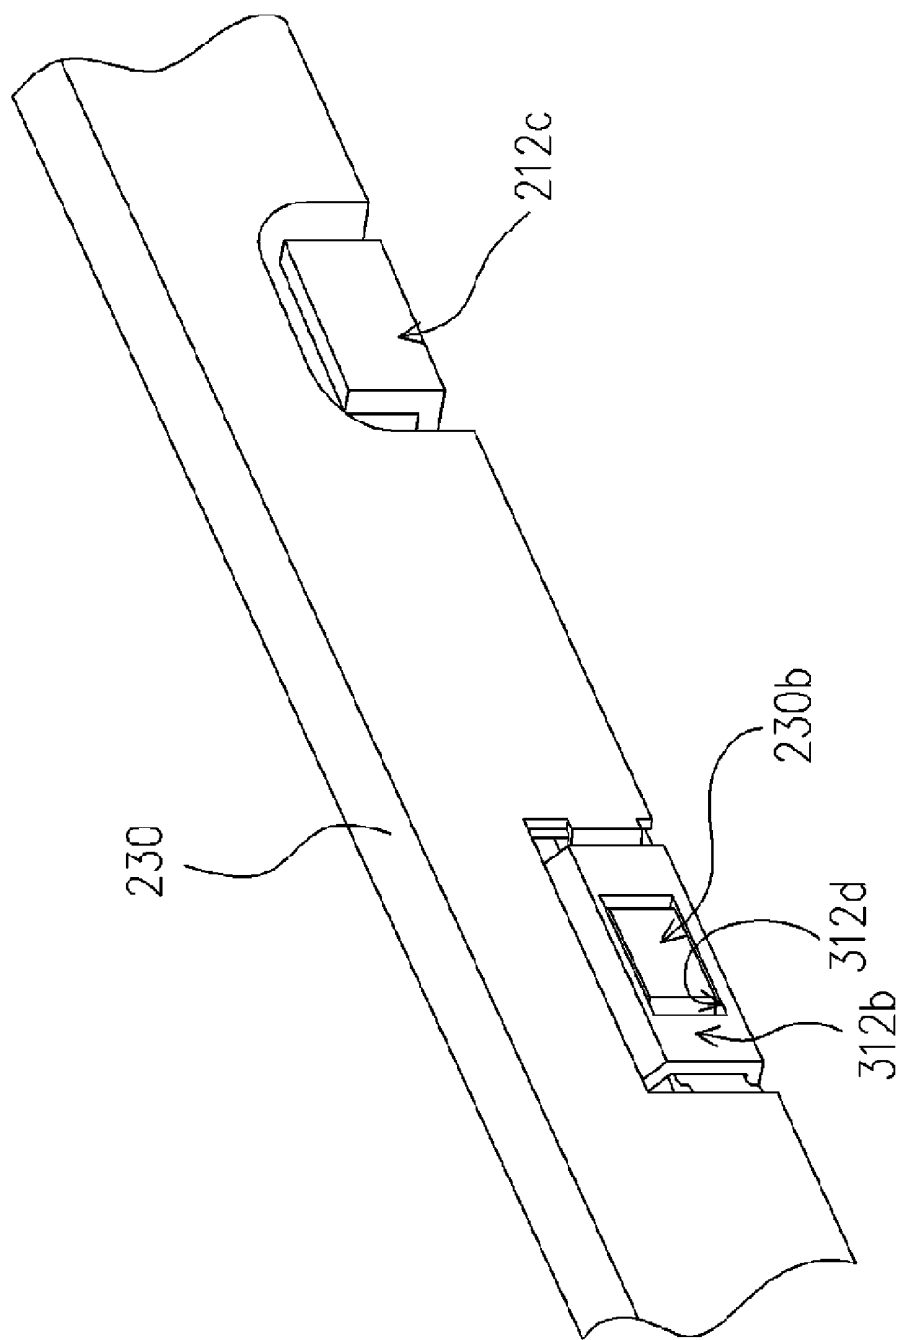


FIG. 6A

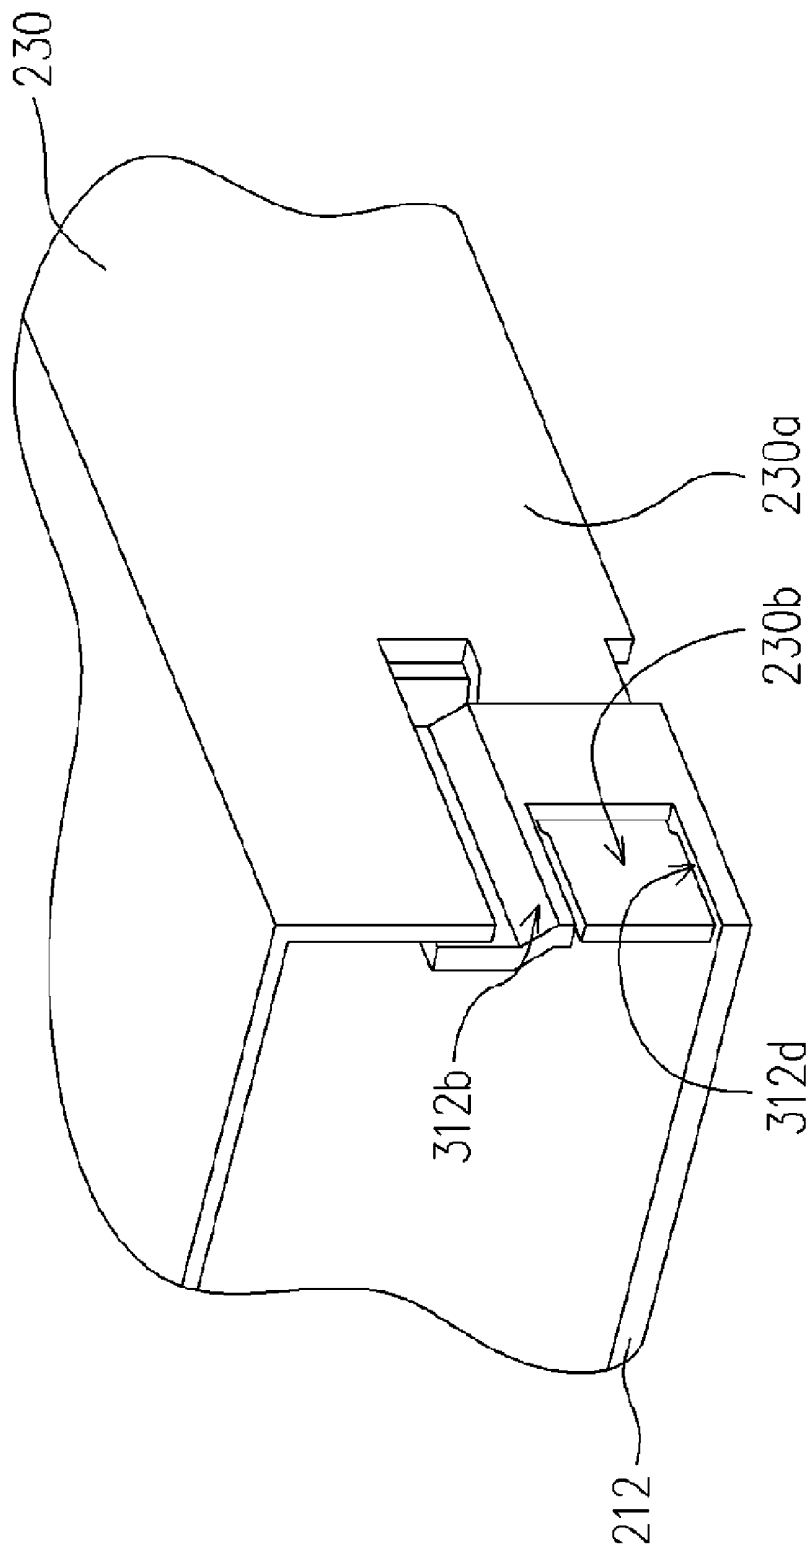


FIG. 6B

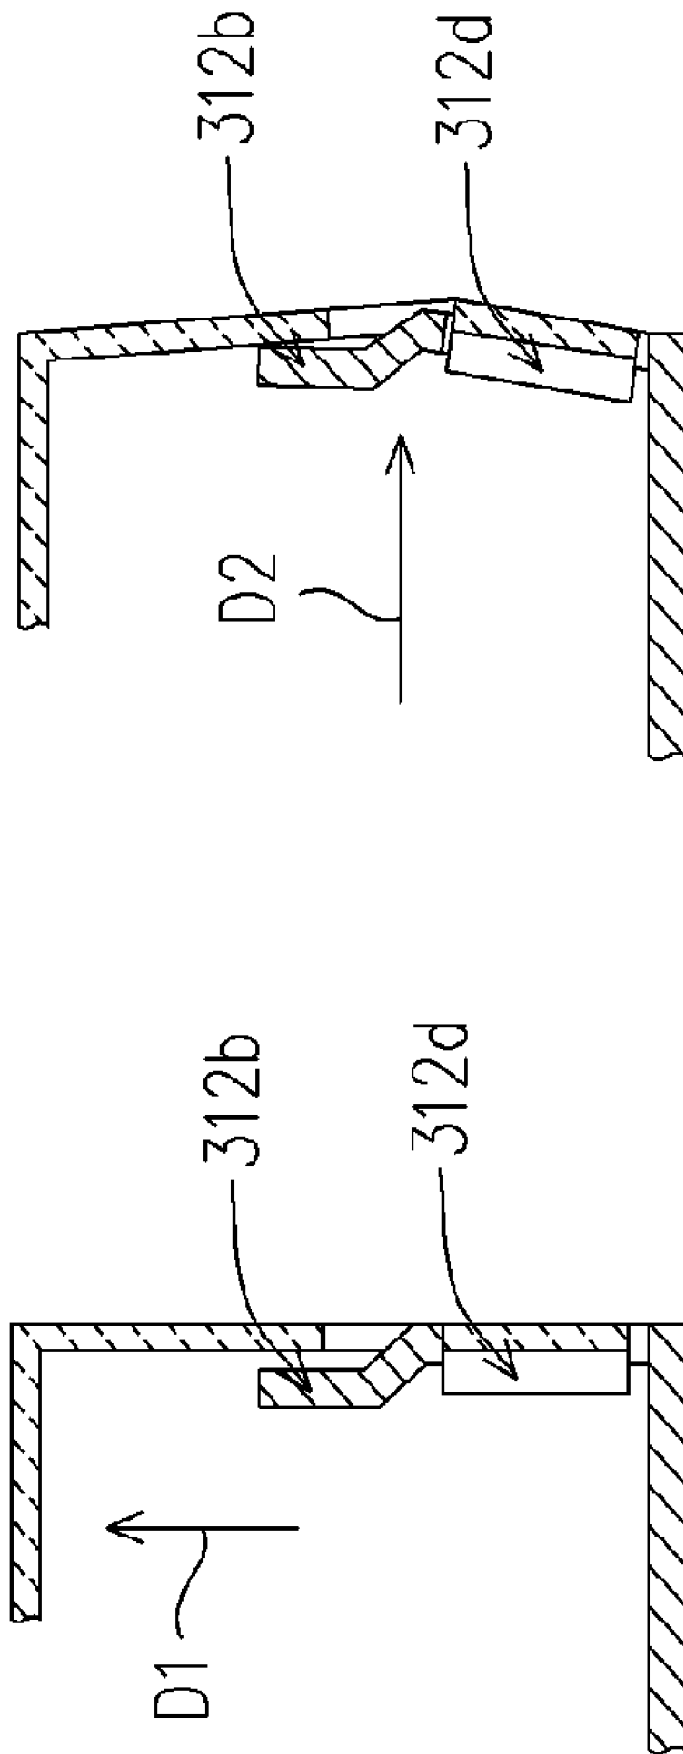


FIG. 6C

LIQUID CRYSTAL DISPLAY DEVICE

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention generally relates to a display device. More particularly, the present invention relates to a liquid crystal display device.

[0003] 2. Description of Related Art

[0004] Recently, the thin film transistor liquid crystal display device (TFT-LCD) having the advantages of high picture quality, slim, low power consumption and radiation-free has gradually become the mainstream in the display market. The TFT-LCD is composed of a liquid crystal display device panel and a backlight module. The liquid crystal display device panel and the backlight module are assembled by frames.

[0005] FIG. 1 is a schematic cross-sectional view showing a conventional liquid crystal display device. The conventional liquid crystal display device 100 comprises a backlight module 110, a liquid crystal display device panel 120 and a second frame 130. The backlight module 110 comprises a first frame 112. The liquid crystal display device panel 120 is arranged on the backlight module 110. The first frame 112 is assembled with the second frame 140 for fixing the liquid crystal display device panel 120. Besides, the backlight module 110 further comprises a light guiding plate 114, a reflector 116, a light source 118 and a sealant 119. The light guiding plate 114 is arranged inside the first frame 112, and the reflector 116 is arranged beside the light guiding plate 114. The sealant 119 is arranged between the first frame 112 and the liquid crystal display device panel 120, and the light source 118 can be a cold cathode fluorescent lamp (CCFL) or a light emitting diode array. More specifically, light emitted from the light source 118 is reflected by the reflector 116 and incident to the liquid crystal display device panel 120 by the light guiding plate 114.

[0006] The first frame 112 and the second frame 130 comprise a fastener 112a and a fastener 130a respectively. As shown in FIG. 1, the fastener 112a of the first frame 112 lodges in the fastener 130a of the second frame 130 in order to assemble the liquid crystal display device panel 120 with the backlight module 110. In brief, the conventional liquid crystal display device panel 120 and the backlight module 110 are fixed after the fastener 112a lodges in the fastener 130a. The next figure only shows the first frame 112 and the second frame 130 in order to simplify the drawing.

[0007] FIG. 2A is a schematic cross-sectional view showing the first frame lodges in the second frame when the liquid crystal display device panel is not impacted. FIG. 2B and FIG. 2C are schematic cross-sectional views showing the separated fasteners and frames when the conventional liquid crystal display device panel is impacted. First, please refer to FIG. 2A, the fastener 112a of the first frame 112 lodges in the fastener 130a of the second frame 130. When the first frame 112 is impacted along some direction (as the impact force F shown in FIG. 2B), the impact force F is applied to the first frame 112, and then the fastener 112a of the first frame 112 would be dragged upward to make the fastener 112a separate from the fastener 130a of the second frame 130. So, as shown in FIG. 2C, the first frame 112 separates from the second frame 130.

[0008] In light of the above, the structure strength of the conventional liquid crystal display device 100 is determined by the lodge strength between the fastener 112a and 130a. Although the anti-impact ability of the conventional liquid crystal display device 100 can be improved by increasing the lodge area between the fastener 112a and 130a, the size of the fastener 112a and 130a are limited to the design of the liquid crystal display device with narrow frame.

SUMMARY OF THE INVENTION

[0009] Accordingly, the present invention is directed to a liquid crystal display device. When the liquid crystal display device is impacted, a first frame and a second frame of the liquid crystal display device can not be separated easily.

[0010] To achieve the above and other objects, the present invention provides a liquid crystal display device. The liquid crystal display device comprises a backlight module, a liquid crystal display device panel and a second frame. The backlight module comprises a first frame. The first frame comprises a first body, a plurality of first fasteners and a plurality of baffles, and the first fasteners and the baffles are arranged on a sidewall of the first body. The liquid crystal display device panel is arranged on the backlight module. The second frame is assembled with the first frame for fixing the liquid crystal display device panel, and the second frame comprises a second body and a plurality of second fasteners arranged on a sidewall of the second body. The second fasteners lodge in the corresponding first fasteners to limit the relative displacement between the first and second body along a first direction, and the baffles are adapted for limiting the relative displacement between the first and second body along a second direction.

[0011] According to an embodiment of the present invention, the first direction is perpendicular to the second direction.

[0012] According to an embodiment of the present invention, the first fasteners and the second fasteners pierce through the second body and the first body respectively.

[0013] According to an embodiment of the present invention, the baffles pierce through the second body respectively, and the baffles and the first body are disposed at one side and the other side of the second body.

[0014] According to an embodiment of the present invention, the backlight module further comprises a light guiding plate, a reflector, a light source and a sealant. The light guiding plate is arranged inside the first frame. The reflector is arranged beside the light guiding plate. The light source is arranged inside the reflector. The sealant is arranged between the first frame and the liquid crystal display device panel.

[0015] According to an embodiment of the present invention, the light source comprises a cold cathode fluorescent lamp or a light emitting diode array.

[0016] To achieve the above and other objects, the present invention provides a liquid crystal display device. The liquid crystal display device comprises a backlight module, a liquid crystal display device panel and a second frame. The backlight module comprises a first frame. The first frame comprises a first body and a plurality of first fasteners, and the first fasteners are arranged on a sidewall of the first body.

The liquid crystal display device panel is arranged on the backlight module. The second frame is assembled with the first frame for fixing the liquid crystal display device panel. The second frame comprises a second body and a plurality of second fasteners arranged on a sidewall of the second body. The second fasteners have a plurality of openings, and the corresponding first fasteners lodge in the openings. The first fasteners fasten with the corresponding second fasteners, to limit the relative displacement between the first and second body along a first direction, and the baffles are adapted for limiting the relative displacement between the first and second body along a second direction.

[0017] According to an embodiment of the present invention, the first direction is perpendicular to the second direction.

[0018] According to an embodiment of the present invention, the first fasteners and the second fasteners pierce through the second body and the first body respectively.

[0019] According to an embodiment of the present invention, the backlight module further comprises a light guiding plate, a reflector, a light source and a sealant. The light guiding plate is arranged inside the first frame. The reflector is arranged beside the light guiding plate. The light source is arranged inside the reflector. The sealant is arranged between the first frame and the liquid crystal display device panel.

[0020] According to an embodiment of the present invention, the light source comprises a cold cathode fluorescent lamp or a light emitting diode array.

[0021] In summary, the liquid crystal display device of the present invention utilizes the baffles lodged in the fasteners to improve the lodge strength between frames and then the structure strength of the liquid crystal display device can be improved, too.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

[0023] FIG. 1 is a schematic cross-sectional view showing a conventional liquid crystal display device.

[0024] FIG. 2A is a schematic cross-sectional view showing the first frame lodges in the second frame when the liquid crystal display device panel is not impacted.

[0025] FIG. 2B is a schematic cross-sectional view showing the separated fasteners when the conventional liquid crystal display device panel is impacted.

[0026] FIG. 2C is a schematic cross-sectional view showing the separated frame.

[0027] FIG. 3 is a three-dimensional diagram showing a liquid crystal display device according to a first embodiment of the present invention.

[0028] FIGS. 4A and 4B are schematic cross-sectional views respectively showing the first fastener and the baffle when the frame shown in FIG. 3 is impacted.

[0029] FIG. 5A is a three-dimensional, cross-sectional diagram of the assembled frames according to a second embodiment of the present invention.

[0030] FIG. 5B is a three-dimensional diagram of the baffle shown in FIG. 5A.

[0031] FIG. 5C is a schematic cross-sectional view showing the first fastener when against the impact according to the second embodiment.

[0032] FIG. 6A is a partial three-dimensional diagram of the assembled frames according to a third embodiment of the present invention.

[0033] FIG. 6B is a three-dimensional diagram of the baffle shown in FIG. 6A.

[0034] FIG. 6C is a schematic cross-sectional view showing the first fastener when against the impact according to the third embodiment.

DESCRIPTION OF THE EMBODIMENTS

[0035] Reference will now be made in detail to the present embodiments of the invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers are used in the drawings and the description to refer to the same or like parts.

First Embodiment

[0036] FIG. 3 is a three-dimensional diagram showing a liquid crystal display device according to the first embodiment of the present invention. Please refer to FIG. 3, the liquid crystal display device 200 comprises a backlight module 210, a liquid crystal display device panel 220 and a second frame 230. The backlight module 210 comprises a first frame 212. The liquid crystal display device panel 220 is arranged on the backlight module 210. The first frame 212 is assembled with the second frame 230, to fix the liquid crystal display device panel 220. Besides, the backlight module 210 further comprises a light guiding plate 214, a reflector 216, a light source 218 and a sealant 219. The light guiding plate 214 is arranged inside the first frame 212. The reflector 216 is arranged beside the light guiding plate 214. The light source 218 is arranged inside the reflector 216. The sealant 219 is arranged between the first frame 212 and the liquid crystal display device panel 220. The light source 218 can be a cold cathode fluorescent lamp (CCFL) or a light emitting diode array. More specifically, the light emitted from the light source 218 is reflected by the reflector 216 and then the light is incident into the liquid crystal display device panel 220 through the light guiding plate 214. Please continue to refer to FIG. 3, the first frame 212 comprises a first body 212a, a plurality of first fasteners 212b and a plurality of baffles 212c. These first fasteners 212b and baffles 212c are arranged on a sidewall of the first body 212a. The second frame 230 comprises a second body 230a and a plurality of second fasteners 230b arranged on a sidewall of the second body 230a. Further, as shown in FIG. 3, the second fastener 230b fastens with the corresponding first fastener 212b in order to limit the relative displacement between the first body 212a and the second body 230a along a first direction D1. The baffle 212c is adapted for limiting the relative displacement between the first body 212a and the second body 230a along a second direction D2. Besides, the first direction D1 is perpendicular to the second direction D2.

[0037] FIGS. 4A and 4B are the schematic cross-sectional views of the first fastener and the baffle when the frame shown in FIG. 3 is impacted respectively. Please continue to refer to FIG. 4A, in the left hand side of FIG. 4A, the first fastener 212b lodges in the second fastener 230b, and the first fastener 212b and the second fastener 230b pierce through the second body 230a and the first body 212a respectively. When the assembled first frame 212 and the second frame 230 are impacted, the relative displacement between the first frame 212 and the second frame 230 along the first direction D1 is constrained by the first fastener 212b and the second fastener 230b as shown in the right hand side of the FIG. 4A. Next, please refer to the left hand side of FIG. 4B, the baffle 212c of the second frame 230 fastens with the first body 212a of the first frame 212. Accordingly, when the assembled first frame 212 and the second frame 230 are impacted, the relative displacement between the first frame 212 and the second frame 230 along the second direction D2 is constrained by the baffle 212c of the first frame 212 as shown in the right hand side of the FIG. 4B. Compared with the conventional liquid crystal display device, the structure strength of the assembled first frame 212 and the second frame 230 can be enhanced under the condition when the liquid crystal display device is impacted.

Second Embodiment

[0038] FIG. 5A is a three-dimensional diagram of the assembled frames according to a second embodiment of the present invention, and FIG. 5B is a three-dimensional diagram of the baffle shown in FIG. 5A. Please refer to FIGS. 5A and 5B, the liquid crystal display device 300 of the second embodiment is similar to the liquid crystal display device 200 of the first embodiment, the difference between them is that the baffles 312c used in this embodiment pierce through the second body 230a, and the baffle 312c and the first body 212a are disposed at one side and the other side of the sidewall of the second body 230a respectively.

[0039] FIG. 5C is a schematic cross-sectional view showing the first fastener when against the impact according to the second embodiment. Compared with the baffles 212c shown in FIG. 3, the baffle 312c may further extend and pierce through the inner side of the first body 230a of the second frame 230. More specifically, the baffle 312c and the first body 212a are disposed at one side and the other side of the sidewall of the second body 230a, and the baffle 312c pierces through the second body 230a partially. This type of baffle 312c can not only resist the upward impact along the first direction D1 but also the second direction D2.

Third Embodiment

[0040] FIG. 6A is a partial three-dimensional diagram of the assembled frames according to a third embodiment of the present invention. FIG. 6B is a three-dimensional diagram of the baffle shown in FIG. 6A. Please refer to FIGS. 6A and 6B, the liquid crystal display device of the third embodiment is similar to the liquid crystal display device 200 of the first embodiment, the difference between them is that: the first fastener 312b of the first frame 212 comprises an opening 312d (as shown in the left hand side of FIG. 6B), such that a portion of the corresponding second fastener 230b can lodge in the opening 312d. It should be noted that, in this embodiment, the first fastener 312b further extends and pierces through the inner side of the second body 230a (similar to the baffle 312c of the second embodiment).

[0041] FIG. 6C is a schematic cross-sectional view showing the first fastener when against the impact according to the third embodiment. Please refer to FIG. 6C, the first fastener 312b of this embodiment has an opening 312d, and a portion of the corresponding second fastener 230b can lodge in the opening 312d. It should be noted that the use of the first fastener 312b and the second fastener 230b may increase the structure strength of the assembled first frame 212 and second frame 230. More specifically, as shown in FIG. 8, the cooperation between the first fastener 312b and the second fastener 230b can not only resist the upward impact along the first direction D1 but also the second direction D2. Besides, the baffle (it means the baffle 312c) of the second embodiment may serve as the baffle 212c of this embodiment.

[0042] Note that the first fastener 212b and the second fastener 312b of the first embodiment, the baffle 312c of the second embodiment (or the baffle 212c of the first embodiment) and the first fastener 312b having the opening 312d of the third embodiment may apply to the first frame 212 or the second frame 230 independently. Otherwise, the combination of different types of the fasteners, baffles and openings may apply to the first frame 212 and the second frame 230 of one embodiment.

[0043] In summary, the invention utilizes two sets of fasteners to limit the relative displacement of the first and second frame under the impact. In other words, when the first and second frames are impacted, the first frame would not separate from the second frame easily. Besides, the baffles and the fasteners may have different design in order to increase the structure strength of the assembled first and second frames.

[0044] It will be apparent to those skilled in the art that various modifications and variations may be made to the structure of the present invention without departing from the scope or spirit of the invention. In view of the foregoing, it is intended that the present invention cover modifications and variations of this invention provided they fall within the scope of the following claims and their equivalents.

What is claimed is:

1. A liquid crystal display device, comprising:
 - a backlight module comprising a first frame, the first frame comprising a first body, a plurality of first fasteners and a plurality of baffles, wherein the first fasteners and the baffles are arranged on a sidewall of the first body;
 - a liquid crystal display device panel arranged on the backlight module; and
 - a second frame assembled with the first frame for fixing the liquid crystal display device panel, the second frame comprising a second body and a plurality of second fasteners arranged on a sidewall of the second body, wherein the second fasteners lodge in the corresponding first fasteners to limit the relative displacement between the first and second body along a first direction, and the baffles are adapted for limiting the relative displacement between the first and second body along a second direction.
2. The liquid crystal display device according to claim 1, wherein the first direction is perpendicular to the second direction.

3. The liquid crystal display device according to claim 1, wherein the first fasteners and the second fasteners pierce through the second body and the first body respectively.

4. The liquid crystal display device according to claim 1, wherein the baffles pierce through the second body respectively, and the baffles and the first body are disposed at one side and the other side of the second body.

5. The liquid crystal display device according to claim 1, wherein the backlight module further comprises:

a light guiding plate arranged inside the first frame;

a reflector arranged beside the light guiding plate;

a light source arranged inside the reflector; and

a sealant arranged between the first frame and the liquid crystal display device panel.

6. The liquid crystal display device according to claim 5, wherein the light source comprises a cold cathode fluorescent lamp or a light emitting diode array.

7. A liquid crystal display device, comprising:

a backlight module comprising a first frame, the first frame comprising a first body and a plurality of first fasteners, wherein the first fasteners are arranged on a sidewall of the first body;

a liquid crystal display device panel arranged on the backlight module; and

a second frame assembled with the first frame for fixing the liquid crystal display device panel, the second frame comprising a second body and a plurality of

second fasteners arranged on a sidewall of the second body, the second fasteners having a plurality of opening, and the corresponding first fasteners lodging in the openings, wherein the first fasteners fasten with the corresponding second fasteners, to limit the relative displacement between the first and second body along a first direction, and the baffles are adapted for limiting the relative displacement between the first and second body along a second direction.

8. The liquid crystal display device according to claim 7, wherein the first direction is perpendicular to the second direction.

9. The liquid crystal display device according to claim 7, wherein the first fasteners and the second fasteners pierce through the second body and the first body respectively.

10. The liquid crystal display device according to claim 7, wherein the backlight module further comprises:

a light guiding plate arranged inside the first frame;

a reflector arranged beside the light guiding plate;

a light source arranged inside the reflector; and

a sealant arranged between the first frame and the liquid crystal display device panel.

11. The liquid crystal display device according to claim 10, wherein the light source comprises a cold cathode fluorescent lamp or a light emitting diode array.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US20070097284A1	公开(公告)日	2007-05-03
申请号	US11/163810	申请日	2005-10-31
[标]申请(专利权)人(译)	何中兴 王耀董先生		
申请(专利权)人(译)	蚝涌兴 王耀东		
当前申请(专利权)人(译)	中华映管股份有限公司.		
[标]发明人	HO CHUNG HSING WANG YAO TUNG		
发明人	HO, CHUNG-HSING WANG, YAO-TUNG		
IPC分类号	G02F1/1333		
CPC分类号	G02B6/0081 G02F1/133308 G02F1/133615 G02F2001/133322 G02F2201/465		
其他公开文献	US7580089		
外部链接	Espacenet USPTO		

摘要(译)

提供一种液晶显示装置，包括背光模块，液晶显示装置面板和第二框架。背光模块包括第一框架。第一框架包括第一主体，第一紧固件和挡板。第一紧固件和挡板布置在第一主体的侧壁上。液晶显示装置面板设置在背光模块上。第二框架与第一框架组装在一起，用于固定液晶显示装置面板，第二框架包括第二主体和设置在第二主体的侧壁上的第二紧固件。第一紧固件与相应的第二紧固件紧固，以限制第一和第二主体之间沿第一方向的相对位移，并且挡板适于限制第一和第二主体之间沿第二方向的相对位移。

