



US 20100265225A1

(19) **United States**(12) **Patent Application Publication**
HAN et al.(10) **Pub. No.: US 2010/0265225 A1**(43) **Pub. Date: Oct. 21, 2010**(54) **LIQUID CRYSTAL DISPLAY****Publication Classification**(76) Inventors: **Sansoo HAN**, Seoul (KR); **Nakjin Seong**, Kyungbuk (KR); **Kyuman Lee**, Gumi-si (KR); **Jaeseo Kim**, Chilgok-gu (KR); **Chulhyun Hwang**, Gumi-si (KR)(51) **Int. Cl.**
G09G 3/36 (2006.01)
G09G 5/10 (2006.01)
(52) **U.S. Cl.** **345/206; 345/691**(57) **ABSTRACT**Correspondence Address:
BIRCH STEWART KOLASCH & BIRCH
PO BOX 747
FALLS CHURCH, VA 22040-0747 (US)

A liquid crystal display is disclosed. The liquid crystal display includes a liquid crystal display panel including an upper substrate, a lower substrate, a liquid crystal layer between the upper substrate and the lower substrate, and $m \times n$ liquid crystal cells (where m and n are a positive integer) arranged in a matrix format according to a crossing structure of $m/2$ data lines and $2n$ gate lines, a plurality of chip on films (COFs) on which source driver integrated circuits (ICs) supplying a data voltage to the data lines are mounted, a printed circuit board (PCB) connected to input terminals of the COFs, and a gate drive circuit directly mounted onto the lower substrate, the gate drive circuit supplying a gate pulse to the gate lines.

(21) Appl. No.: **12/638,898**(22) Filed: **Dec. 15, 2009**(30) **Foreign Application Priority Data**

Apr. 20, 2009 (KR) 10-2009-0034184

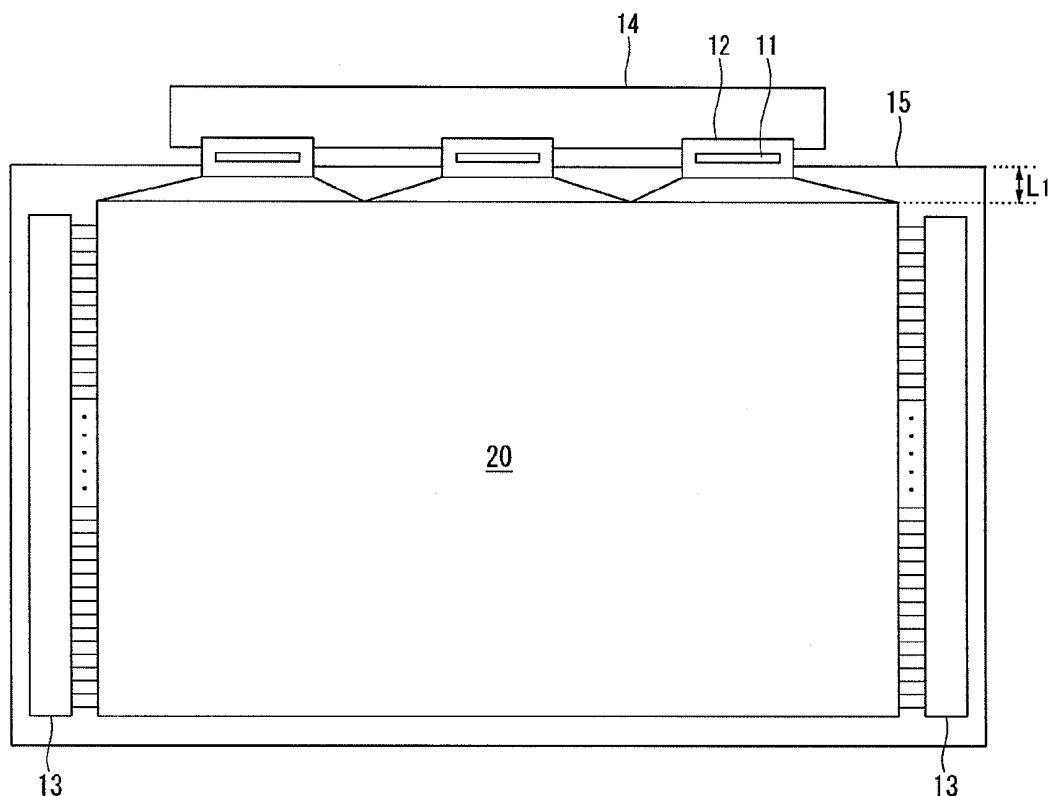


FIG. 1

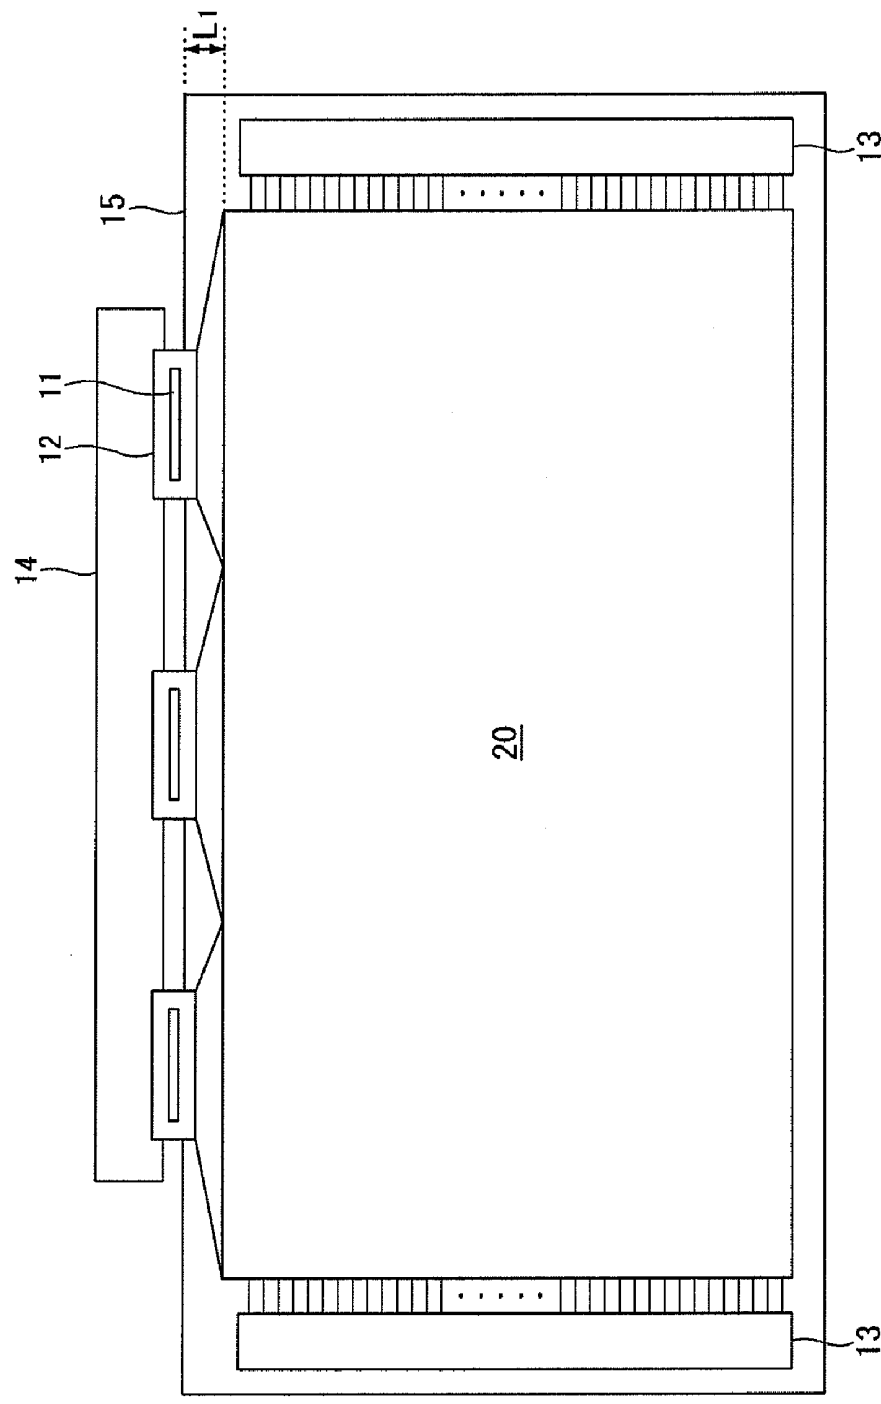


FIG. 2

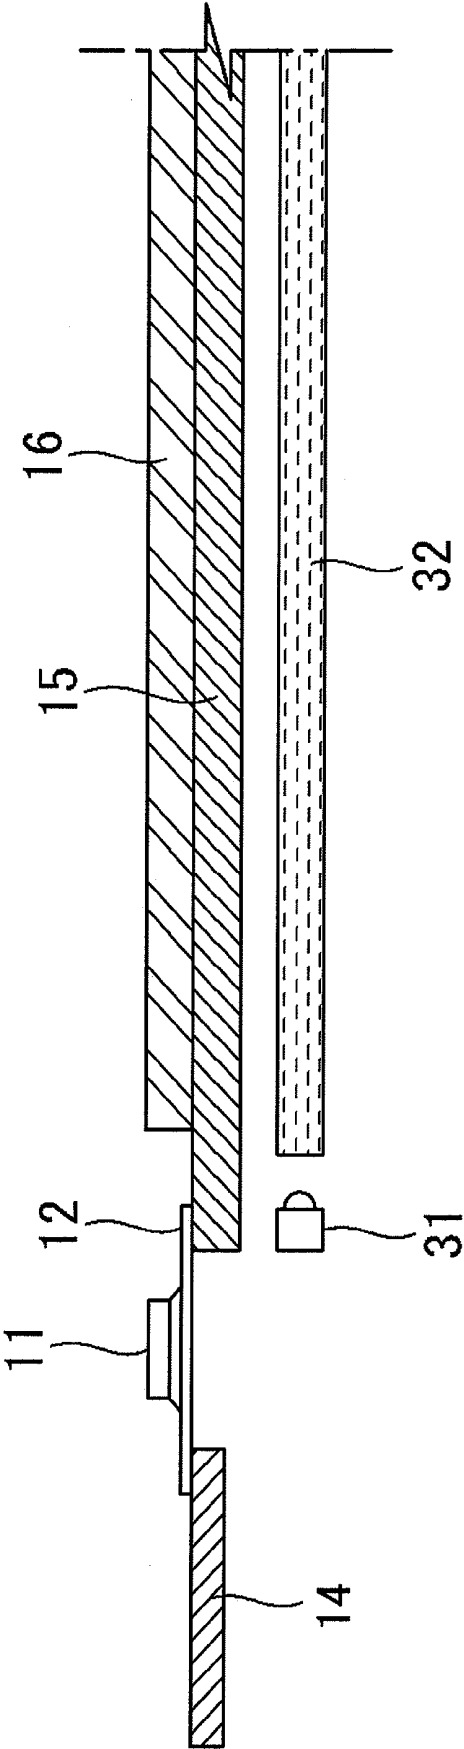


FIG. 3

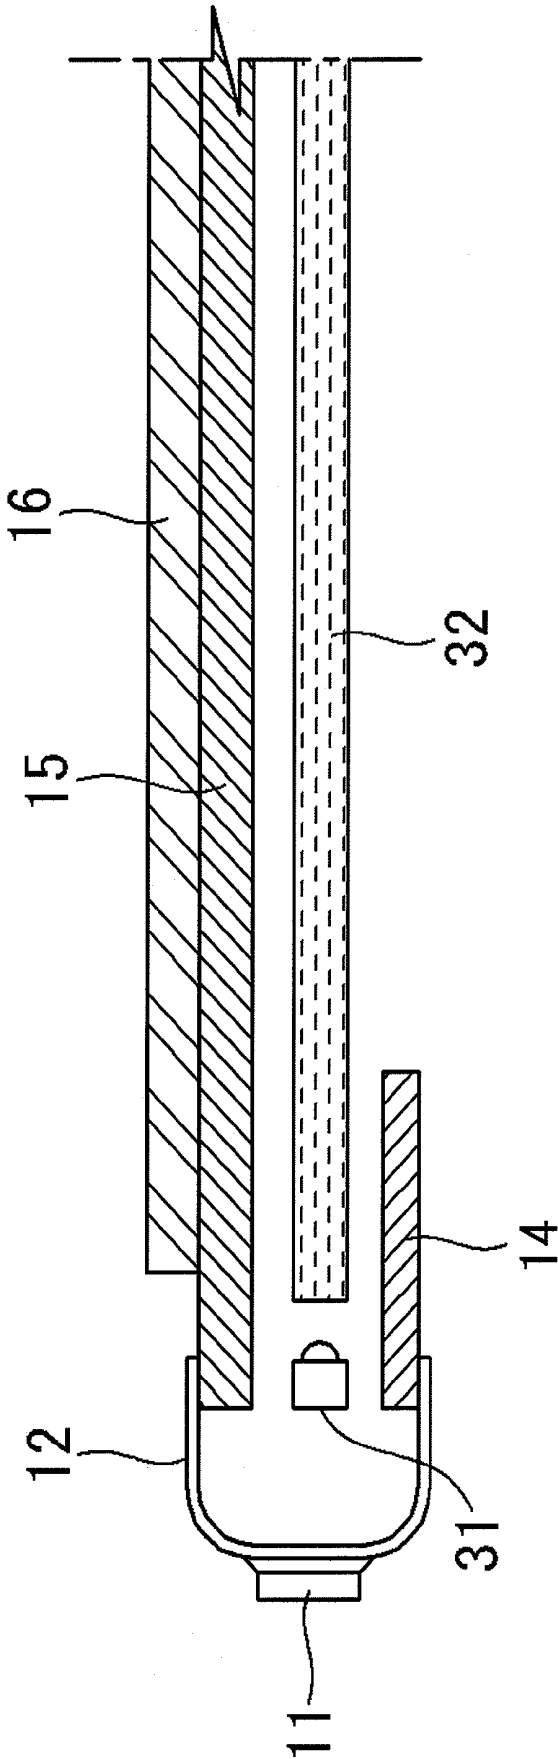


FIG. 4

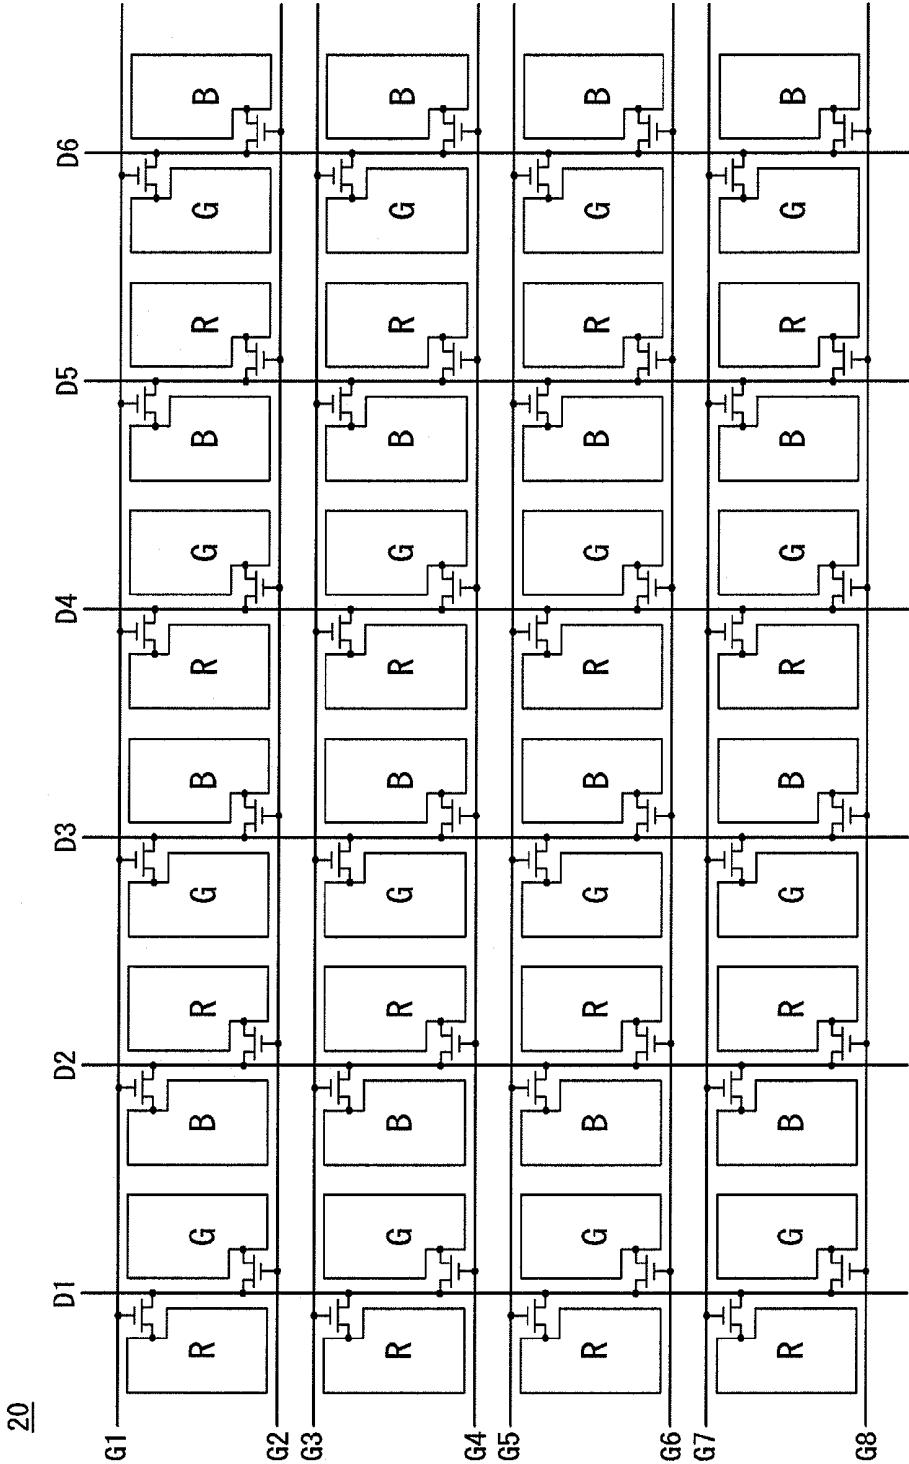


FIG. 5


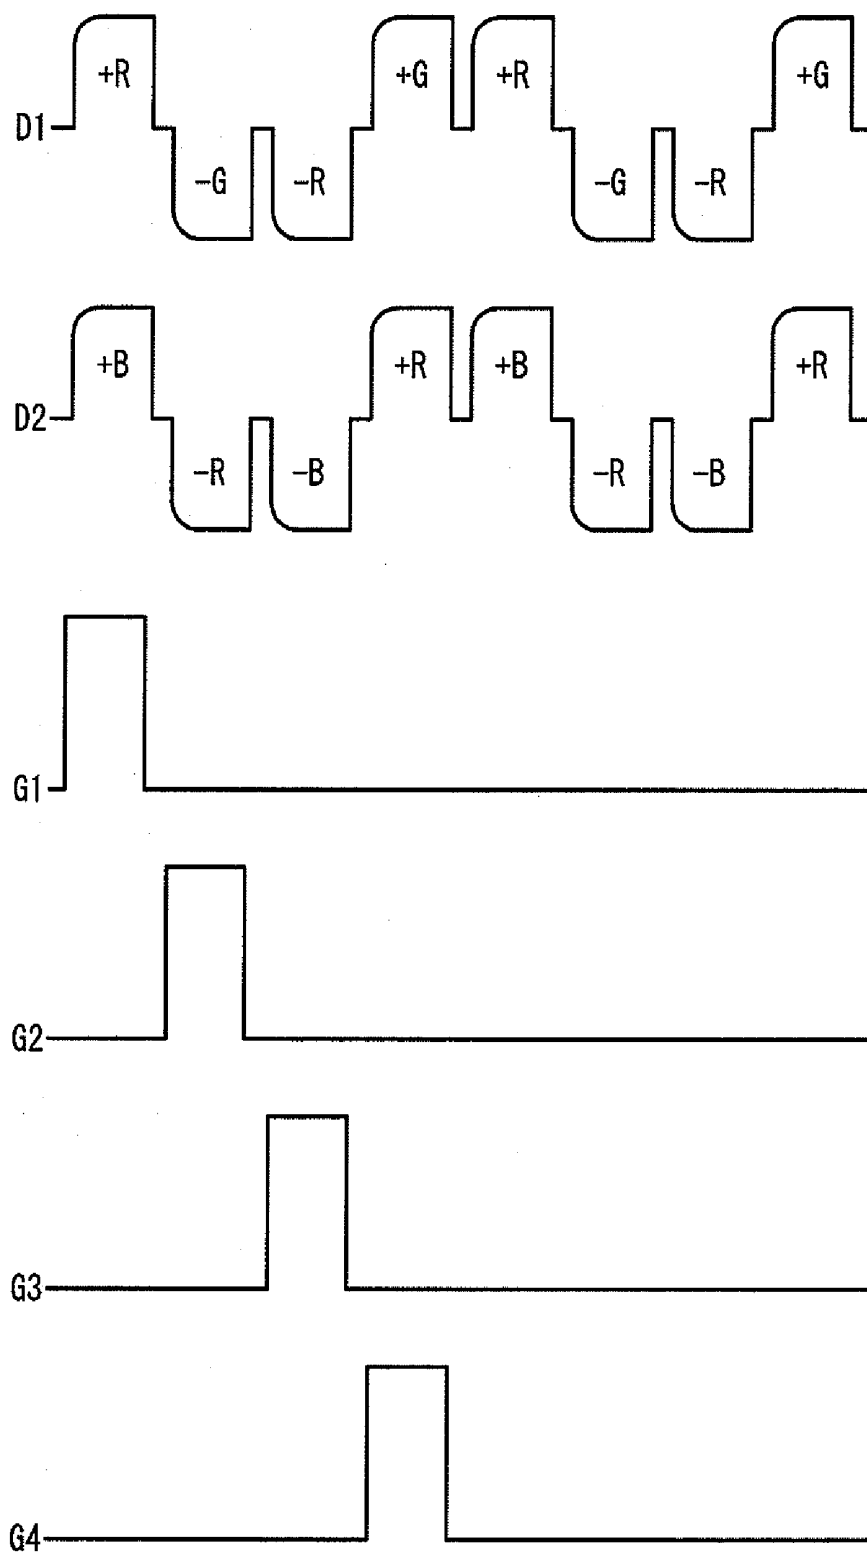


FIG. 6

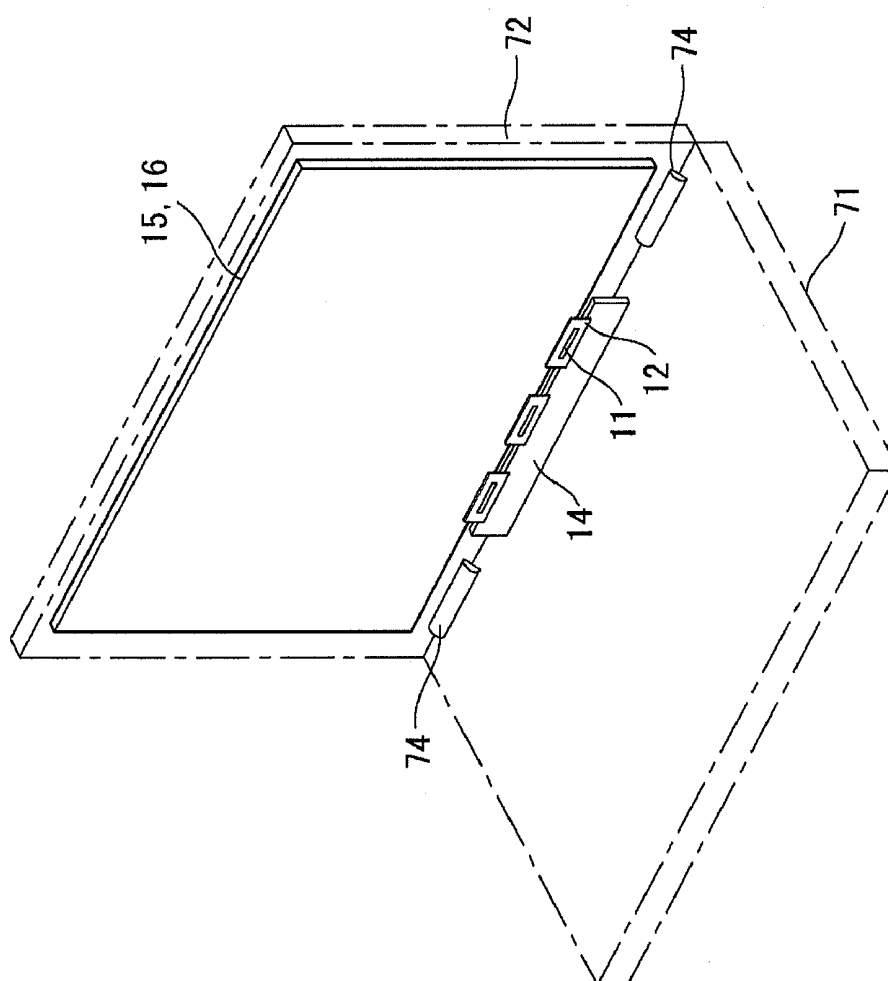

LIQUID CRYSTAL DISPLAY

[0001] This application claims the benefit of Korea Patent Application No. 10-2009-0034184 filed on Apr. 20, 2009, the entire contents of which is incorporated herein by reference for all purposes as if fully set forth herein.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] Embodiments of the invention relate to a liquid crystal display.

[0004] 2. Discussion of the Related Art

[0005] Active matrix type liquid crystal displays display a moving picture using a thin film transistor (TFT) as a switching element. The active matrix type liquid crystal displays have been implemented in televisions as well as display devices in portable devices, such as office equipment and computers, because of the thin profile of an active matrix type liquid crystal displays. Accordingly, cathode ray tubes (CRT) are being rapidly replaced by active matrix type liquid crystal displays.

[0006] A driving circuit of a liquid crystal display includes a data drive circuit supplying a data voltage to data lines of a liquid crystal display panel and a gate drive circuit supplying a gate pulse to gate lines of the liquid crystal display panel. Integrated circuits (ICs) of each of the data drive circuit and the gate drive circuit are connected to the data lines and the gate lines through a tape carrier package (TCP) technology or a chip on glass (COG) technology. Printed circuit boards (PCBs) of the liquid crystal display may be connected to the liquid crystal display panel through the TCP technology or may be connected to ICs bonded on a glass substrate of the liquid crystal display panel using a flexible printed circuit (FPC) through the COG technology. In a module assembly process of the liquid crystal display, the PCBs may be assembled in a flat structure parallel to the glass substrate of the liquid crystal display panel by the TCP or the FPC or may be assembled in a bent structure of the liquid crystal display panel.

[0007] However, the manufacturing cost of the related art liquid crystal display increases because of the use of the expensive ICs. Further, because a large number of ICs are required to drive the liquid crystal display and a large number of signal lines are formed on the PCB, the size of the PCB increases. Accordingly, the size of the PCB has to be reduced for the thin-profile liquid crystal display.

[0008] When the ICs are boned on the glass substrate of the liquid crystal display panel through the COG technology, defective orientation of liquid crystals may be generated. More specifically, in the COG technology, in a high temperature laminating process, the ICs are boned on the glass substrate using an anisotropic conductive film (ACF). Subsequently, when the ICs and the glass substrate are cooled at a normal temperature, a shrinkage amount of the ICs is different from a shrinkage amount of the glass substrate because a thermal expansion coefficient of the glass substrate is different from a thermal expansion coefficient of the ICs. As a result, the defective orientation of the liquid crystals is partially generated around a bonding surface between the ICs and the glass substrate.

SUMMARY OF THE INVENTION

[0009] Embodiments of the invention provide a liquid crystal display capable of reducing the size of a printed circuit

board and preventing defective orientation of liquid crystals by reducing the number of integrated circuits.

[0010] In one aspect, there is a liquid crystal display comprising a liquid crystal display panel including an upper substrate, a lower substrate, a liquid crystal layer between the upper substrate and the lower substrate, and $m \times n$ liquid crystal cells (where m and n are a positive integer) arranged in a matrix format according to a crossing structure of $m/2$ data lines and $2n$ gate lines, a plurality of chip on films (COFs) on which source driver integrated circuits (ICs) supplying a data voltage to the data lines are mounted, a printed circuit board (PCB) connected to input terminals of the COFs, and a gate drive circuit directly mounted onto the lower substrate, the gate drive circuit supplying a gate pulse to the gate lines.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

[0012] FIG. 1 is a block diagram illustrating a liquid crystal display according to an embodiment of the invention;

[0013] FIG. 2 is a cross-sectional view illustrating an example of assembling a liquid crystal display according to an embodiment of the invention to a flat type liquid crystal display module;

[0014] FIG. 3 is a cross-sectional view illustrating an example of assembling a liquid crystal display according to an embodiment of the invention to a bent type liquid crystal display module;

[0015] FIG. 4 is an equivalent circuit diagram illustrating a portion of a pixel array;

[0016] FIG. 5 is a waveform diagram illustrating an example of a data voltage and a gate pulse supplied to a pixel array; and

[0017] FIG. 6 is a perspective view illustrating an example of applying a flat type liquid crystal display module to a monitor of a notebook PC.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0018] Reference will now be made in detail embodiments of the invention examples of which are illustrated in the accompanying drawings.

[0019] As shown in FIGS. 1 to 3, a liquid crystal display according to an embodiment of the invention includes a liquid crystal display panel, chip on films (COFs) 12 connected to data lines of the liquid crystal display panel, a gate drive circuit 13 directly mounted onto a lower glass substrate 15 of the liquid crystal display panel, a printed circuit board (PCB) 14 connected to the COFs 12, and the like.

[0020] The liquid crystal display panel includes an upper glass substrate 16 and the lower glass substrate 15 that are positioned opposite each other with a liquid crystal layer interposed between the upper glass substrate 16 and the lower glass substrate 15. The liquid crystal display panel includes a pixel array 20 displaying video data. The pixel array 20 includes $m \times n$ liquid crystal cells (where m and n are a positive integer) arranged in a matrix format according to a crossing structure of $m/2$ data lines and $2n$ gate lines. The $m \times n$ liquid crystal cells include m liquid crystal columns indicating liq-

liquid crystal cells arranged in a data line direction (or a vertical line direction) and n liquid crystal lines indicating liquid crystal cells arranged in a gate line direction (or a horizontal line direction).

[0021] The pixel array **20** including the $m/2$ data lines, the $2n$ gate lines, $m \times n$ pixel electrodes, $m \times n$ thin film transistors (TFTs) connected to the pixel electrodes, and $m \times n$ storage capacitors connected to the pixel electrodes is formed on the lower glass substrate **15** of the liquid crystal display panel. Each of the data lines is connected to TFTs of left liquid crystal columns and TFTs of right liquid crystal columns with each of the data lines interposed between the left liquid crystal columns and the right liquid crystal columns. The gate drive circuit **13** connected to the gate lines is directly formed on a non-display surface outside a formation portion of the pixel array **20** in the lower glass substrate **15**. The pixel array **20** and the gate drive circuit **13** are simultaneously formed on the lower glass substrate **15** through the same thin film process. The liquid crystal cells are connected to the TFTs and are driven by an electric field between the pixel electrodes and a common electrode. A width $L1$ between the pixel array **20** and the COF **12** in the lower glass substrate **15** may be less than a width between the pixel array **20** and the COF **12** when source driver integrated circuits (ICs) are directly mounted onto the glass substrate through a chip-on glass (COG) process. A reduction amount of the width $L1$ may be equal to or greater than a thickness of the source driver ICs.

[0022] A black matrix, a color filter, and the common electrode are formed on the upper glass substrate **16** of the liquid crystal display panel. The common electrode is formed on the upper glass substrate **16** in a vertical electric drive manner, such as a twisted nematic (TN) mode and a vertical alignment (VA) mode. The common electrode and the pixel electrode **1** are formed on the lower glass substrate **15** in a horizontal electric drive manner, such as an in-plane switching (IPS) mode and a fringe field switching (FFS) mode.

[0023] Polarizing plates are respectively attached to the upper glass substrate **16** and the lower glass substrate **15** of the liquid crystal display panel. Alignment layers for setting a pre-tilt angle of liquid crystals are respectively formed on the upper glass substrate **16** and the lower glass substrate **15**. Because the COG process is not used in the liquid crystal display panel according to the embodiment of the invention, defective orientation of the liquid crystals caused by the COG process can be prevented.

[0024] A liquid crystal mode of the liquid crystal display panel applicable to the embodiment of the invention may be implemented in any liquid crystal mode as well as the TN, VA, IPS, and FFS modes. The liquid crystal display according to the embodiment of the invention may be implemented in any type liquid crystal display including a backlit liquid crystal display, a transmissive liquid crystal display, and a reflective liquid crystal display. A backlight unit is necessary in the backlit liquid crystal display and the transmissive liquid crystal display. The backlight unit may be implemented as an edge type backlight unit or a direct type backlight unit. In the edge type backlight unit, as shown in FIGS. 2 and 3, a light source **31** is positioned opposite the side of a light guide plate **32**, and a plurality of optical sheets (not shown) are positioned between the liquid crystal display panel and the light guide plate **32**. In the direct type backlight unit, a plurality of optical sheets (not shown) and a diffusion plate (not shown) are stacked under the liquid crystal display panel, and a plurality of light sources (not shown) are positioned under the diffu-

sion plate. The light source of the backlight unit may use one or at least two of a hot cathode fluorescent lamp (HCFL), a cold cathode fluorescent lamp (CCFL), an external electrode fluorescent lamp (EEFL), and a light emitting diode (LED). The backlight unit of the liquid crystal display according to the embodiment of the invention may use the direct type backlight unit as well as the edge type backlight unit shown in FIGS. 2 and 3.

[0025] Each of the COFs **12** includes a source driver IC **11** mounted on a flexible film. Each of the source driver ICs **11** includes a data drive circuit for supplying a data voltage to the data lines of the liquid crystal display panel. The data drive circuit samples and latches digital video data serially input from the PCB **14** in response to a data timing control signal to convert the digital video data into parallel data. The data drive circuit converts the deserialized digital video data into a positive or negative analog video data voltage using an analog gamma compensation voltage. The data drive circuit time-divides a data voltage to be charged to left liquid crystal cells and a data voltage to be charged to right liquid crystal cells, the left liquid crystal cells and the right liquid crystal cells being arranged on the same liquid crystal line of the pixel array **20**. Accordingly, the source driver ICs **11** may supply the data voltages to the data lines whose the total number is two times more than the total number of output channels of the source driver ICs **11**.

[0026] The gate drive circuit **13** receives a gate timing control signal and a gate driving voltage through interconnections of a line on glass (LOG) and the COF **12** that are formed on the lower glass substrate **15**. The gate drive circuit **13** includes a shift register sequentially shifting the gate driving voltage in response to the gate timing control signal to sequentially supply a gate pulse (or a scan pulse) to the gate lines.

[0027] The PCB **14** is connected to input terminals of the CPFs. A circuit, such as a DC-DC converter, a level shifter, and a timing controller, is mounted on the PCB **14**. The DC-DC converter generates an analog voltage, such as the analog gamma compensation voltage and a common voltage supplied to the common electrode, supplied to the pixel array **20**. The level shifter converts an input voltage level into a gate driving voltage level to supply the gate driving voltage level to the shift register of the gate drive circuit **13**.

[0028] The timing controller receives RGB digital video data and timing signals, such as a vertical sync signal Vsync, a horizontal sync signal Hsync, a data enable signal DE, and a dot clock CLK, through an interface, such as a low voltage differential signaling (LVDS) interface and a transition minimized differential signaling (TMDS) interface. The timing controller serially transmits the RGB digital video data to the source driver ICs **11** in a mini LVDS interface manner. The timing controller generates a data timing control signal for controlling the source driver ICs **11** and a gate timing control signal for controlling the gate drive circuit **13** using the timing signals Vsync, Hsync, DE, and CLK. The timing controller may multiply a frequency of each of the data timing control signal and the gate timing control signal based on a frame frequency of $(60 \times i)$ Hz (where "i" is a positive integer equal to or greater than 2), so that digital video data input at a frame frequency of 60 Hz can be reproduced in the pixel array **20** of the liquid crystal display panel at the frame frequency of $(60 \times i)$ Hz.

[0029] The data timing control signal includes a source start pulse, a source sampling clock, a polarity control signal,

a source output enable signal, and the like. The source start pulse controls a start time point of a data sampling operation of the data drive circuit. The source sampling clock controls a data sampling operation inside the data drive circuit based on a rising or falling edge. The polarity control signal controls a polarity of the data voltage output from the data drive circuit. The source output enable signal controls output timing of the data drive circuit.

[0030] The gate timing control signal includes a gate start pulse, a gate shift clock, a gate output enable signal, and the like. The gate start pulse controls timing of a first gate pulse. The gate shift clock is a clock for shifting the gate start pulse. The gate output enable signal controls output timing of the gate drive circuit **13**.

[0031] In the embodiment, because m liquid crystal columns are driven using the $m/2$ data lines, the number of source driver ICs is reduced to one half of the number of source driver ICs in the related art. As a result, the size of the PCB can be reduced by a reduction in the number of source driver ICs. Further, in the embodiment, because the gate drive circuit **13** is directly mounted onto the lower glass substrate **15**, a tape carrier package (TCP) and a gate PCB are not necessary.

[0032] FIG. 2 is a cross-sectional view illustrating an example of assembling the liquid crystal display according to the embodiment of the invention to a flat type liquid crystal display module.

[0033] As shown in FIG. 2, in a module assembly process, the lower glass substrate **15** of the liquid crystal display panel, the COF **12**, and the PCB **14** are assembled in a flat structure. Accordingly, a thickness of a flat type liquid crystal display module shown in FIG. 2 may be smaller than a thickness of a bent type liquid crystal display module shown in FIG. 3, and a bezel area of the flat type liquid crystal display module may be wider than a bezel area of the bent type liquid crystal display module.

[0034] FIG. 3 is a cross-sectional view illustrating an example of assembling the liquid crystal display according to the embodiment of the invention to a bent type liquid crystal display module.

[0035] As shown in FIG. 3, in a module assembly process, the COF **12** is bent, so that the PCB **14** can be positioned around the bottom of the backlight unit. The backlight unit is positioned between the lower glass substrate **15** and the PCB **14**. As above, the thickness of the bent type liquid crystal display module of FIG. 3 may be greater than the thickness of the flat type liquid crystal display module of FIG. 2, but the bezel area of the bent type liquid crystal display module of FIG. 3 may be smaller than the bezel area of the flat type liquid crystal display module of FIG. 2.

[0036] The embodiment may use a pixel array substrate extracted from the same mother glass in the assembly process of the flat type liquid crystal display module and the assembly process of the bent type liquid crystal display module. The plurality of pixel arrays **20** each having a predetermined size are simultaneously formed on the mother glass. When the source driver ICs **11** are connected to the liquid crystal display panel using the COFs **12**, the width **L1** between the pixel array **20** and each of the COF **12** in the lower glass substrate **15** can be reduced as described above. Further, the number of pixel arrays **20** formed on one mother glass can increase by a reduction in the width **L1**.

[0037] FIG. 4 is an equivalent circuit diagram illustrating a portion of the pixel array **20** on the lower glass substrate **15**.

FIG. 5 is a waveform diagram illustrating an example of the data voltage and the gate pulse supplied to the pixel array **20**.

[0038] As shown in FIGS. 4 and 5, liquid crystal columns between neighboring data lines **D1** to **D6** are positioned in two rows. Each of the data lines **D1** to **D6** is connected to TFTs of left liquid crystal columns and TFTs of right liquid crystal columns with each data line interposed between the left liquid crystal columns and the right liquid crystal columns. Gate lines **G1** to **G8** include odd-numbered gate lines **G1**, **G3**, **G5** and **G7** and even-numbered gate lines **G2**, **G4**, **G6** and **G8**. In the same liquid crystal cell, the odd-numbered gate lines **G1**, **G3**, **G5** and **G7** are connected to TFTs of odd-numbered liquid crystal cells, and the even-numbered gate lines **G2**, **G4**, **G6** and **G8** are connected to TFTs of even-numbered liquid crystal cells. The TFTs include source electrodes connected to the data lines **D1** to **D6**, gate electrodes connected to the gate lines **G1** to **G8**, and drain electrodes connected to the pixel electrode. The data voltages time-divided by the source driver ICs **11** are supplied to the data lines **D1** to **D6** as shown in FIG. 5. The gate drive circuit **13** supplies an odd gate pulse synchronized with the data voltage charged to the odd-numbered liquid crystal cells to the odd-numbered gate lines **G1**, **G3**, **G5** and **G7** and supplies an even gate pulse synchronized with the data voltage charged to the even-numbered liquid crystal cells to the even-numbered gate lines **G2**, **G4**, **G6** and **G8**.

[0039] As described above, in the embodiment, the number of source driver ICs can decrease, and the number of interconnects on the PCB can decrease. As a result, the size of the CPB can be reduced. Accordingly, when the liquid crystal display according to the embodiment of the invention is applied to a monitor of a notebook PC, interference of the PCB **14** and a hinge **74** can be prevented even if the liquid crystal display is assembled to a flat type liquid crystal display module as shown in FIG. 6. In FIG. 6, a reference numeral **71** denotes a body of the notebook PC including a keypad and a main circuit board, and a reference numeral **72** denotes a body of the monitor rotatably fastened to the notebook PC body **71** using the hinge **74**.

[0040] As describe above, in the liquid crystal display according to the embodiment of the invention, the source driver ICs whose the number of output channels is less than a horizontal resolution of the liquid crystal display panel are used, and the source driver ICs are connected to the liquid crystal display panel through the COF technology. Further, the gate drive circuit and the pixel array are directly formed onto the glass substrate of the liquid crystal display panel. As a result, the number of ICs required to drive the liquid crystal display panel can be reduced, the size of the PCB can be reduced, and the defective orientation of the liquid crystals can be prevented.

[0041] Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the scope of the principles of this disclosure. More particularly, various variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

What is claimed is:

1. A liquid crystal display comprising:
a liquid crystal display panel including an upper substrate, a lower substrate, a liquid crystal layer between the upper substrate and the lower substrate, and $m \times n$ liquid crystal cells (where m and n are a positive integer) arranged in a matrix format according to a crossing structure of $m/2$ data lines and $2n$ gate lines;
a plurality of chip on films (COFs) on which source driver integrated circuits (ICs) supplying a data voltage to the data lines are mounted;
a printed circuit board (PCB) connected to input terminals of the COFs; and
a gate drive circuit directly mounted onto the lower substrate, the gate drive circuit supplying a gate pulse to the gate lines.
2. The liquid crystal display of claim 1, wherein the lower substrate of the liquid crystal display panel, the COFs, and the PCB are assembled in a flat structure.
3. The liquid crystal display of claim 1, wherein the COFs are bent so that the PCB is positioned in the rear of the liquid crystal display panel.

4. The liquid crystal display of claim 1, wherein each of the source driver ICs time-divides a data voltage to be charged to odd-numbered liquid crystal cells on the left of each of the data lines and a data voltage to be charged to even-numbered liquid crystal cells on the right of each of the data lines to supply the time-divided data voltages to the data lines,

wherein the odd-numbered liquid crystal cells and the even-numbered liquid crystal cells are adjacent to each other with the data line interposed between the odd-numbered liquid crystal cells and the even-numbered liquid crystal cells.

5. The liquid crystal display of claim 4, wherein the gate drive circuit supplies an odd gate pulse synchronized with the data voltage to be charged to the odd-numbered liquid crystal cells to odd-numbered gate lines and then supplies an even gate pulse synchronized with the data voltage to be charged to the even-numbered liquid crystal cells to even-numbered gate lines.

* * * * *

专利名称(译)	液晶显示器		
公开(公告)号	US20100265225A1	公开(公告)日	2010-10-21
申请号	US12/638898	申请日	2009-12-15
[标]申请(专利权)人(译)	韩SANSOO 洪城nakjin LEE KYUMAN KIM JAESEO HWANG CHULHYUN		
申请(专利权)人(译)	韩SANSOO 洪城nakjin LEE KYUMAN KIM JAESEO HWANG CHULHYUN		
当前申请(专利权)人(译)	韩SANSOO 洪城nakjin LEE KYUMAN KIM JAESEO HWANG CHULHYUN		
[标]发明人	HAN SANSOO SEONG NAKJIN LEE KYUMAN KIM JAESEO HWANG CHULHYUN		
发明人	HAN, SANSOO SEONG, NAKJIN LEE, KYUMAN KIM, JAESEO HWANG, CHULHYUN		
IPC分类号	G09G3/36 G09G5/10		
CPC分类号	G02F1/13452 G09G2300/0426 G09G3/3648 G09G3/3607		
优先权	1020090034184 2009-04-20 KR		
其他公开文献	US8363039		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种液晶显示器。液晶显示器包括液晶显示面板，该液晶显示面板包括上基板，下基板，位于上基板和下基板之间的液晶层，以及 $m \times n$ 个液晶单元（其中 m 和 n 是正整数）排列在根据 $m/2$ 数据线和 $2n$ 栅极线的交叉结构的矩阵形式中，安装多个芯片上芯片（COF），其上安装有向数据线提供数据电压的源极驱动器集成电路（IC），连接到COF的输入端的印刷电路板（PCB）和直接安装在下基板上的栅极驱动电路，栅极驱动电路向栅极线提供栅极脉冲。

