



US 20110149200A1

(19) **United States**

(12) **Patent Application Publication**
Joo

(10) **Pub. No.: US 2011/0149200 A1**

(43) **Pub. Date: Jun. 23, 2011**

(54) **LIQUID CRYSTAL DISPLAY DEVICE**

(52) **U.S. Cl. 349/61**

(76) **Inventor: Hyung Dal Joo, Daejeon-si (KR)**

(57) **ABSTRACT**

(21) **Appl. No.: 12/257,847**

A liquid crystal display device that is capable of preventing the damage to optical sheets and a liquid crystal panel due to vibration and impact is disclosed. The liquid crystal display device includes a liquid crystal panel for controlling transmissivity of liquid crystal to display images, a backlight unit configured to include a plurality of optical sheets for irradiating light to the liquid crystal panel, and a support main for supporting the liquid crystal panel and the backlight unit, the support main having a protrusion curved to prevent the drop of the liquid crystal panel at the middle thereof. With the above construction, it is possible to minimize the friction between the liquid crystal panel and the optical sheets, prevent the formation of wrinkles or scratches at the optical sheets, and prevent the optical sheets from being rubbed.

(22) **Filed: Oct. 24, 2008**

(30) **Foreign Application Priority Data**

Oct. 26, 2007 (KR) P 2007-108224

Publication Classification

(51) **Int. Cl.**
G02F 1/1335 (2006.01)

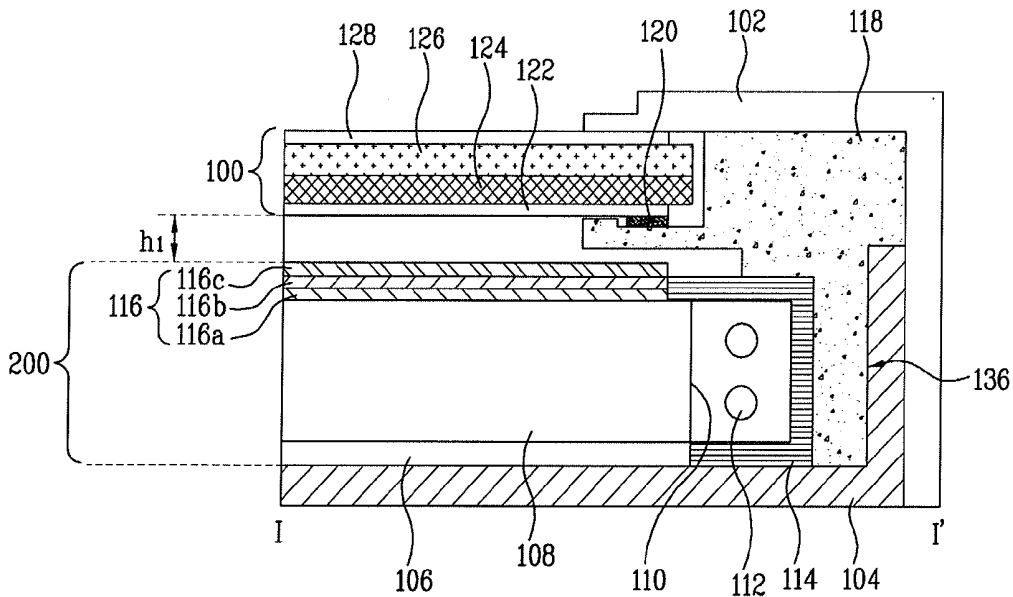


FIG. 1

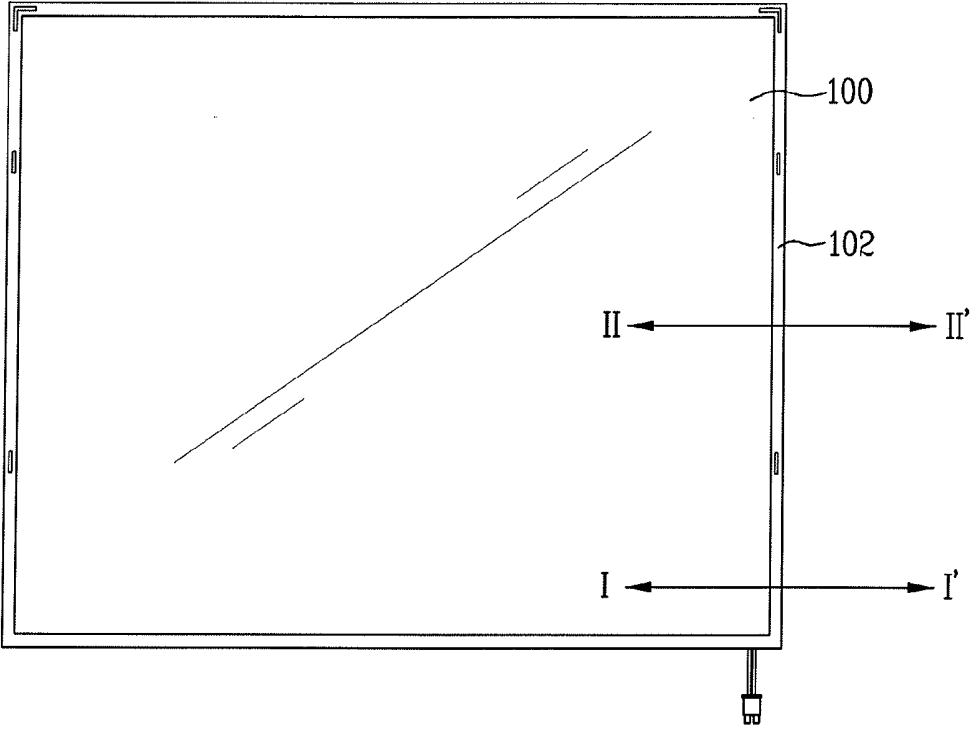


FIG. 2

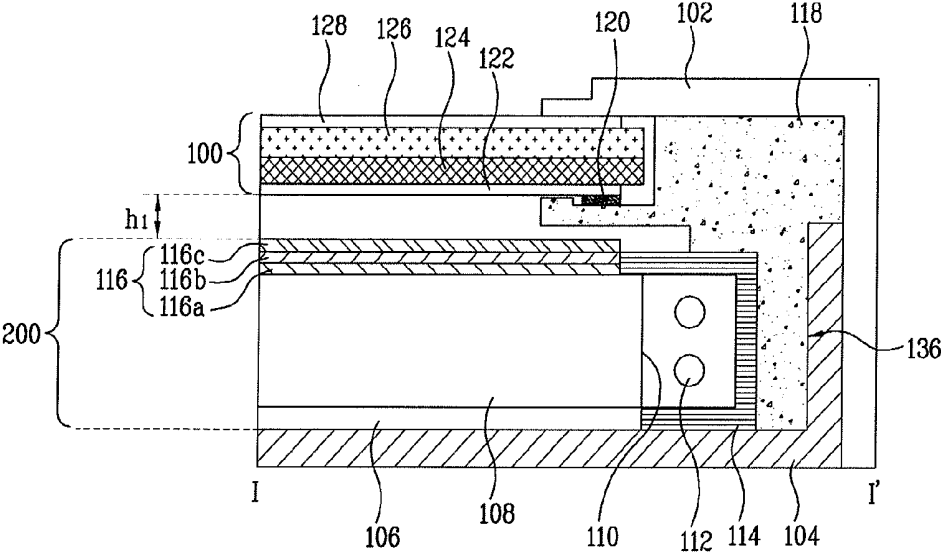


FIG. 3A

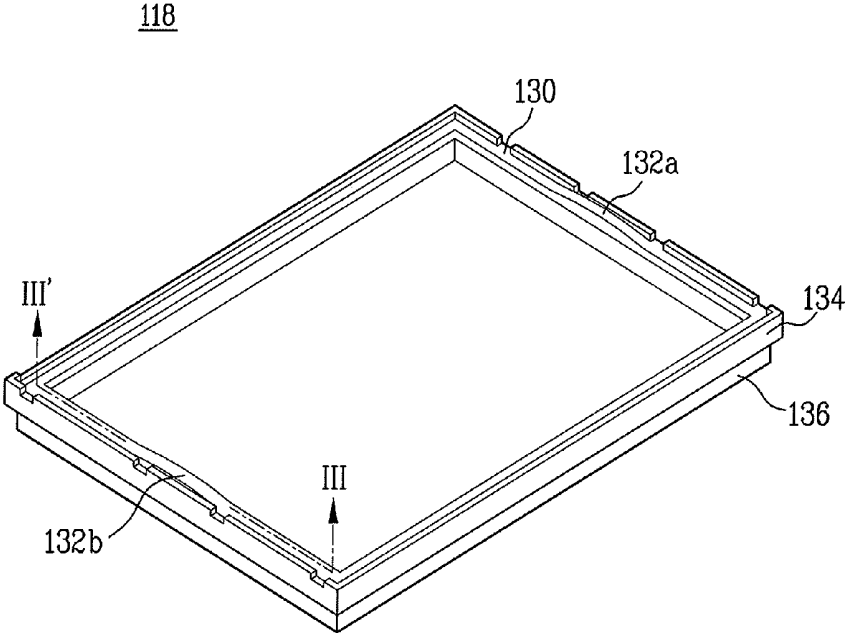


FIG. 3B

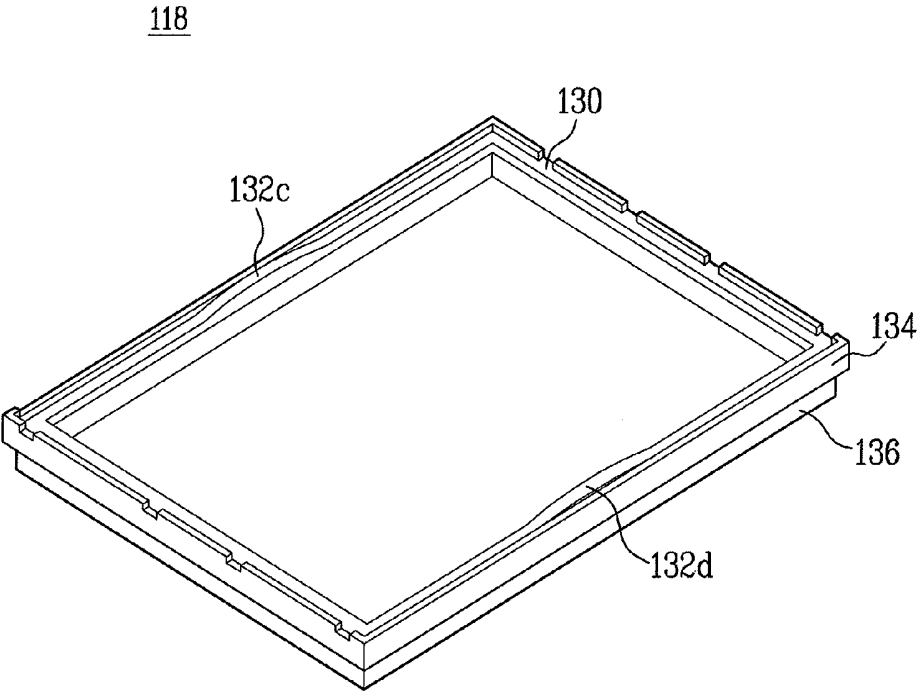


FIG. 4

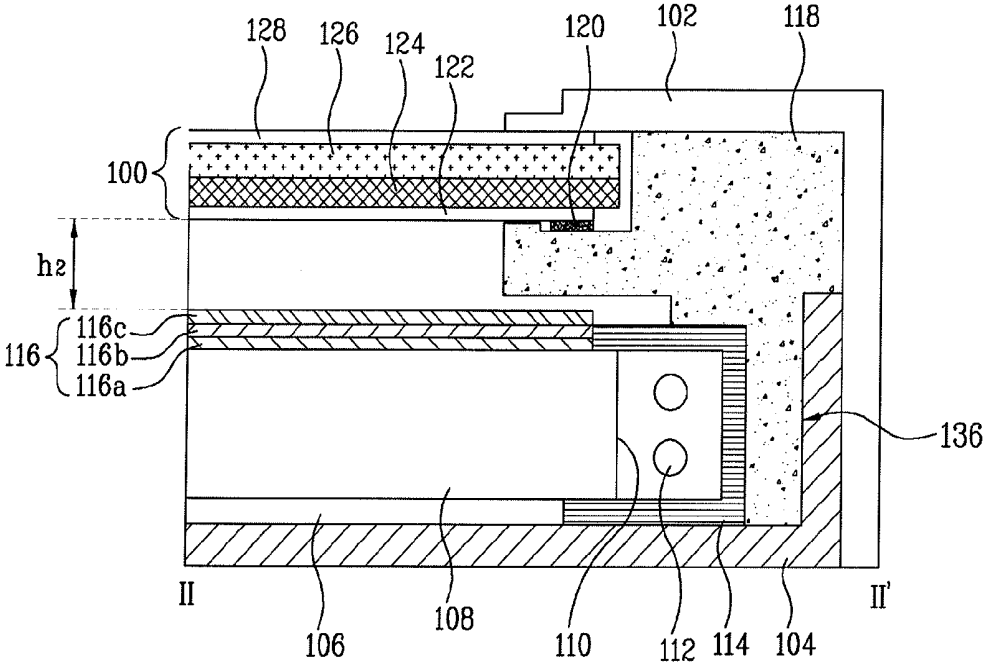


FIG. 5A

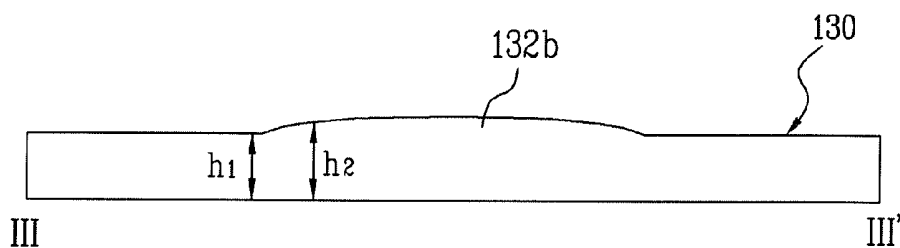


FIG. 5B


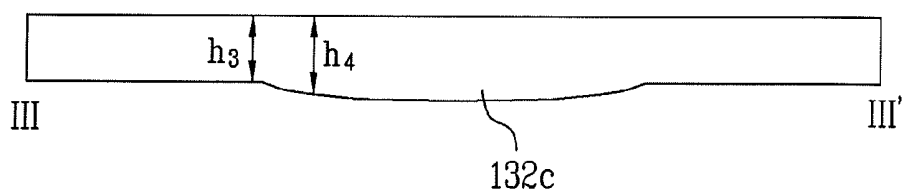


FIG. 5C

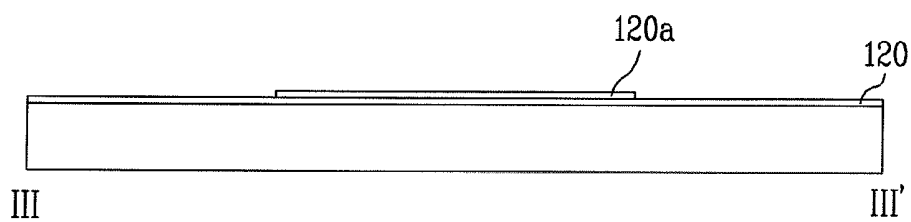

LIQUID CRYSTAL DISPLAY DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of Korean Patent Application No. 10-2007-108224, filed on Oct. 26, 2007, which is hereby incorporated by reference in its entirety as if fully set forth herein.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display device, and more particularly, to a liquid crystal display device that is capable of preventing damage to optical sheets and a liquid crystal panel due to vibration and impact.

[0004] 2. Discussion of the Related Art

[0005] Recently, various flat panel displays, which solve the disadvantages of a cathode ray tube, i.e., reduce weight and volume, are on the rise. These flat panel displays include a liquid crystal display, a field emission display, a plasma display panel, a light emitting display, etc.

[0006] A liquid crystal display device controls optical transmissivity using an electric field to display images. To this end, the liquid crystal display device includes a liquid crystal panel having liquid crystal cells, a backlight unit for irradiating light to the liquid crystal panel, and a drive circuit for driving the liquid crystal cells.

[0007] The liquid crystal panel of the liquid crystal display device is a non-emissive element that displays images through the adjustment of the amount of light incident from the outside, and therefore, the liquid crystal display device needs an additional light source, i.e., the backlight unit, for irradiating light to the liquid crystal panel. Based on the installation position of the backlight unit, the backlight unit may be classified as an edge-type backlight unit or a direct-type backlight unit.

[0008] The edge-type backlight unit includes lamps disposed at opposite sides of the liquid crystal panel for generating light, a light guide plate disposed below the liquid crystal panel for guiding the light generated from the lamps to the liquid crystal panel, lamp housings disposed at sides of the respective lamps for protecting the respective lamps, and optical sheets disposed on the lamp housings and the light guide plate for uniformly transmitting light to the liquid crystal panel.

[0009] Recently, the thickness of the liquid crystal display device has been reduced. As a result, the distance between the liquid crystal panel and the optical sheets has decreased. For this reason, the liquid crystal display device is designed to prevent the contact between the liquid crystal panel and the optical sheets. However, the liquid crystal panel comes into contact with the optical sheets due to the droop of the liquid crystal panel at the middle thereof.

[0010] Friction may occur between the liquid crystal panel and the optical sheets, which are in contact with each other, due to vibration and impact caused during transportation or vibration tests of the liquid crystal panel. The optical sheets, scratched by such friction, deteriorate the display quality of the liquid crystal display device.

SUMMARY

[0011] A liquid crystal display device includes a liquid crystal panel for controlling transmissivity of liquid crystal to

display images, a backlight unit for irradiating light to the liquid crystal panel, and a support main for supporting the liquid crystal panel and the backlight unit, the support main having a protrusion curved to prevent the droop of the liquid crystal panel at the middle thereof.

[0012] In another aspect of the present invention, a liquid crystal display device includes a liquid crystal panel for controlling transmissivity of liquid crystal to display images, a backlight unit configured to include a plurality of optical sheets for irradiating light to the liquid crystal panel, a support main for supporting the liquid crystal panel and the backlight unit, and an adhesive pad attached to the top of the support main for fixing the liquid crystal panel and preventing the droop of the liquid crystal panel at the middle thereof.

[0013] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

[0015] FIG. 1 is a perspective view illustrating a liquid crystal display device according to an embodiment of the present invention;

[0016] FIG. 2 is a sectional view taken along line I-I' of the liquid crystal display device according to the present invention shown in FIG. 1;

[0017] FIGS. 3A and 3B are perspective views illustrating a support main according to an embodiment of the present invention;

[0018] FIG. 4 is a sectional view taken along line II-II' of the liquid crystal display device according to the present invention shown in FIG. 1; and

[0019] FIGS. 5A to 5C are sectional views illustrating other embodiments of the support main according to the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0020] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0021] FIG. 1 is a perspective view illustrating a liquid crystal display device according to an embodiment of the present invention, FIG. 2 is a sectional view taken along line I-I' of the liquid crystal display device according to the present invention shown in FIG. 1, and FIGS. 3A and 3B are perspective views illustrating a support main according to an embodiment of the present invention.

[0022] Referring to FIGS. 1, 2, 3A and 3B the liquid crystal display device according to the present invention includes a liquid crystal panel **100** for controlling transmissivity of liquid crystal to display images, a backlight unit **200** configured to include a plurality of optical sheets **116** for irradiating light to the liquid crystal panel **100**, and a support main **118** for

supporting the liquid crystal panel **100** and the backlight unit **200**, the support main **118** having protrusions **132a** and **132b** curved to prevent the droop of the liquid crystal panel **100** at the middle thereof.

[0023] The liquid crystal panel **100** includes a lower substrate **124** and an upper substrate **126**, which are joined to each other while being opposite to each other. Between the lower substrate **124** and the upper substrate **126** are interposed a liquid crystal layer (not shown) and a spacer (not shown) for uniformly maintaining the distance between the lower substrate **124** and the upper substrate **126**.

[0024] The upper substrate **126** includes at least three color filters, e.g., red, green, and blue color filters, a black matrix for separating the respective color filters from one another and defining pixel cells, and a common electrode to which common voltage is applied. The common electrode may be formed at the lower substrate **124** according to liquid crystal mode.

[0025] The lower substrate **124** includes a plurality of data lines and a plurality of gate lines, which intersect one another, thin film transistors (TFT) formed at pixel cell areas defined by the intersection between the data lines and the gate lines, and pixel electrodes connected to the thin film transistors. The thin film transistors respond to gate pulses from the gate lines to transmit image signals from the data lines to the liquid crystal cells (not shown).

[0026] The liquid crystal cells include the common electrode and the pixel electrodes, which are connected to the respective thin film transistors. The pixel electrodes face the common electrode while the liquid crystal layer is disposed between the pixel electrodes and the common electrode. Consequently, the liquid crystal cells may be represented as liquid crystal capacitors. Also, each liquid crystal cell includes a storage capacitor (not shown) for maintaining an image signal charged in the corresponding liquid crystal capacitor until the corresponding liquid crystal capacitor is charged with the next image signal. Also, a lower polarizing film **122** is attached to the bottom of the lower substrate **124** such that the lower polarizing film **122** faces the optical sheets **116**. The lower polarizing film **122** serves to polarize light irradiated from the optical sheets **116**. The transmission axis of the lower polarizing film **122** is arranged at a predetermined angle such that the transmission axis of the lower polarizing film **122** coincides with the orientation direction of the liquid crystal layer.

[0027] To the top of the upper substrate **126** is attached an upper polarizing film **128**. The upper polarizing film **128** serves to polarize light transmitted through the liquid crystal layer and the color filter array substrate. The transmission axis of the upper polarizing film **128** is arranged at predetermined angle such that the transmission axis of the upper polarizing film **128** is perpendicular to the transmission axis of the lower polarizing film **122**.

[0028] A top cover **102** covers the front edge of the liquid crystal panel **100** disposed at a bottom cover **104** and the side of the bottom cover **104**. To this end, the top cover **102** includes a plane part for covering the non-display area excluding the display area of the liquid crystal panel **100**, i.e., the edge of the liquid crystal panel **100**, and a side part bent perpendicularly from the plane part for covering the side of the bottom cover **104**. The bottom cover **104** is formed to receive the backlight unit **200** and the support main **118**. The

bottom cover **104** may be made of a material exhibiting high heat conductivity to discharge heat generated from the backlight unit **200** outside.

[0029] The backlight unit **200** includes at least one light source **112**, a reflective sheet **106** stacked on the bottom cover **104**, a light guide plate **108** disposed on the reflective sheet **106**, a light source housing **114** for guiding light generated from the at least one light source **112** to the light guide plate **108**, and a plurality of optical sheets **116** stacked on the light guide plate **108**.

[0030] The at least one light source **112** is disposed at one-side edge of the bottom cover **104** such that the at least one light source **112** is opposite to a light entrance part **110** of the light guide plate **108**. The at least one light source **112** may be a fluorescent lamp or a light emitting diode. The at least one light source **112** is driven by light source voltage applied from the outside to generate light and irradiate the generated light to the light entrance part **110** of the light guide plate **108**.

[0031] The reflective sheet **106** is disposed at the bottom of the bottom cover **104** for reflecting light advancing toward the rear of the light guide plate **108** toward the liquid crystal panel **100** to prevent optical loss. The reflective sheet **106** has a size equal to or greater than that of the light guide plate **108** to prevent the leakage of light reflected in the light guide plate **108**.

[0032] The light guide plate **108** is disposed on the bottom cover **104** to which the reflective sheet **106** is attached. The light guide plate **108** scatters the light irradiated from the at least one light source **112** through the light entrance part **110** and sends the scattered light toward the liquid crystal panel **100**. That is, the light guide plate **108** converts light incident from the at least one light source **112** into planar light and irradiates the planar light to the optical sheets **116**. The light guide plate **108** may be made of a plastic material, such as polymethyl methacrylate (PMA), a resin material, or a glass material exhibiting high heat resistance. Also, the light guide plate **108** may be formed in a flat type structure or a wedge type structure.

[0033] The light guide plate **108** may be a prism light guide plate including an inclined rear plane and a prismatic exit plane having a peak and a valley formed in the shape of a line or a circle. In other words, a plurality of prism patterns having peaks and valleys may be formed at the exit plane of the light guide plate **108**.

[0034] The light source housing **114** is disposed at one side of the light guide plate **108** for protecting the at least one light source **112**. The light source housing **114** guides light from the at least one light source **112** to the light entrance part **110** of the light guide plate **108** and prevents the light guide plate **108** from approaching the at least one light source **112** and thus the damage to the at least one light source **112**.

[0035] The optical sheets **116** improve the brightness and uniformity of light exiting from the light guide plate **108** and irradiate the light, the brightness and uniformity of which have been improved, to the liquid crystal panel **100**. To this end, the optical sheets **116** include diffusion sheets **116a** and **116b** for diffusing the light exiting from the light guide plate **108** to the overall areas and at least one prism sheet **116c** for condensing the light diffused by the diffusion sheets **116a** and **116b**. The diffusion sheets **116a** and **116b** and the at least one prism sheet **116c** may be stacked sequentially, nonsequentially, or alternately to improve the brightness and uniformity of light.

[0036] The support main 118 is located at the bottom cover 104 to fix the backlight unit 200.

[0037] As shown in FIGS. 3A and 3B, the support main 118 includes a sidewall frame 134 constituting the external appearance of the support main 118, a panel location part 130 where the liquid crystal panel 100 is located, an adhesive pad 120 for fixing the liquid crystal panel 100 on the panel location part 130, a coupling groove 136 for allowing the support main 118 to be coupled to the bottom cover 120 thereby, and projections 132a to 132d formed at the middle of the top of the panel location part 130.

[0038] The sidewall frame 134 is formed in the shape of a rectangular frame. The coupling groove 136 is formed at the lower outside part of the sidewall frame 134 such that the inside wall of the bottom cover 104 is coupled to the coupling groove 136. The outside wall of the bottom cover 104 does not protrude outwardly of the sidewall frame 134 by virtue of the coupling groove 136.

[0039] The panel location part 130 supports the rear edge of the liquid crystal panel 100. Also, the panel location part 130 is provided at the middle of the top thereof with protrusions 132a and 132b for preventing the droop of the liquid crystal panel 100 at the middle thereof.

[0040] The adhesive pad 120 is attached to the panel location part 130 of the support main 118. The liquid crystal panel 100 is fixed to the panel location part 130 by the adhesive pad 120. The adhesive pad 120 is made of a semitransparent SKC JS 15R based material, which is manufactured by mixing polyethylene terephthalate (PET) and a dispersing agent. The adhesive pad 120 is attached to the panel location part 130 by a 3M-based polyurethane adhesive, with the result that the creation of foreign matter due to high temperature is prevented.

[0041] The protrusions may be formed at the middle of one or more sides of the panel location part 130. In the drawings, the protrusions 132a to 132d are formed at the middles of four side portions of the panel location part 130. The protrusions 132a to 132d have a gentle inclination such that the liquid crystal panel 100 is safely located on the panel location part 130. Also, the protrusions 132a to 132d have a height equivalent to the difference between the edge height h1 of the support main 118 where the protrusion 132b is not formed and the middle height h2 of the support main 118 where the protrusion 132b is formed, as shown in FIG. 5A. Preferably, the height of the protrusions 132a to 132d is about 0.1 mm or more, which is necessary to correct the bending of the liquid crystal panel 100.

[0042] Consequently, as shown in FIGS. 2 and 4, the middle height h2 of the liquid crystal panel 100 is greater than the edge height h1 of the liquid crystal panel 100, with the result that the optical sheets are prevented from being rubbed or damaged due to the droop of the liquid crystal panel 100 at the middle thereof.

[0043] FIG. 5B is a sectional view illustrating the structure of a support main according to a second embodiment of the present invention. A liquid crystal display device according to a second embodiment of the present invention is identical in construction to the liquid crystal display device according to the previous first embodiment of the present invention except the structure of the support main, particularly, the protrusions of the support main, and therefore, a detailed description of the same construction will not be given.

[0044] As previously described, the support main 118 according to the first embodiment of the present invention is

constructed in a structure in which the protrusions 132a and 132b are formed at the top of the support main 118 where the liquid crystal panel 100 is attached. In the second embodiment of the present invention, as shown in FIG. 5B, the protrusion 132 is formed at the bottom of the support main 119 with which the optical sheets 116 are in contact to prevent the droop of the liquid crystal panel 100 at the middle thereof. The protrusion 132c is formed at the middle of at least one side of the bottom of the panel location part 130. The protrusion 132c is formed with a gentle inclination not to damage the optical sheets 116. Also, the protrusion 132c has a height equivalent to the difference between the edge height h3 of the support main 118 where the protrusion 132c is not formed and the middle height h4 of the support main 118 where the protrusion 132c is formed, as shown in FIG. 5A. Preferably, the height of the protrusion 132c is about 0.1 mm or more, which is necessary to correct the bending of the liquid crystal panel 100.

[0045] FIG. 5C is a sectional view illustrating the structure of a support main according to a third embodiment of the present invention. A liquid crystal display device according to a third embodiment of the present invention is identical in construction to the liquid crystal display device according to the previous first embodiment of the present invention except the structure of the support main, particularly, the protrusions of the support main, and therefore, a detailed description of the same construction will not be given.

[0046] Referring to FIG. 5C, an auxiliary adhesive pad 120a is additionally attached to the adhesive pad 120, which is attached to the panel location part 130 of the support main 118 to fix the liquid crystal panel 100, such that the adhesive pad 120 has a height to correct the bending of the liquid crystal panel 100, without changing the frame structure of the support main 118 as in the previous first and second embodiments of the present invention, thereby preventing the droop of the liquid crystal panel 100. The auxiliary adhesive pad 120a is attached to the middle of at least one side of the panel location part 130. Preferably, the height of the auxiliary adhesive pad 120a is about 0.1 mm or more, which is necessary to correct the bending of the liquid crystal panel 100.

[0047] In the liquid crystal display device with the above-stated construction according to the present invention, therefore, it is possible to prevent the friction between the liquid crystal panel 100 and the optical sheet 116, which may occur when the liquid crystal panel 100 droops at the middle thereof due to the reduction in thickness of the liquid crystal display device and thus the reduction in distance between the liquid crystal panel 100 and the optical sheets 116, by the provision of the gently inclined protrusions 132a and 132b formed at one or more sides of the support main 118 which supports the liquid crystal panel 100. Consequently, it is possible to minimize the friction between the liquid crystal panel 100 and the optical sheets 116, prevent the formation of wrinkles or scratches at the optical sheets 116, and prevent the optical sheets 116 from being rubbed.

[0048] Apparent from the above description, the liquid crystal display device with the above-stated construction according to the present invention is constructed to prevent the friction between the liquid crystal panel and the optical sheet, which may occur when the liquid crystal panel droops at the middle thereof due to the reduction in thickness of the liquid crystal display device and thus the reduction in distance between the liquid crystal panel and the optical sheets, by the provision of the gently inclined protrusion formed at least one

side of the support main which supports the liquid crystal panel. Consequently, the present invention has the effect of minimizing the friction between the liquid crystal panel and the optical sheets, preventing the formation of wrinkles or scratches at the optical sheets, and preventing the optical sheets from being rubbed.

[0049] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the inventions. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A liquid crystal display device comprising:
 - a liquid crystal panel that controls transmissivity of liquid crystal to display images;
 - a backlight unit that irradiates light to the liquid crystal panel; and
 - a support main that supports the liquid crystal panel and the backlight unit, the support main having a protrusion curved to prevent the droop of the liquid crystal panel at the middle thereof.
2. The liquid crystal display device according to claim 1, wherein
 - the support main includes a panel location part where the liquid crystal panel is located, and
 - the protrusion is disposed at the middle of the panel location part.

3. The liquid crystal display device according to claim 2, wherein the protrusion has a gentle incline about the middle of at least one side of the panel location part.

4. The liquid crystal display device according to claim 2, wherein the protrusion is disposed at least one the top or bottom of the panel location part.

5. The liquid crystal display device according to claim 2, wherein the protrusion has a height of about 0.1 mm or more.

6. A liquid crystal display device comprising:
 - a liquid crystal panel that controls transmissivity of liquid crystal to display images;
 - a backlight unit configured to include a plurality of optical sheets that irradiate light to the liquid crystal panel;
 - a support main that supports the liquid crystal panel and the backlight unit; and
 - an adhesive pad attached to the top of the support main that fixes the liquid crystal panel and prevents the droop of the liquid crystal panel at the middle thereof.

7. The liquid crystal display device according to claim 6, wherein the adhesive pad is constructed in a structure in which a plurality of layers are stacked about the middle of at least one side of the support main such that the adhesive pad has a gentle incline.

8. The liquid crystal display device according to claim 7, wherein the adhesive pad has a height of about 0.1 mm or more.

9. The liquid crystal display device according to claim 6, wherein the protrusion is attached to at least one of the top or bottom of the support main.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US20110149200A1	公开(公告)日	2011-06-23
申请号	US12/257847	申请日	2008-10-24
[标]申请(专利权)人(译)	JOO HYUNG DAL		
申请(专利权)人(译)	JOO HYUNG DAL		
当前申请(专利权)人(译)	JOO HYUNG DAL		
[标]发明人	JOO HYUNG DAL		
发明人	JOO, HYUNG DAL		
IPC分类号	G02F1/1335		
CPC分类号	G02F1/133308 G02F2201/54 G02F2001/133317		
优先权	1020070108224 2007-10-26 KR		
其他公开文献	US8130338		
外部链接	Espacenet USPTO		

摘要(译)

本发明公开了一种液晶显示装置，其能够防止由于振动和冲击而损坏光学片和液晶面板。液晶显示装置包括：液晶面板，用于控制液晶的透射率以显示图像；背光单元，被配置为包括用于将光照射到液晶面板的多个光学片，以及用于支撑液晶面板的支撑主体背光单元，支撑主体具有弯曲的突起，以防止液晶面板在中间下垂。利用上述结构，可以使液晶面板和光学片之间的摩擦最小化，防止在光学片上形成皱折或划痕，并防止光学片被摩擦。

