



US 20050068483A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0068483 A1**

Lee et al.

(43) **Pub. Date:** **Mar. 31, 2005**

(54) **FRINGE FIELD SWITCHING LIQUID CRYSTAL DISPLAY**

Publication Classification

(76) Inventors: **Kyung Ha Lee**, Kyoungki-do (KR);
Chi Wook An, Kyoungki-do (KR)

(51) **Int. Cl. 7** **G02F 1/1343**

(52) **U.S. Cl.** **349/141**

Correspondence Address:

LADAS & PARRY LLP
224 SOUTH MICHIGAN AVENUE
SUITE 1200
CHICAGO, IL 60604 (US)

(57) ABSTRACT

(21) Appl. No.: **10/938,258**

Disclosed is a fringe field switching liquid crystal display. The fringe field switching liquid crystal display comprises a black matrix formed on an upper substrate, a pixel electrode formed above a lower substrate and having an edge portion overlapped with the black matrix by a predetermined region, and liquid crystal interposed between the upper substrate and the lower substrate, wherein the edge portion of the pixel electrode has a linear line shape. According to such an edge portion of the pixel electrode, it is possible to stably drive the liquid crystal located at the edge portion of the pixel electrode and also to restore the liquid crystal with rapidity.

(22) Filed: **Sep. 10, 2004**

(30) **Foreign Application Priority Data**

Sep. 26, 2003 (KR) 2003-66965

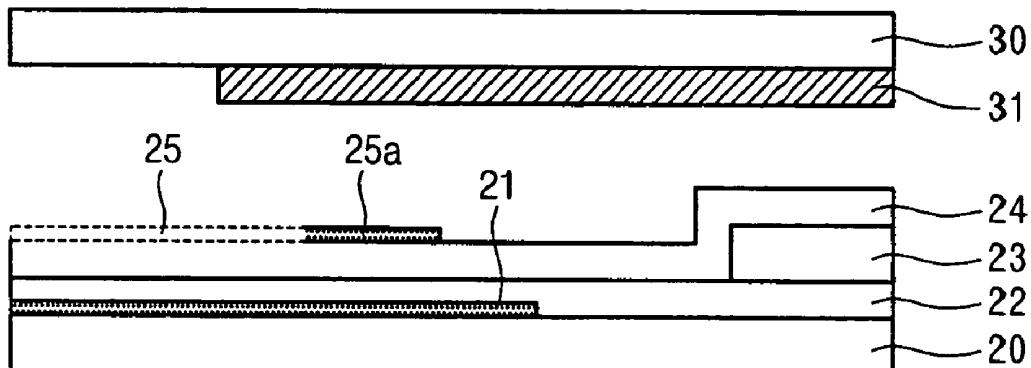
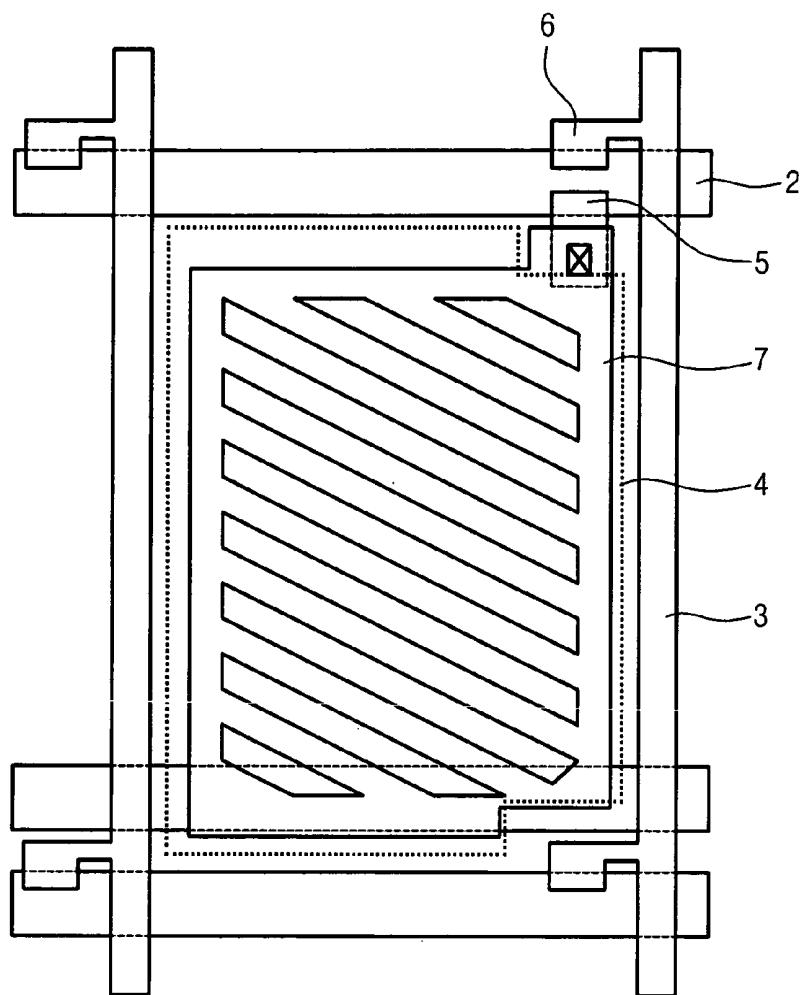


FIG.1

(PRIOR ART)

**FIG.2**

(PRIOR ART)

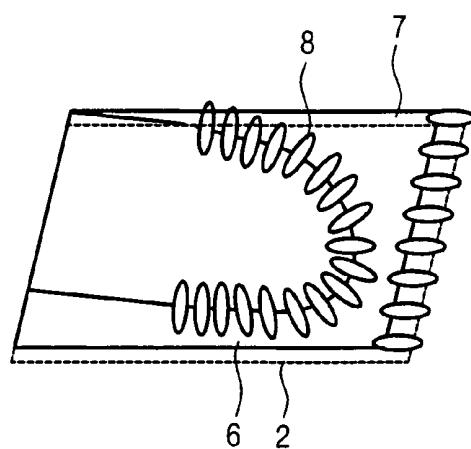
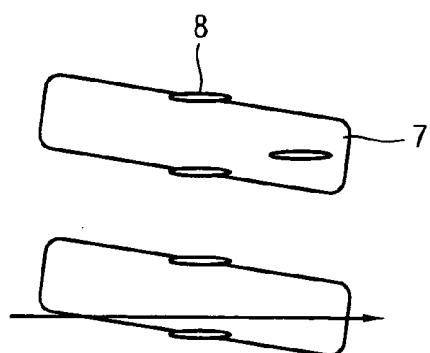
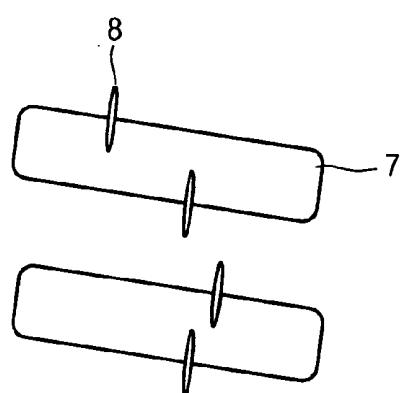


FIG.3A

(PRIOR ART)

**FIG.3B**

(PRIOR ART)

**FIG.3C**

(PRIOR ART)

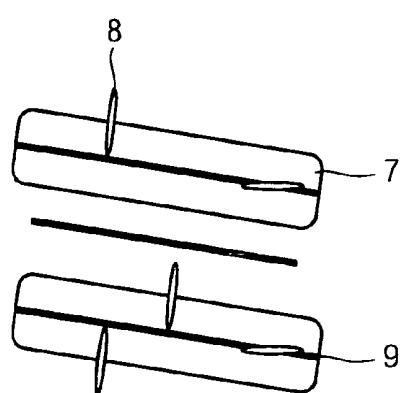


FIG.4

(PRIOR ART)

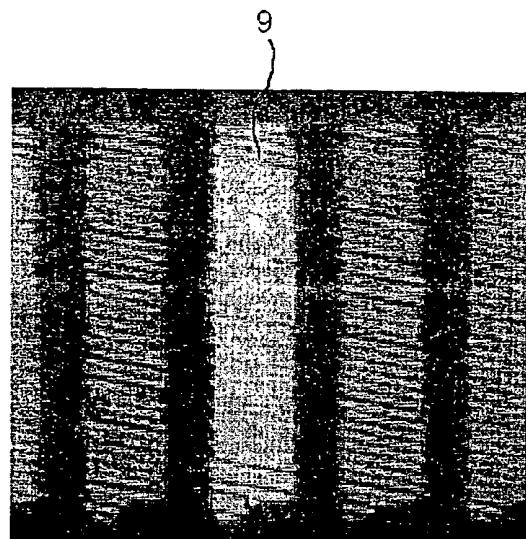
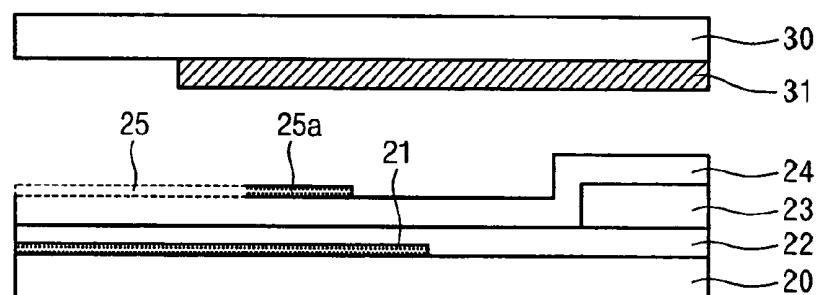
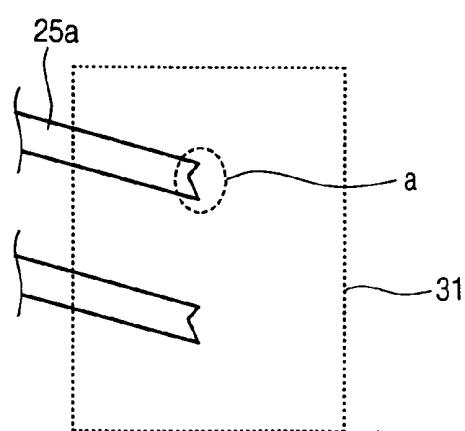
**FIG.5****FIG.6**

FIG.7

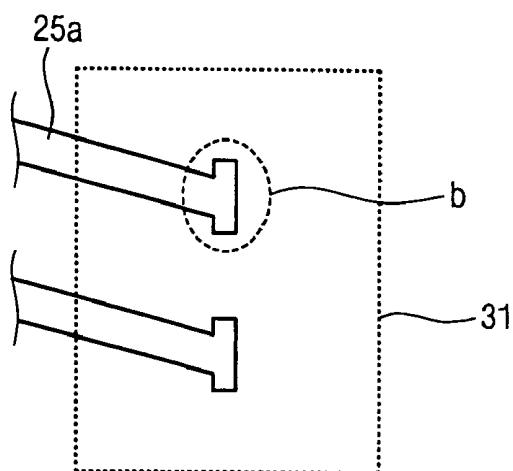


FIG.8

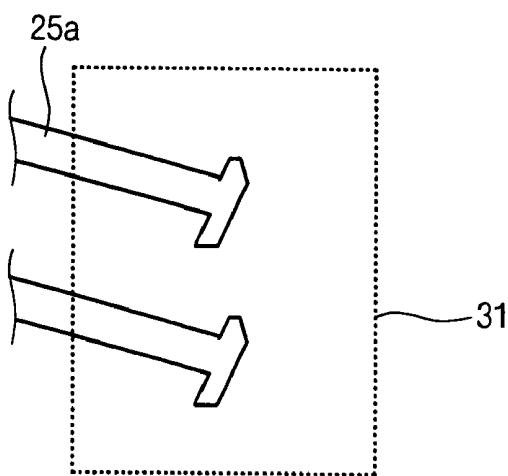


FIG.9

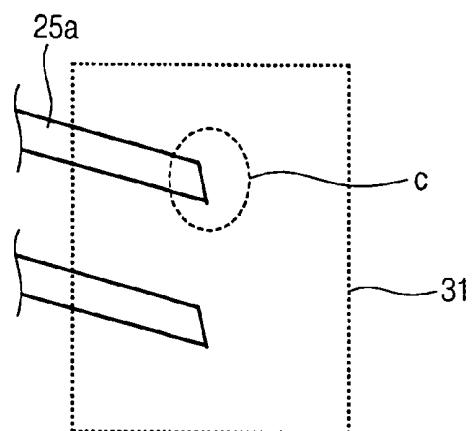


FIG.10


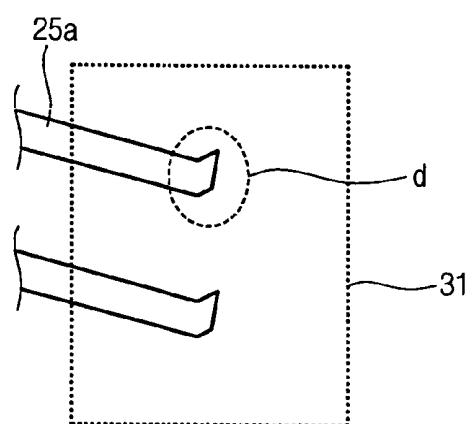


FIG.11

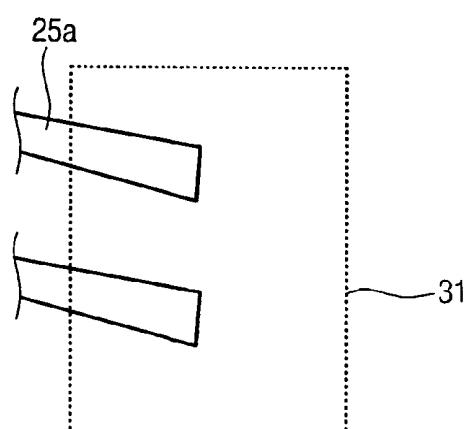

FRINGE FIELD SWITCHING LIQUID CRYSTAL DISPLAY

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a fringe field switching liquid crystal display (hereinafter, simply referred to as "FFS-LCD"), and more particularly to an FFS-LCD capable of preventing a misalignment of liquid crystal molecules caused by rubbing pressure in an FFS-LCD pixel structure, thereby preventing a display fault.

[0003] 2. Description of the Prior Art

[0004] As generally known in the art, conventional thin-film liquid crystal displays (LCDs) are used as information display apparatuses, such as information display screens of portable terminals, displayers of notebook PCs, monitors of lap top computers, etc. Particularly, such liquid crystal displays have been widely used in various industrial fields in replacement of conventional CRT (cathode ray tube) monitors.

[0005] FIG. 1 is a plan view for illustrating a conventional FFS-LCD.

[0006] In addition, FIG. 2 is a view for showing a shape of a pixel electrode and a state of liquid crystal when an electric field is applied to the pixel electrode in the conventional FFS-LCD.

[0007] As shown in FIG. 1, the conventional FFS-LCD 1 includes a pixel electrode 7 which is formed on the upper surface of a common electrode 4. The pixel electrode 7 has a slit pattern. Herein, it is recommended that an edge portion of the pixel electrode 7 should be formed in a constant angle of incline, but in actuality, as shown in FIG. 2, the edge portion of the pixel electrode 7 is formed in a curved line shape due to limitations of an exposure process.

[0008] In FIG. 1, reference numeral '2' represents a gate line, reference numeral '3' represents a data line, and reference numerals 5 and 6 represent source and drain electrodes respectively.

[0009] FIG. 3A is a view for showing a state of liquid crystal when an electric field is not applied to the pixel electrode, and FIG. 3B is a view for showing a state of the liquid crystal when a high electric field is applied to the pixel electrode. In addition, FIG. 3C is a view for showing a fault state of the liquid crystal which is caused by a misalignment of liquid crystal resulting from a high electric field and/or rubbing pressure.

[0010] Meanwhile, FIG. 4 is a view for explaining a problem which exists in the conventional FFS-LCD.

[0011] The operation of the conventional FFS-LCD having such a construction is as follows.

[0012] When any electric field is not formed at the common electrode and the pixel electrode, liquid crystal 8 is horizontally aligned as shown in FIG. 3A. In FIG. 3A, an arrow represents a rubbing direction.

[0013] Meanwhile, when a low electric field is applied, the liquid crystal is twisted by a few angles from the horizontal direction, and when a middle-degree electric field is applied,

the liquid crystal is twisted by a little more degrees than those caused when the low electric field is applied.

[0014] In addition, as shown in FIGS. 2 and 3B, when a high electric field is applied to the liquid crystal 8, molecules of the liquid crystal 8 are twisted in such a manner that twisting angles of the molecules become enlarged more and more, to a right angle in maximum, as they reach the end part of an edge portion of the pixel electrode having a curved line shape due to an electric field interference between a black matrix (not shown) and the pixel electrode 7, so that the molecules of the liquid crystal 8 are vertically aligned at the end part of the edge portion. Since such an alignment may exert an influence on rubbing pressure, as shown in FIG. 3C, a circle phenomenon generated in the edge portion of the pixel electrode complicates the mobility of the liquid crystal according to applied voltages, thereby causing a fault due to a misalignment of liquid crystal when rubbing pressure is applied in a white gradation state.

[0015] That is, as shown in FIGS. 3C and 4, when rubbing pressure is applied under the white gradation state, the liquid crystal may not return to an initial alignment state, so a rubbing trace, that is, disclination lines 9 may occur.

SUMMARY OF THE INVENTION

[0016] Accordingly, the present invention has been made to solve the above-mentioned problems occurring in the prior art, and an object of the present invention is to provide a fringe field switching liquid crystal display, in which an edge portion of a pixel electrode is changed from a curved line shape into a linear line shape so as to correct a misalignment of liquid crystal, thereby preventing a rubbing trace, such as a disclination line, from being created in the edge portion of the pixel electrode.

[0017] In order to accomplish this object, there is provided a fringe field switching liquid crystal display comprising: a black matrix formed on an upper substrate; a pixel electrode formed above a lower substrate and having an edge portion overlapped with the black matrix by a predetermined region; and liquid crystal interposed between the upper substrate and the lower substrate, wherein the edge portion of the pixel electrode has a linear line shape.

[0018] The linear line shape includes a wedge shape and a structure having two 'U'-shaped protrusions protruding in opposition to each other.

[0019] The edge portion has a structure having a width, which becomes enlarged more and more in a direction of an end part of the edge portion.

[0020] The edge portion is aligned in parallel to a central portion of the pixel electrode, and an end part of the edge portion is inclined by a predetermined angle with respect to the central portion.

[0021] The edge portion of the pixel electrode is aligned such that the edge portion is inclined at an angle of 5° to 9° with respect to the central portion of the pixel electrode.

[0022] The edge portion includes a structure having an end part, which is bent by 9° to 12° with respect to the pixel electrode.

[0023] In accordance with another aspect of the present invention, there is provided a fringe field switching liquid

crystal display comprising: a black matrix formed on an upper substrate; a pixel electrode formed above a lower substrate, an edge portion of the pixel electrode being overlapped with the black matrix by a predetermined region; and liquid crystal interposed between the upper substrate and the lower substrate, wherein the edge portion of the pixel electrode has a linear line shape and is aligned in such a manner that the edge portion is inclined by a predetermined angle with respect to a central portion of the pixel electrode.

[0024] The edge portion includes a structure having an end part, which is bent by 9° to 12° with respect to the edge portion of the pixel electrode.

[0025] The edge portion has a structure having a width, which becomes enlarged more and more in a direction of one side of the edge portion.

[0026] The edge portion is aligned such that the edge portion is inclined at an angle of 5° to 9° with respect to the central portion of the pixel electrode.

[0027] In accordance with still another aspect of the present invention, there is provided a fringe field switching liquid crystal display comprising: a black matrix formed on an upper substrate; a pixel electrode formed above a lower substrate, an edge portion of the pixel electrode being overlapped with the black matrix by a predetermined region; and liquid crystal interposed between the upper substrate and the lower substrate, wherein the edge portion of the pixel electrode has a linear line shape and is aligned in such a manner that the edge portion is inclined by a predetermined angle with respect to a central portion of the pixel electrode.

[0028] The linear line shape includes a wedge shape and a structure having two ‘ \square ’-shaped protrusions protruding in opposition to each other.

[0029] The edge portion is aligned such that an end part of the edge portion is inclined at an angle of 9° to 12° with respect to the edge portion of the pixel electrode.

[0030] The edge portion has a structure having a width, which becomes enlarged more and more in a direction of one side of the edge portion.

[0031] The edge portion is aligned such that the edge portion is inclined at an angle of 5° to 9° with respect to the central portion of the pixel electrode.

[0032] In accordance with still another aspect of the present invention, there is provided a fringe field switching liquid crystal display comprising: a black matrix formed on an upper substrate; a pixel electrode formed above a lower substrate, an edge portion of the pixel electrode being overlapped with the black matrix by a predetermined region; and liquid crystal interposed between the upper substrate and the lower substrate, wherein the edge portion of the pixel electrode has a linear line shape while the edge portion is aligned in such a manner that the edge portion is inclined by a predetermined angle with respect to a central portion of the pixel electrode, and the edge portion has a structure having an end part, a side face of which is inclined.

[0033] The linear line shape includes a wedge shape and a structure having two ‘ \square ’-shaped protrusions protruding in opposition to each other.

[0034] The end part of the edge portion is aligned to be inclined at an angle of 9° to 12° with respect to the edge portion of the pixel electrode.

[0035] The edge portion has a structure having a width, which becomes enlarged more and more in a direction of an end part of the edge portion.

[0036] The edge portion is aligned such that the edge portion is inclined at an angle of 5° to 9° with respect to the central portion of the pixel electrode.

[0037] The edge portion of the pixel electrode forms mixed angles including a first angle larger than an angle defined between a central portion of the pixel electrode and a rubbing direction and a second angle smaller than the angle defined between the central portion of the pixel electrode and the rubbing direction.

BRIEF DESCRIPTION OF THE DRAWINGS

[0038] The above and other objects, features and advantages of the present invention will be more apparent from the following detailed description taken in conjunction with the accompanying drawings, in which:

[0039] FIG. 1 is a plan view for illustrating a conventional FFS-LCD;

[0040] FIG. 2 is a view for showing a shape of a pixel electrode and a state of liquid crystal when an electric field is applied to the pixel electrode;

[0041] FIG. 3A is a view for showing a state of liquid crystal when an electric field is not applied to the pixel electrode;

[0042] FIG. 3B is a view for showing a state of liquid crystal when a high electric field is applied to the pixel electrode;

[0043] FIG. 3C is a view for showing a fault state of liquid crystal in which a liquid crystal alignment is distorted due to a high electric field and/or rubbing pressure;

[0044] FIG. 4 is a view for explaining a problem of a conventional FFS-LCD;

[0045] FIG. 5 is a sectional view illustrating a fringe field switching liquid crystal display according to an embodiment of the present invention;

[0046] FIG. 6 is a plan view for schematically illustrating a shape of an edge portion of a pixel electrode in an FFS-LCD according to a first embodiment of the present invention;

[0047] FIGS. 7 and 8 are plan views for schematically illustrating shapes of edge portions of pixel electrodes in FFS-LCDs according to a second embodiment of the present invention;

[0048] FIG. 9 is a plan view for schematically illustrating a shape of an edge portion of a pixel electrode in an FFS-LCD according to a third embodiment of the present invention;

[0049] FIG. 10 is a plan view for schematically illustrating a shape of an edge portion of a pixel electrode in an FFS-LCD according to a fourth embodiment of the present invention; and

[0050] FIG. 11 is a plan view for schematically illustrating a shape of an edge portion of a pixel electrode in an FFS-LCD according to a fifth embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0051] Hereinafter, preferred embodiments of the present invention will be described with reference to the accompanying drawings. In the following description and drawings, the same reference numerals are used to designate the same or similar components, and so repetition of the description on the same or similar components will be omitted.

[0052] FIG. 5 is a sectional view illustrating a fringe field switching liquid crystal display (hereinafter, simply referred to as "FFS-LCD") according to an embodiment of the present invention.

[0053] As shown in FIG. 5, a FFS-LCD according to the present invention includes a common electrode 21 formed on a lower substrate 20, a pixel electrode 25 formed above the common electrode 21, a black matrix 31 formed on an upper substrate 30. Herein, a predetermined region of the black matrix 31 formed on the upper substrate 30 is overlapped over an edge portion of the pixel electrode 25 formed above the lower substrate 20. In addition, liquid crystal (not shown) is interposed between the two substrates.

[0054] The edge portion of the pixel electrode 25 is formed in a linear line shape. Herein, material of the pixel electrode 25 includes a TCO, a metal, a metal under a gel or a sol state, or a highly conductive polymer.

[0055] FIG. 6 is a plan view for schematically illustrating a shape of an edge portion of a pixel electrode in an FFS-LCD according to a first embodiment of the present invention.

[0056] As shown in FIG. 6, according to the first embodiment of the present invention, an edge portion 25a of the pixel electrode 25 having a linear line shape may be formed in a wedge shape A. Herein, the edge portion of the pixel electrode 25, which has the wedge shape A, may be aligned in line with a central portion of the pixel electrode 25 as shown in FIG. 6, or may be inclined from the central portion of the pixel electrode by a predetermined angle, which is not shown.

[0057] FIGS. 7 and 8 are plan views for schematically illustrating shapes of edge portions of pixel electrodes in FFS-LCDs according to a second embodiment of the present invention.

[0058] As shown in FIG. 7, according to the second embodiment of the present invention, an edge portion 25a of the pixel electrode 25 having a linear line shape includes a structure B, an end part of which is formed by two 'U'-shaped patterns protruding in opposition to each other. In addition, in the structure B having two 'U'-shaped patterns at the end part thereof, one side of each 'U'-shaped pattern may be inclined as shown in FIG. 8.

[0059] FIG. 9 is a plan view for schematically illustrating a shape of an edge portion of a pixel electrode in an FFS-LCD according to a third embodiment of the present invention.

[0060] As shown in FIG. 9, according to the third embodiment of the present invention, an edge portion 25a of the pixel electrode 25, which has a linear line shape, may be formed in a structure C in which one side face is inclined.

[0061] FIG. 10 is a plan view for schematically illustrating a shape of an edge portion of a pixel electrode in an FFS-LCD according to a fourth embodiment of the present invention.

[0062] As shown in FIG. 10, according to the fourth embodiment of the present invention, an edge portion 25a of the pixel electrode 25, which has a linear line shape, may include a structure D which is aligned in parallel to a central portion of the pixel electrode and has an end part bent by 9° to 12°.

[0063] FIG. 11 is a plan view for schematically illustrating a shape of an edge portion of a pixel electrode in an FFS-LCD according to a fifth embodiment of the present invention.

[0064] As shown in FIG. 11, according to the fifth embodiment of the present invention, an edge portion 25a of the pixel electrode 25, which has a linear line shape, may be formed in a structure having a width, which becomes enlarged more and more towards the end part of the pixel electrode, and having an end part inclined by 5° to 9° with respect to a central portion of the pixel electrode.

[0065] With the fifth embodiment of the present invention, since the edge portion of the pixel electrode has a structure inclined by 5° to 9°, a restoring force of the liquid crystal is further improved as compared with the fourth embodiment of FIG. 10. Therefore, the liquid crystal located in the vicinity of the edge portion of the pixel electrode is stabilized in white gradation state.

[0066] The above-mentioned edge portions of pixel electrodes according to embodiments of the present invention may solve problems of a twisting speed and a restoring force of the liquid crystal, thereby further stabilizing the liquid crystal, as compared with the conventional edge portion having a curved line shape.

[0067] The operation of the FFS-LCD having the above-mentioned construction according to the present invention is as follows.

[0068] When an electric field is not applied, liquid crystal molecules are in a horizontal direction. When a high electric field is applied, the molecules of the liquid crystal are twisted in such a manner that twisting angles of the molecules become enlarged more and more, to 90° in maximum, as they reach a central portion in the end part of the edge portion of the pixel electrode due to an electric field interference between a black matrix and the pixel electrode, so that the molecules of the liquid crystal are vertically aligned. In this case, since such an alignment may exert an influence on rubbing pressure, the restoring force and the bias force of the liquid crystal, which is located at the edge portion of the pixel electrode, increase as a result of the edge portion of the pixel electrode having a linear line shape. Therefore, when pressure occurs in the white gradation state, the alignment of the liquid crystal can return to an initial state.

[0069] Meanwhile, according to the present invention, the edge portion of the pixel electrode forms mixed angles including a first angle larger than an angle defined between

a central portion of the pixel electrode and a rubbing direction and a second angle smaller than the angle defined between the central portion of the pixel electrode and the rubbing direction.

[0070] According to the present invention, since the edge portion of the pixel electrode is formed in a linear line shape, when the white gradation is applied, the restoring force of the liquid crystal, which is located at the edge portion of the pixel electrode, may increase so that the liquid crystal can easily return to its initial position, and also the bias force applied to the liquid crystal may increase.

[0071] As described above, with a structure of the edge portion of the pixel electrode changed according to the present invention, it is possible to stably drive the liquid crystal located at the edge portion of the pixel electrode and also to restore the liquid crystal with rapidity.

[0072] Therefore, due to the reduction of the distortion of the liquid crystal alignment, it is possible to prevent a rubbing trace or inclination lines from occurring in a display image even if external physical power, such as rubbing pressure, is applied to the liquid crystal. Consequently, the response speed of the liquid crystal is improved.

[0073] Although a preferred embodiment of the present invention has been described for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

What is claimed is:

1. A fringe field switching liquid crystal display comprising:

a black matrix formed on an upper substrate;

a pixel electrode formed above a lower substrate and having an edge portion overlapped with the black matrix by a predetermined region; and

liquid crystal interposed between the upper substrate and the lower substrate, wherein the edge portion of the pixel electrode has a linear line shape.

2. The fringe field switching liquid crystal display as claimed in clam **1**, wherein the linear line shape includes a wedge shape.

3. The fringe field switching liquid crystal display as claimed in clam **1**, wherein the linear line shape includes a structure having two 'U'-shaped protrusions protruding in opposition to each other.

4. The fringe field switching liquid crystal display as claimed in clam **1**, wherein the edge portion has a structure

having a width, which becomes enlarged more and more in a direction of an end part of the edge portion.

5. The fringe field switching liquid crystal display as claimed in clam **1**, wherein the edge portion is aligned in parallel to a central portion of the pixel electrode and an end part of the edge portion is inclined by a predetermined angle with respect to the central portion.

6. The fringe field switching liquid crystal display as claimed in clam **5**, wherein the edge portion of the pixel electrode is aligned such that the edge portion is inclined at an angle of 5° to 9° with respect to the central portion of the pixel electrode.

7. The fringe field switching liquid crystal display as claimed in clam **1**, wherein the edge portion includes a structure having an end part, which is bent by 9° to 12° with respect to the pixel electrode.

8. The fringe field switching liquid crystal display as claimed in clam **1**, wherein the edge portion of the pixel electrode forms mixed angles including a first angle larger than an angle defined between a central portion of the pixel electrode and a rubbing direction and a second angle smaller than the angle defined between the central portion of the pixel electrode and the rubbing direction.

9. A fringe field switching liquid crystal display comprising:

a black matrix formed on an upper substrate;

a pixel electrode formed above a lower substrate, an edge portion of the pixel electrode being overlapped with the black matrix by a predetermined region; and

liquid crystal interposed between the upper substrate and the lower substrate, wherein the edge portion of the pixel electrode has a linear line shape and is aligned in such a manner that the edge portion is inclined by a predetermined angle with respect to a central portion of the pixel electrode.

10. The fringe field switching liquid crystal display as claimed in clam **9**, wherein the edge portion includes a structure having an end part, which is bent by 9° to 12° with respect to the edge portion of the pixel electrode.

11. The fringe field switching liquid crystal display as claimed in clam **9**, wherein the edge portion has a structure having a width, which becomes enlarged more and more in a direction of one side of the edge portion.

12. The fringe field switching liquid crystal display as claimed in clam **9**, wherein the edge portion is aligned such that the edge portion is inclined at an angle of 5° to 9° with respect to the central portion of the pixel electrode.

* * * * *

专利名称(译)	边缘场切换液晶显示器		
公开(公告)号	US20050068483A1	公开(公告)日	2005-03-31
申请号	US10/938258	申请日	2004-09-10
[标]申请(专利权)人(译)	李敬HA 安驰旭		
申请(专利权)人(译)	李敬HA 安驰旭		
[标]发明人	LEE KYUNG HA AN CHI WOOK		
发明人	LEE, KYUNG HA AN, CHI WOOK		
IPC分类号	G02F1/133 G02F1/1335 G02F1/1343 G02F1/136 G02F1/1368		
CPC分类号	G02F1/134363 G02F1/133512		
优先权	1020030066965 2003-09-26 KR		
其他公开文献	US7345728		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种边缘场切换液晶显示器。边缘场切换液晶显示器包括形成在上基板上的黑矩阵，形成在下基板上方并且具有通过预定区域与黑矩阵重叠的边缘部分的像素电极，以及插入在上基板和下基板之间的液晶。下基板，其中像素电极的边缘部分具有直线形状。根据像素电极的这种边缘部分，可以稳定地驱动位于像素电极的边缘部分的液晶，并且还可以快速地恢复液晶。

