



US 20080043168A1


(19) **United States**(12) **Patent Application Publication**
Hsiao(10) **Pub. No.: US 2008/0043168 A1**(43) **Pub. Date: Feb. 21, 2008**(54) **LIQUID CRYSTAL DISPLAY DEVICE
HAVING HOOKS FOR FIXING LAMP**(30) **Foreign Application Priority Data**

Aug. 18, 2006 (TW) 95130447

(75) Inventor: **Chih-Chung Hsiao**, Santa Clara,
CA (US)**Publication Classification**(51) **Int. Cl.**
G02F 1/13357 (2006.01)(52) **U.S. Cl.** **349/58**(57) **ABSTRACT**

An exemplary liquid crystal display device (100) includes a first frame (11), a liquid crystal panel (12), a backlight unit (13) for providing uniform light for the liquid crystal panel, and a second frame (14) cooperating with the first frame to define a space receiving the liquid crystal panel and the backlight unit. The backlight unit includes a reflector (17) and a lamp (16) received in the reflector. The reflector includes a hook (175). The second frame includes a through hole (145). The hook engages in the through hole, thereby facilitating the fixing of the reflector to the second frame.

Correspondence Address:

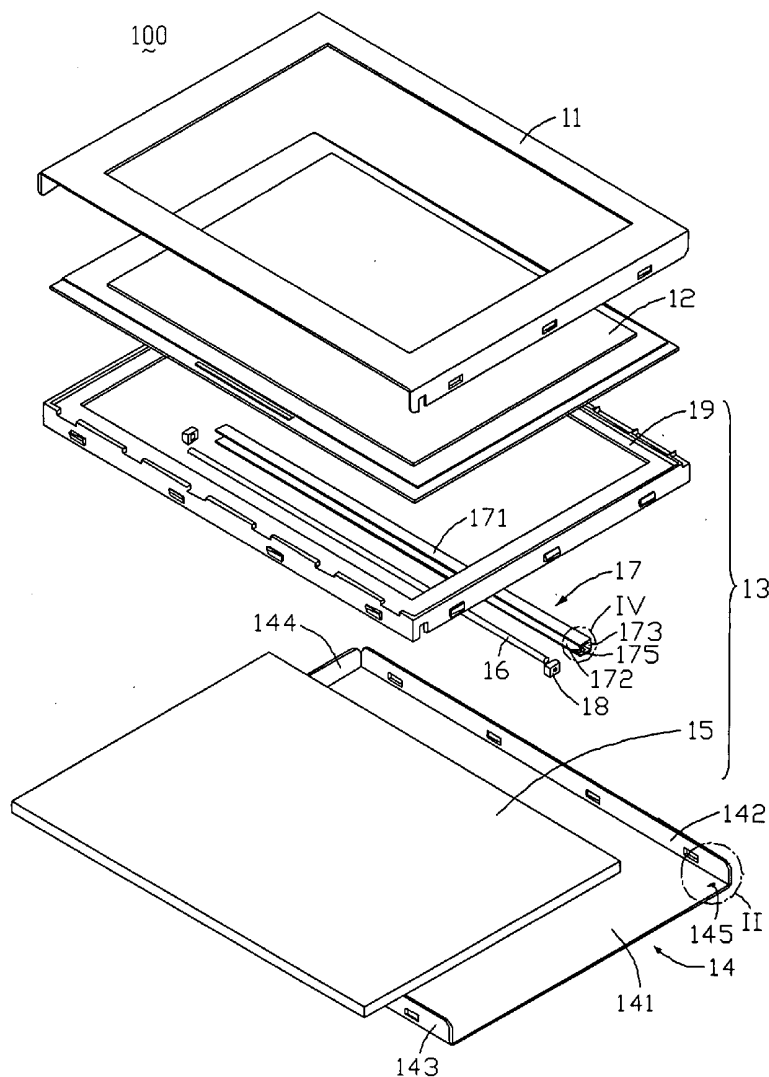WEI TE CHUNG
FOXCONN INTERNATIONAL, INC.
1650 MEMOREX DRIVE
SANTA CLARA, CA 95050(73) Assignee: **INNOLUX DISPLAY CORP.**(21) Appl. No.: **11/894,131**(22) Filed: **Aug. 20, 2007**

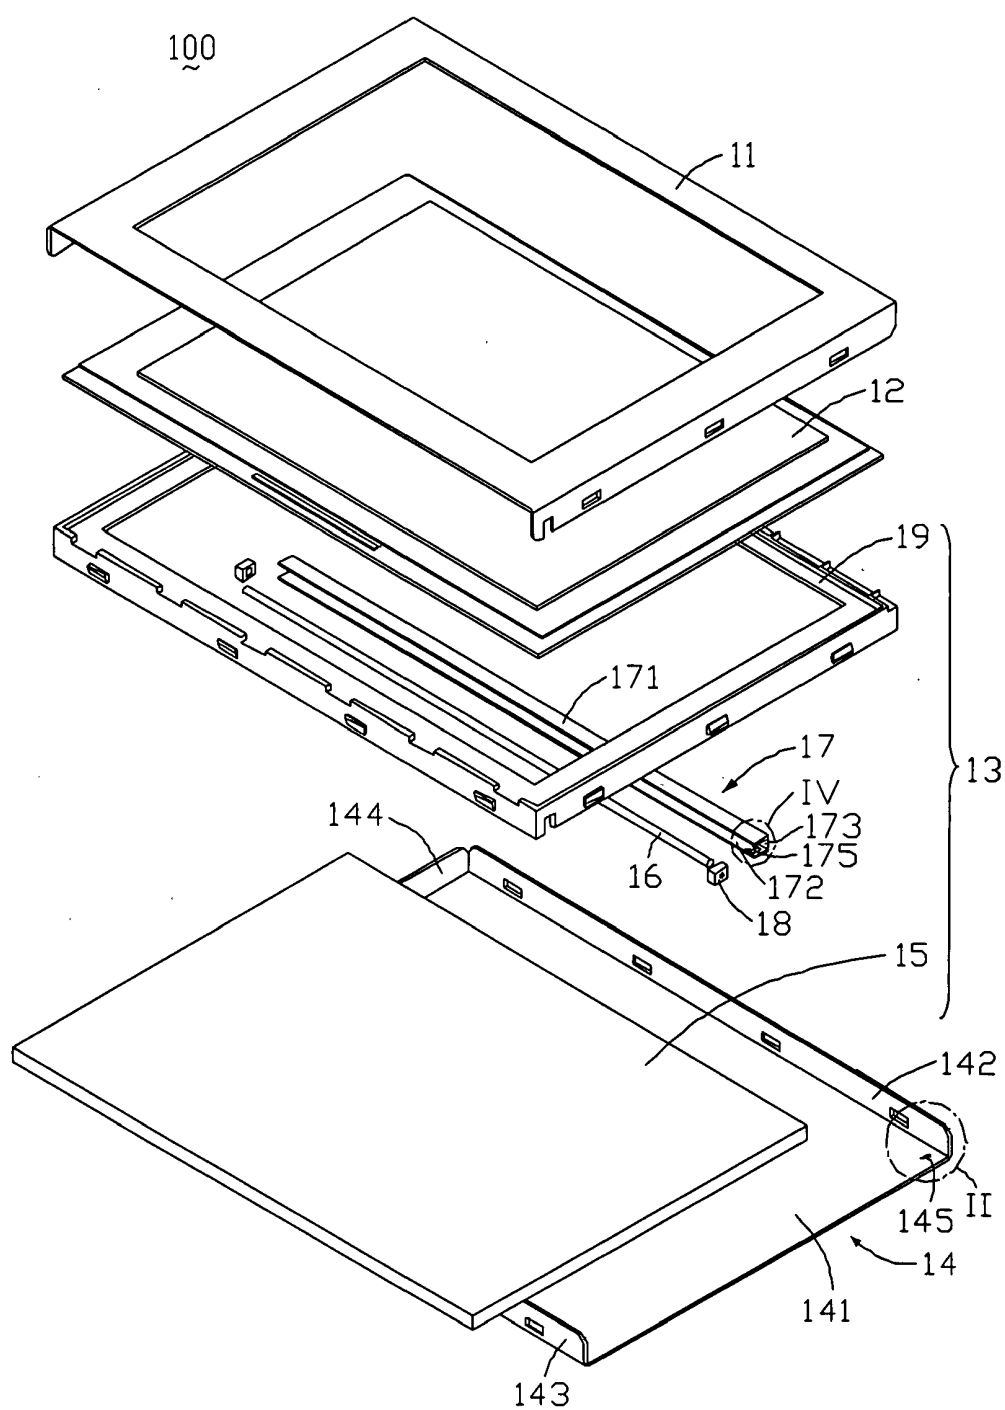


FIG. 1

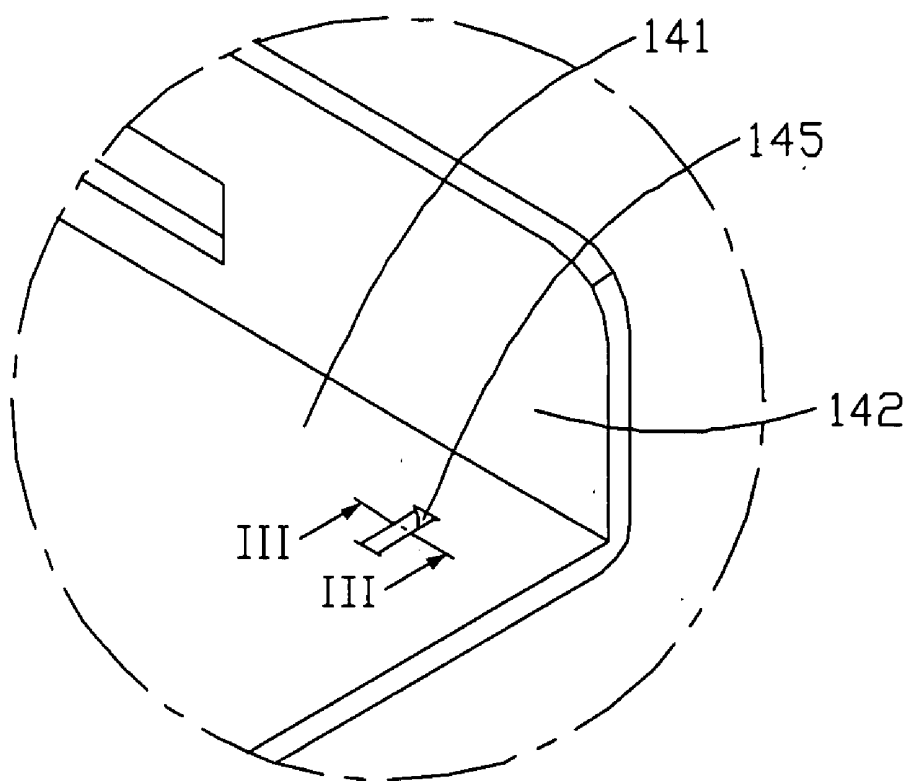


FIG. 2

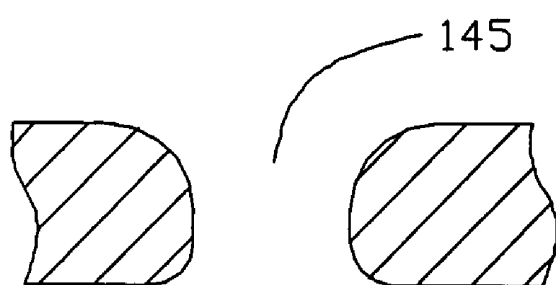


FIG. 3

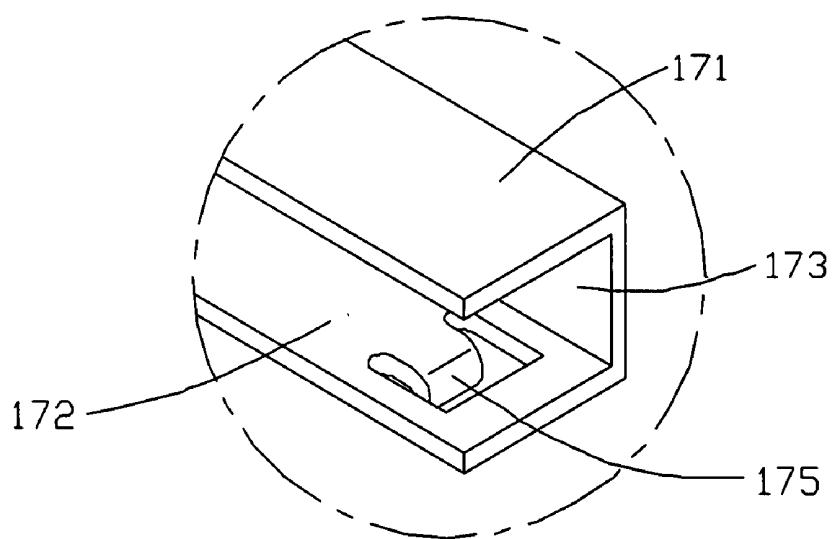


FIG. 4

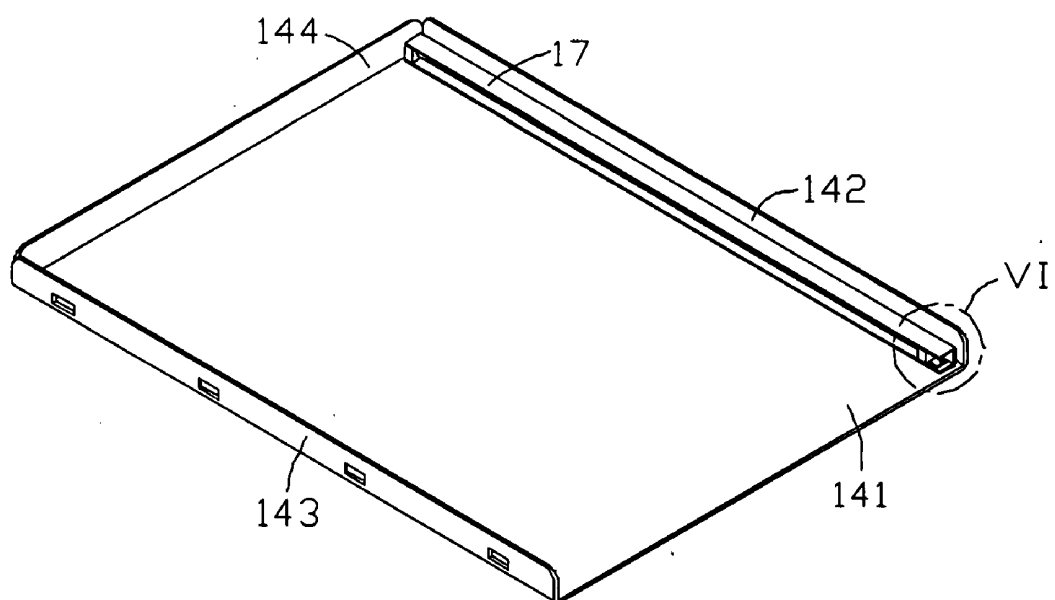


FIG. 5

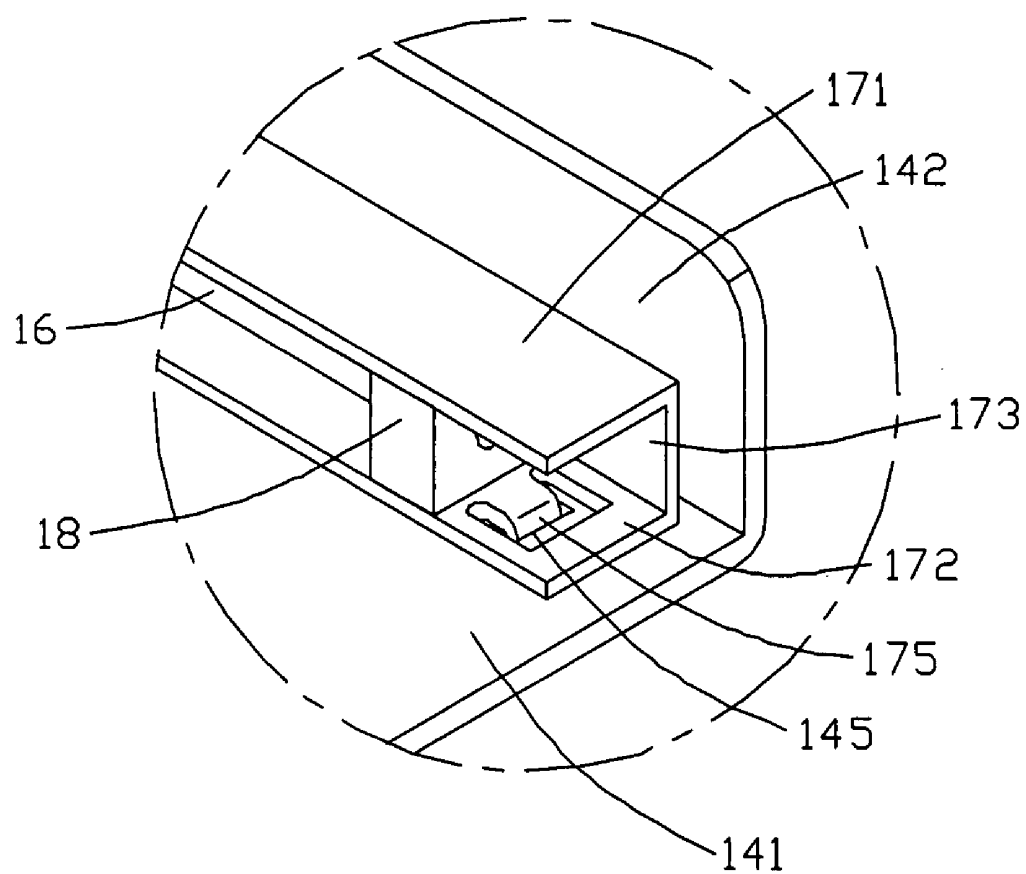


FIG. 6

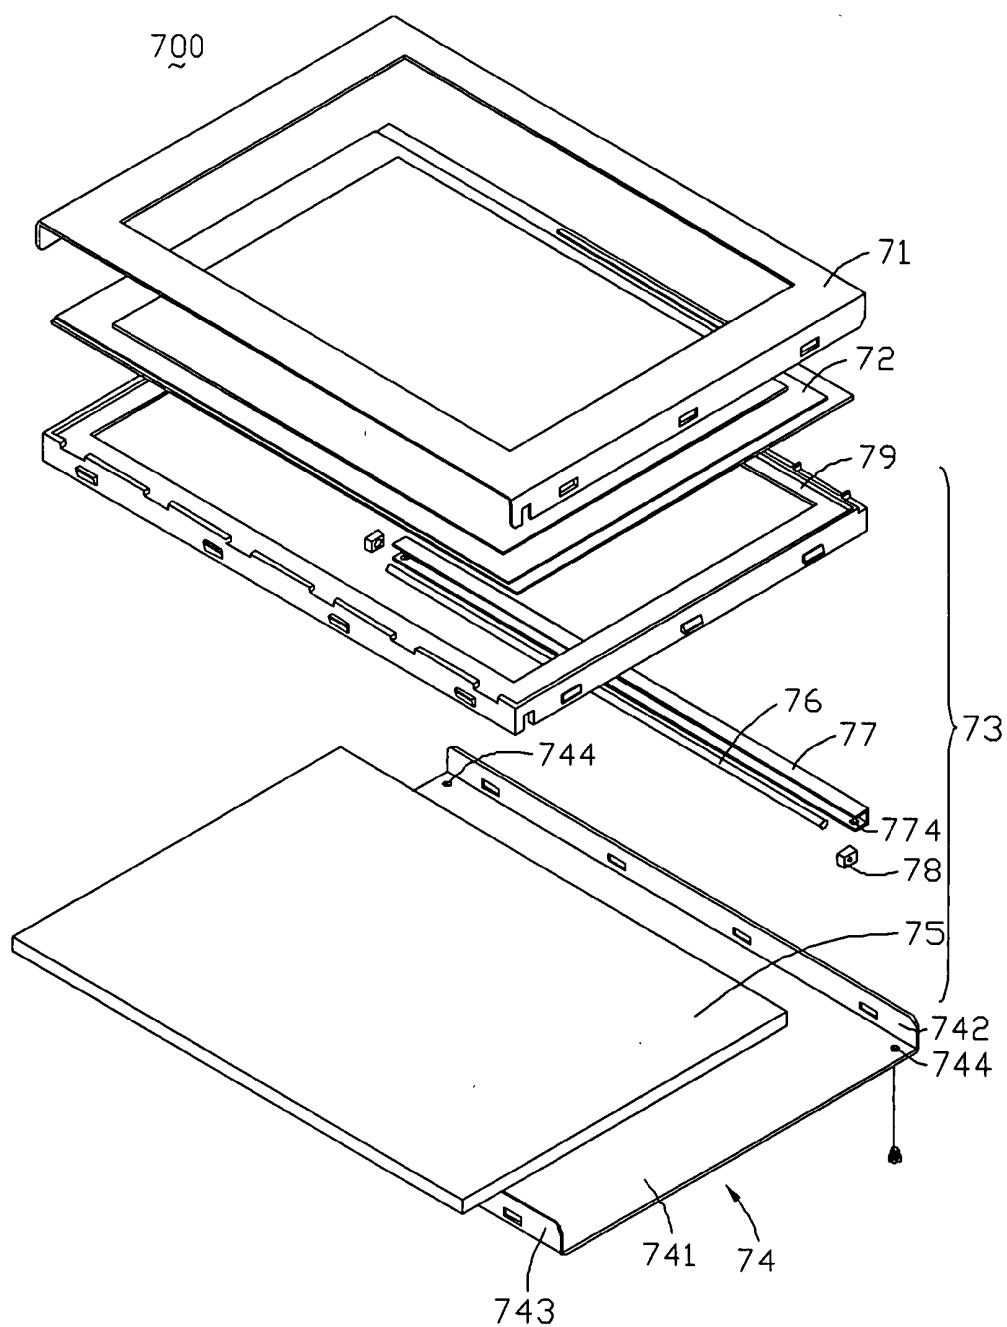


FIG. 7
(RELATED ART)

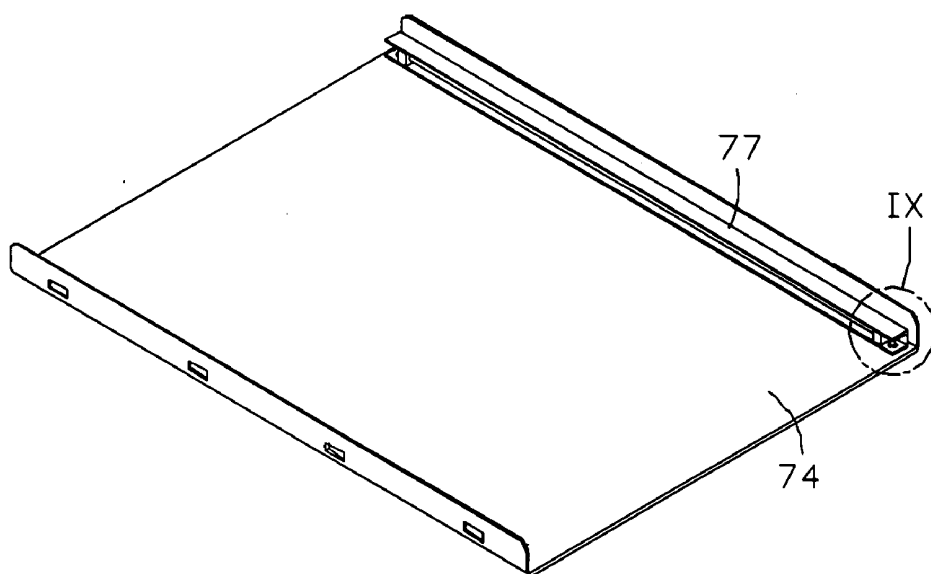


FIG. 8
(RELATED ART)

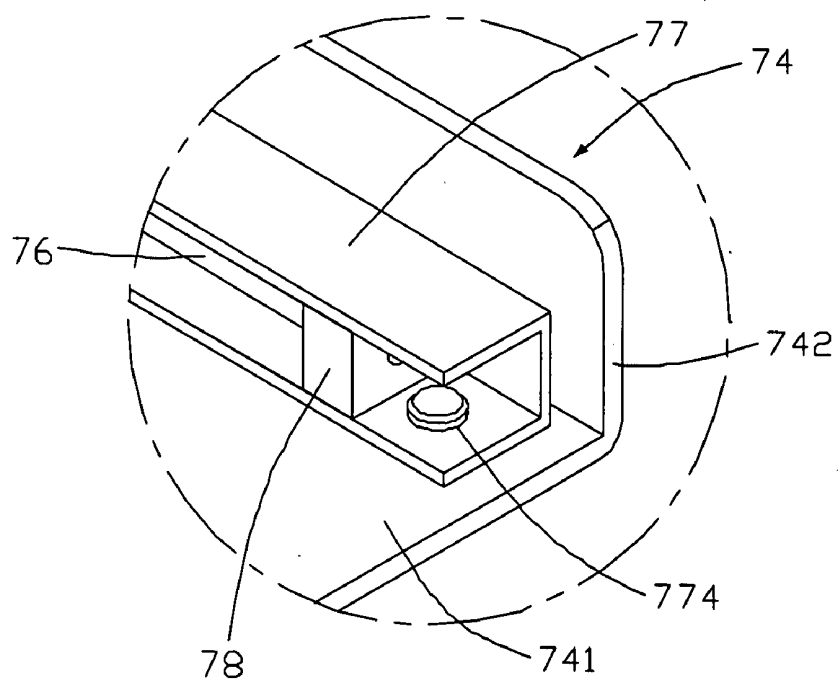


FIG. 9
(RELATED ART)

LIQUID CRYSTAL DISPLAY DEVICE HAVING HOOKS FOR FIXING LAMP

FIELD OF THE INVENTION

[0001] The present invention relates to liquid crystal display (LCD) devices, and particularly to an LCD device in which a lamp reflector is fixed by means of a hook engaging in a hole.

BACKGROUND OF THE INVENTION

[0002] A typical LCD has the advantages of portability, low power consumption, and low radiation, and has been widely used in various portable information products such as notebooks, personal digital assistants (PDAs), video cameras and the like.

[0003] Referring to FIG. 7, this shows a conventional LCD device. The LCD device **700** includes a metal top bezel **71**, an LCD panel **72**, a backlight unit **73** for providing uniform light for the LCD panel **72**, and a metal bottom frame **74**. The top bezel **71** and the bottom frame **74** cooperatively form a space to accommodate the LCD panel **72** and the backlight unit **73**.

[0004] The bottom frame **74** includes a rectangular bottom plate **741**, a first side plate **742**, and a second side plate **743** opposite to the first side plate **742**. The side plates **742**, **743** perpendicularly extend from the bottom plate **741**. The bottom plate **741** has two first screw holes **744** formed in two corners thereof adjacent to the first side plate **742**.

[0005] The backlight unit **73** includes a light guide plate **75**, a linear lamp **76** adjacent to the light guide plate **75**, a metal reflector **77**, a pair of rubber stoppers **78**, and a plastic frame **79**. The reflector **77** essentially surrounds three sides of the lamp **76**, and reflects light emitted from the lamp **76** toward the light guide plate **75**. The light guide plate **75** receives the light from the lamp **76** and the reflector **77**, and guides the light to emit from a top surface of the light guide plate **75**. The rubber stoppers **78** are engaged around two ends of the lamp **76** to protect and fix the lamp **76**. The plastic frame **79** is used to accommodate the light guide plate **75**, the lamp **76**, the reflector **77**, and the rubber stoppers **78**.

[0006] The reflector **77** includes two second screw holes **774** corresponding to the first screw holes **744**, respectively.

[0007] Referring also to FIG. 8 and FIG. 9, when the LCD device **700** is assembled, the rubber stoppers **78** are engaged around the ends of the lamp **76** respectively. The rubber stoppers **78** together with the lamp **76** are received in the reflector **77**. The reflector **77** is placed on the bottom plate **741** adjacent to the first side plate **742**. The first screw holes **744** are aligned with the second screw holes **774** respectively. The reflector **77** is fixed to the bottom frame **74** by means of engagement of two screws (only one shown, not labeled) in the corresponding first screw holes **741** and the corresponding second screw holes **774**.

[0008] The need for the screws contributes to making the process of assembly of the LCD device **700** somewhat complicated. It is desired to provide a new LCD device which can overcome this above-described deficiency.

SUMMARY

[0009] In one embodiment, a liquid crystal display device includes a first frame, a liquid crystal panel, a backlight unit, and a second frame cooperating with the first frame to define a space receiving the liquid crystal panel and the backlight

unit. The backlight unit includes a reflector and a lamp received in the reflector. The reflector includes a hook. The second frame includes a through hole. The hook engages in the through hole and thereby facilitating fixing of the reflector to the second frame.

[0010] Other novel features and advantages will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 is an exploded, isometric view of a liquid crystal display (LCD) device according to an exemplary embodiment of the present invention, the LCD device including a reflector and a bottom frame.

[0012] FIG. 2 is an enlarged view of a circled portion II of FIG. 1.

[0013] FIG. 3 is an enlarged, cross-sectional view taken along line III-III of FIG. 2.

[0014] FIG. 4 is an enlarged view of a circled portion IV of FIG. 1.

[0015] FIG. 5 is an assembled view of the reflector and the bottom frame of the LCD device of FIG. 1.

[0016] FIG. 6 is an enlarged view of a circled portion VI of FIG. 5.

[0017] FIG. 7 is an exploded, isometric view of a conventional LCD device, the LCD device including a reflector and a bottom frame.

[0018] FIG. 8 is an assembled view of the reflector and the bottom frame of the LCD device of FIG. 7.

[0019] FIG. 9 is an enlarged view of a circled portion IX of FIG. 8.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0020] Reference will now be made to the drawings to describe preferred and exemplary embodiments of the present invention in detail.

[0021] Referring to FIG. 1, an LCD device **100** according to an exemplary embodiment of the present invention is shown. The LCD device **100** includes a top bezel **11**, an LCD panel **12**, a backlight unit **13**, and a bottom frame **14**. The top bezel **11** and the bottom frame **14** cooperatively form a space to accommodate the LCD panel **12** and the backlight unit **13**.

[0022] The bottom frame **14** is typically made of iron or another kind of metal. The bottom frame **14** includes a rectangular bottom plate **141**, a first side plate **142**, a second side plate **143**, and a third side plate **144**. The three side plates **142**, **143**, **144** respectively extend up from the bottom plate **141**. The first side plate **142** is opposite to the second side plate **143**. The third side plate **144** connects with both the first side plate **142** and the second side plate **143**. The bottom plate **141** has a rectangular through hole **145** at a corner thereof adjacent to the first side plate **142** and far from the third side plate **144**.

[0023] Referring also to FIG. 2 and FIG. 3, a horizontal area of a middle portion of the through hole **145** is less than a horizontal area of each of an upper portion of the through hole **145** and a lower portion of the through hole **145**.

[0024] The backlight unit **13** includes a light guide plate (LGP) **15** for guiding light, a linear lamp **16** adjacent to the light guide plate **15**, a metal reflector **17**, a pair of rubber stoppers **18**, and a plastic frame **19**.

[0025] The lamp 16 can for example be a cold cathode fluorescent lamp (CCFL). The reflector 17 essentially surrounds three sides of the lamp 16, and reflects light radiating from the lamp 16 toward the light guide plate 15. The rubber stoppers 18 are engaged around two ends of the lamp 16 respectively, to protect and fix the lamp 16. The plastic frame 19 is used to accommodate the light guide plate 15, the lamp 16, the reflector 17, and the rubber stoppers 18.

[0026] Referring also to FIG. 4, the reflector 17 includes an upper wall 171, a lower wall 172 opposite to the upper wall 171, a lateral wall 173 perpendicularly interconnecting the upper wall 171 and the lower wall 172, and a hook 175 formed at an end of the lower wall 172.

[0027] The hook 175 corresponds to the through hole 145. A transverse cross-section of the hook 175, taken at any part of the hook 175 from a base portion thereof to a free end thereof, is rectangular. A thickness of the hook 175 is substantially the same as or slightly greater than the horizontal area of the middle portion of the through hole 145, and is less than each of the horizontal area of the upper portion of the through hole 145 and the horizontal area of the lower portion of the through hole 145. Thereby, the through hole 145 can interferentially receive the hook 175 therein such that the hook 175 is firmly engaged in the through hole 145.

[0028] Referring also to FIG. 5 and FIG. 6, assembly of the LCD device 100 is as follows. The two rubber stoppers 18 are engaged around the two ends of the lamp 16 respectively. The lamp 16 with the rubber stoppers 18 is received in the reflector 17, with the rubber stoppers 18 being deformably and interferentially received between the upper and lower walls 171, 172 of the reflector 17. An end of the reflector 17 without the hook 175 is placed against an inner surface of the third side plate 144. The hook 175 is pushed into the through hole 145 and is interferentially fixed in the through hole 145. Thus, the reflector 17 having the lamp 16 and the rubber stoppers 18 is fixed to the bottom frame 14. Next, the LGP 15 and the plastic frame 19 are received in the bottom frame 14, with a long edge of the LGP 15 facing the lamp 16. Detents (not labeled) of the plastic frame 19 are engaged in slots (not labeled) of the first and second side plates 142, 143 of the bottom frame 14. Thus, a bottom cavity (not labeled) of the plastic frame 19 accommodates the LGP 15 and the reflector 17. Then the LCD panel 12 is fitted on top of the plastic frame 19. Finally, the top bezel 11 is attached to the plastic frame 19, with other detents (not labeled) of the plastic frame 19 engaging in slots (not labeled) of the top bezel 11. Thus, the LCD device 100 is assembled.

[0029] Unlike conventional LCD devices, the reflector 17 of the LCD device 100 is fixed in position by means of the engagement of the hook 175 in the through hole 145. The process of assembly of the LCD device 100 is simple and convenient.

[0030] Further or alternative embodiments may include the following. In one example, the hook 175 can be formed at any suitable position of the lower wall 172 or of the lateral wall 173. Correspondingly, the through hole 145 can be formed in the bottom plate 141 or the first side plate 142 according to the position of the hook 175.

[0031] In another example, the bottom frame 14 can include two or more through holes 145, and the reflector 17 can include two or more hooks 175 formed thereat according to the positions of the through holes 145.

[0032] In a further example, the through hole 145 can be triangular, round, or have another suitable shape. Correspondingly, the transverse cross-section of the hook 175 can be triangular, round, or have another suitable shape.

[0033] In a still further example, the through hole 145 can be formed in the lower wall 172 or the lateral wall 173 of the reflector 17. Correspondingly, the hook 175 can be formed at the bottom plate 141 or the first side plate 142 of the bottom frame 14.

[0034] It is to be further understood that even though numerous characteristics and advantages of preferred and exemplary embodiments have been set out in the foregoing description, together with details of structures and functions associated with the embodiments, the disclosure is illustrative only, and changes may be made in detail (including in matters of shape, size, and arrangement of parts) within the principles of the invention to the full extent indicated by the broad general meaning of the terms in which the appended claims are expressed.

What is claimed is:

1. A liquid crystal display device comprising:
 - a first frame;
 - a liquid crystal panel;
 - a backlight unit configured for providing uniform light for the liquid crystal panel, the backlight unit comprising a reflector and a lamp received in the reflector, the reflector comprising a hook; and
 - a second frame cooperating with the first frame to define a space receiving the liquid crystal panel and the backlight unit, the second frame comprising a through hole, the hook engaging in the through hole and thereby facilitating fixing of the reflector to the second frame.
2. The liquid crystal display device of claim 1, wherein the reflector comprises an upper wall, a lower wall, and a lateral wall between the upper wall and the lower wall.
3. The liquid crystal display device of claim 2, wherein the second frame comprises a rectangular bottom plate, a first side plate and a second side plate extending from opposite sides of the bottom plate, and a third side plate extending from another side of the bottom plate between the first side plate and the second side plate.
4. The liquid crystal display device of claim 3, wherein the through hole is formed in the second frame at a position thereof where the second frame and the reflector abut each other.
5. The liquid crystal display device of claim 4, wherein the through hole is formed at a corner of the bottom plate adjacent to the first side plate and far from the third side plate.
6. The liquid crystal display device of claim 5, wherein one end of the reflector abuts against the third side plate.
7. The liquid crystal display device of claim 6, wherein a thickness of the hook is substantially the same as or slightly greater than a corresponding narrowest width of the through hole.
8. The liquid crystal display device of claim 7, wherein a transverse cross-sectional of the hook has a shape selected from the group consisting of rectangular, triangular, and round.
9. The liquid crystal display device of claim 8, further comprising two rubber stoppers engaged around two ends of the lamp, wherein the rubber stoppers together with the lamp are received in the reflector.

10. The liquid crystal display device of claim **1**, wherein the backlight unit further comprises a light guide plate and a plastic frame, and the plastic frame accommodates the light guide plate and the reflector.

11. The liquid crystal display device of claim **1**, wherein the second frame is made of iron or another metal.

12. The liquid crystal display device of claim **1**, wherein the lamp is a cold cathode fluorescent lamp.

13. A liquid crystal display device comprising:

a first frame;

a liquid crystal panel;

a backlight unit configured for providing uniform light for the liquid crystal panel, the backlight unit comprising a reflector and a lamp received in the reflector, the reflector comprising a through hole; and

a second frame cooperating with the first frame to define a space receiving the liquid crystal panel and the backlight unit, the second frame comprising a hook, the hook engaging in the through hole and thereby facilitating fixing of the reflector to the second frame.

14. The liquid crystal display device of claim **13**, wherein the reflector comprises an upper wall, a lower wall, and a lateral wall between the upper wall and the lower wall.

15. The liquid crystal display device of claim **14**, wherein the second frame comprises a rectangular bottom plate, a

first side plate and a second side plate extending from opposite sides of the bottom plate, and a third side plate extending from another side of the bottom plate between the first side plate and the second side plate.

16. The liquid crystal display device of claim **15**, wherein the through hole is formed in the reflector at a position thereof where the second frame and the reflector abut each other.

17. The liquid crystal display device of claim **16**, wherein an end of the reflector abuts against the third side plate.

18. The liquid crystal display device of claim **17**, wherein a thickness of the hook is substantially the same as or slightly greater than a corresponding narrowest width of the through hole.

19. The liquid crystal display device of claim **18**, wherein a transverse cross-section of the hook has a shape selected from the group consisting of rectangular, triangular, and round.

20. The liquid crystal display device of claim **19**, further comprising two rubber stoppers engaged around two ends of the lamp, the rubber stoppers together with the lamp being received in the reflector.

* * * * *

专利名称(译)	具有用于固定灯的钩子的液晶显示装置		
公开(公告)号	US20080043168A1	公开(公告)日	2008-02-21
申请号	US11/894131	申请日	2007-08-20
[标]申请(专利权)人(译)	群创光电股份有限公司		
申请(专利权)人(译)	群创光电股份有限公司.		
当前申请(专利权)人(译)	群创光电		
[标]发明人	HSIAO CHIH CHUNG		
发明人	HSIAO, CHIH-CHUNG		
IPC分类号	G02F1/13357		
CPC分类号	G02B6/009 G02B6/0031		
优先权	095130447 2006-08-18 TW		
其他公开文献	US7746422		
外部链接	Espacenet USPTO		

摘要(译)

示例性液晶显示装置 (100) 包括第一框架 (11) , 液晶面板 (12) , 用于为液晶面板提供均匀光的背光单元 (13) , 以及与之配合的第二框架 (14) 第一框架, 用于限定容纳液晶面板和背光单元的空间。背光单元包括反射器 (17) 和容纳在反射器中的灯 (16) 。反射器包括钩子 (175) 。第二框架包括通孔 (145) 。钩子接合在通孔中, 从而便于将反射器固定到第二框架上。

