



US 20020101553A1

(19) **United States**

(12) **Patent Application Publication**

Enomoto et al.

(10) **Pub. No.: US 2002/0101553 A1**

(43) **Pub. Date: Aug. 1, 2002**

(54) **LIQUID-CRYSTAL DISPLAY DEVICE
HAVING A SHIELD SHIELDING AN
ELECTROMAGNETIC WAVE RADIATED
FROM ONE OF A DRIVER AND AN
ELECTRODE LEAD-OUT LINE**

(30) **Foreign Application Priority Data**

Jan. 31, 2001 (JP) 2001-024594

Publication Classification

(75) Inventors: **Hiromi Enomoto**, Kawasaki (JP);
Noriyuki Ohashi, Kawasaki (JP); **Hong
Yong Zhang**, Kawasaki (JP)

(51) **Int. Cl.⁷** G02F 1/1333

(52) **U.S. Cl.** 349/110

Correspondence Address:

Patrick G. Burns, Esq.
GREER, BURNS & CRAIN, LTD.
Suite 2500
300 South Wacker Dr.
Chicago, IL 60606 (US)

ABSTRACT

(73) Assignee: **FUJITSU LIMITED**

(21) Appl. No.: **09/930,417**

(22) Filed: **Aug. 11, 2001**

A liquid-crystal display device is provided. The liquid-crystal display device comprises a first substrate having a pixel electrode, a signal line, a scanning line, and a driver driving one of the signal line and the scanning line, a second substrate opposing the first substrate and having a common electrode, a liquid-crystal layer formed between the pixel electrode and the common electrode, and a first shield placed opposite the driver so as to shield an electromagnetic wave radiated from the driver.

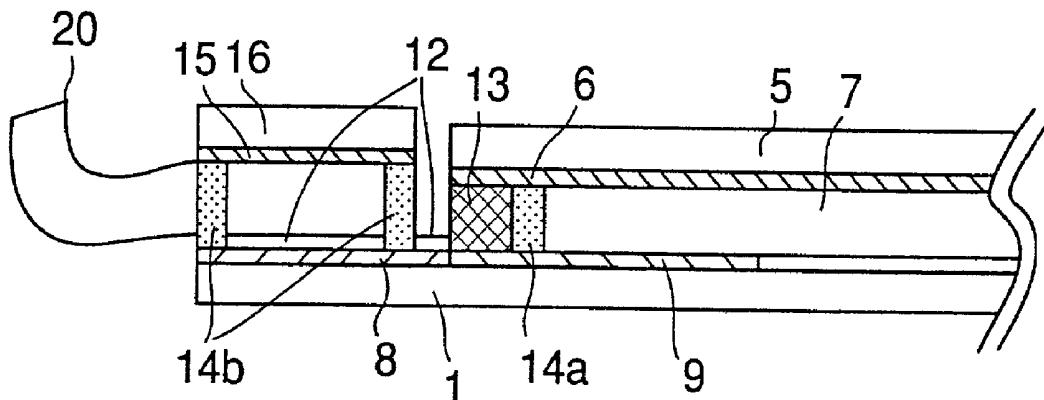


FIG. 1 PRIOR ART

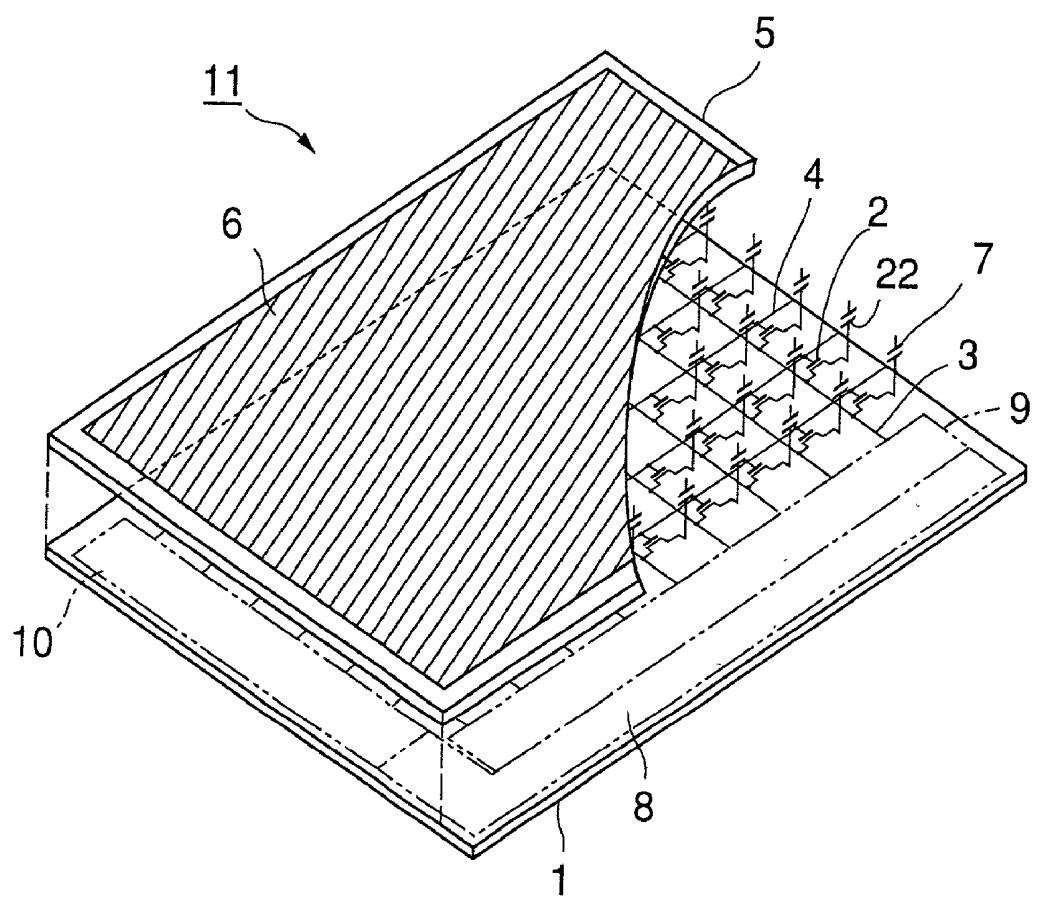


FIG. 2 PRIOR ART

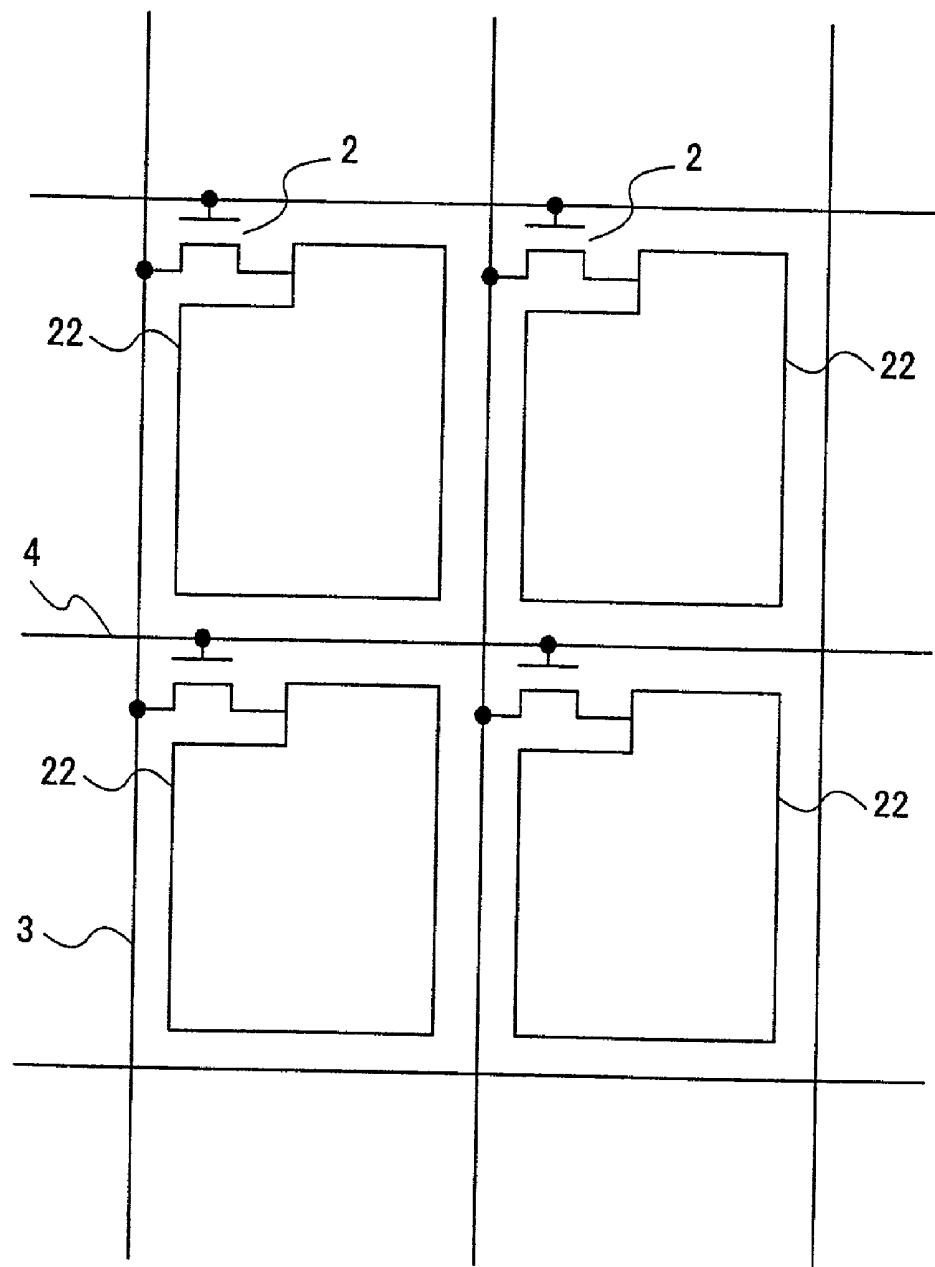


FIG. 3 PRIOR ART

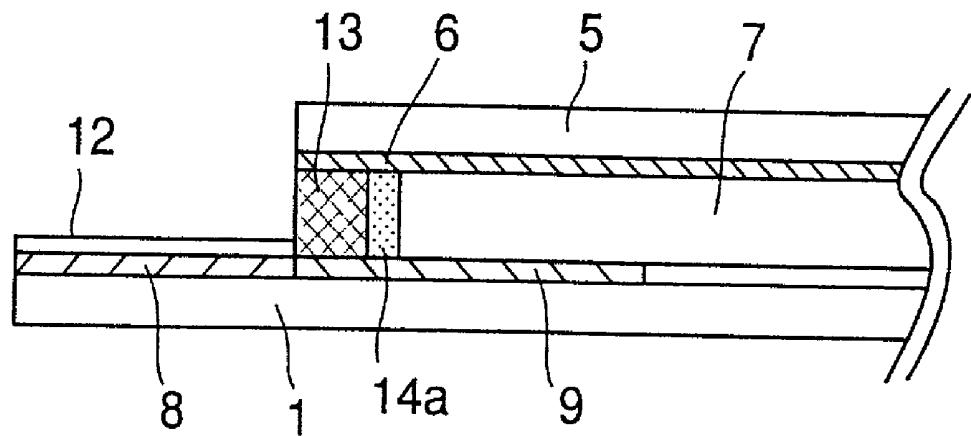


FIG. 4

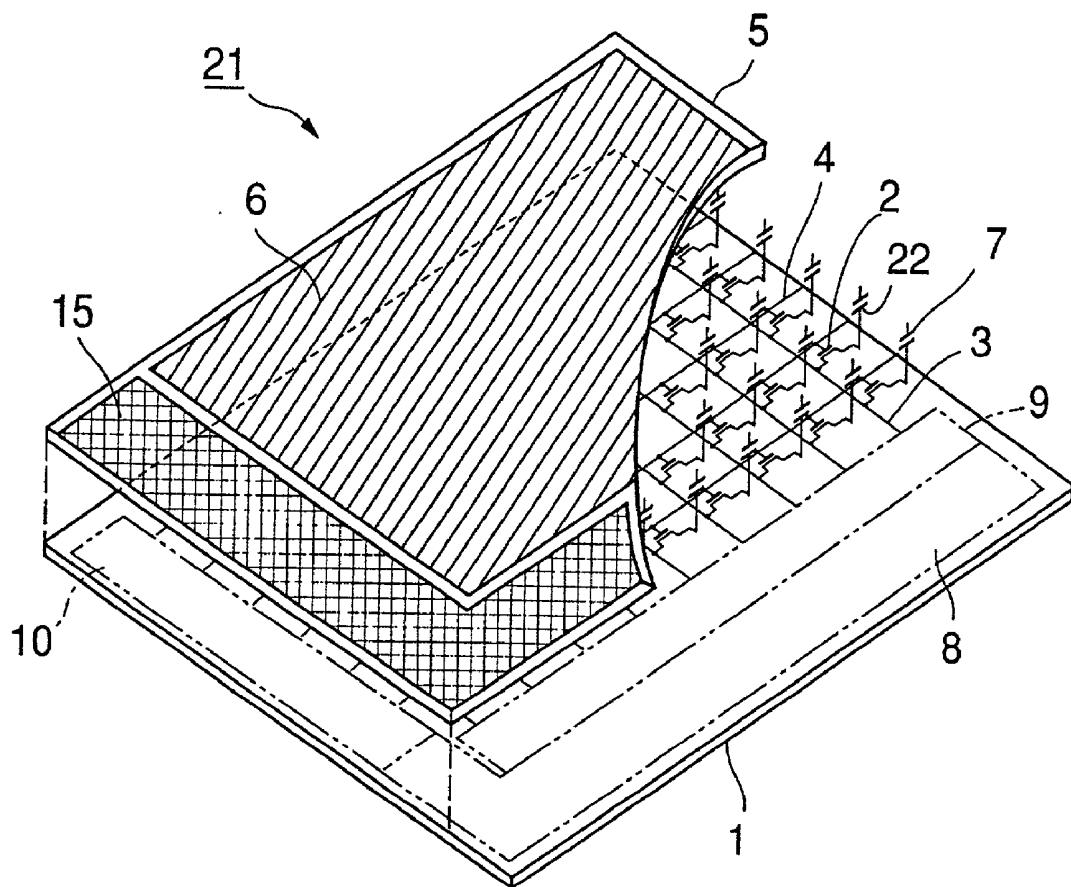


FIG. 5

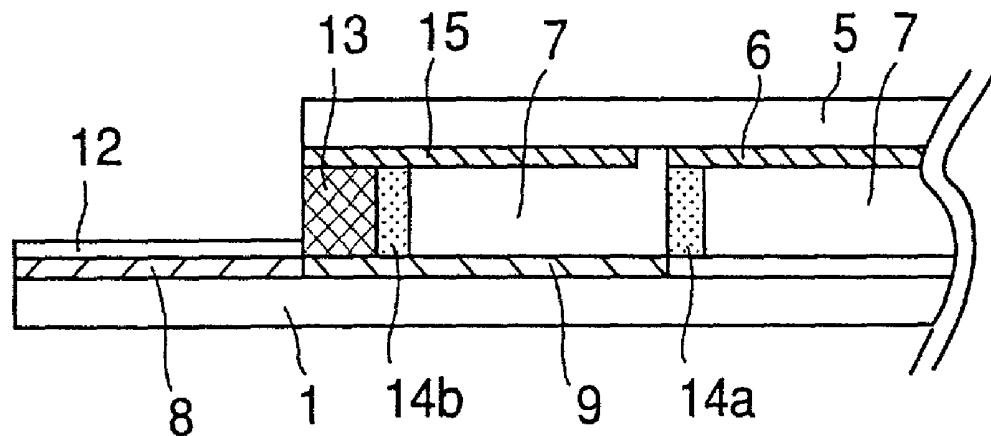


FIG. 6

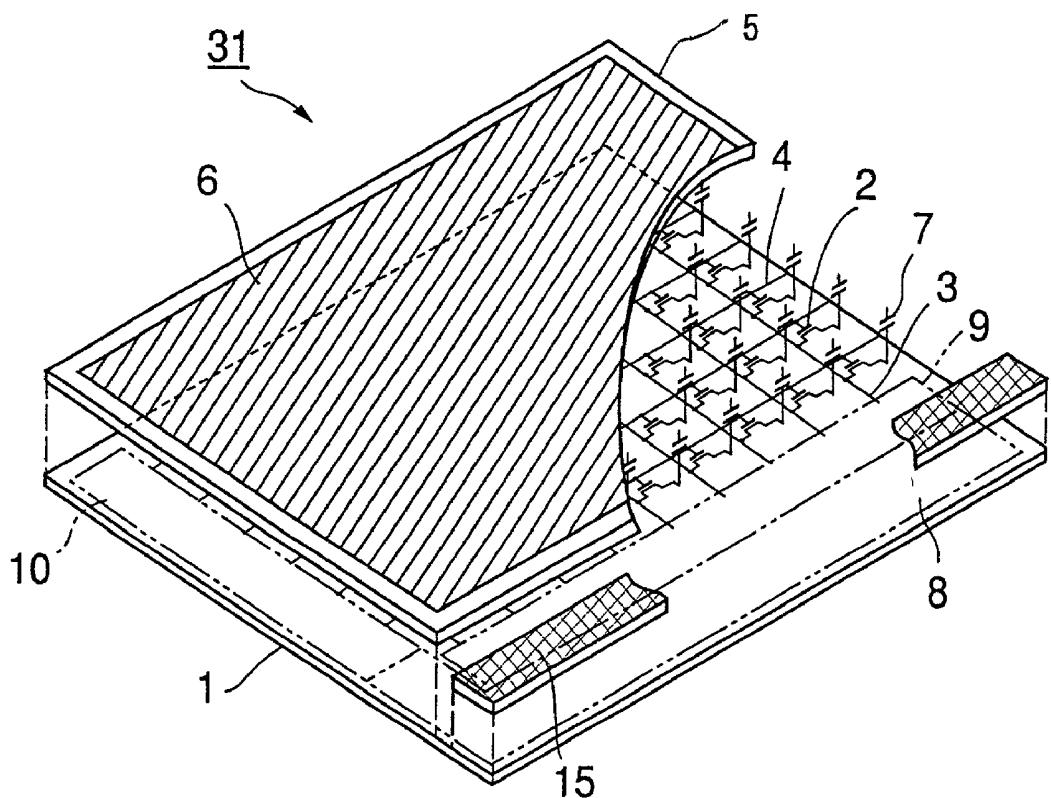


FIG. 7

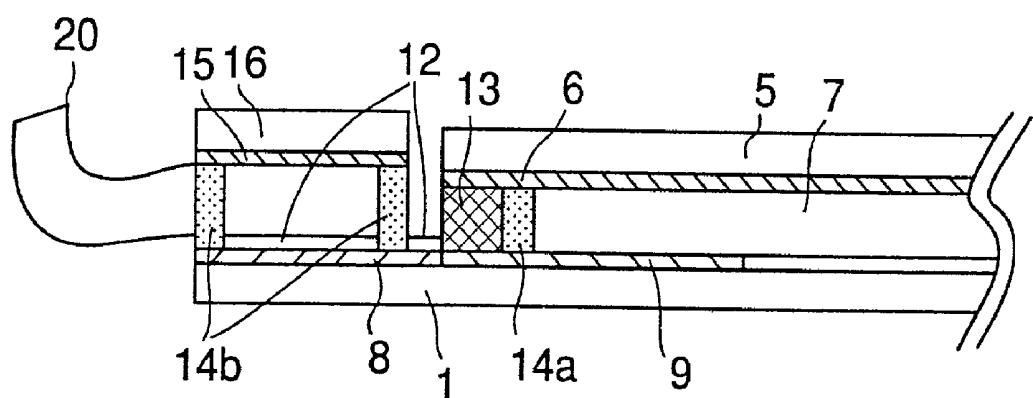


FIG. 8

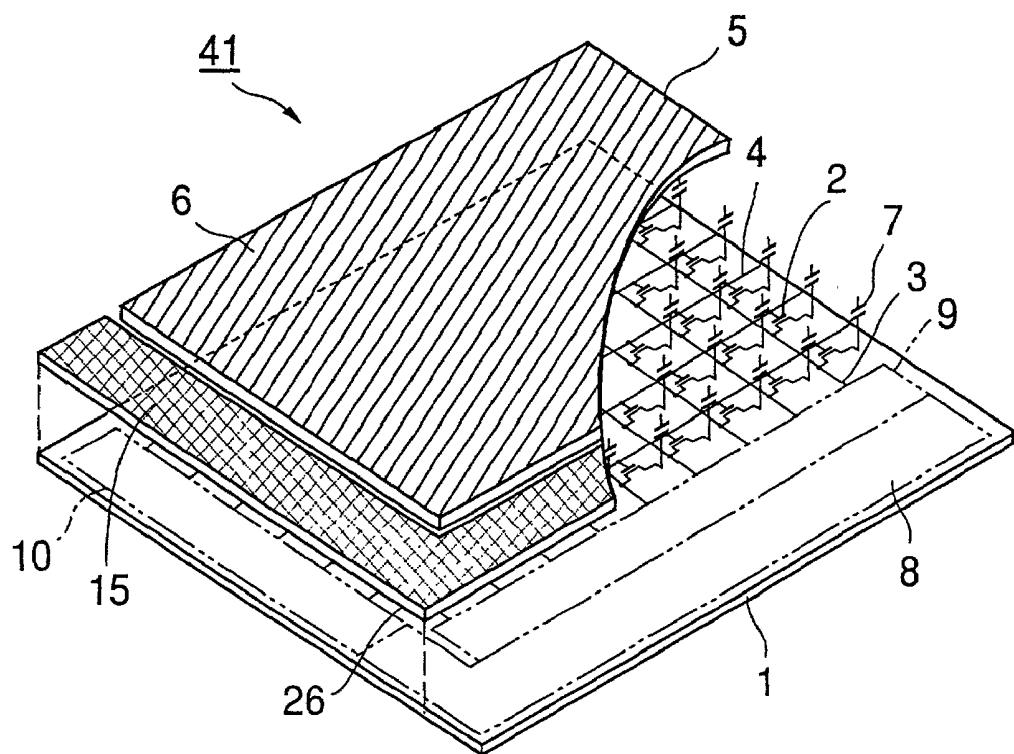


FIG. 9

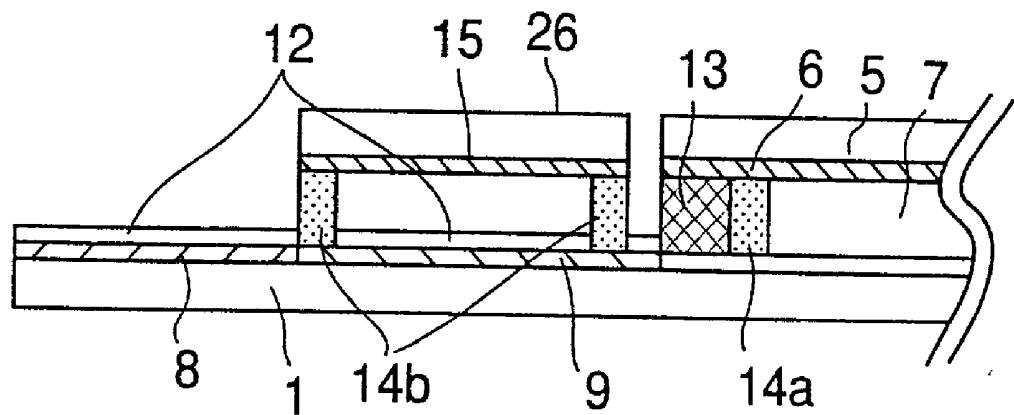


FIG. 10

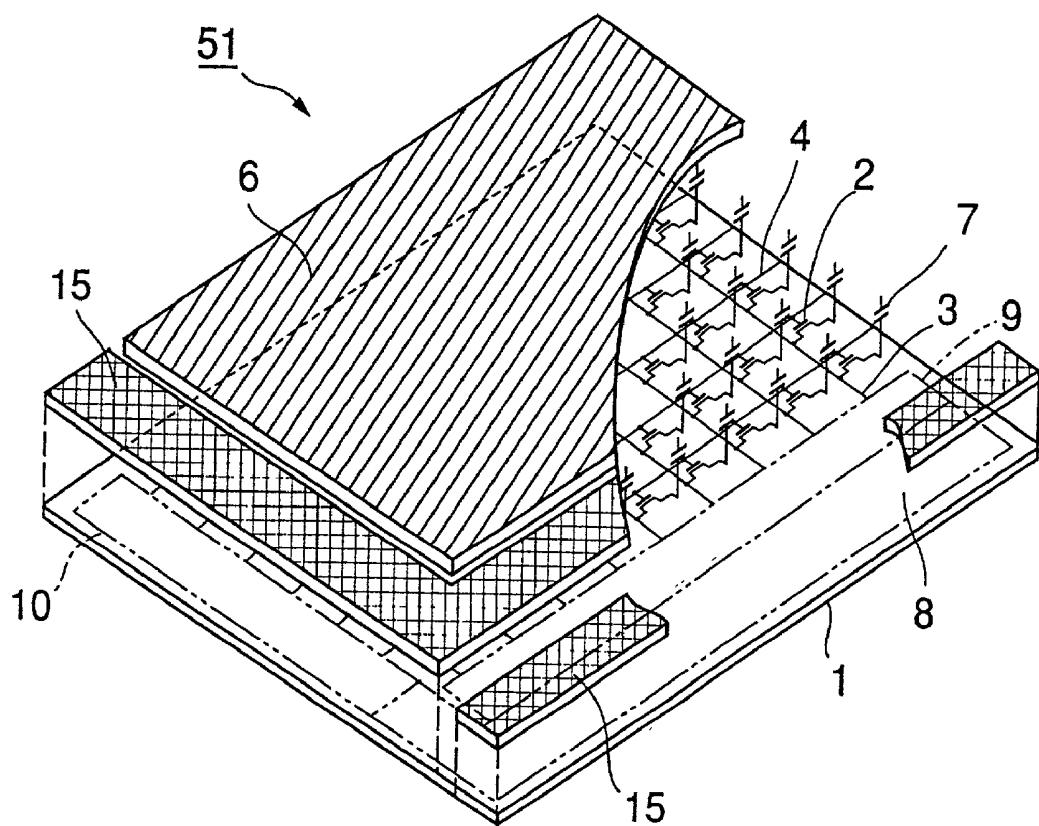


FIG. 11

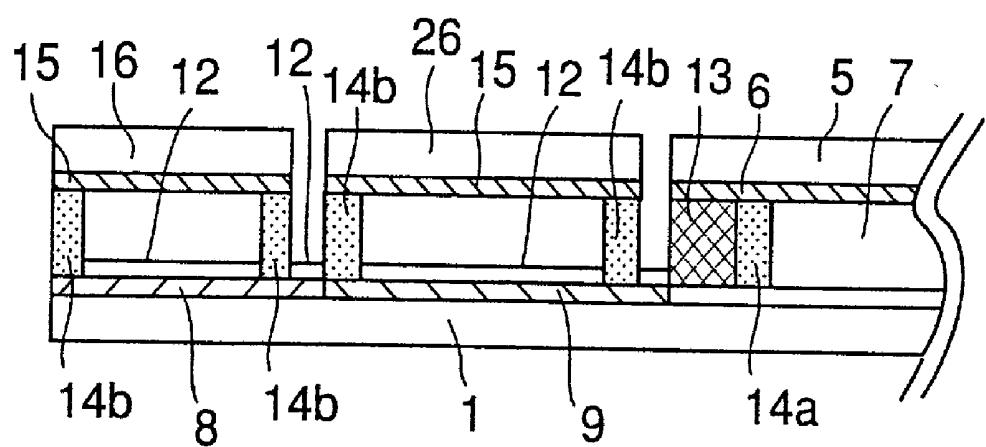


FIG. 12

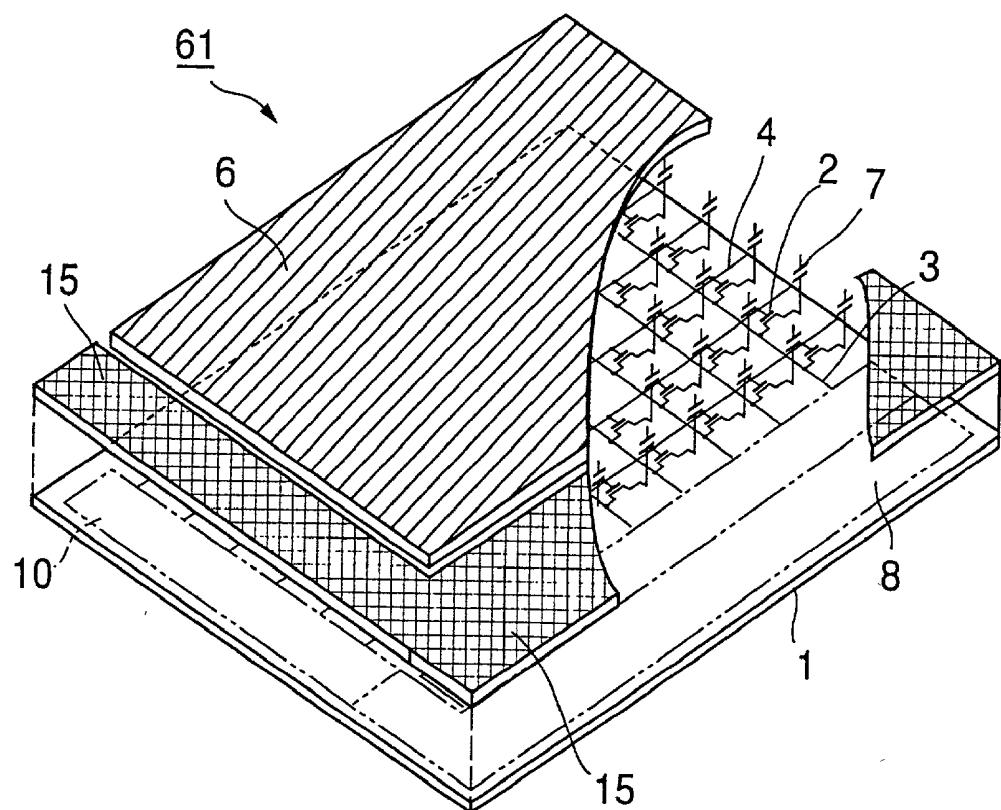


FIG. 13

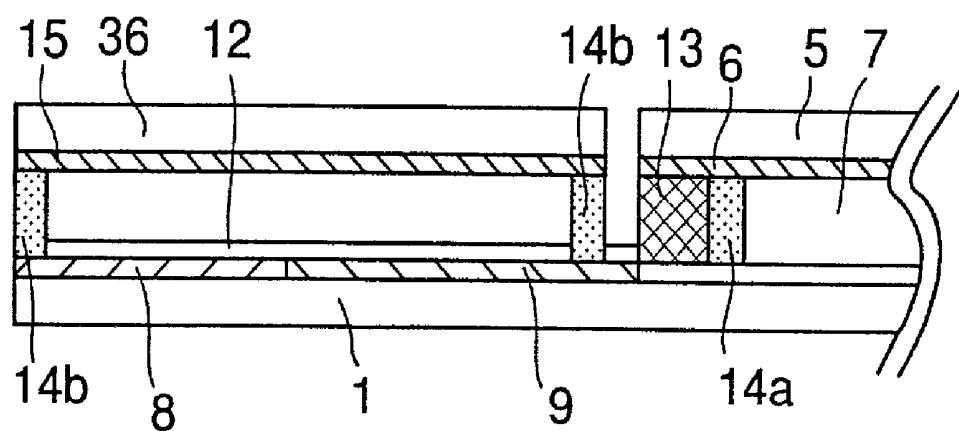


FIG. 14


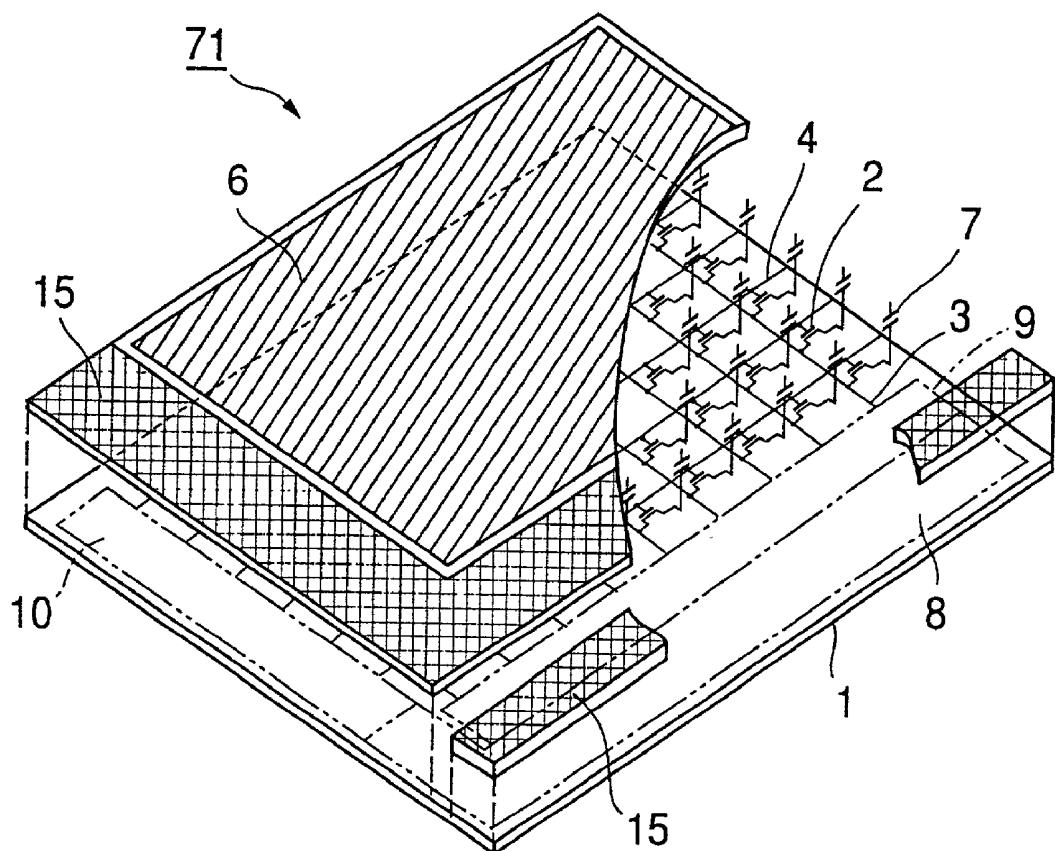


FIG. 15

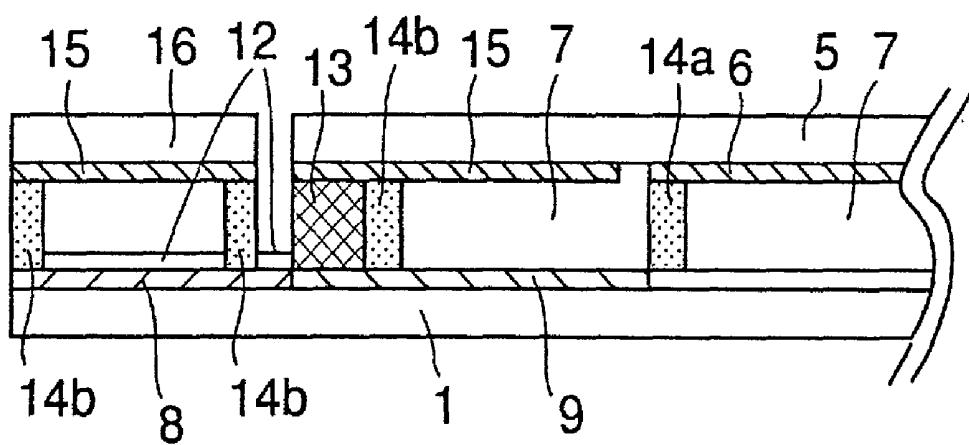

LIQUID-CRYSTAL DISPLAY DEVICE HAVING A SHIELD SHIELDING AN ELECTROMAGNETIC WAVE RADIATED FROM ONE OF A DRIVER AND AN ELECTRODE LEAD-OUT LINE

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention generally relates to a liquid-crystal display device, and more particularly, to a liquid-crystal display device displaying an image on a liquid-crystal panel.

[0003] 2. Description of the Related Art

[0004] Currently, an active matrix liquid-crystal display device represented by a TFT (thin film transistor) liquid-crystal panel is expected to spread as a display device for general household TVs and OA apparatuses. This is because such an active matrix liquid-crystal display device can be easily made thin and light compared to a CRT, and at the same time, can display no poorer image than a CRT.

[0005] In light of the advantage of being thin and light, the active matrix liquid-crystal display device is expected to be applied, not only to a portable information device such as a note PC, but to various multimedia information devices. Besides, a polysilicon LCD realizing a narrow frame is expected to become prevalent with stronger measures being implemented against an EMI (electromagnetic interference).

[0006] A description will be given hereinbelow of a structure of such an active matrix liquid-crystal display device displaying one of the highest-quality images among flat panel displays. **FIG. 1** is an illustration showing a structure of the conventional liquid-crystal display device. As shown in **FIG. 1**, a conventional liquid-crystal display device **11** comprises a TFT substrate **1**, TFTs (thin-film transistors) **2**, signal lines **3**, scanning lines **4**, a common electrode substrate **5**, a common electrode **6**, a liquid-crystal layer **7**, an electrode lead-out line **8**, a signal-line drive circuit **9**, a scanning-line drive circuit **10**, and pixel electrodes **22**. The TFTs **2**, the signal lines **3**, the scanning lines **4**, the common electrode **6**, the pixel electrodes **22**, the liquid-crystal layer **7** provided between the pixel electrodes **22** and the common electrode **6**, compose a liquid-crystal panel.

[0007] **FIG. 2** is a plan view showing a panel structure in the liquid-crystal display device **11** shown in **FIG. 1**. As shown in **FIG. 2**, switching elements each consisting of the TFT **2**, the signal lines **3**, the scanning lines **4**, and the pixel electrodes **22** each connected to the TFT **2**, are formed on the TFT substrate **1**. Further, as shown in **FIG. 1**, the signal-line drive circuit **9** driving the signal lines **3**, the scanning-line drive circuit **10** driving the scanning lines **4**, and the electrode lead-out line **8** are formed on peripheral parts of the TFT substrate **1**. In addition, the common electrode **6** made of an ITO (a transparent electrode) or a color filter is formed on a glass substrate on the common electrode substrate **5**.

[0008] Also as shown in **FIG. 2**, the TFTs **2** and the pixel electrodes **22** are formed in the form of a matrix on the TFT substrate **1**. The signal line **3** supplies an image signal to the pixel electrode **22** via the TFT **2**. The scanning line **4** transmits a control signal to a gate of the TFT **2**, the control signal turning on/off the TFT **2** which is connected to the pixel electrode **22** so as to regulate writing of data to each

pixel. It is noted that a unit like the liquid-crystal display device **11** that drives the signal lines **3** and the scanning lines **4** so as to display an image via the pixel electrodes **22** formed in the form of a matrix is referred to as an “active matrix liquid-crystal display device”.

[0009] **FIG. 3** shows a cross-sectional structure of the liquid-crystal display device **11** shown in **FIG. 1**. As shown in **FIG. 3**, the signal-line drive circuit **9** and other elements are formed on the TFT substrate **1**. The liquid-crystal layer **7** is provided between the common electrode **6** formed on the common electrode substrate **5** and the pixel electrodes **22** formed on the TFT substrate **1**. The TFT substrate **1** is electrically connected to the common electrode substrate **5** by a transfer **14a**. In addition, as shown in **FIG. 3**, a sealing portion **13** is provided between the TFT substrate **1** and the common electrode substrate **5** outside the transfer **14a**. The electrode lead-out line **8** and a protective film **12** are formed on a part of the TFT substrate **1** not covered by the common electrode substrate **5**. Signals are transmitted from the electrode lead-out line **8** to external devices by using a cable such as a flexible flat cable.

[0010] In the liquid-crystal display device **11** having the above-described structure, the TFTs **2** in a selected row are turned on so that an image-signal voltage applied to the signal line **3** is written to each of the pixel electrodes **22**, and the information is retained therein by keeping the electric charge until the next time the row is selected. In this course, the inclination of liquid-crystal molecules is so determined in accordance with the retained information as to regulate the amount of light transmission, enabling a gradation display, etc. Further, for a color display, an RGB color filter is used to mix lights.

[0011] The backside of such a liquid-crystal panel as above is provided with a surface light source called backlight. Recently, however, a reflective liquid-crystal panel not requiring this backlight attracts attention in the portable information device technology. The reflective liquid-crystal panel is provided with a layer referred to as a reflective electrode, and displays an image by reflecting externally supplied lights and transmits the lights through a liquid-crystal layer.

[0012] The above-described conventional liquid-crystal display device **11** has a problem that, since only an ITO (a transparent electrode) or an insulating layer is provided above the signal-line drive circuit **9** and the scanning-line drive circuit **10** formed on peripheral parts of the TFT substrate **1**, noises generated from these drive circuits cannot be reduced, which leads to an EMI (electromagnetic interference) especially in a high-frequency operation.

[0013] The same problem occurs with respect to the electrode lead-out line **8** shown in **FIG. 1** and **FIG. 3**.

SUMMARY OF THE INVENTION

[0014] It is a general object of the present invention to provide an improved and useful liquid-crystal display device in which the above-mentioned problems are eliminated.

[0015] A more specific object of the present invention is to provide a liquid-crystal display device in which noises (electromagnetic waves) emitted outwardly can be reduced.

[0016] In order to achieve the above-mentioned objects, there is provided according to one aspect of the present invention a liquid-crystal display device comprising:

[0017] a first substrate having a pixel electrode, a signal line, a scanning line, and a driver driving one of the signal line and the scanning line;

[0018] a second substrate having a common electrode, the second substrate opposing the first substrate;

[0019] a liquid-crystal layer formed between the pixel electrode and the common electrode; and

[0020] a first shield placed opposite the driver so as to shield an electromagnetic wave radiated from the driver.

[0021] Other objects, features and advantages of the present invention will become more apparent from the following detailed description when read in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] FIG. 1 is an illustration showing a structure of a conventional liquid-crystal display device;

[0023] FIG. 2 is a plan view showing a panel structure in the liquid-crystal display device shown in FIG. 1;

[0024] FIG. 3 shows a cross-sectional structure of the liquid-crystal display device shown in FIG. 1;

[0025] FIG. 4 is an illustration showing a structure of a liquid-crystal display device according to a first embodiment of the present invention;

[0026] FIG. 5 shows a cross-sectional structure of the liquid-crystal display device shown in FIG. 4;

[0027] FIG. 6 is an illustration showing a structure of a liquid-crystal display device according to a second embodiment of the present invention;

[0028] FIG. 7 shows a cross-sectional structure of the liquid-crystal display device shown in FIG. 6;

[0029] FIG. 8 is an illustration showing a structure of a liquid-crystal display device according to a third embodiment of the present invention;

[0030] FIG. 9 shows a cross-sectional structure of the liquid-crystal display device shown in FIG. 8;

[0031] FIG. 10 is an illustration showing a structure of a liquid-crystal display device according to a fourth embodiment of the present invention;

[0032] FIG. 11 shows a cross-sectional structure of the liquid-crystal display device shown in FIG. 10;

[0033] FIG. 12 is an illustration showing a structure of a liquid-crystal display device according to a fifth embodiment of the present invention;

[0034] FIG. 13 shows a cross-sectional structure of the liquid-crystal display device shown in FIG. 12;

[0035] FIG. 14 is an illustration showing a structure of a liquid-crystal display device according to a sixth embodiment of the present invention; and

[0036] FIG. 15 shows a cross-sectional structure of the liquid-crystal display device shown in FIG. 14.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0037] A description will now be given, with reference to the drawings, of embodiments according to the present invention. Elements in the drawings that are identical or equivalent are referenced by the same reference marks.

[0038] Liquid-crystal display devices according to embodiments of the present invention are provided with augmented measures against an EMI (electromagnetic interference) by forming a layer of a shield electrode above the drive circuits and the electrode lead-out line formed on peripheral parts of the TFT substrate composing a liquid-crystal panel so as to reduce noises generated from these drive circuits. It is noted that stabilizing the electric potential of the shield electrode at a constant electric potential such as a ground potential enhances the shield effect, contributing effectively to the measures against the EMI. More specific descriptions will be given in the following.

[0039] [Embodiment 1]

[0040] FIG. 4 is an illustration showing a structure of a liquid-crystal display device 21 according to a first embodiment of the present invention. FIG. 5 shows a cross-sectional structure of the liquid-crystal display device 21. As shown in FIG. 4, the liquid-crystal display device 21 comprises the TFT substrate (a first substrate) 1, the TFTs (thin-film transistors) 2, the signal lines 3, the scanning lines 4, the common electrode substrate (a second substrate) 5, the common electrode 6, the liquid-crystal layer 7, the electrode lead-out line 8, the signal-line drive circuit 9, the scanning-line drive circuit 10, a ground electrode (a first shield) 15, and the pixel electrodes 22. The TFTs 2, the signal lines 3, the scanning lines 4, the common electrode 6, the pixel electrodes 22, and the liquid-crystal layer 7 provided between the pixel electrodes 22 and the common electrode 6, compose a liquid-crystal panel.

[0041] In the above-mentioned structure, switching elements each consisting of the TFT 2, the signal lines 3, the scanning lines 4, and the pixel electrodes 22 each connected to the TFT 2, are formed on the TFT substrate 1. Further, the signal-line drive circuit 9 driving the signal lines 3, the scanning-line drive circuit 10 driving the scanning lines 4, and the electrode lead-out line 8 are formed on peripheral parts of the TFT substrate 1.

[0042] On the other hand, unlike the conventional liquid-crystal display device 11 shown in FIG. 1, the common electrode substrate 5 of the liquid-crystal display device 21 according to the present first embodiment is provided with the ground electrode (a shield electrode) 15 formed above the signal-line drive circuit 9 and the scanning-line drive circuit 10, along with the common electrode 6 made of an ITO (a transparent electrode) or a color filter.

[0043] However, as in the conventional liquid-crystal display device 11 shown in FIG. 1 and FIG. 2, the TFTs 2 and the pixel electrodes 22 are formed in the form of a matrix on the TFT substrate 1. The signal line 3 supplies an image signal to the pixel electrode 22 via the TFT 2. The scanning line 4 transmits a control signal to a gate of the TFT 2, the control signal turning on/off the TFT 2 which is connected to the pixel electrode 22 so as to regulate writing of data to each pixel.

[0044] As shown in **FIG. 5**, the common electrode **6** is supplied with a common electrode potential from the TFT substrate **1** via the transfer **14a**. The ground electrode **15** is supplied with a ground potential from the TFT substrate **1** via a transfer (a voltage supplier) **14b**.

[0045] In the liquid-crystal display device **21** according to the present first embodiment, the ground electrode **15** functions as a shield against electromagnetic waves generated from the signal-line drive circuit **9** and the scanning-line drive circuit **10** so as to reduce electromagnetic waves leaked to the outside of the liquid-crystal display device **21**, contributing to the measures against the EMI.

[0046] [Embodiment 2]

[0047] **FIG. 6** is an illustration showing a structure of a liquid-crystal display device **31** according to a second embodiment of the present invention. **FIG. 7** shows a cross-sectional structure of the liquid-crystal display device **31**. As shown in **FIG. 6**, the liquid-crystal display device **31** has the same structure as the liquid-crystal display device **21** according to the above-mentioned first embodiment, except that the common electrode substrate **5** (see also **FIG. 7**) not having the ground electrode **15** is so provided as to cover the TFTs **2**, the pixel electrodes (not shown in the figure), the signal lines **3**, the scanning lines **4**, the signal-line drive circuit **9** and the scanning-line drive circuit **10**, and that a shield substrate (a third substrate) **16** (see **FIG. 7**) having the ground electrode (a first shield) **15** is further provided above the electrode lead-out line **8**. The common electrode **6** is formed all across the common electrode substrate **5** not having the ground electrode **15**.

[0048] Additionally, as shown in **FIG. 7**, a flexible flat cable **20** is applied to the electrode lead-out line **8** by pressure, and thereafter, the shield substrate **16** having the ground electrode **15** formed by using aluminum or titanium is provided above the electrode lead-out line **8** and the part where the above-mentioned flexible flat cable **20** is applied to the electrode lead-out line **8**. The ground electrode **15** is supplied with a ground potential from the TFT substrate **1** via the transfer **14b**. The ground electrode **15** may be electrically connected to the TFT substrate **1** by a wire bonding, etc. in place of the transfer **14b**.

[0049] In this structure, since the shield substrate **16** is positioned outside a so-called display area in which the TFTs **2** and the pixel electrodes (not shown in the figure) are formed on the TFT substrate **1**, the shield substrate **16** does not cause a problem of narrowing the visible range of an image. Additionally, forming the ground electrode **15** by using aluminum or titanium as mentioned above can reduce a sheet resistance of the ground electrode **15** so as to further increase the shield effect.

[0050] In the liquid-crystal display device **31** according to the present second embodiment, the ground electrode **15** formed on the shield substrate **16** functions as a shield against electromagnetic waves generated from the electrode lead-out line **8** so as to reduce electromagnetic waves leaked outwardly from the liquid-crystal display device **31**; this makes the measures against the EMI more effective.

[0051] Additionally, according to the liquid-crystal display device **31** of the present second embodiment, the shield substrate **16** is a separate and independent component from the TFT substrate **1** and the common electrode substrate **5**

and thus can be manufactured separately and independently. Also, the shield substrate **16** can be combined with a conventional liquid-crystal display device easily into the liquid-crystal display device according to the present second embodiment.

[0052] [Embodiment 3]

[0053] **FIG. 8** is an illustration showing a structure of a liquid-crystal display device **41** according to a third embodiment of the present invention. **FIG. 9** shows a cross-sectional structure of the liquid-crystal display device **41**. As shown in **FIG. 8**, the liquid-crystal display device **41** has the same structure as the liquid-crystal display device **31** according to the above-mentioned second embodiment, except that the common electrode substrate **5** is provided above the TFTs **2**, the pixel electrodes (not shown in the figure), the signal lines **3**, and the scanning lines **4**, and that a shield substrate (a third substrate) **26** having the ground electrode (a first shield) **15** is provided above the signal-line drive circuit **9** and the scanning-line drive circuit **10**.

[0054] As shown in **FIG. 9**, the ground electrode **15** is supplied with a ground potential from the TFT substrate **1** via the transfer **14b**, as in the liquid-crystal display device **31** according to the above-mentioned second embodiment.

[0055] In the liquid-crystal display device **41** according to the present third embodiment, the ground electrode **15** formed on the shield substrate **26** functions as a shield against electromagnetic waves generated from the signal-line drive circuit **9** and the scanning-line drive circuit **10** so as to reduce electromagnetic waves leaked from the liquid-crystal display device **41** outwardly; this makes the measures against the EMI more effective.

[0056] Additionally, as in the liquid-crystal display device **31** according to the above-mentioned second embodiment, the shield substrate **26** is a separate and independent component from the TFT substrate **1** and the common electrode substrate **5** and thus can be manufactured separately and independently. Also, the shield substrate **26** can be combined with a conventional liquid-crystal display device easily into the liquid-crystal display device according to the present third embodiment.

[0057] [Embodiment 4]

[0058] **FIG. 10** is an illustration showing a structure of a liquid-crystal display device **51** according to a fourth embodiment of the present invention. **FIG. 11** shows a cross-sectional structure of the liquid-crystal display device **51**. As shown in **FIG. 10**, the liquid-crystal display device **51** has the same structure as the liquid-crystal display device **41** according to the above-mentioned third embodiment, except that the shield substrate **16** (see **FIG. 11**) having the ground electrode **15** is further provided above the electrode lead-out line **8**.

[0059] As shown in **FIG. 11**, the ground electrodes **15** formed on the shield substrates **16** and **26** are supplied with a ground potential from the TFT substrate **1** via the transfers **14b**, as in the liquid-crystal display devices **31** and **41** according to the above-mentioned second and third embodiments.

[0060] In the liquid-crystal display device **51** according to the present fourth embodiment, the ground electrode **15** (a first shield) formed on the shield substrate (a third substrate)

16 and the ground electrode **15** (a second shield) formed on the shield substrate (a fourth substrate) **26** function as shields against electromagnetic waves generated from the electrode lead-out line **8**, the signal-line drive circuit **9** and the scanning-line drive circuit **10** so as to reduce electromagnetic waves leaked from the liquid-crystal display device **51** outwardly; this contributes to the measures against the EMI effectively. In addition, the shield substrates **16** and **26** are a separate and independent component from the TFT substrate **1** and the common electrode substrate **5** and thus can be manufactured separately and independently.

[0061] [Embodiment 5]

[0062] FIG. 12 is an illustration showing a structure of a liquid-crystal display device **61** according to a fifth embodiment of the present invention. FIG. 13 shows a cross-sectional structure of the liquid-crystal display device **61**. As shown in FIG. 12, the liquid-crystal display device **61** has the same structure as the liquid-crystal display device **51** according to the above-mentioned fourth embodiment, except that a unitary shield substrate (a third substrate) **36** (see FIG. 13) having the ground electrode (a shield) **15** formed unitarily thereon is provided above the electrode lead-out line **8**, the signal-line drive circuit **9** and the scanning-line drive circuit **10**. In other words, in the liquid-crystal display device **61** according to the present fifth embodiment, the shield substrates **16** and **26** of the liquid-crystal display device **51** according to the above-mentioned fourth embodiment are unitarily formed.

[0063] As shown in FIG. 13, the ground electrode **15** formed on the shield substrate **36** is supplied with a ground potential from the TFT substrate **1** via the transfer **14b**, as in the liquid-crystal display device **51** according to the above-mentioned fourth embodiment.

[0064] In the liquid-crystal display device **61** according to the present fifth embodiment, the ground electrode **15** formed on the shield substrate **36** functions as a shield against electromagnetic waves generated from the electrode lead-out line **8**, the signal-line drive circuit **9** and the scanning-line drive circuit **10** so as to reduce electromagnetic waves leaked from the liquid-crystal display device **61** outwardly; this contributes to the measures against the EMI effectively.

[0065] Additionally, in the liquid-crystal display device **61** according to the present fifth embodiment, the shield substrate has a larger area such that a larger number of the transfers **14b** can be provided between the shield substrate **36** and the TFT substrate **1**; this increases the shield effect further.

[0066] [Embodiment 6]

[0067] FIG. 14 is an illustration showing a structure of a liquid-crystal display device **71** according to a sixth embodiment of the present invention. FIG. 15 shows a cross-sectional structure of the liquid-crystal display device **71**. As shown in FIG. 14, the liquid-crystal display device **71** has the same structure as the liquid-crystal display device **21** according to the above-mentioned first embodiment, except that the shield substrate (a third substrate) **16** (see FIG. 15) having the ground electrode (a second shield) **15** is further provided above the electrode lead-out line **8**.

[0068] As shown in FIG. 15, the ground electrode **15** formed on the shield substrate **16** is supplied with a ground

potential from the TFT substrate **1** via the transfer **14b**, as in the liquid-crystal display devices **31** and **51** according to the above-mentioned second and fourth embodiments.

[0069] In the liquid-crystal display device **71** according to the present sixth embodiment, the ground electrodes **15** formed on the common electrode substrate **5** and the shield substrate **16** function as shields against electromagnetic waves generated from the signal-line drive circuit **9**, the scanning-line drive circuit **10**, and the electrode lead-out line **8** so as to reduce electromagnetic waves leaked from the liquid-crystal display device **71** outwardly; this contributes to the measures against the EMI effectively.

[0070] Besides, in the liquid-crystal display devices according to the above-described first to sixth embodiment, when the ground electrode **15** is formed of the same material as the common electrode **6**, the ground electrode **15** and the common electrode **6** can be formed at the same time by the same process. Thus, the liquid-crystal display devices can be achieved without increasing the number of manufacturing steps.

[0071] Also, as mentioned above, forming the ground electrode **15** by using aluminum or titanium can reduce a sheet resistance of the ground electrode **15** so as to further increase the shield effect.

[0072] The present invention is not limited to the specifically disclosed embodiments, and variations and modifications may be made without departing from the scope of the present invention.

[0073] The present application is based on Japanese priority application No. 2001-024594 filed on Jan. 31, 2001, the entire contents of which are hereby incorporated by reference.

What is claimed is:

1. A liquid-crystal display device comprising:
 - a first substrate having a pixel electrode, a signal line, a scanning line, and a driver driving one of said signal line and said scanning line;
 - a second substrate having a common electrode, the second substrate opposing said first substrate;
 - a liquid-crystal layer formed between said pixel electrode and said common electrode; and
 - a first shield placed opposite said driver so as to shield an electromagnetic wave radiated from said driver.
2. The liquid-crystal display device as claimed in claim 1, wherein said first shield is formed on said second substrate.
3. The liquid-crystal display device as claimed in claim 1, wherein said first shield is formed on a third substrate separate from said first substrate and said second substrate.
4. The liquid-crystal display device as claimed in claim 2, further comprising:
 - an electrode lead-out line formed on said first substrate so as to input and output a signal to and from said driver; and
 - a second shield formed on a third substrate placed opposite said electrode lead-out line so as to shield an electromagnetic wave radiated from said electrode lead-out line, the third substrate being separate from said first substrate and said second substrate.

5. A liquid-crystal display device comprising:
 - a first substrate having a pixel electrode, a signal line, a scanning line, a driver driving one of said signal line and said scanning line, and an electrode lead-out line used for inputting and outputting a signal to and from said driver;
 - a second substrate having a common electrode, the second substrate opposing said first substrate;
 - a liquid-crystal layer formed between said pixel electrode and said common electrode; and
 - a first shield placed opposite said electrode lead-out line so as to shield an electromagnetic wave radiated from said electrode lead-out line.
6. The liquid-crystal display device as claimed in claim 5, wherein said first shield is formed on a third substrate separate from said first substrate and said second substrate.
7. The liquid-crystal display device as claimed in claim 6, further comprising a second shield formed on a fourth substrate placed opposite said driver so as to shield an electromagnetic wave radiated from said driver.
8. A liquid-crystal display device comprising:
 - a first substrate having a pixel electrode, a signal line, a scanning line, a driver driving one of said signal line and said scanning line, and an electrode lead-out line used for inputting and outputting a signal to and from said driver;
 - a second substrate having a common electrode, the second substrate opposing said first substrate;
 - a liquid-crystal layer formed between said pixel electrode and said common electrode; and
 - a shield formed unitarily on a third substrate placed opposite said driver and said electrode lead-out line so

as to shield electromagnetic waves radiated from said driver and said electrode lead-out line, the third substrate being separate from said first substrate and said second substrate.

9. The liquid-crystal display device as claimed in claim 1, further comprising a voltage supplier electrically connecting said first shield with said first substrate so as to supply a predetermined voltage to said first shield.

10. The liquid-crystal display device as claimed in claim 5, further comprising a voltage supplier electrically connecting said first shield with said first substrate so as to supply a predetermined voltage to said first shield.

11. The liquid-crystal display device as claimed in claim 8, further comprising a voltage supplier electrically connecting said shield with said first substrate so as to supply a predetermined voltage to said shield.

12. The liquid-crystal display device as claimed in claim 1, wherein said first shield is formed of a same material as said common electrode.

13. The liquid-crystal display device as claimed in claim 5, wherein said first shield is formed of a same material as said common electrode.

14. The liquid-crystal display device as claimed in claim 8, wherein said shield is formed of a same material as said common electrode.

15. The liquid-crystal display device as claimed in claim 1, wherein said first shield is formed of one of aluminum and titanium.

16. The liquid-crystal display device as claimed in claim 5, wherein said first shield is formed of one of aluminum and titanium.

17. The liquid-crystal display device as claimed in claim 8, wherein said shield is formed of one of aluminum and titanium.

* * * * *

专利名称(译)	液晶显示装置，具有屏蔽从驱动器和电极引出线之一辐射的电磁波的屏蔽		
公开(公告)号	US20020101553A1	公开(公告)日	2002-08-01
申请号	US09/930417	申请日	2001-08-11
[标]申请(专利权)人(译)	富士通株式会社		
申请(专利权)人(译)	FUJITSU LIMITED		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	ENOMOTO HIROMI OHASHI NORIYUKI ZHANG HONG YONG		
发明人	ENOMOTO, HIROMI OHASHI, NORIYUKI ZHANG, HONG YONG		
IPC分类号	G02F1/1345 G02F1/13 G02F1/1333		
CPC分类号	G02F1/13452 G02F2001/133334		
优先权	2001024594 2001-01-31 JP		
其他公开文献	US6897919		
外部链接	Espacenet USPTO		

摘要(译)

提供一种液晶显示装置。液晶显示装置包括第一基板，第一基板具有像素电极，信号线，扫描线，驱动信号线和扫描线之一的驱动器，与第一基板相对的第二基板，并具有公共电极，形成在像素电极和公共电极之间的液晶层，和与驱动器相对放置的第一屏蔽，以屏蔽从驱动器辐射的电磁波。

