



US 20040160435A1

(19) **United States**

(12) **Patent Application Publication** (10) Pub. No.: US 2004/0160435 A1
Cui et al. (43) Pub. Date: Aug. 19, 2004

(54) **REAL-TIME DYNAMIC DESIGN OF LIQUID CRYSTAL DISPLAY (LCD) PANEL POWER MANAGEMENT THROUGH BRIGHTNESS CONTROL**

(76) Inventors: **Ying Cui**, Mountain View, CA (US);
Richard W. Jensen, Fair Oaks, CA (US);
David Wyatt, San Jose, CA (US);
Venu M. Kuchibhotla, Campbell, CA (US);
Sathyamurthi Sadhasivan, Eldorado Hills, CA (US); **Todd M. Witter**, Orangevale, CA (US)

Correspondence Address:
BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN
LLP
Seventh Floor
12400 Wilshire Boulevard
Los Angeles, CA 90025-1026 (US)

(21) Appl. No.: 10/367,070


(22) Filed: **Feb. 14, 2003**

Publication Classification

(51) Int. Cl.⁷ G06F 1/30
(52) U.S. Cl. 345/211

(57) **ABSTRACT**

According to one embodiment of the present invention, a method of power management for a flat panel display is disclosed. The method includes: receiving image data; determining a segment mode for the received image data; selecting a portion of the received image data corresponding to the determined segment mode; accumulating a value of the selected portion of the received image data; comparing the accumulated value to a threshold value; and generating an interrupt signal if the accumulated value exceeds the threshold value.

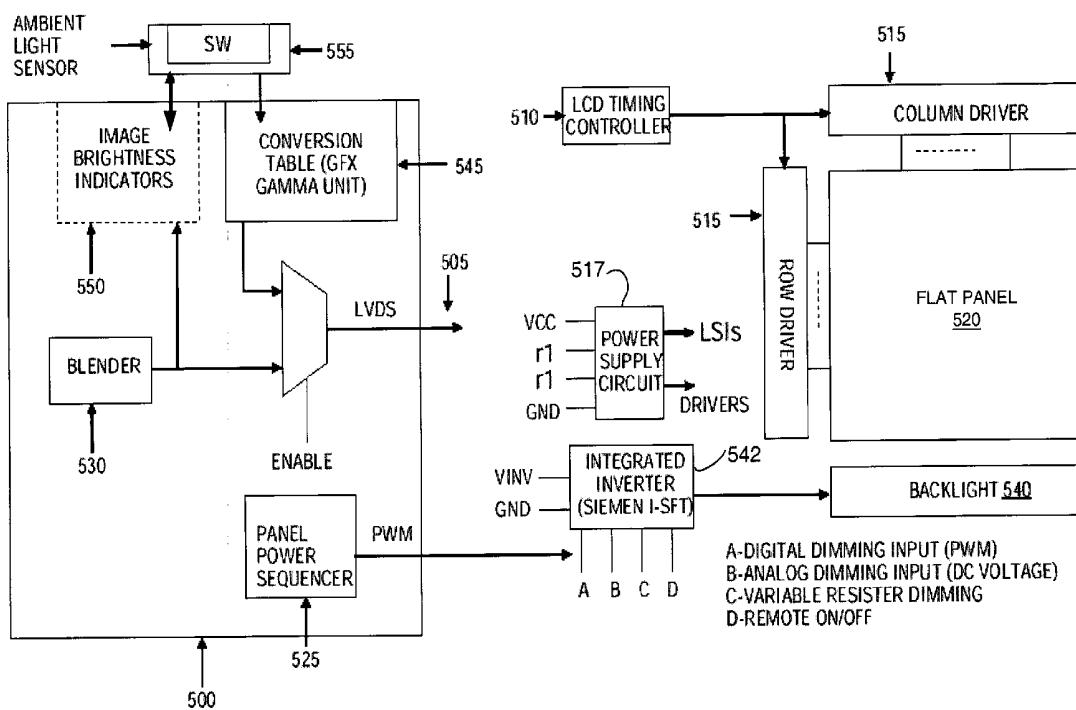

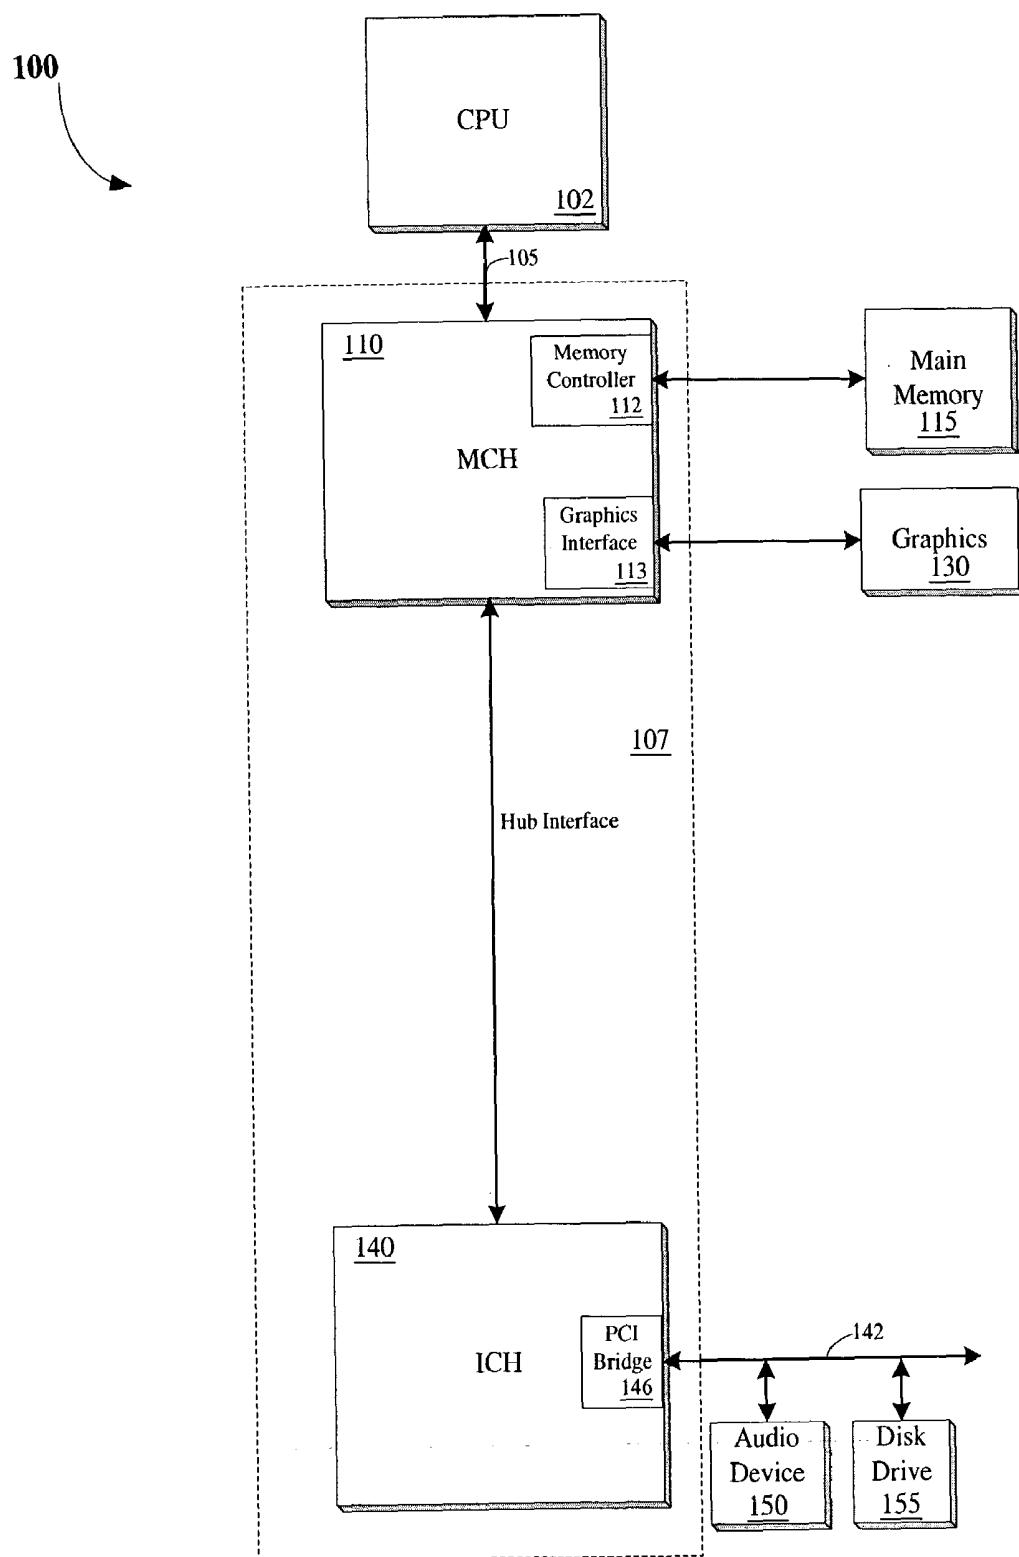


Fig. 1

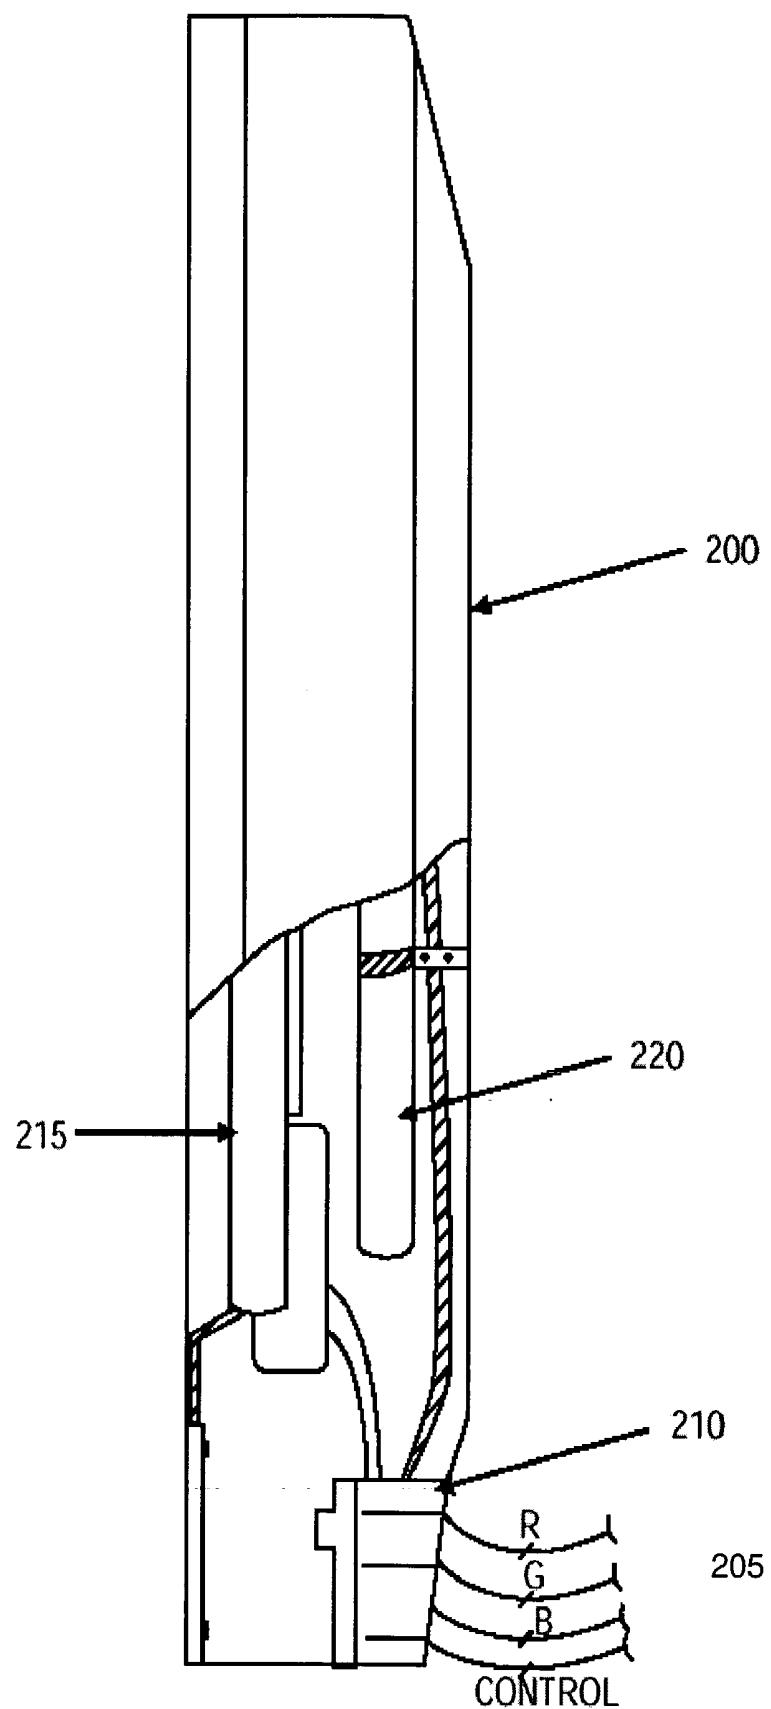


Fig. 2

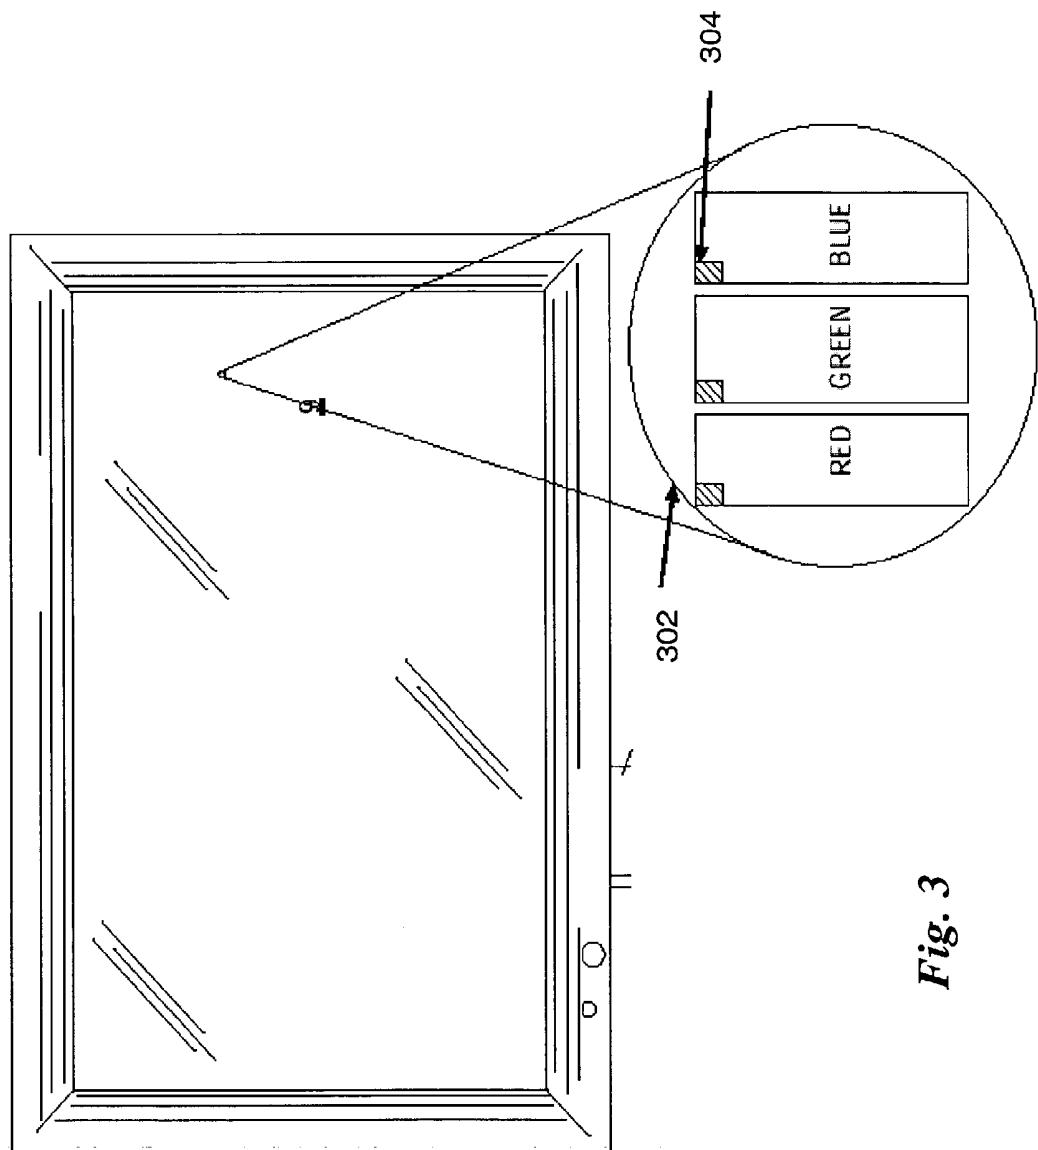


Fig. 3

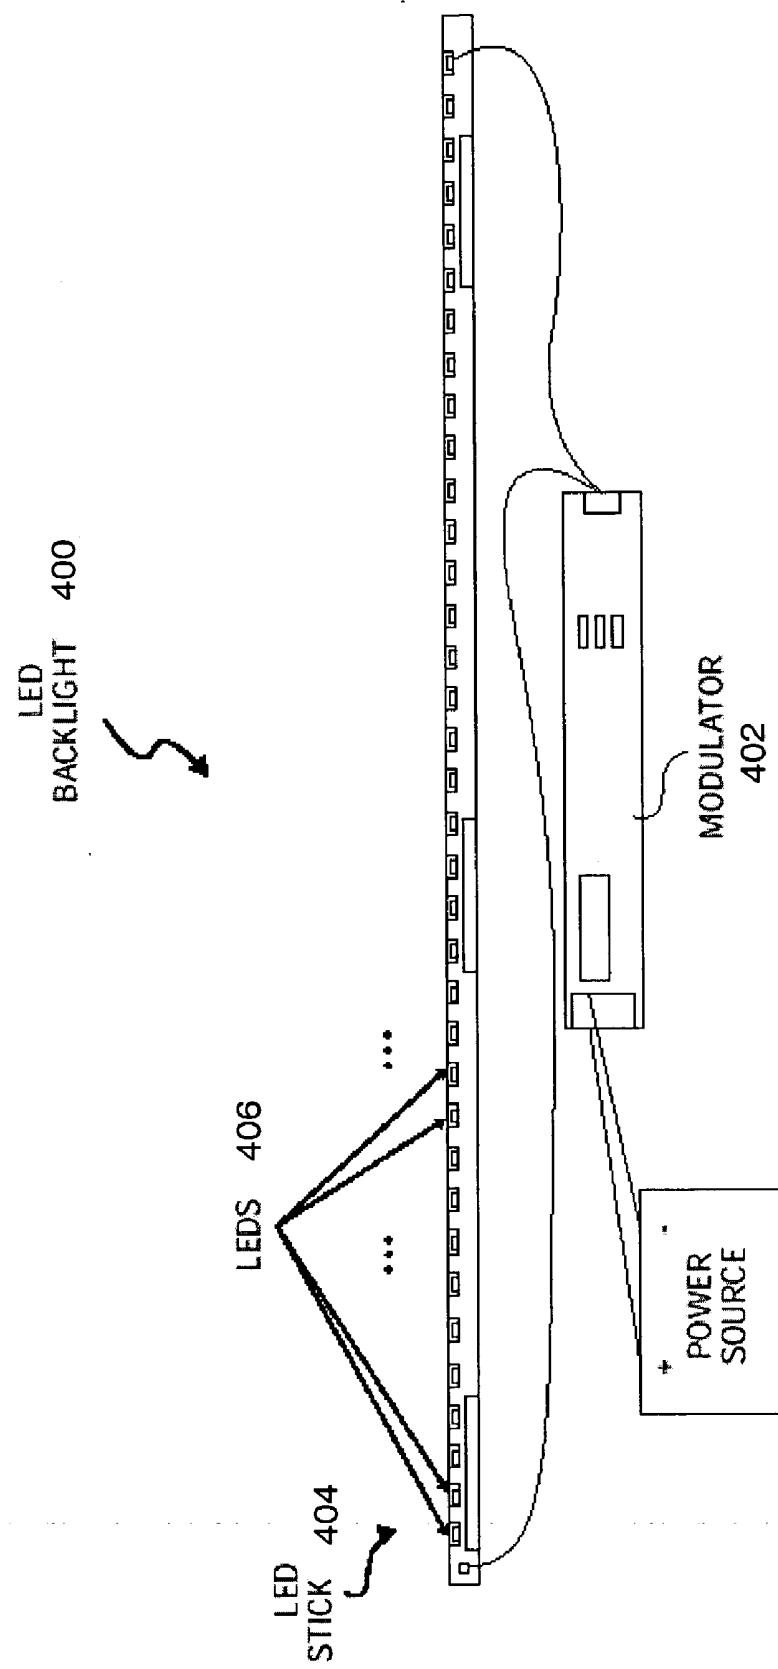
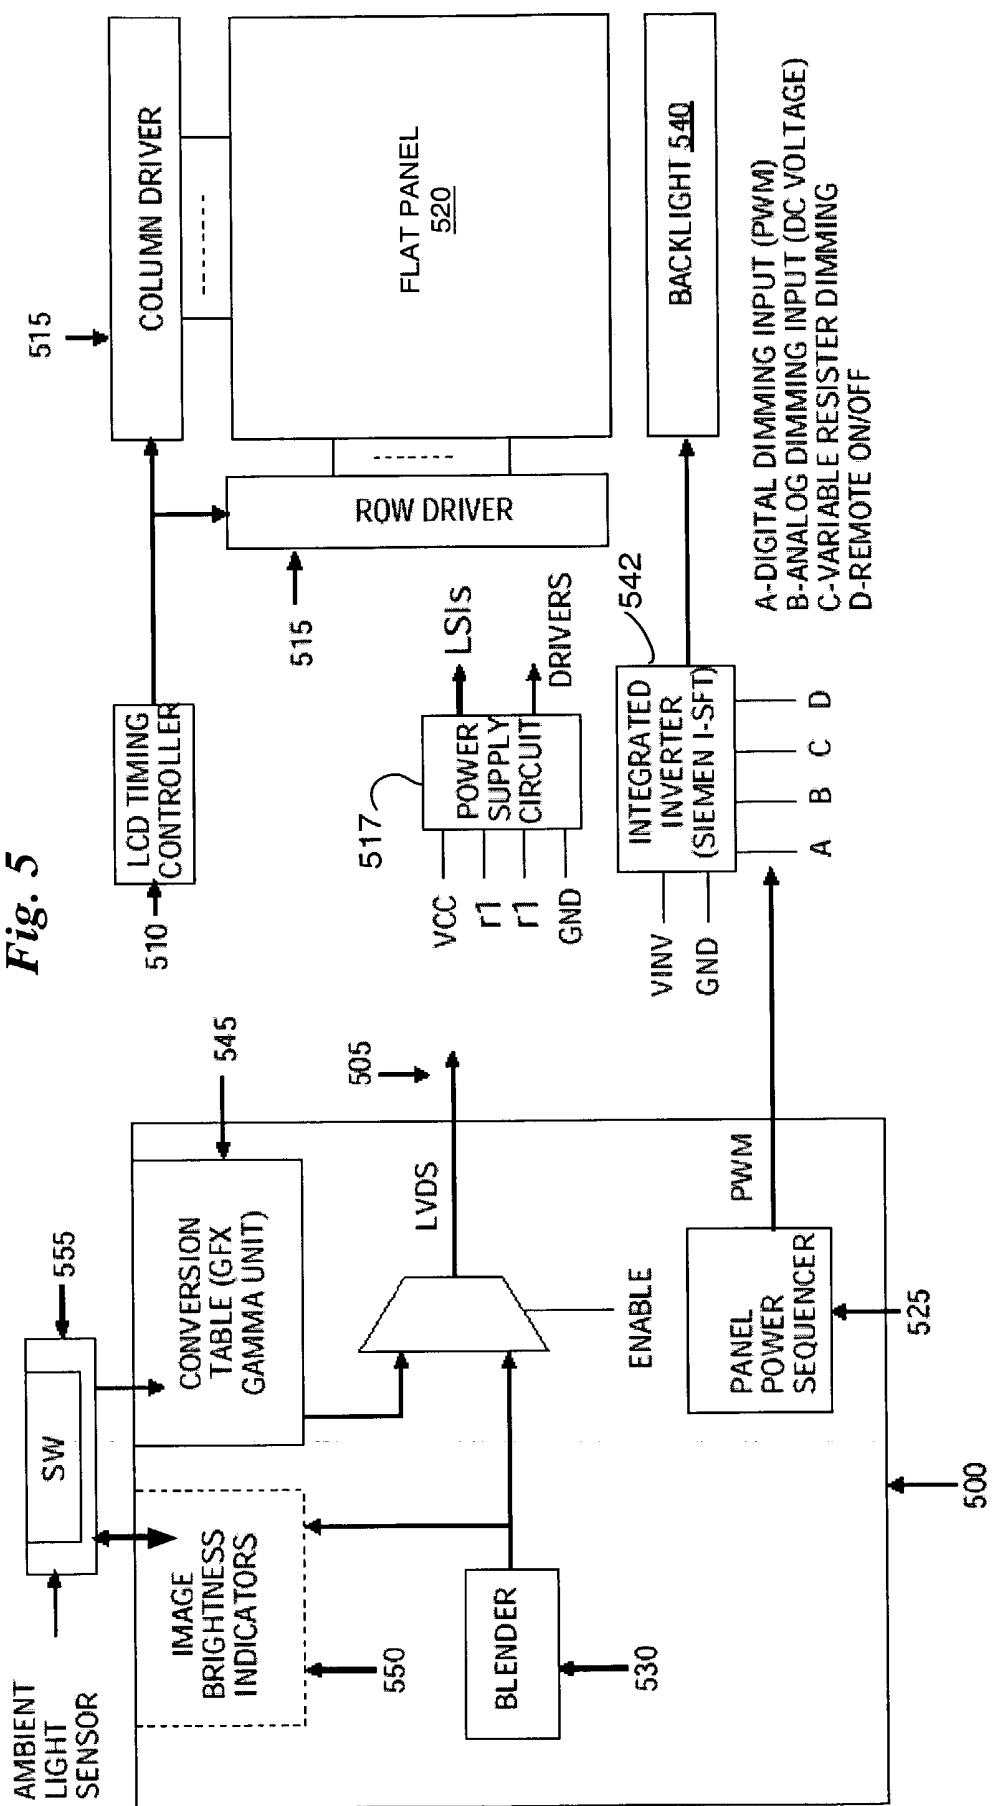


Fig. 4

Fig. 5



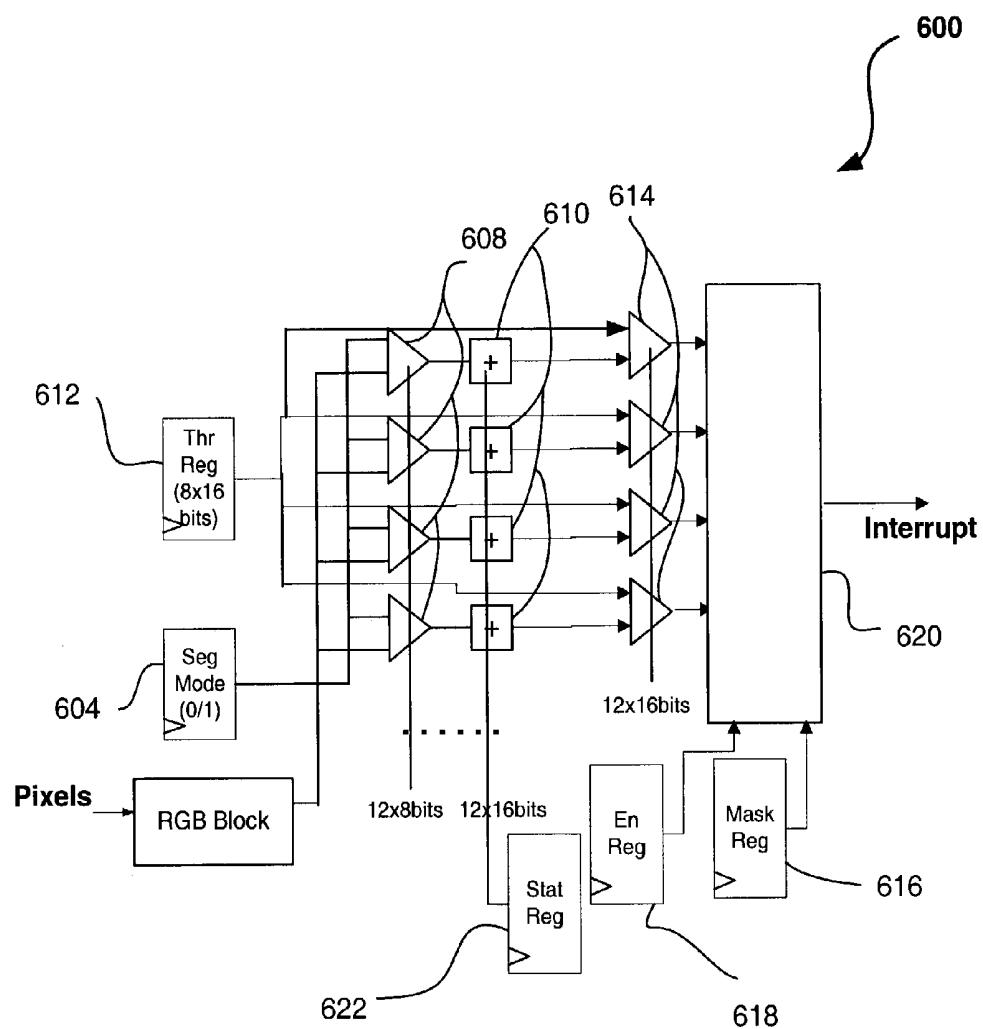


Fig. 6

REAL-TIME DYNAMIC DESIGN OF LIQUID CRYSTAL DISPLAY (LCD) PANEL POWER MANAGEMENT THROUGH BRIGHTNESS CONTROL

COPYRIGHT NOTICE

[0001] Contained herein is material that is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction of the patent disclosure by any person as it appears in the Patent and Trademark Office patent files or records, but otherwise reserves all rights to the copyright whatsoever.

FIELD OF THE INVENTION

[0002] The present invention generally relates to the field of electronic displays. More particularly, an embodiment of the present invention relates to real-time dynamic design of liquid crystal display (LCD) panel power management through brightness control.

BACKGROUND

[0003] Notebook (also called laptop) computers are light-weight personal computers, which are quickly gaining popularity. The popularity of the notebook computers has especially increased since their prices have been dropping steadily, while maintaining similar performance as their larger siblings (i.e., desktop computers or workstations). One clear advantage of notebook computers is their ease of portability. The lighter weight restrictions require the mobile platform manufacturers to produce images that compete with the desktop models, while maintaining an increased battery life.

[0004] As more functionality is integrated within mobile computing platforms, the need to reduce power consumption becomes increasingly important. Furthermore, users expect increasingly longer battery life in mobile computing platforms, furthering the need for creative power conservation solutions. Mobile computer designers have responded by implementing power management solutions such as, reducing processor and chipset clock speeds, intermittently disabling unused components, and reducing power required by display devices, such as an LCD or "flat panel" display.

[0005] Generally, power consumption in flat-panel display monitors increases with flat panel display backlight brightness. In some computer systems, flat panel display backlight power consumption can soar as high as six Watts when the backlight is at maximum luminance. In a mobile computing system, such as a laptop computer system, this can significantly shorten battery life. In order to reduce flat panel power consumption and thereby increase battery life, mobile computing system designers have designed power management systems to reduce the flat-panel display backlight brightness while the system is in battery-powered mode. However, in reducing backlight brightness in a flat panel display, the user is often left with a display image that is of lower quality than when the mobile computing platform is operating on alternating current (AC) power. This reduction in image quality results from a reduction in color and brightness contrast when backlight brightness is reduced.

[0006] Image quality can be further affected by ambient light surrounding the display. This reduces the number of environments in which a user can use a mobile computing system comfortably.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The invention is illustrated by way of example and not limitation in the figures of the accompanying drawings, in which like references indicate similar or identical elements, and in which:

[0008] FIG. 1 illustrates an exemplary block diagram of a computer system 100 in accordance with an embodiment of the present invention;

[0009] FIG. 2 illustrates an exemplary cross-section of a flat-panel display monitor 200 in accordance with an embodiment of the present invention;

[0010] FIG. 3 illustrates a group of pixels within a flat-panel monitor screen in accordance with one embodiment;

[0011] FIG. 4 illustrates a light emitting diode (LED) backlight for a notebook computer display system, according to one embodiment of the invention;

[0012] FIG. 5 illustrates a display system according to one embodiment; and

[0013] FIG. 6 illustrates an exemplary block diagram of a backlight modulation circuit 600 in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION

[0014] In the following detailed description of the present invention numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced without these specific details. In other instances, well-known structures and devices are shown in block diagram form, rather than in detail, in order to avoid obscuring the present invention.

[0015] Reference in the specification to "one embodiment" or "an embodiment" means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. The appearances of the phrase "in one embodiment" in various places in the specification are not necessarily all referring to the same embodiment.

[0016] FIG. 1 illustrates an exemplary block diagram of a computer system 100 in accordance with an embodiment of the present invention. The computer system 100 includes a central processing unit (CPU) 102 coupled to a bus 105. In one embodiment, the CPU 102 is a processor in the Pentium® family of processors including the Pentium® II processor family, Pentium® III processors, Pentium® IV processors available from Intel Corporation of Santa Clara, Calif. Alternatively, other CPUs may be used, such as Intel's XScale processor, Intel's Banias Processors, ARM processors available from ARM Ltd. of Cambridge, the United Kingdom, or OMAP processor (an enhanced ARM-based processor) available from Texas Instruments, Inc., of Dallas, Tex.

[0017] A chipset 107 is also coupled to the bus 105. The chipset 107 includes a memory control hub (MCH) 110. The MCH 110 may include a memory controller 112 that is coupled to a main system memory 115. Main system memory 115 stores data and sequences of instructions that are executed by the CPU 102 or any other device included in the system 100. In one embodiment, main system memory

115 includes dynamic random access memory (DRAM); however, main system memory **115** may be implemented using other memory types. Additional devices may also be coupled to the bus **105**, such as multiple CPUs and/or multiple system memories.

[0018] The MCH **110** may also include a graphics interface **113** coupled to a graphics accelerator **130**. In one embodiment, graphics interface **113** is coupled to graphics accelerator **130** via an accelerated graphics port (AGP) that operates according to an AGP Specification Revision **2.0** interface developed by Intel Corporation of Santa Clara, Calif. In an embodiment of the present invention, a flat panel display may be coupled to the graphics interface **113** through, for example, a signal converter that translates a digital representation of an image stored in a storage device such as video memory or system memory into display signals that are interpreted and displayed by the flat-panel screen. It is envisioned that the display signals produced by the display device may pass through various control devices before being interpreted by and subsequently displayed on the flat-panel display monitor.

[0019] In addition, the hub interface couples the MCH **110** to an input/output control hub (ICH) **140** via a hub interface. The ICH **140** provides an interface to input/output (I/O) devices within the computer system **100**. The ICH **140** may be coupled to a Peripheral Component Interconnect (PCI) bus adhering to a Specification Revision **2.1** bus developed by the PCI Special Interest Group of Portland, Oregon. Thus, the ICH **140** includes a PCI bridge **146** that provides an interface to a PCI bus **142**. The PCI bridge **146** provides a data path between the CPU **102** and peripheral devices.

[0020] The PCI bus **142** includes an audio device **150** and a disk drive **155**. However, one of ordinary skill in the art will appreciate that other devices may be coupled to the PCI bus **142**. In addition, one of ordinary skill in the art will recognize that the CPU **102** and MCH **110** could be combined to form a single chip. Furthermore, graphics accelerator **130** may be included within MCH **110** in other embodiments.

[0021] In addition, other peripherals may also be coupled to the ICH **140** in various embodiments. For example, such peripherals may include integrated drive electronics (IDE) or small computer system interface (SCSI) hard drive(s), universal serial bus (USB) port(s), a keyboard, a mouse, parallel port(s), serial port(s), floppy disk drive(s), digital output support (e.g., digital video interface (DVI)), and the like. Moreover, the computer system **100** is envisioned to receive electrical power from one or more of the following sources for its operation: a battery, alternating current (AC) outlet (e.g., through a transformer and/or adaptor), automotive power supplies, airplane power supplies, and the like.

[0022] FIG. 2 illustrates an exemplary cross-section of a flat-panel display monitor **200** in accordance with an embodiment of the present invention. In one embodiment, display signals **205** generated by a display device, such as a graphics accelerator, are interpreted by a flat-panel monitor control device **210** and subsequently displayed by enabling pixels within a flat-panel monitor screen **215**. The pixels are illuminated by a backlight **220**, the brightness of which effects the brightness of the pixels and therefore the brightness of the displayed image.

[0023] FIG. 3 illustrates a group of pixels within a flat-panel monitor screen in accordance with one embodiment.

In one embodiment, the pixels are formed using thin film transistor (TFT) technology, and each pixel is composed of three sub-pixels **302** that, when enabled, cause a red, green, and blue (RGB) color to be displayed, respectively. Each sub-pixel is controlled by a TFT **304**. A TFT enables light from a display backlight to pass through a sub-pixel, thereby illuminating the sub-pixel to a particular color. Each sub-pixel color may vary according to a combination of bits representing each sub-pixel. The number of bits representing a sub-pixel determines the number of colors, or color depth, that may be displayed by a sub-pixel.

[0024] Accordingly, by increasing the number of bits that are used to represent each sub-pixel, the number of colors that each sub-pixel represents increases by a factor of $2N$, where "N" is the color depth of a sub-pixel. For example, a sub-pixel represented digitally by 8 bits may display **28** or 256 colors. A brighter or dimmer shade of a color being displayed by a pixel can be achieved by scaling the binary value representing each sub-pixel color (red, green, and blue, respectively) within the pixel. The particular binary values used to represent different colors depends upon the color-coding scheme, or color space, used by the particular display device. By modifying the color shade of the sub-pixels (by scaling the binary values representing sub-pixel colors) the brightness of the display image may be modified on a pixel-by-pixel basis. Furthermore, by modifying the color shade of each pixel, the amount of backlight necessary to create a display image of a particular display image quality can be reduced accordingly.

[0025] FIG. 4 illustrates a light emitting diode (LED) backlight for a notebook computer display system, according to one embodiment of the invention. According to an embodiment of the invention, the LED backlight **400** includes a modulator **402**, and an LED stick **404**. The LED stick **404** includes a number of LEDs **406**. For example, according to an embodiment of the invention, the LED stick **404** includes **36** LEDs. In an alternative embodiment of the invention, the LED stick **404** includes **18** LEDs. According to other embodiments of the invention, the LED stick **404** includes a greater or lesser number of LEDs (e.g., **1** LED or **48** LEDs.). The LEDs **406** are blue LEDs, according to one embodiment of the invention. However, according to an alternative embodiment of the invention, the LEDs **406** are ultraviolet LEDs.

[0026] The modulator **402** receives power from a battery (e.g., a 12 Volt battery), according to an embodiment of the invention. According to an alternative embodiment of the invention, the modulator **402** receives power from a rectified AC power source (e.g., through a plug-in AC to DC adapter).

[0027] Typically, when non-white light is used to illuminate LCD systems, the non-white light is converted into light that may be used to display an image. For example, colored light is converted into light usable by the red, green, and blue color masks of an LCD matrix (i.e., the light is converted into red, green and blue light).

[0028] FIG. 5 illustrates a display system according to one embodiment. In one embodiment, the direction of arrows shown in FIG. 5 indicates the direction of the data/signal flow between different components. In an embodiment, a display device **500** generates display signals **505**, which enable an LCD timing controller **510** to activate appropriate column and row drivers **515** to display an image on a

flat-panel display monitor **520**. In an embodiment of the present invention, the display **520** may be an LCD or plasma display. A power supply **517** may provide power to the drivers **515** and other large-scale integration (LSI) circuits.

[0029] In one embodiment, the display device includes a panel power sequencer (PWM) **525**, a blender unit **530**, and a graphics gamma unit **545**. The PWM may control luminance (brightness) of a backlight **540** within the flat-panel display monitor. As illustrated in **FIG. 5**, the PWM may be incorporated with other signals (e.g., analog dimming input (B), variable resistor dimming (C), and/or remote on/off control (D)) through an integrated inverter **542**. In one embodiment, the integrated inverter **542** may be a industry Siemens flat panel display technology (I-SFT) inverter for the backlight **540**.

[0030] In an embodiment, the blender unit **530** creates an image to be displayed on the display monitor by combining a display image with other display data, such as texture(s), lighting, and/or filtering data.

[0031] In one embodiment of the present invention, the display image from the blender unit **530** and the output of the gamma unit **545** can be combined to create a low voltage display signal (LVDS) **505**, which is transmitted to a flat-panel display device. The LVDS signal **505** may be further translated into other signal types in order to traverse a greater physical distance before being translated to an appropriate display format and subsequently displayed on monitor such as a flat-panel display.

[0032] In a further embodiment, the graphics gamma unit **545** effects the brightness of an image to be displayed on the display monitor by scaling each sub-pixel color. In one embodiment, the graphics gamma unit **545** can be programmed to scale the sub-pixel color on a per-pixel basis in order to achieve greater brightness in some areas of the display image, while reducing the brightness in other areas of the display image.

[0033] **FIG. 5** further illustrates one embodiment in which a unit **550** containing image brightness indicators samples the display image prior to it being translated to the LVDS format. The display image brightness indicators detect a display image brightness by monitoring and accumulating pixel color within the display image. The display image brightness indicators can then indicate to a software program (**555**) the brightness of certain features within the display image, such as display image character and background brightness. In an embodiment, the software program **555** receives ambient light sensor information to determine the environment the display is being used in to, for example, adjust the display characteristics (such as brightness and/or contrast) accordingly.

[0034] **FIG. 6** illustrates an exemplary block diagram of a backlight modulation circuit **600** in accordance with an embodiment of the present invention. In one embodiment, the backlight modulation circuit **600** illustrates the internal operation of the image brightness indicators unit **550** of **FIG. 5**. In an embodiment, the backlight modulation circuit **600** is envisioned to define a way of increasing image brightness and reducing back light brightness thus scaling down the LCD back light power consumption by about 30-70% in battery mode.

[0035] In one embodiment, the backlight modulation can be performed in singlewide display mode using the original

image data. In singlewide display mode (i.e., 1 pixel per clock cycle), when back light modulation is enabled, the original image data may be used to calculate the brightness indicators and the interrupt which is in turn used by the software (such as the software unit **555** of **FIG. 5**) to modify the displayed image. The output of a gamma correction block (not shown), which also receives the original image data can be used by a panel fitter to perform panel fitting. In a further embodiment of the present invention, the back light modulation may be disabled in dual-display mode.

[0036] In one embodiment, the gamma correction block, which may be implemented by three lookup table (LUT) random access memories (RAMs), one for each color component. Essentially, each of the LUT RAMs may act the same way, but with different data inputs. There may be three modes of operation. Data can go straight through without gamma correction, a straight look-up can occur providing an 8-bit precision output, or a combination look-up and mathematical operation can yield 10-bits of accuracy.

[0037] The circuit **600** includes a red, green, and blue (RGB) adjustment block **602**. In an embodiment of the present invention, the output of the RGB block is eight bits wide. The RGB block **602** receives image data after gamma correction (or otherwise as described above) and manipulates the RGB data for each set of pixel data to calculate a Y function. This is done for all the pixel data until the end of the frame is reached. In an embodiment of the present invention, the end of the frame may be indicated by a video blank (VBlank) signal. In an embodiment, the Y function is calculated by the following formula:

$$Y=0.299*R+0.587*G+0.114*B$$

[0038] where R represents the value of red, G represents the value of green, and B represents the value of blue.

[0039] The Y function may be implemented as follows:

$$Y=(\frac{1}{4}+\frac{1}{32}+\frac{1}{64})*R+(\frac{1}{4}+\frac{1}{16}+\frac{1}{64}+\frac{1}{128})*G+(\frac{1}{8})*B$$

[0040] which in turn results in:

$$Y=0.296875*R+0.5859375*G+0.125*B$$

[0041] Accordingly, the binary implementation may result in an error of about 0.0021 for R, 0.0010 for G, and 0.011 for B.

[0042] The circuit **600** further includes a segment mode register **604**. In an embodiment of the present invention, the mode value may be 0 for selection of bits **0** to **7** and 1 for selection of bits **0** to **15** (i.e., 8 pixels per bit for mode **0** and 16 pixels per bit for mode **1**). The output of the RGB block **602** and the segment mode register **604** (as a selection control, e.g., one-bit wide) are provided to a bank of comparators **608**. The segment mode register **604** stores the mode value for the segment being processed by the circuit **600**. In an embodiment of the present invention, the Y[9:2] can take values from 0 to 255. Part of 255 spectrum consist of eight segments, with two modes for segment definition (lower **16,16,16,16**, and upper **16,16,16,16**) and (lower **16,16,32,32**, and upper **32,32,16,16**). There are 16-bit accumulators for each of the segments (**610**) and the segment corresponding to the value of Y[9:2] will be incremented (i.e., the corresponding counter **610**).

[0043] The circuit **600** further includes a threshold register **612** to store desired threshold values. In an embodiment of the present invention, the output of the threshold register **612**

is 16 bits wide. The output of the comparators **608** and the threshold register **612** are provided to a bank of comparators **614**. Accordingly, depending on the segment mode select bit (e.g., stored in the segment mode register **604**), the accumulated values in the (12×16 bits) segment accumulation registers (e.g., the counters **610**) are compared against the threshold register (**612**).

[0044] In an embodiment, based on the interrupt mask (e.g., stored in a mask register **616**) and interrupt enable bits (e.g., stored in an enable register **618**), an interrupt is generated by an image brightness comparator block **620**. In one embodiment of the present invention, the interrupt is an OR function of all the interrupt enabled segments. In a further embodiment of the present invention, the output of the enable register **618** and the mask register **616** are 12 bits wide each. In an embodiment of the present invention, the enable register **618** stores enable bit information base on which bit is to be enabled for the interrupt generation (e.g., as determined by the controlling software module such as the software unit **555** of **FIG. 5**).

[0045] The circuit **600** further includes a status register **622**, which receives its input from the counters **610** and provides the data to the controlling software module (e.g., the software unit **555** of **FIG. 5**). In an embodiment of the present invention, the status register **622** is updated at the end of each frame. In one embodiment of the present invention, based on the backlight PWM signal (such as that discussed with respect to the panel power sequencer **525** of **FIG. 5**), PWM clock is generated. In an embodiment, the PWM cycle is programmable from 1K to 10k and the duty cycle is programmable to 64K levels. The PWM cycle may be utilized to indicate the percentage brightness of all turned-on pixels.

[0046] In one embodiment, the PWM implementation includes two counters; counter **1** is initialized to back light PWM register bits [15:0] and counter **2** is initialized to back light PWM register bits [31:16] on reset. Each of these counters decrement at each clock cycle. PWM signal is asserted (e.g., high) until counter **2** reaches 0 and then PWM signal is deasserted (e.g., low) until counter **1** reaches 0. When counter **1** reaches 0, both the counters are reset to values from the registers.

[0047] In a further embodiment, the controlling software module (e.g., the software unit **555** of **FIG. 5**) loads the LUT unit with appropriate values when the threshold interrupt is generated by the image brightness comparator block **620**. Any change in values is not envisioned to cause noticeable tearing, however, in such situations the software may load intermediate values to smooth out the transition.

[0048] In accordance with some embodiments, the backlight brightness of a flat-panel display monitor controlled from a computer system may be adjusted to satisfy a computer system power consumption target when the computer system is operating on either battery power or AC power. In order to maintain a pre-determined display image quality, a display image brightness may then be detected and adjusted in response to adjusting the flat-panel display monitor backlight brightness. In one embodiment, the display image brightness is detected by display image detectors that indicate display image brightness to a software program. The software program may then configure a device,

such as a graphics gamma unit, to adjust the display image brightness, while the power consumption target is achieved or maintained.

[0049] In accordance with an embodiment of the present invention, in order to maintain a display image quality, a display image should be illuminated within an acceptable range. Display image luminance may be effected by either increasing display image brightness (by varying the color shade of individual pixels) or increasing backlight brightness. In one embodiment of the present invention, the latter is undesirable in mobile computer systems that rely on battery power to operate, as the backlight tends to consume a significant amount of power.

[0050] In accordance with another embodiment of the present invention, the backlight brightness in a flat-panel display monitor is decreased while maintaining the displayed image quality. Furthermore, the display image brightness may be adjusted in order to achieve or maintain a display image quality regardless of variances in backlight brightness of a flat-panel display or ambient light brightness surrounding a flat-panel display.

[0051] Whereas many alterations and modifications of the present invention will no doubt become apparent to a person of ordinary skill in the art after having read the foregoing description, it is to be understood that any particular embodiment shown and described by way of illustration is in no way intended to be considered limiting. For example, the techniques described herein may be equally beneficial in non-mobile platforms (such as desktop or workstation computer systems) to reduce power consumption. Also, even though embodiments of the present invention discuss RGB images, similar techniques may be applied to luminance-bandwidth-chrominance (YUV) images. Therefore, references to details of various embodiments are not intended to limit the scope of the claims which in themselves recite only those features regarded as essential to the invention.

What is claimed is:

1. A power management method comprising:
receiving image data;
determining a segment mode for the received image data;
selecting a portion of the received image data corresponding to the determined segment mode;
accumulating a value of the selected portion of the received image data;
comparing the accumulated value to a threshold value;
and
generating an interrupt signal if the accumulated value exceeds the threshold value.
2. The method of claim 1 further including providing the interrupt signal to a software module to control a brightness of a display.
3. The method of claim 2 wherein the software module controls the brightness of the display based on ambient light sensor information.
4. The method of claim 2 wherein the display is selected from a group comprising an LCD, a flat panel display, and a plasma screen.
5. The method of claim 1 wherein the image data is in a format selected from a group comprising RGB and YUV.

6. The method of claim 1 further including calculating a Y function of the received image data prior to the selecting act.

7. The method of claim 6 wherein the Y function for an RGB formatted image data is calculated by:

$$0.299*R+0.587*G+0.114*B.$$

8. The method of claim 6 wherein the Y function for an RGB formatted image data is calculated by:

$$(\frac{1}{4}+\frac{1}{32}+\frac{1}{64})*R+(\frac{1}{2}+\frac{1}{16}+\frac{1}{64}+\frac{1}{128})*G+(\frac{1}{8})*B.$$

9. The method of claim 1 further including updating a status register at an end of each frame of the received image data.

10. The method of claim 1 wherein the accumulating act is performed by a bank of counters.

11. The method of claim 1 wherein the portion of the received image data encompasses the entire received image data.

12. A computer system comprising:

a central processing unit (CPU);

a chipset coupled to the CPU;

a flat panel display to display an image;

a backlight modulation circuit coupled to the flat panel display and the chipset to increase image brightness and reducing backlight brightness to reduce power consumption of the flat panel display.

13. The computer system of claim 11 wherein the backlight brightness is reduced to achieve a power consumption reduction of about 30% to about 70%.

14. The computer system of claim 12 wherein the backlight modulation circuit includes:

a bank of comparators;

a threshold register and a bank of accumulators coupled to the bank of comparators, the bank of comparators generating an interrupt signal if a value provided by the bank of accumulators exceeds a threshold value provided by the threshold register.

15. The computer system of claim 14 further including a segment mode register to select a portion of received image data to be displayed on the flat panel display.

16. The computer system of claim 12 further including an enable register to enable a generation of an interrupt signal.

17. The computer system of claim 12 further including a mask register to enable a generation of an interrupt signal.

18. The computer system of claim 12 further including a status register to indicate an end of a frame of image data being processed by the backlight modulation circuit.

19. An article of manufacture comprising:

a machine readable medium that provides instructions that, if executed by a machine, will cause the machine to perform operations including:

receiving image data;

determining a segment mode for the received image data;

selecting a portion of the received image data corresponding to the determined segment mode;

accumulating a value of the selected portion of the received image data;

comparing the accumulated value to a threshold value; and

generating an interrupt signal if the accumulated value exceeds the threshold value.

20. The article of claim 19 wherein the operations further include providing the interrupt signal to a software module to control a brightness of a display.

21. The article of claim 20 wherein the software module controls the brightness of the display based on ambient light sensor information.

22. The article of claim 20 wherein the display is selected from a group comprising an LCD, a flat panel display, and a plasma screen.

23. The article of claim 19 wherein the image data is in a format selected from a group comprising RGB and YUV.

24. The article of claim 19 wherein the operations further include calculating a Y function of the received image data prior to the selecting operation.

25. The article of claim 24 wherein the Y function for an RGB formatted image data is calculated by:

$$0.299*R+0.587*G+0.114*B.$$

26. The article of claim 24 wherein the Y function for an RGB formatted image data is calculated by:

$$(\frac{1}{4}+\frac{1}{32}+\frac{1}{64})*R+(\frac{1}{2}+\frac{1}{16}+\frac{1}{64}+\frac{1}{128})*G+(\frac{1}{8})*B.$$

27. The article of claim 19 wherein the operations further include updating a status register at an end of each frame of the received image data.

28. The article of claim 19 wherein the accumulating operation is performed by a bank of counters.

29. The article of claim 19 wherein the portion of the received image data encompasses the entire received image data.

* * * * *

专利名称(译)	通过亮度控制实现液晶显示 (LCD) 面板电源管理的动态设计		
公开(公告)号	US20040160435A1	公开(公告)日	2004-08-19
申请号	US10/367070	申请日	2003-02-14
[标]申请(专利权)人(译)	崔莹 JENSEN RICHARDW WYATT DAVID KUCHIBHOTLA VENU中号 SADHASIVAN SATHYAMURTHI 惠TODD中号		
申请(专利权)人(译)	崔颖 JENSEN RICHARD W. WYATT DAVID KUCHIBHOTLA VENU M. SADHASIVAN SATHYAMURTHI 惠TODD M.		
当前申请(专利权)人(译)	崔颖 JENSEN RICHARD W. WYATT DAVID KUCHIBHOTLA VENU M. SADHASIVAN SATHYAMURTHI 惠TODD M.		
[标]发明人	CUI YING JENSEN RICHARD W WYATT DAVID KUCHIBHOTLA VENU M SADHASIVAN SATHYAMURTHI WITTER TODD M		
发明人	CUI, YING JENSEN, RICHARD W. WYATT, DAVID KUCHIBHOTLA, VENU M. SADHASIVAN, SATHYAMURTHI WITTER, TODD M.		
IPC分类号	G09G3/28 G09G3/34 G06F1/30		
CPC分类号	G09G3/28 G09G3/3406 G09G2320/0626 G09G2320/064 G09G2320/0646 G09G2360/16 G09G2320/0673 G09G2330/021 G09G2360/144 G09G2360/145 G09G2320/0666		
其他公开文献	US7348957		
外部链接	Espacenet USPTO		

摘要(译)

根据本发明的一个实施例，公开了一种用于平板显示器的电源管理的方法。该方法包括：接收图像数据;确定所接收的图像数据的分段模式;选择与所确定的段模式相对应的所接收的图像数据的一部分;累积所接收的图像数据的所选部分的值;将所述累加值与阈值进行比较;以及如果所述累加值超过所述阈值，则产生中断信号。

