



US007382423B2

(12) **United States Patent**
Chang et al.

(10) **Patent No.:** **US 7,382,423 B2**
(45) **Date of Patent:** **Jun. 3, 2008**

(54) **LIQUID CRYSTAL DISPLAY DEVICE AND BACKLIGHT MODULE THEREOF COMPRISING A SPACER FOR SUPPORTING THE OPTICAL FILM SET**

(75) Inventors: **Ke Chin Chang**, Hsin-Chu (TW); **Fu Tung Chen**, Taoyuan County (TW); **Yu Hsien Wang**, Taoyuan County (TW)

(73) Assignee: **Hannstar Display Corp.**, Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 387 days.

6,417,833	B1	7/2002	Takemoto	
6,783,256	B2	8/2004	Moon	
6,815,485	B2	11/2004	Kamo	
6,867,825	B2	3/2005	Kanatsu et al.	
6,974,221	B2 *	12/2005	Wu et al.	362/29
6,979,102	B2 *	12/2005	You	362/218
6,997,582	B2	2/2006	Yang et al.	
7,059,736	B2 *	6/2006	Yu et al.	362/97
7,101,069	B2	9/2006	Yu et al.	
2002/0044437	A1	4/2002	Lee	
2002/0113924	A1	8/2002	Saito et al.	
2003/0123258	A1	7/2003	Nitto et al.	
2004/0012763	A1	1/2004	Chuan-Pei Yu et al.	

FOREIGN PATENT DOCUMENTS

JP	1138234 A	5/1989
JP	10-326517	12/1998

(21) Appl. No.: **10/957,670**

(22) Filed: **Oct. 5, 2004**

(65) Prior Publication Data

US 2005/0219431 A1 Oct. 6, 2005

(30) Foreign Application Priority Data

Mar. 31, 2004 (TW) 93108883 A

(51) Int. Cl.

G02F 1/1333	(2006.01)
G02F 1/1335	(2006.01)
G01D 11/28	(2006.01)
F21V 7/04	(2006.01)

(52) U.S. Cl. **349/64; 349/58; 349/70; 362/29; 362/632**

(58) Field of Classification Search 349/61, 349/58, 64; 362/632-634, 29
See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

6,407,781 B2 6/2002 Kitada

OTHER PUBLICATIONS

JP 2002-116704A, Publication Date Apr. 19, 2002.

* cited by examiner


Primary Examiner—Andrew Schechter

Assistant Examiner—W. Patty Chen

(57) ABSTRACT

A backlight module is applied to a liquid crystal display device. The liquid crystal display device includes an optical film set having at least one optical film. The optical film set is disposed above the backlight module. The backlight module includes a housing and a spacer. The housing has a bottom plate provided with a through opening, an inward side and an outward side, wherein the inward side faces the optical film and the outward side is opposite to the inward side. The spacer supports the optical film set and is mounted onto the bottom plate of the backlight module from the outward side of the bottom plate.

19 Claims, 8 Drawing Sheets

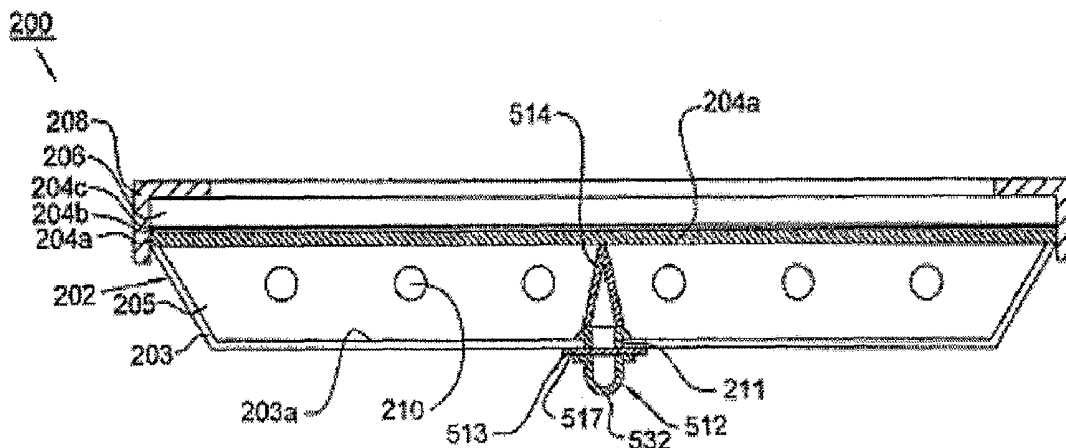

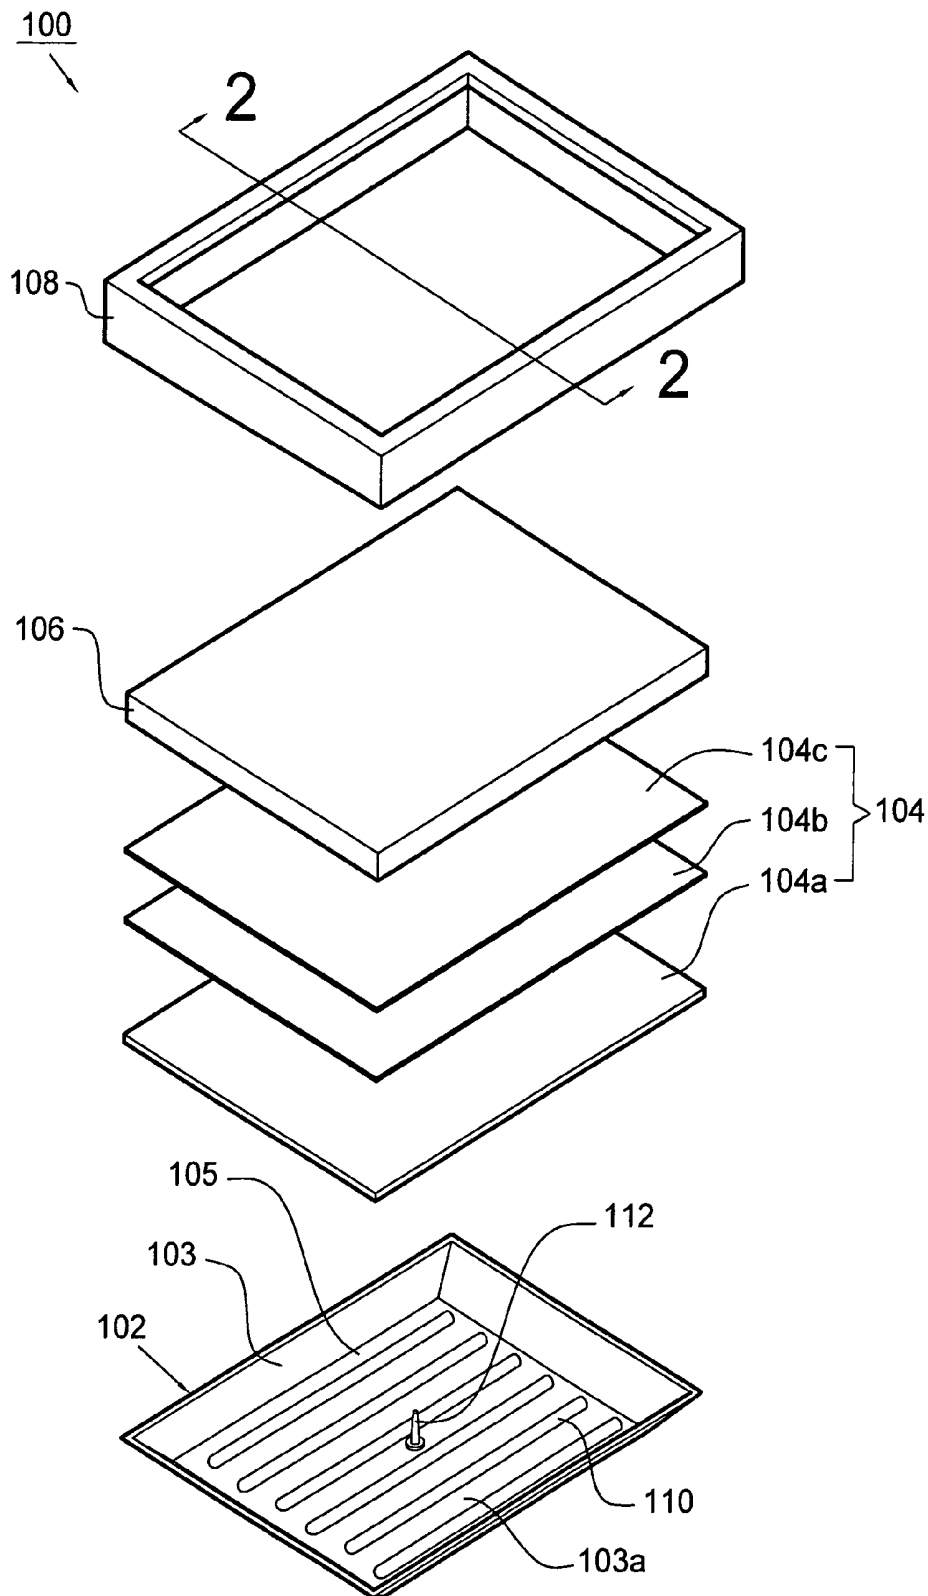


FIG. 1 (PRIOR ART)

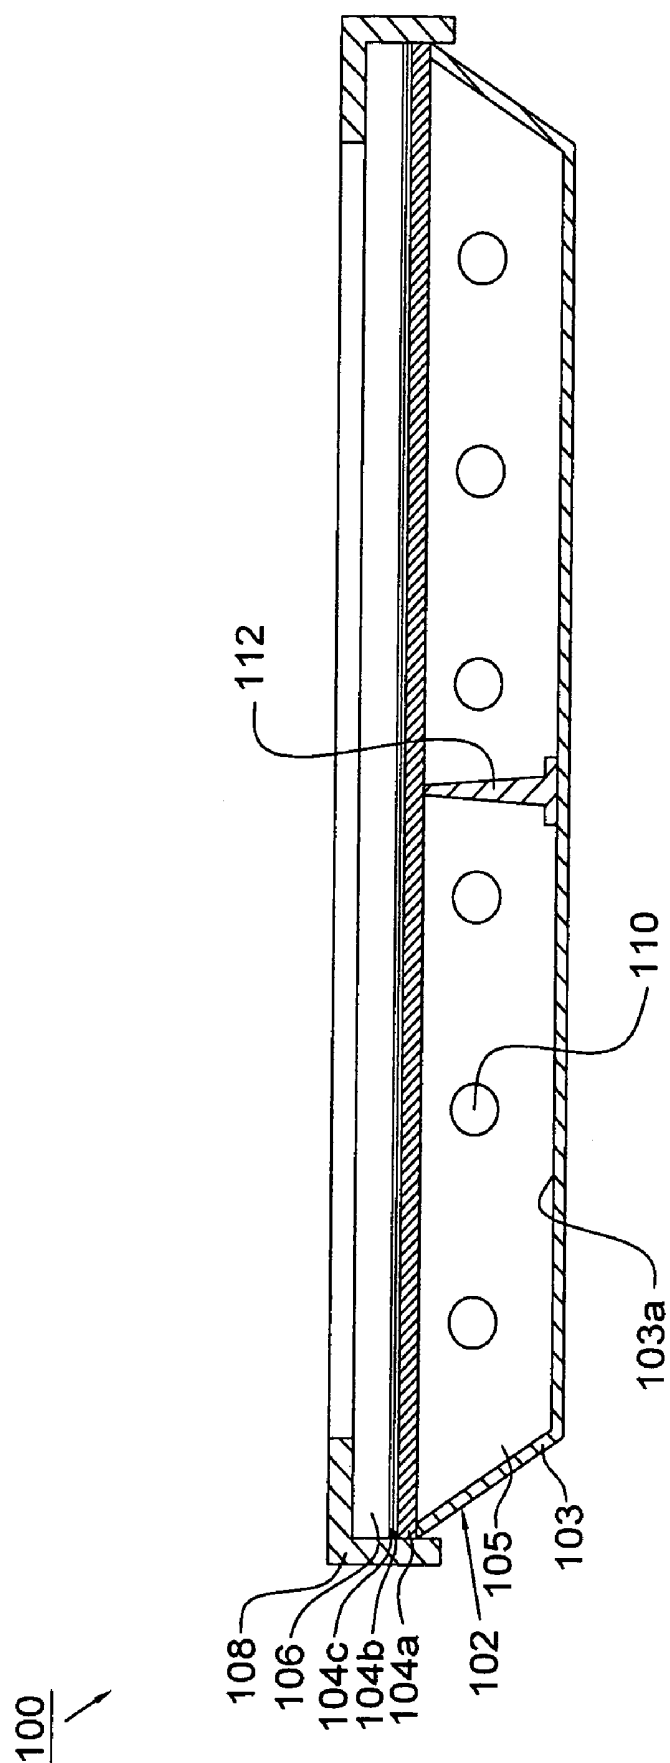


FIG. 2 (PRIOR ART)

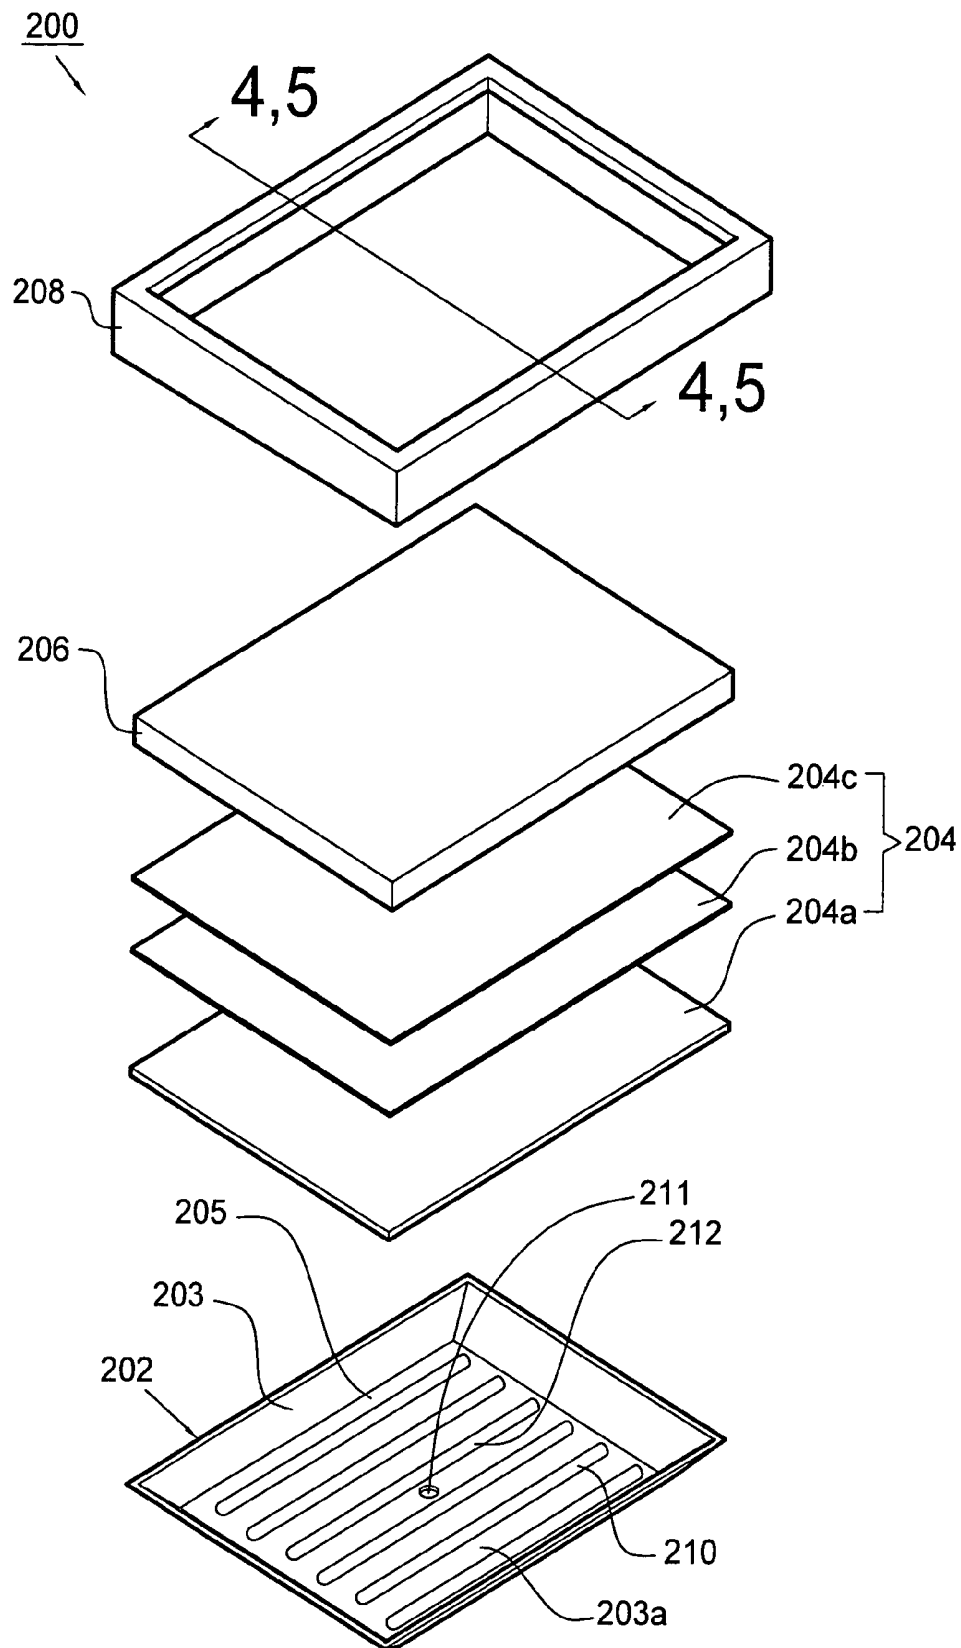


FIG. 3

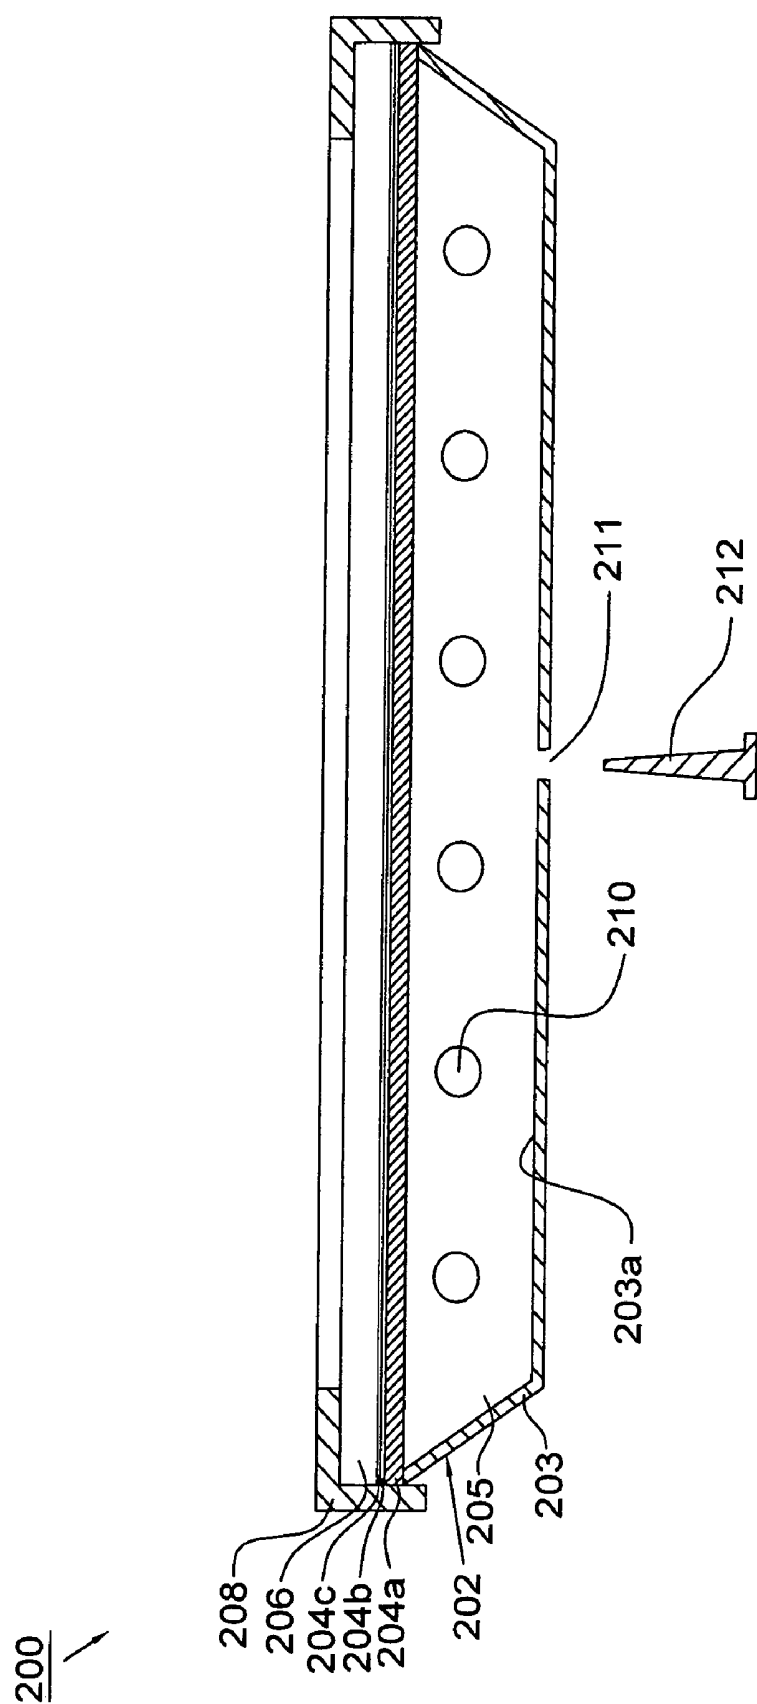


FIG. 4

200

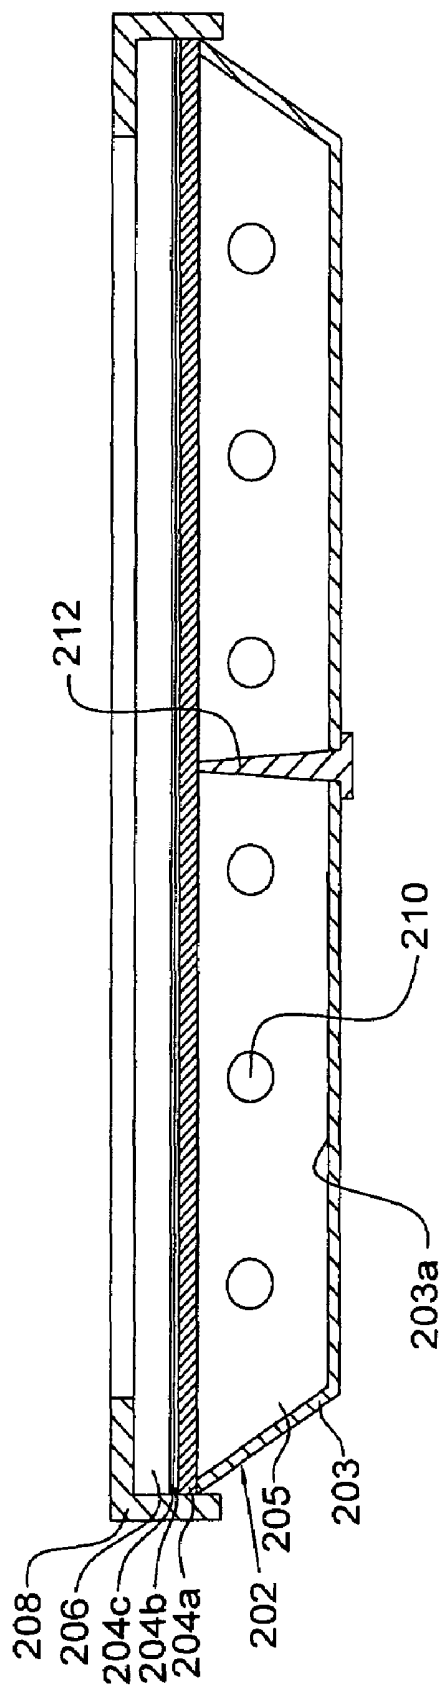


FIG. 5

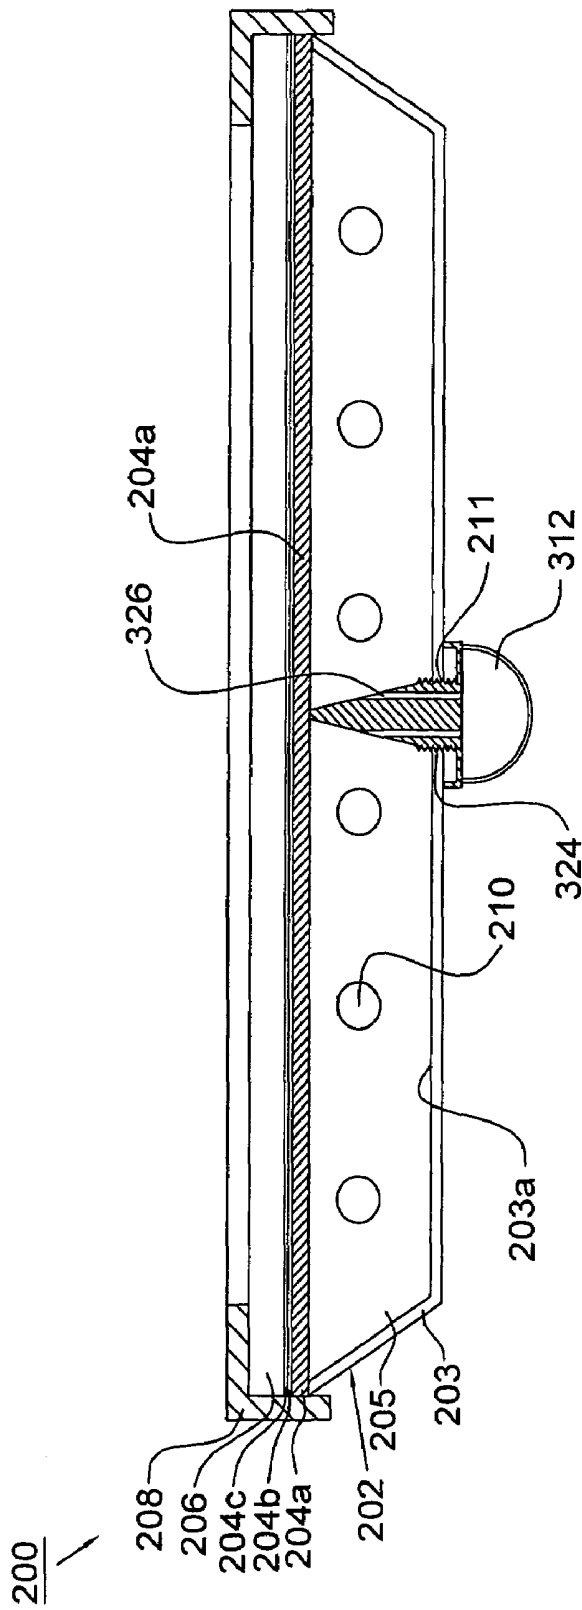


FIG. 6

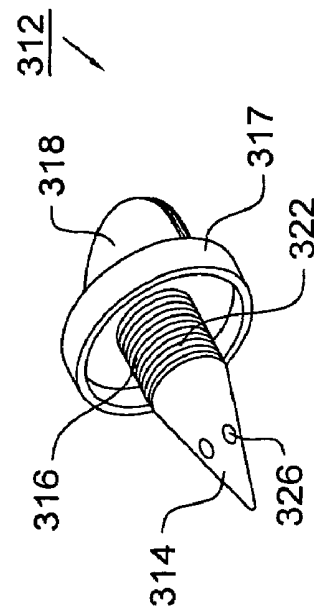


FIG. 7

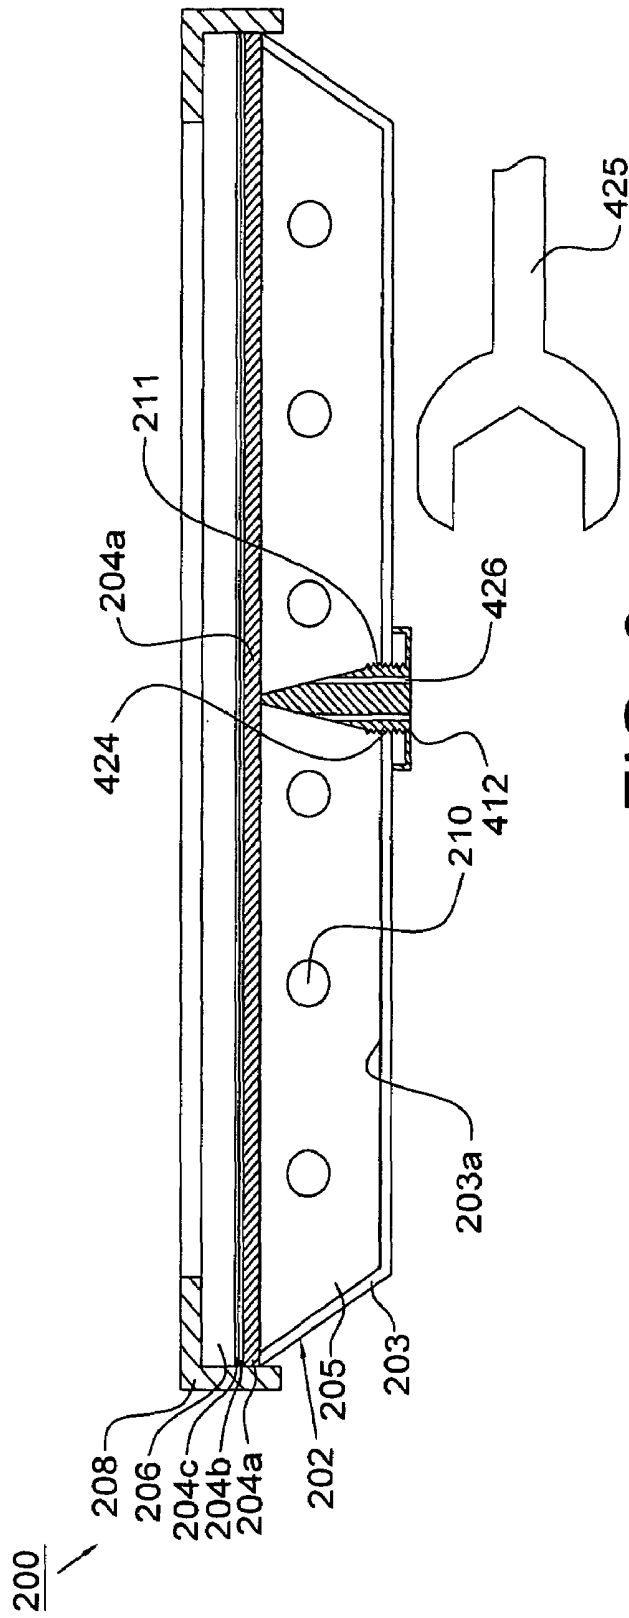


FIG. 8

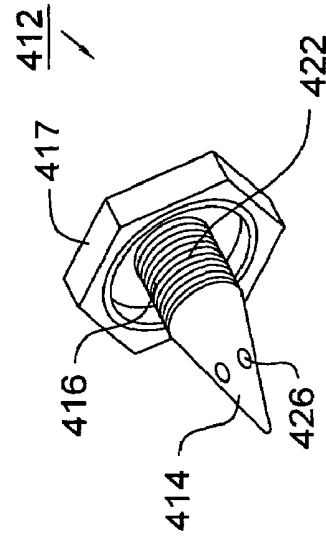


FIG. 9

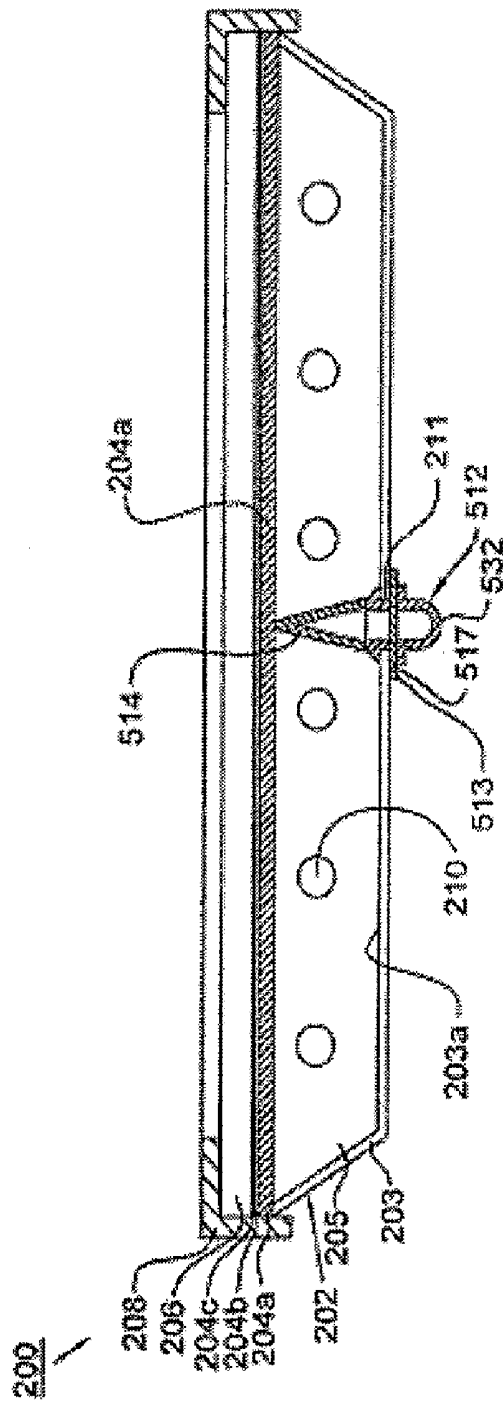


FIG. 10

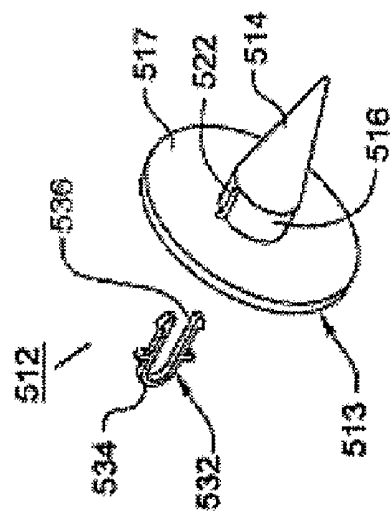


FIG. 11a

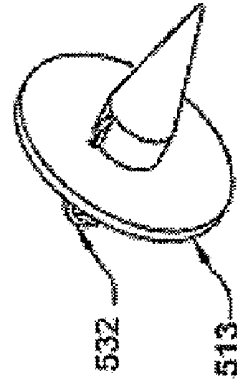


FIG. 11b

LIQUID CRYSTAL DISPLAY DEVICE AND BACKLIGHT MODULE THEREOF COMPRISING A SPACER FOR SUPPORTING THE OPTICAL FILM SET

This application claims the priority benefit of Taiwan Patent Application Serial Number 093108883, filed Mar. 31, 2004, the full disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention generally relates to a liquid crystal display device, and more particularly to a backlight module of a liquid crystal display device including a spacer which is mounted onto the bottom plate of the backlight module from the outward side of the bottom plate.

2. Description of the Related Art

Due to the advance of electronic technology, especially for the popularity of portable electronic products, the requirements of light, compact and low-energy consuming display are gradually increasing. With the advantages of low-energy consuming, low-heat dissipation, light weight and non-luminescence, liquid crystal displays (LCD) have been widely used in the electronic products and even have replaced the traditional CRT displays.

In general, a liquid crystal display usually includes a backlight module for providing light to its liquid crystal panel. However, the liquid crystal display may use different kinds of backlight modules depending on its use and size. There are two main types for these backlight modules, i.e. a direct back light type (or direct type) and an edge light type (or side light type).

Referring to FIG. 1, it depicts a direct back light type backlight module of conventional liquid crystal display device 100. The liquid crystal display device 100 includes a backlight module 102, an optical film set 104, a liquid crystal panel 106 and a frame 108. The back light module 102 is disposed under the liquid crystal panel 106 for distributing the light from a light source uniformly over the surface of the liquid crystal panel 106. The back light module 102 includes a metal housing 103 and a plurality of lamps 110 disposed on an inward side of the metal housing 103. The optical film set 104 is disposed between the backlight module 102 and the liquid crystal panel 106 and includes a diffusing plate 104a located on the back light module 102, a diffusing sheet 104b located on the diffusing plate 104a and a prism sheet 104c located on the diffusing sheet 104b. The frame 108 is disposed on the liquid crystal panel 106 and the optical film set 104 and joined with the backlight module 102 for fixing the liquid crystal panel 106 and the optical film set 104 to the backlight module 102.

Referring to FIG. 2, the lamps 110 are separately disposed in a cavity 105 formed by the metal housing 103 and located under a display region of the liquid crystal panel 106 for uniformly distributing the generated light to the liquid crystal panel 106.

The liquid crystal display has a tendency to develop the large dimension, and therefore the requirement of the illumination is increasingly high as the dimension is increasingly large. Particularly, a direct back light type backlight module is applied to the liquid crystal display with large dimension, and therefore the direct back light type backlight module is increasingly important. However, the light emitting area of the direct back light type backlight module is increasingly large, but the thickness of the direct back light

type backlight module is not changed. Thus, the structural strength of the direct back light type backlight module is not high enough such that it is easily deformed. In order to solve the problem of deformation, the direct back light type backlight module is provided with a plurality of spacers disposed therein for increasing the structural strength of the direct back light type backlight module.

Furthermore, referring to FIG. 2 again, there must be a predetermined distance between each lamp 110 and the diffusing plate 104a, and therefore the bottom plate 103a of the metal housing 103 is provided with at least one spacer 112 for supporting the diffusing plate 104a such that there can be the predetermined distance between each lamp 110 and the diffusing plate 104a. The metal housing 103 is coated with an adhesive layer (not shown), and the spacer 112 is mounted on the bottom plate 103a of the metal housing 103 by means of the adhesive layer.

Recently, when the optical film set is assembled to the direct back light type backlight module, the spacer 112 is firstly put in the metal housing 103 by a front putting manner (i.e. the front putting manner is that the spacer 112 is put in the metal housing 103 from the upward side of the bottom plate 103a) and is then mounted on the bottom plate 103a of the metal housing 103, and the diffusing plate 104a, the diffusing sheet 104b and the prism sheet 104c are finally disposed on the backlight module 102. However, the diffusing plate 104a and the optical films must be positioned by a fine-tuning action, and the fine-tuning action may cause the spacer 112 to scrape the surface of the diffusing plate 104a, thereby resulting in a scrape on the diffusing plate 104a and further resulting in bad display quality.

Accordingly, there exists a need for a backlight module including a spacer which is mounted onto the bottom plate of the backlight module from the outward side of the bottom plate.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a backlight module including a spacer which can be mounted onto the bottom plate of the backlight module from the outward side of the bottom plate so as to prevent a diffusing plate from scrape.

The present invention provides a backlight module, which is applied to a liquid crystal display device. The liquid crystal display device includes an optical film set having at least one optical film, wherein the optical film is disposed above the backlight module. The backlight module includes a housing and a spacer. The housing has a bottom plate provided with a through opening, an inward side and an outward side, wherein the inward side faces the optical film and the outward side is opposite to the inward side. The spacer supports the optical film set and is mounted onto the bottom plate of the backlight module from the outward side of the bottom plate.

According to the backlight module of the present invention, the fine-tuning action of the optical film set cannot cause the spacer to scrape the optical film set. If the housing must be taken apart when the lamp needs change, the spacer can be firstly removed from the outward side of the housing so as to prevent the diffusing plate from scrape. Furthermore, the spacer according to the present invention has advantages of easy assembly and resource recovery.

The foregoing, as well as additional objects, features and advantages of the invention will be more readily apparent from the following detailed description, which proceeds with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded perspective schematic view of a liquid crystal display device in the prior art.

FIG. 2 is a cross-sectional schematic view along of 2-2 line of FIG. 1.

FIG. 3 is an exploded perspective schematic view of a liquid crystal display device according to the present invention.

FIG. 4 is a cross-sectional schematic view along of 4-4 line of FIG. 3 showing a spacer not disposed thereto.

FIG. 5 is a cross-sectional schematic view along of 5-5 line of FIG. 3 showing a spacer disposed thereto.

FIG. 6 is a cross-sectional schematic view of a liquid crystal display device according to the present invention showing a spacer according to the first embodiment.

FIG. 7 is a perspective schematic view of a spacer according to the first embodiment of the present invention.

FIG. 8 is a cross-sectional schematic view of a liquid crystal display device according to the present invention showing a spacer according to the second embodiment.

FIG. 9 is a perspective schematic view of a spacer according to the second embodiment of the present invention.

FIG. 10 is a cross-sectional schematic view of a liquid crystal display device according to the present invention showing a spacer according to the third embodiment.

FIG. 11a is a perspective schematic view of a spacer according to the third embodiment of the present invention showing the spacer is disassembled.

FIG. 11b is a perspective schematic view of a spacer according to the third embodiment of the present invention showing the spacer is assembled.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to FIG. 3, it depicts a liquid crystal display device 200 according to an embodiment of the present invention. The liquid crystal display device 200 includes a backlight module 202 (e.g. a direct back light type backlight module), an optical film set 204, a liquid crystal panel 206 and a frame 208. The backlight module 202 is disposed under the liquid crystal panel 206 and the optical film set 204 for distributing the light from a light source uniformly over the surface of the liquid crystal panel 206. The backlight module 202 includes a housing 203, such as a metal housing, and a plurality of lamps 210, such as cold cathode fluorescent lamps, disposed on a bottom plate 203a of the housing 203. The optical film set 204 is disposed between the backlight module 202 and the liquid crystal panel 206 and includes a diffusing plate 204a located on the backlight module 202 and a plurality of optical films, such as a diffusing sheet 204b and a prism sheet 204c, located on the diffusing sheet 204b. The frame 208 is disposed on the liquid crystal panel 206 and the optical film set 204 and joined with the backlight module 202 for fixing the liquid crystal panel 206 and the optical film set 204 to the backlight module 202. The lamps 210 are separately disposed in a cavity 205 formed by the housing 203 and located under a display region of the liquid crystal panel 206 for uniformly distributing the generated light to the liquid crystal panel 206.

Referring to FIG. 4, the bottom plate 203a has an inward side and an outward side opposite to the inward side, wherein the inward side faces the optical film set 204. When the optical film set 204 is assembled to the backlight module 202, the diffusing plate 204a and the optical films are firstly

disposed on the backlight module 202, the diffusing plate 204a and the optical films are then positioned by a fine tuning action, and at least one spacer 212 is finally put in the housing 203 by a rear putting manner (i.e. the rear putting manner is that the spacer 212 is put in a through opening 211 of the bottom plate 203a from a downward side or a outward side of the bottom plate 203a) and is mounted on the bottom plate 203a of the housing 203 for supporting the optical film set 204, shown in FIG. 5. Thus, the fine-tuning action of the diffusing plate 204a and the optical films cannot cause the spacer 212 to scrape a lower surface of the optical film set 204. Furthermore, if the housing 203 must be taken apart when the lamp needs change, the spacer 312 can be firstly removed from the outward side of the housing 203 so as to prevent the optical film set 204 from scrape.

Referring to FIG. 5 again, there can be a constant distance between each lamp 210 and the optical film set 204 by using the spacer 212. Furthermore, the spacer 212 enhances the structure of the backlight module 202 so as to prevent the backlight module 202 from deformation.

Referring to FIGS. 6 and 7, they depict a spacer 312 according to the first embodiment of the present invention. The spacer 312 is mounted in the bottom plate 203a by means of a screwed attachment manner. The spacer 312 includes a protruding portion 314, an intermediate portion 316, a stopper portion 317 and a rear portion 318. The protruding portion 314 will touch the optical film set 204 and can be of white or transparent taper shape, which is made of polycarbonate (PC) or Polymethyl Methacrylate (PMMA) material. The intermediate portion 316 can be cylindrical in shape, is connected to the protruding portion 314, and is provided with outer threads 322. The stopper portion 317 can be in the shape of cap, e.g. being flat in shape, in the shape of screw nut, being circular in shape or being rectangular in shape, is connected to the intermediate portion 316, and is located on the outer side of the bottom plate 203a. The rear portion 318 is connected to the stopper portion 317, and can be in the shape of plate so as to be conveniently rotated by a user.

The through opening 211 of the bottom plate 203a is provided with inner threads 324 which are corresponding to the outer threads 322 of the intermediate portion 316. When the spacer 312 is put in the through opening 211 from the outward side of the bottom plate 203a, the rear portion 318 of the spacer 312 can be rotated by the hand of the user. The outer threads 322 of the intermediate portion 316 are engaged with the inner threads 324 of the through opening 211, such that the protruding portion 314 of the spacer 312 can be rotated and entered into the cavity 205 of the backlight module 200. When the stopper portion 317 of the spacer 312 is stopped on the bottom plate, the spacer 312 is mounted on the bottom plate 203a of the housing 203. Likewise, when the spacer 312 must be taken away from the through opening 211 of the bottom plate 203a, the rear portion 318 of the spacer 312 can be rotated in opposite direction by the hand of the user, such that the spacer 312 can be taken away from the bottom plate 203a of the housing 203. The spacer 312 according to the present invention has advantages of easy assembly and resource recovery.

Furthermore, referring to FIGS. 6 and 7 again, the spacer 312 further includes a plurality of thermally conductive holes or grooves 326 which are connected to one another or are separated for dissipating the heat of the cavity 205 of the housing 203.

Referring to FIGS. 8 and 9, they depict a spacer 412 according to the second embodiment of the present invention, which is mounted on the bottom plate 203a by using a

screwed attachment manner. The spacer **412** is similar to the spacer **312** wherein the similar elements are designated with the similar reference numerals. The spacer **412** includes a protruding portion **414**, an intermediate portion **416** and a stopper portion **417**. The protruding portion **414** will contact the optical film set **204**. The intermediate portion **416** is connected to the protruding portion **414** and provided with outer threads **422**. The stopper portion **417** is connected to the intermediate portion **416** and can be in the shape of screwed cap, e.g. being hexagon in shape, so as to be conveniently rotated by a user using a tool **425**, e.g. hexagon wrench.

The through opening **211** of the bottom plate **203a** is provided with inner threads **424** which are corresponding to the outer threads **422** of the intermediate portion **416**. When the spacer **412** is put in the through opening **211** from the outward side of the bottom plate **203a**, the stopper portion **417** of the spacer **412** can be rotated by the user using the tool **425**. The outer threads **422** of the intermediate portion **416** are engaged with the inner threads **424** of the through opening **211**, such that the protruding portion **414** of the spacer **412** can be rotated and entered into the cavity **205** of the backlight module **200**. When the stopper portion **417** of the spacer **412** is stopped on the bottom plate **203a**, the spacer **412** is mounted on the bottom plate **203a** of the housing **203**. Likewise, when the spacer **412** must be taken away from the through opening **211** of the bottom plate **203a**, the stopper portion **417** of the spacer **412** can be rotated in opposite direction by the user using the tool **425**, such that the spacer **412** can be taken away from the bottom plate **203a** of the housing **203**. The spacer **412** according to the present invention has advantages of easy assembly and resource recovery.

Furthermore, referring to FIGS. **8** and **9** again, the spacer **412** further includes a plurality of thermally conductive holes or grooves **326** for dissipating the heat of the cavity **205** of the housing **203**.

Referring to FIGS. **10**, **11a** and **11b**, they depict a spacer **512** according to the third embodiment of the present invention, which is mounted on the bottom plate **203a** by using a structurally snapping manner. The spacer **512** includes a spacer body **513** and an inverse hook **532**. The spacer body **513** includes a protruding portion **514**, an intermediate portion **516** and a stopper portion **517**. The protruding portion **514** will contact the optical film set **204**. The intermediate portion **516** can be cylindrical in shape or rectangular in shape, is connected to the protruding portion **514**, and has a groove **522** located in the edge of the intermediate portion **516**. The stopper portion **517** is connected to the intermediate portion **516** and located on the outside of the bottom plate **203a**. The inverse hook **532** has a rear end **534** and a protruding end **536**, and the protruding end **536** can be snapped into the groove **522** of the intermediate portion **516**. The inverse hook **532** can be made of elastic material.

The through opening **211** of the bottom plate **203a** can be circular or rectangular opening for be corresponding the intermediate portion **516** of the spacer body **513**. When the spacer **512** is put in the through opening **211** from the outward side of the bottom plate **203a**, the spacer body **513** is inserted into the through opening **211** and then the protruding end **536** of the inverse hook **532** is inserted and snapped into the groove **522** of the intermediate portion **516** by the user. The protruding end **536** of the inverse hook **532** hooks the bottom plate **203a**, such that the protruding portion **514** of the spacer **512** is mounted to the cavity **205** of the backlight module **200**. When the stopper portion **517**

of the spacer **512** is stopped on the bottom plate **203a**, the spacer **512** is mounted on the bottom plate **203a** of the housing **203**. Likewise, when the spacer **512** must be taken away from the through opening **211** of the bottom plate **203a**, the inverse hook **532** is firstly removed and then the spacer body **513** is removed, such that the spacer **512** can be taken away from the bottom plate **203a** of the housing **203**. The spacer **512** according to the present invention has advantages of easy assembly and resource recovery.

Furthermore, referring to FIGS. **11a** and **11b** again, the spacer **512** can be of hollow shape and is connected to the groove **522** of the intermediate portion **516**. The gap between the protruding end **536** and the groove **522** is provided for dissipating the heat of the cavity **205** of the housing **203**.

Although the invention has been explained in relation to its preferred embodiment, it is not used to limit the invention. It is to be understood that many other possible modifications and variations can be made by those skilled in the art without departing from the spirit and scope of the invention as hereinafter claimed.

What is claimed is:

1. A backlight module for a liquid crystal display device, comprising:

an optical film set;

a housing having a bottom plate defining a through opening therein, an inward side and an outward side, wherein the inward side faces the optical film set and the outward side is opposite to the inward side; and

a spacer for supporting the optical film set, the spacer being put into the through opening of the bottom plate of the backlight module from the outward side of the bottom plate, the spacer comprising a thermally conductive groove, and the spacer having:

a tapered protruding portion,

an intermediate portion connected to the protruding portion, and

a stopper portion connected to the intermediate portion, wherein:

the protruding portion is configured to contact the optical film set,

the diameter of the intermediate portion is not larger than the diameter of the through opening,

the intermediate portion is disposed in the through opening,

the stopper portion is in the shape of plate, and

all of the stopper portion is positioned outside the outward side of the bottom plate.

2. The backlight module as claimed in claim 1, wherein the spacer is hollow in shape.

3. The backlight module as claimed in claim 1, wherein the spacer is mounted on the bottom plate by structurally snapping manner.

4. The backlight module as claimed in claim 1, wherein the spacer further comprises an inverse hook for mounting the protruding portion in the backlight module.

5. The backlight module as claimed in claim 4, wherein the intermediate portion has a groove, and the inverse hook has a protruding end snapped into the groove of the intermediate portion.

6. The backlight module as claimed in claim 5, wherein there is a gap between the protruding end and the groove of the intermediate portion.

7. A liquid crystal display device comprising:

a liquid crystal panel;

a backlight module disposed under the liquid crystal panel and comprising:

an optical film set;
 a housing having a bottom plate defining a through opening therein, an inward side and an outward side, wherein the inward side faces the optical film set and the outward side is opposite to the inward side; and
 a spacer for supporting the optical film set, the spacer being put into the through opening of the bottom plate of the backlight module from the outward side of the bottom plate, the spacer being hollow and having a tapered protruding portion, an intermediate portion connected to the tapered protruding portion, and a stopper portion connected to the intermediate portion, wherein the protruding portion is:
 configured to contact the optical film set,
 the diameter of the intermediate portion is not larger than the diameter of the through opening,
 the intermediate portion is disposed in the through opening,
 the stopper portion is in the shape of plate, and
 all of the stopper portion is positioned outside the outward side of the bottom plate; and
 a frame joined with the backlight module for fixing the liquid crystal panel.

8. The liquid crystal display device as claimed in claim 7, wherein the spacer further comprises a rear portion connected to the stopper portion.

9. The liquid crystal display device as claimed in claim 7, wherein the spacer is mounted on the bottom plate by a structurally snapping manner.

10. The liquid crystal display device as claimed in claim 9, wherein the spacer further comprises an inverse hook for mounting the protruding portion in the backlight module.

11. The liquid crystal display device as claimed in claim 10, wherein the intermediate portion has a groove, and the inverse hook has a protruding end snapped into the groove of the intermediate portion.

12. The liquid crystal display device as claimed in claim 7, wherein the spacer further comprises a thermally conductive groove.

13. The liquid crystal display device as claimed in claim 7, wherein the spacer further comprises a thermally conductive groove.

14. A backlight module for a liquid crystal display device, comprising:
 an optical film set;
 a housing having a bottom plate defining a through opening therein, an inward side and an outward side, wherein the inward side faces the optical film set and the outward side is opposite to the inward side; and
 a spacer for supporting the optical film set, the spacer being put into the through opening of the bottom plate of the backlight module from the outward side of the bottom plate, the spacer being hollow, and the spacer having:
 a tapered protruding portion,
 an intermediate portion connected to the protruding portion, and
 a stopper portion connected to the intermediate portion, wherein:
 the protruding portion is configured to contact the optical film set,
 the intermediate portion is disposed in the through opening, and
 all of the stopper portion is positioned outside the outward side of the bottom plate.

15. The backlight module as claimed in claim 14, wherein the spacer is mounted on the bottom plate by structurally snapping manner.

16. The backlight module as claimed in claim 14, wherein the spacer further comprises an inverse hook for mounting the protruding portion in the backlight module.

17. The backlight module as claimed in claim 16, wherein the intermediate portion has a groove, and the inverse hook has a protruding end snapped into the groove of the intermediate portion.

18. The backlight module as claimed in claim 16, wherein there is a gap between the protruding end and the groove of the intermediate portion.

19. The backlight module as claimed in claim 14, wherein the spacer further comprises a thermally conductive groove.

* * * * *

专利名称(译)	液晶显示装置及其背光模块，包括用于支撑光学膜组的间隔物		
公开(公告)号	US7382423	公开(公告)日	2008-06-03
申请号	US10/957670	申请日	2004-10-05
[标]申请(专利权)人(译)	瀚宇彩晶股份有限公司		
申请(专利权)人(译)	瀚宇彩晶股份有限公司.		
[标]发明人	CHANG KE CHIN CHEN FU TUNG WANG YU HSIEN		
发明人	CHANG, KE CHIN CHEN, FU TUNG WANG, YU HSIEN		
IPC分类号	G02F1/1333 F21V7/04 G02F1/1335 G01D11/28 G02F1/13357		
CPC分类号	G02F1/133608 G02F1/133604		
优先权	093108883 2004-03-31 TW		
其他公开文献	US20050219431A1		
外部链接	Espacenet USPTO		

摘要(译)

背光模块应用于液晶显示装置。液晶显示装置包括具有至少一个光学膜的光学膜组。光学膜组件设置在背光模块上方。背光模块包括壳体和垫片。壳体具有底板，该底板设有通孔，向内侧和向外侧，其中向内侧面面向光学膜，而向外侧面与向内侧相对。间隔件支撑光学膜组，并从底板的外侧安装到背光模块的底板上。

