



US007982706B2

(12) **United States Patent**
Ichikawa et al.

(10) **Patent No.:** **US 7,982,706 B2**
(45) **Date of Patent:** **Jul. 19, 2011**

(54) **BACKLIGHT DEVICE, METHOD OF DRIVING BACKLIGHT AND LIQUID CRYSTAL DISPLAY APPARATUS**

(75) Inventors: **Hiroaki Ichikawa**, Kanagawa (JP);
Kenichi Kikuchi, Kanagawa (JP);
Kimio Hatajiri, Kanagawa (JP)

(73) Assignee: **Sony Corporation** (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 834 days.

(21) Appl. No.: **11/283,148**

(22) Filed: **Nov. 18, 2005**

(65) **Prior Publication Data**

US 2006/0125773 A1 Jun. 15, 2006

(30) **Foreign Application Priority Data**

Nov. 19, 2004 (JP) 2004-336572
Aug. 10, 2005 (JP) 2005-232385

(51) **Int. Cl.**
G09G 3/36 (2006.01)

(52) **U.S. Cl.** **345/102; 345/87; 345/88; 345/204**

(58) **Field of Classification Search** **345/102, 345/690, 87-88, 204; 349/61-62**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,411,046 B1 * 6/2002 Muthu 315/309
6,441,558 B1 * 8/2002 Muthu et al. 315/149
6,621,482 B2 9/2003 Fuller
6,888,529 B2 * 5/2005 Bruning et al. 345/102
7,199,771 B2 4/2007 Yamazaki et al.
7,208,713 B2 * 4/2007 Ishiguchi 250/205

7,439,941 B1 * 10/2008 Kumakura et al. 345/60
7,511,695 B2 * 3/2009 Furukawa et al. 345/102
7,656,371 B2 * 2/2010 Shimizu et al. 345/83
7,888,623 B2 * 2/2011 Kawashima et al. 250/205
2003/0011559 A1 * 1/2003 Adachi et al. 345/102
2003/0214242 A1 11/2003 Berg-johansen
2003/0230991 A1 12/2003 Muthu et al.
2006/0022616 A1 * 2/2006 Furukawa et al. 315/309
2006/0221047 A1 * 10/2006 Tanizoe et al. 345/102

FOREIGN PATENT DOCUMENTS

EP 1482770 12/2004
JP 10-049074 A 2/1998

(Continued)

Primary Examiner — Alexander Eisen


Assistant Examiner — Jason M Mandeville

(74) *Attorney, Agent, or Firm* — Lerner, David, Littenberg, Krumholz & Mentlik, LLP

(57) **ABSTRACT**

The present invention prevents extension of the time period from powering on a device to convergence of chromaticity of emitted white light on a certain chromaticity, irrespective of the temperature when the device is powered on. A color liquid crystal display apparatus includes a liquid crystal display unit, a backlight employing LEDs of red, green and blue as its light source, a drive unit for driving the LEDs of each color, a temperature sensor for sensing the temperature of the LEDs, and a chromaticity sensor for sensing the chromaticity of white light emitted from the LEDs. The drive unit supplies a current to the LEDs to drive them, and implements feedback control of the amount of current for the LEDs of each color based on a value sensed by the chromaticity sensor so that the white light has a certain chromaticity. Furthermore, upon powering on the backlight, the drive unit retrieves initial current values of the LEDs of each color from a non-volatile memory, and corrects the initial current values according to a value sensed by the temperature sensor to activate the LEDs of each color with the corrected value.

8 Claims, 10 Drawing Sheets

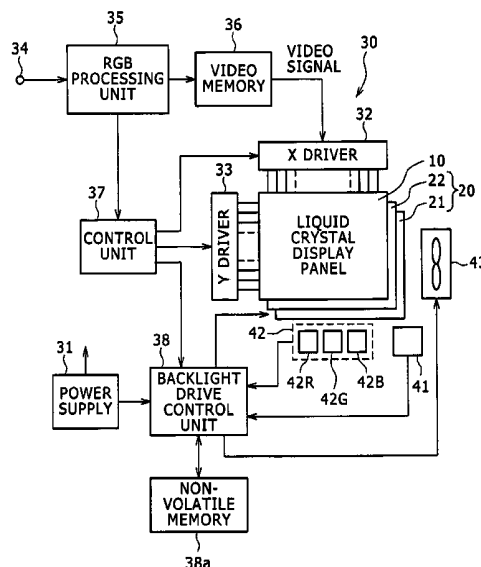

US 7,982,706 B2

Page 2

FOREIGN PATENT DOCUMENTS

JP 2001-257921 A 9/2001
JP 2001-272938 10/2001
JP 2002-189220 A 7/2002

JP 2002-258792 A 9/2002
JP 2004-193029 A 7/2004
WO WO 03075617 A1 * 9/2003

* cited by examiner

FIG. 1

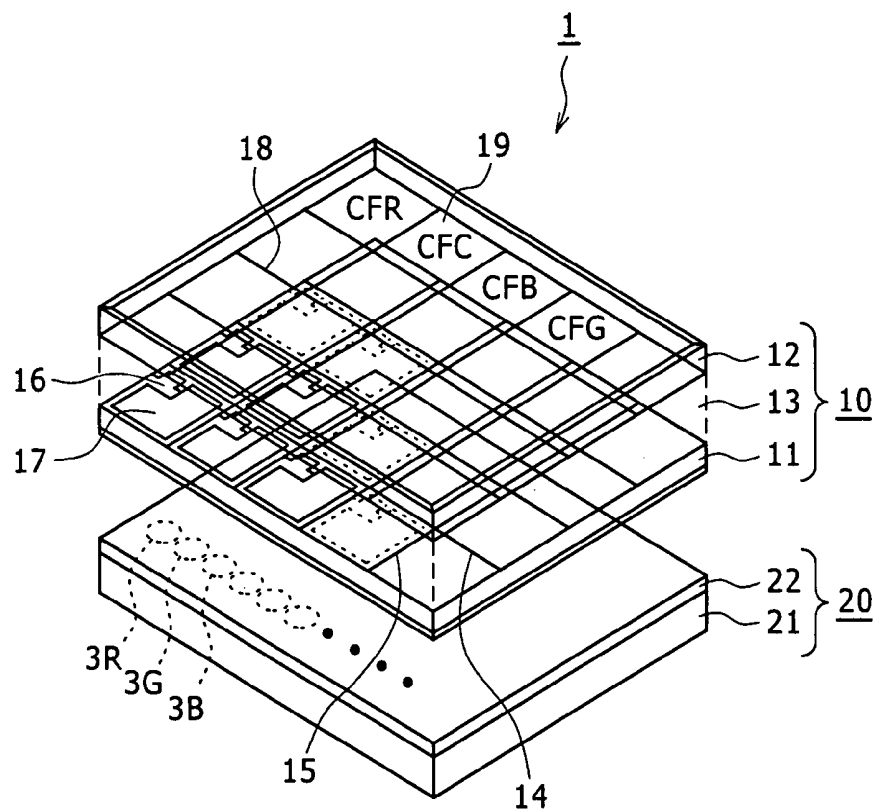


FIG. 2

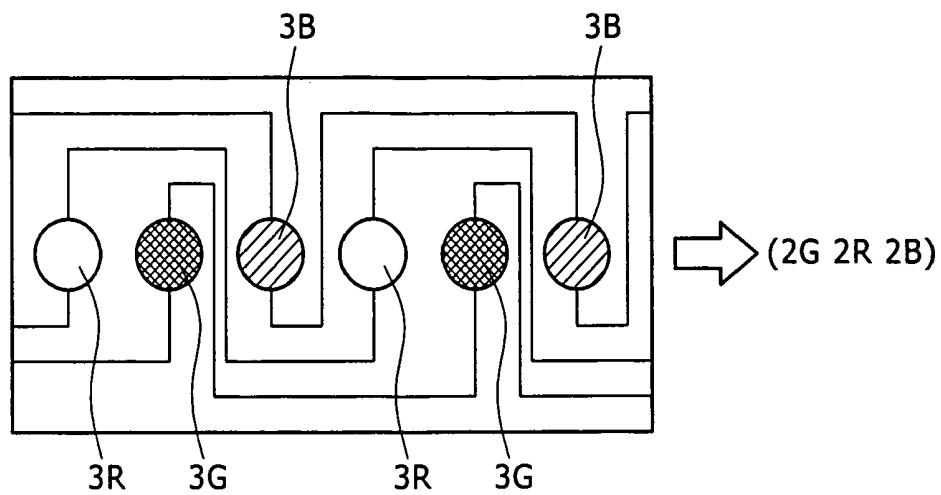


FIG. 3

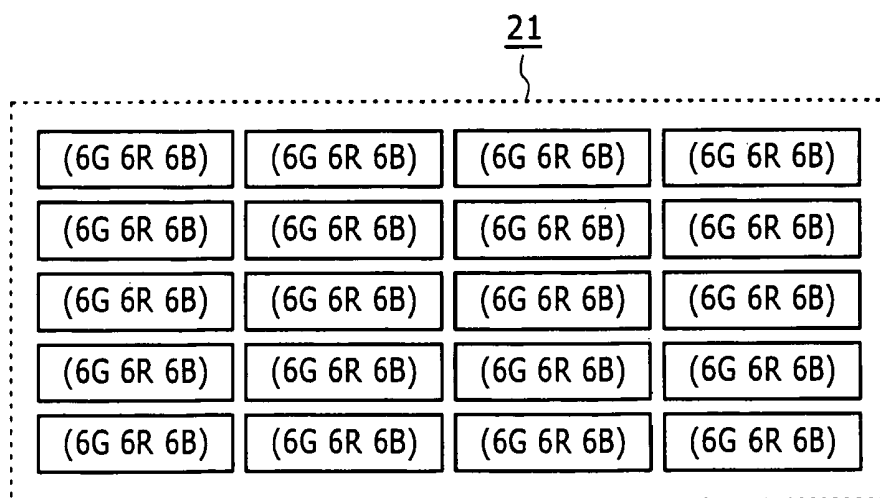


FIG. 4

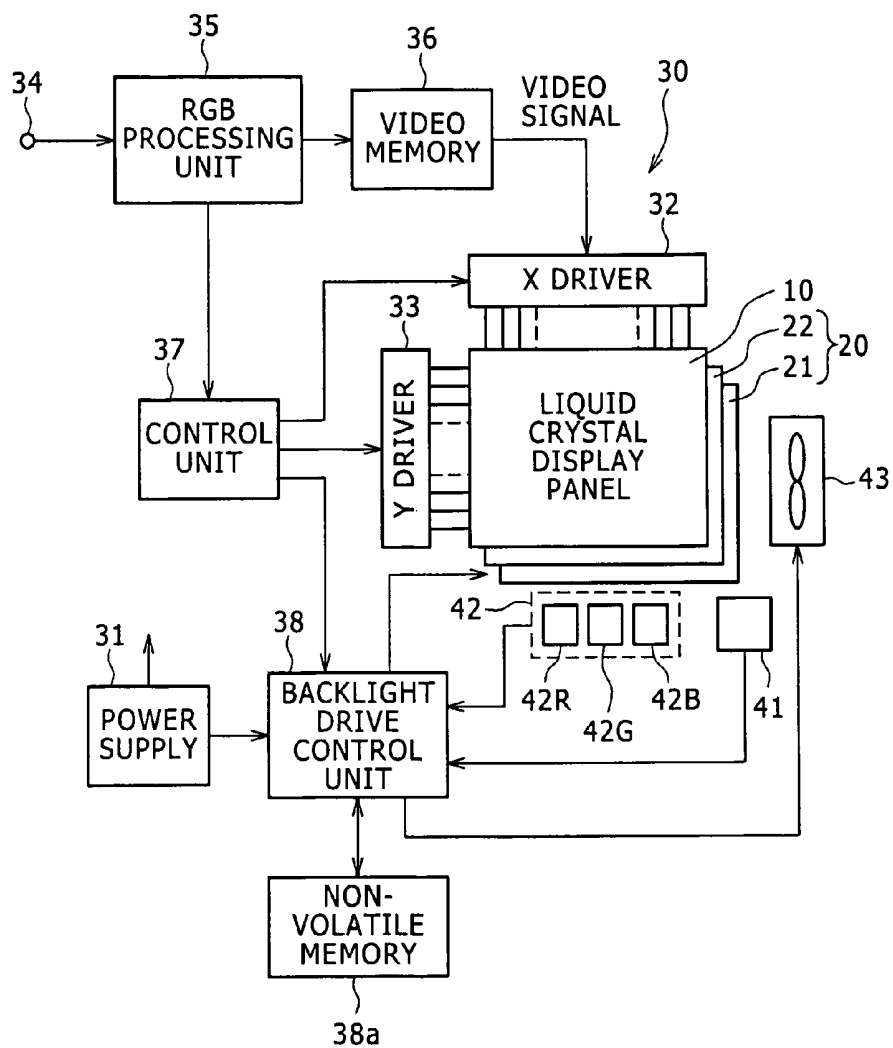


FIG. 5

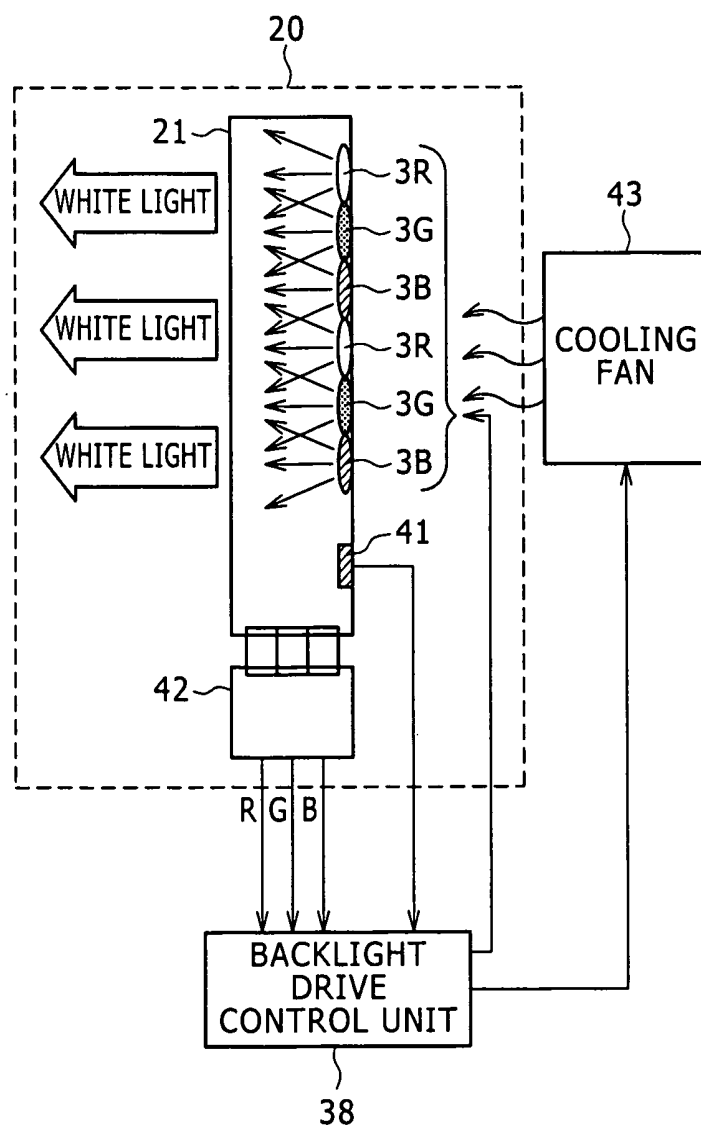


FIG. 6

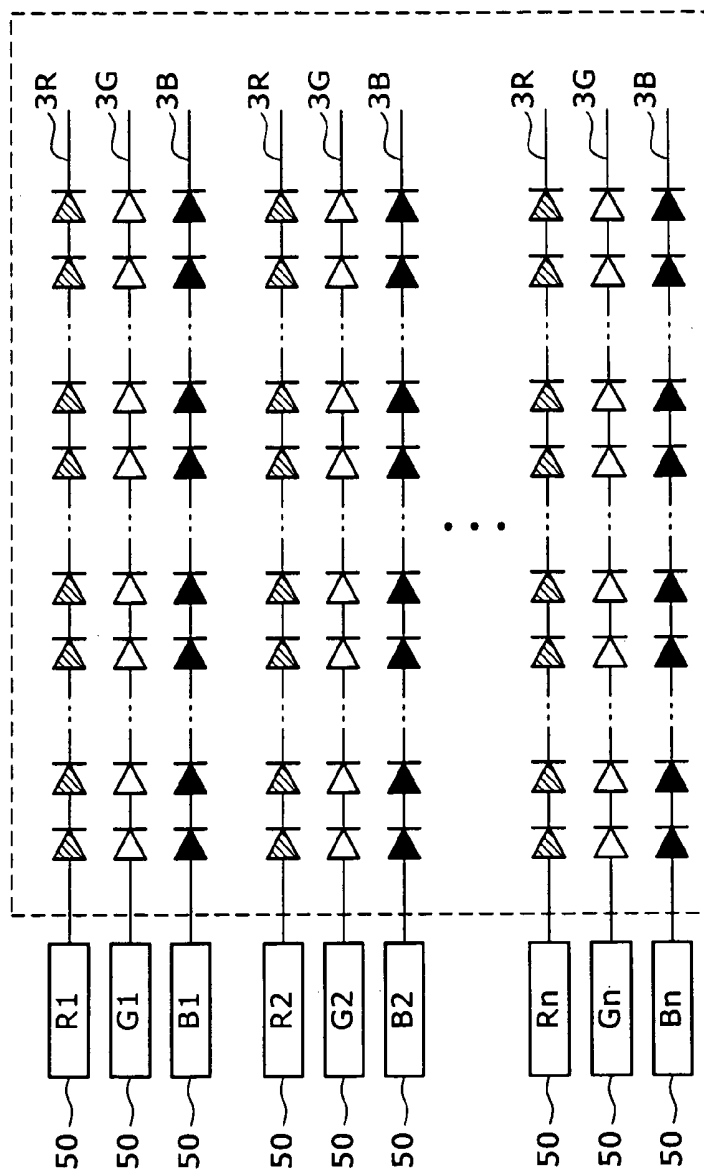


FIG. 7

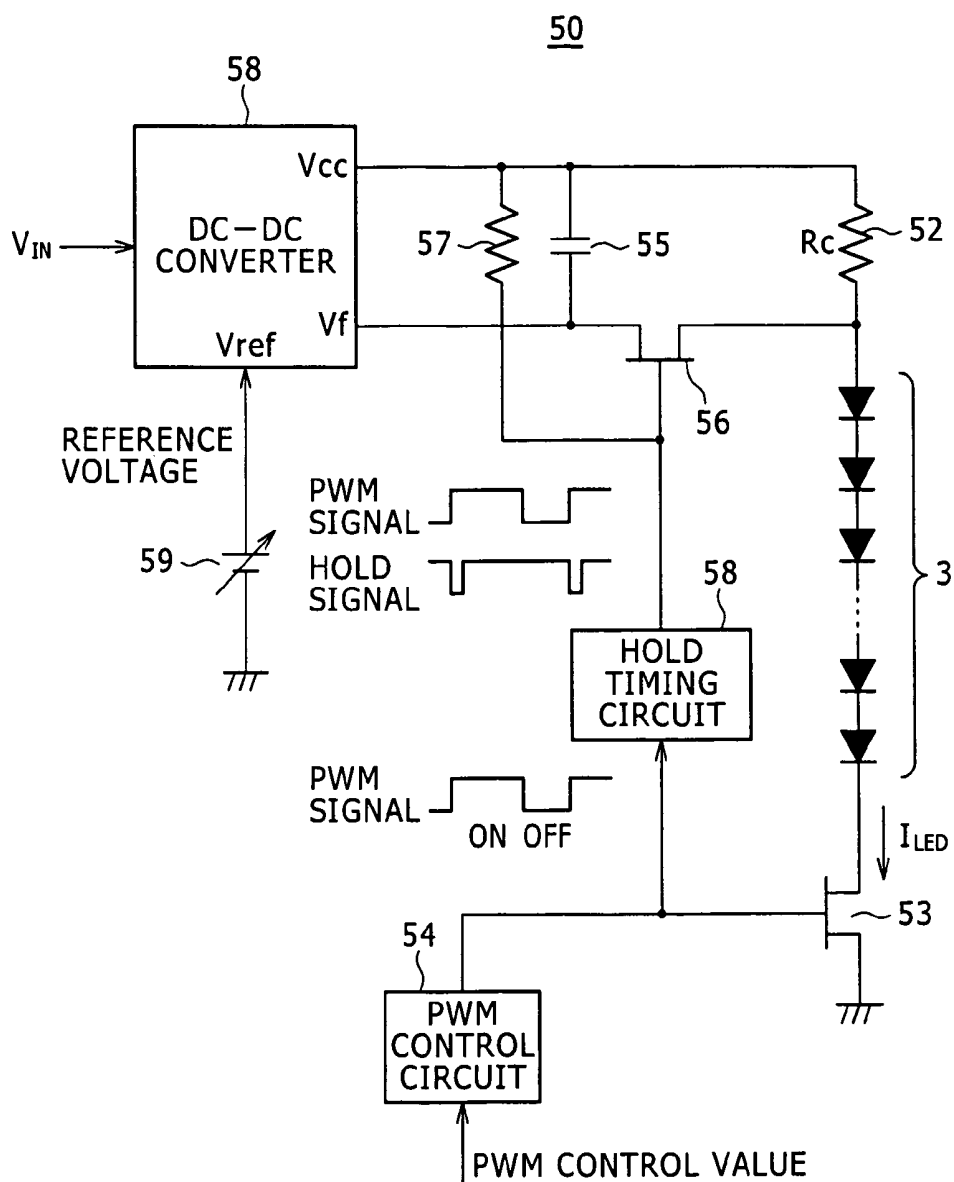


FIG. 8

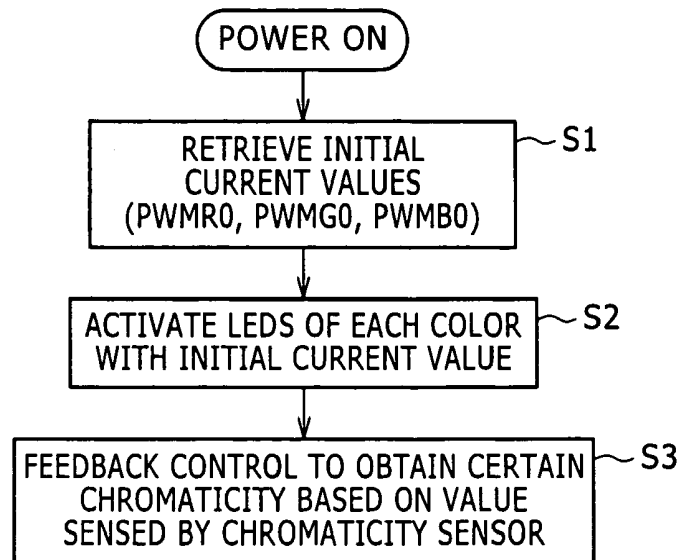


FIG. 9

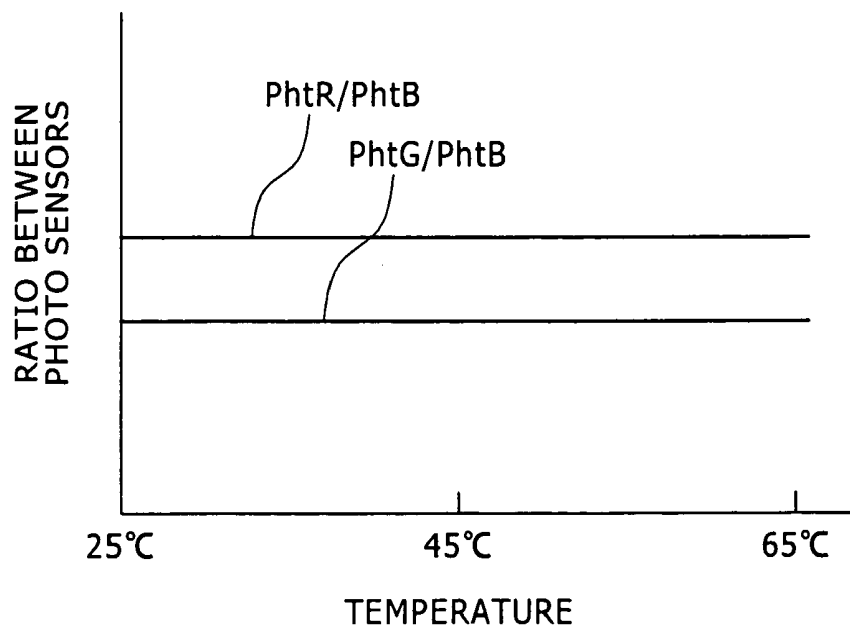


FIG. 10

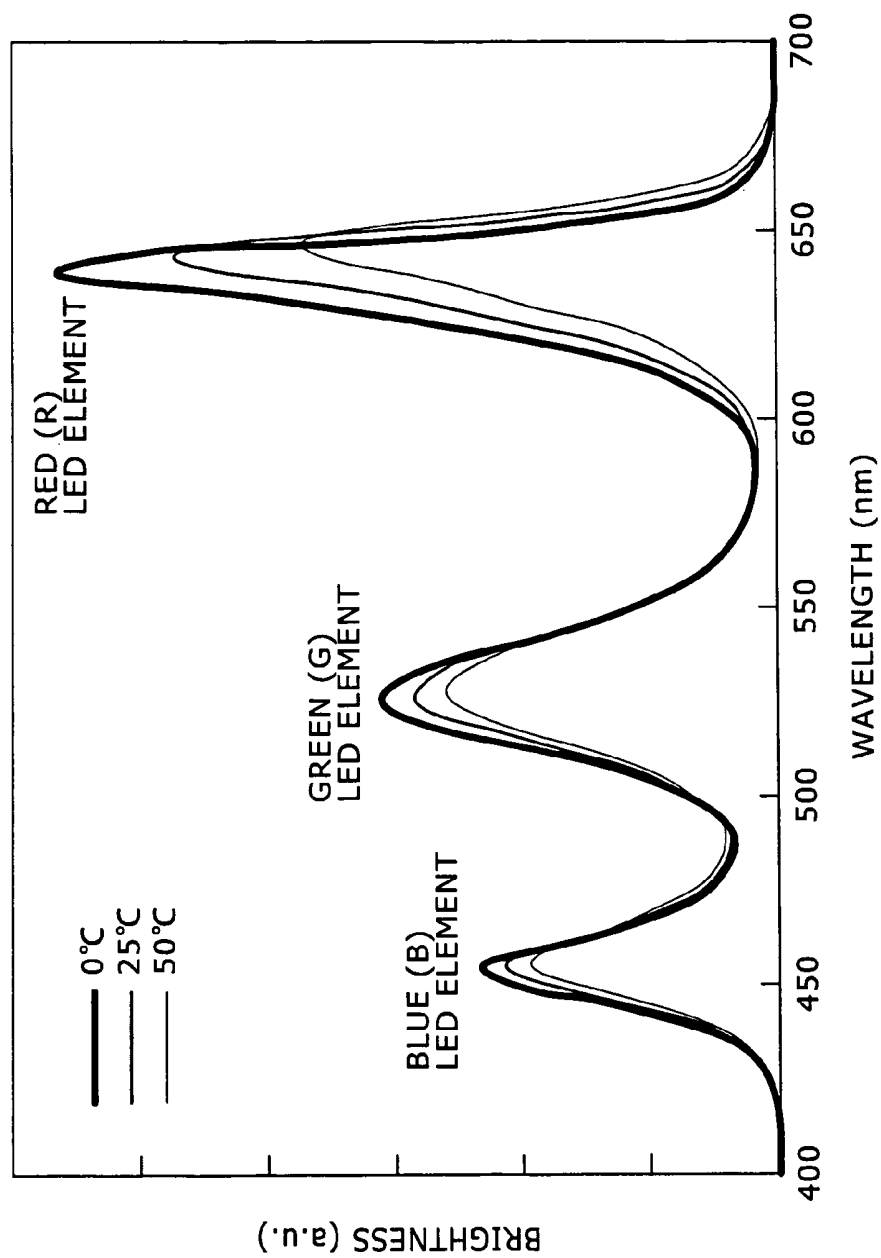


FIG. 11

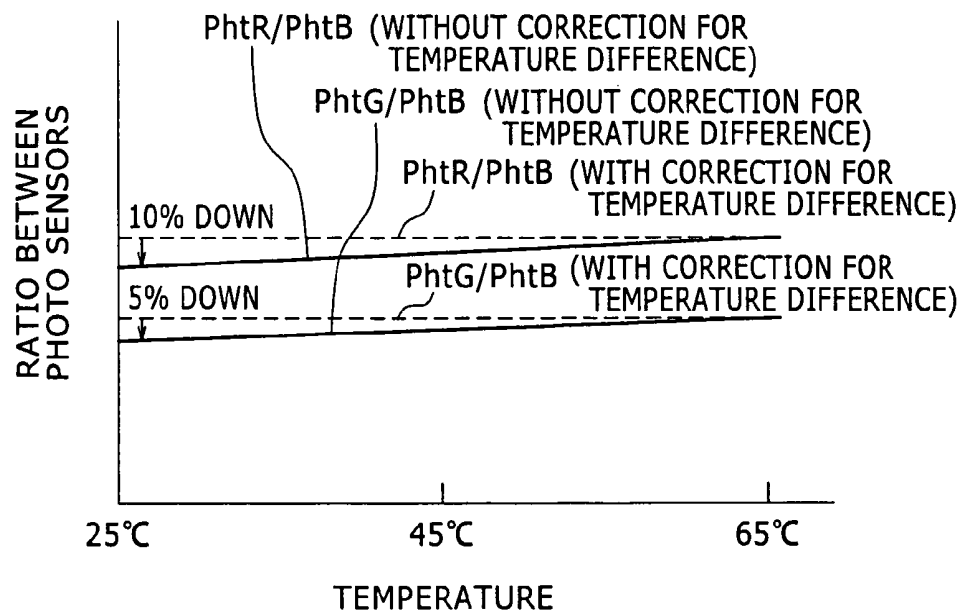


FIG. 12


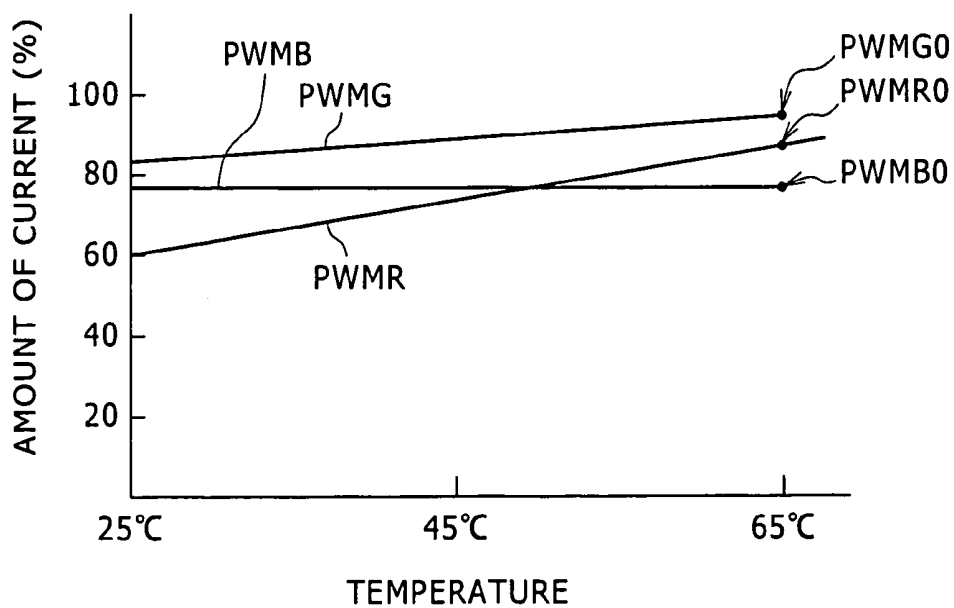


FIG. 13

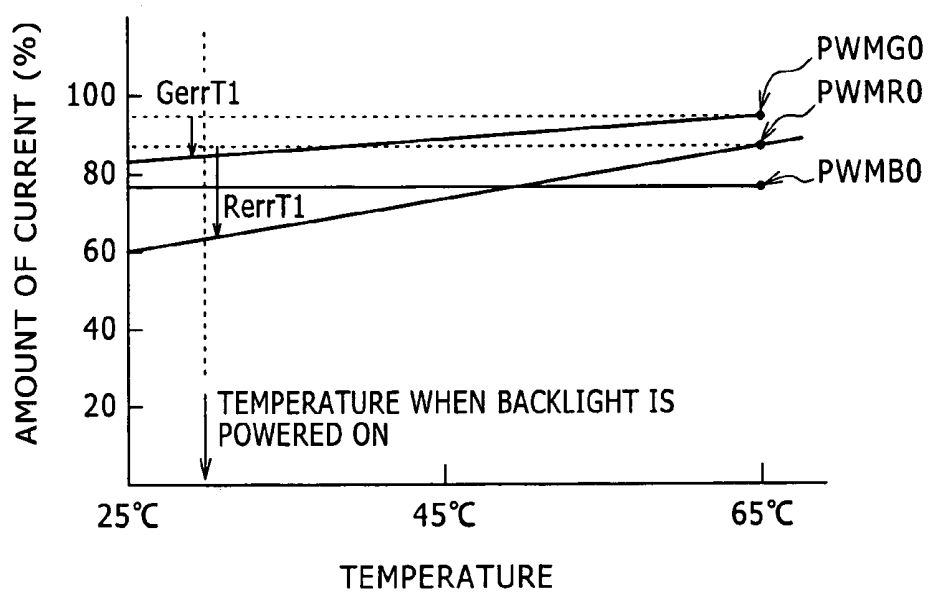

1

BACKLIGHT DEVICE, METHOD OF DRIVING BACKLIGHT AND LIQUID CRYSTAL DISPLAY APPARATUS

CROSS-REFERENCES TO RELATED APPLICATIONS

The present invention contains subject matter related to Japanese Patent Application JP 2004-336572 filed in the Japanese Patent Office on Nov. 19, 2004, and Japanese Patent Application JP 2005-232385 filed in the Japanese Patent Office on Aug. 10, 2005, the entire contents of which being incorporated herein by reference.

BACKGROUND OF THE INVENTION

The present invention relates to a backlight device provided on the backside of a non-emissive transmission display, a method of driving a backlight, and a liquid crystal display apparatus.

As a backlight of a liquid crystal panel, cold cathode fluorescent lamp (CCFL) type backlights employing fluorescent tubes have been the mainstream. However, needs for mercury-less products have been increasing on environmental grounds. These needs have raised expectations for light emission diodes (LEDs) as a light source replacing CCFLs in recent years. In particular, a method in which each of primary color LEDs of red, green and blue is individually used and the primary colors are optically subjected to additive color mixing to thereby obtain white light, is suitable for achieving a balance among the colors. Thus, it has been intensively studied to utilize this method for television use.

If LEDs are used as a light source of a backlight, a current applied to LEDs of one color must be independent of currents to LEDs of other colors since red, green and blue LEDs have different luminous efficiency. In addition, the semiconductor composition of an LED is different dependent on the color of the LED. Therefore, the voltage applied to an element and power consumption are also different for each color. Furthermore, when using LEDs as a light source of a backlight, it is impossible to individually drive the LEDs of each color in terms of actual costs (for example, refer to Japanese Patent Laid-open No. 2001-272938).

In such a backlight using red, green and blue LEDs as a light source, light rays of these colors must be optically synthesized at a certain ratio to thereby produce white light that invariably has a certain chromaticity. Therefore, photo sensors for red, green and blue are used to sense the luminous power of the corresponding color, and currents applied to the LEDs of the respective colors are adjusted by feedback control. Thus, red, green and blue light rays are synthesized at a certain ratio to adjust the resultant light into white light having a certain chromaticity.

However, if the speed of responses to such feedback control is high, the chromaticity frequently changes and these changes are easily recognized by a user. In order to avoid the disadvantage of the frequent chromaticity changes, typically the speed of responses to the feedback control is set low. Accordingly, at the time of powering on a backlight, chromaticity adjustment by such feedback control cannot be expected.

In such a backlight employing LEDs as a light source, therefore, the initial current amount (for example, the duty ratio of pulse width modulation (PWM)) is calculated in advance for each of red, green and blue, and the LEDs of each color are driven with the initial current amount immediately after powering up. These initial current amounts are calcu-

2

lated according to characteristics of the backlight prior to factory shipment thereof, for example. Adequate setting of these amounts can shorten the time period from powering up until convergence of chromaticity of emitted white light on a certain chromaticity.

If the initial current amounts are not adequately set and thus the time period until convergence on a certain chromaticity is long, a phenomenon arises in which initially a pink color is displayed on the screen and thereafter the color gradually approaches white.

SUMMARY OF THE INVENTION

When using LEDs as a light source of a backlight, a large number of LEDs are used. Therefore, a large difference exists between the temperature of the LEDs immediately after powering on the backlight and that in a stationary operation state (a state in which the temperature is constant). In addition, optical characteristics of an LED significantly vary depending on temperature. Therefore, optical characteristics of LEDs immediately after powering up are greatly different from those of the LEDs in a stationary operation state.

Accordingly, even if adequate initial amounts of current supplied to LEDs at the time of powering up are calculated in advance, the calculated values are not adequate values if the temperature at the powering up varies. This temperature variation precludes the shortening of the time period from powering up until convergence on a certain chromaticity.

The present invention is proposed in view of the above-described past circumstances, and an object thereof is to provide a backlight device that employs LEDs and is capable of preventing extension of a time period from powering on the device until convergence of chromaticity of emitted white light on a certain chromaticity irrespective of temperature at the time of the powering up, a method of driving a backlight, and a liquid crystal display apparatus.

An aspect of the present invention is to provide a backlight device having a plurality of light emitting diodes of at least three colors as a light source. The backlight device synthesizes light emitted from the light emitting diodes of each color to produce white light and emits the produced white light from a backside of a display unit. The backlight device includes a temperature sensor that senses temperature of the light source, and drive control means that supplies a current to the light emitting diodes of each color to drive the light emitting diodes. The backlight device also includes storage means that stores an initial current amount for the light emitting diodes of each color and a correction amount for the initial current amount. The correction amount depends on temperature. The drive control means calculates, upon powering on the backlight device, the correction amount based on a value sensed by the temperature sensor. The drive control means adds the calculated correction amount to the initial current amount of the light emitting diodes of each color and activates the light emitting diodes of each color with a corrected initial current amount.

Another aspect of the invention is to provide a backlight device having light emitting diodes of red, green and blue as a light source. The backlight device synthesizes light emitted from the light emitting diodes of each color to produce white light and emits the produced white light from a backside of a display unit. The backlight device includes a chromaticity sensor that senses a chromaticity of the white light, and a temperature sensor that senses temperature of the light source. The backlight device also includes drive control means that supplies a current to the light emitting diodes of each color to drive the light emitting diodes, and implements

feedback control of an amount of a current to the light emitting diodes of each color based on a value sensed by the chromaticity sensor so that the white light has a certain chromaticity. The drive control means fixes an amount of a current flowing through the light emitting diodes of blue and adjusts amounts of currents flowing through the light emitting diodes of red and green to thereby implement the feedback control so that the white light has a certain chromaticity.

Still another aspect of the invention is to provide a method of driving a backlight device having a plurality of light emitting diodes of at least three colors as a light source. The backlight device synthesizes light emitted from the light emitting diodes of each color to produce white light and emits the produced white light from a backside of a display unit. The method includes the steps of storing an initial current amount for the light emitting diodes of each color and a correction amount for the initial current amount. The correction amount depends on temperature. The method also includes calculating, upon powering on the backlight device, the correction amount based on a value sensed by a temperature sensor that senses temperature of the light source, and adding the calculated correction amount to the initial current amount of the light emitting diodes of each color. The method further includes activating the light emitting diodes of each color with a corrected initial current amount, and implementing feedback control of an amount of a current to the light emitting diodes of each color based on a value sensed by a chromaticity sensor that senses a chromaticity of the white light so that the white light has a certain chromaticity.

A further aspect of the invention is to provide a method of driving a backlight device having light emitting diodes of red, green and blue as a light source. The backlight device synthesizes light emitted from the light emitting diodes of each color to produce white light and emits the produced white light from a backside of a display unit. The method includes the step of implementing feedback control of an amount of a current to the light emitting diodes of each color based on a value sensed by a chromaticity sensor that senses a chromaticity of the white light so that the white light has a certain chromaticity. An amount of a current flowing through the light emitting diodes of blue is fixed and amounts of currents flowing through the light emitting diodes of red and green are adjusted to thereby implement the feedback control so that the white light has a certain chromaticity.

A yet further aspect of the invention is to provide a liquid crystal display apparatus including a transparent color liquid crystal display panel and a backlight device that has a plurality of light emitting diodes of at least three colors as a light source. The backlight device synthesizes light emitted from the light emitting diodes of each color to produce white light. The transparent color liquid crystal display panel is irradiated with the produced white light from a backside of the transparent color liquid crystal display panel. The backlight device includes a temperature sensor that senses temperature of the light source, and a chromaticity sensor that senses a chromaticity of the white light. The backlight device also includes drive control means that supplies a current to the light emitting diodes of each color to drive the light emitting diodes, and storage means that stores an initial current amount for the light emitting diodes of each color and a correction amount for the initial current amount. The correction amount depends on temperature. The drive control means calculates, upon powering on the backlight device, the correction amount based on a value sensed by the temperature sensor. The drive control means then adds the calculated correction amount to the initial current amount of the light emitting diodes of each color and activates the light emitting diodes of each color with

a corrected initial current amount. Thereafter, the drive control means implements feedback control of an amount of a current to the light emitting diodes of each color based on a value sensed by the chromaticity sensor so that the white light has a certain chromaticity.

A still further aspect of the invention is to provide a liquid crystal display apparatus including a transparent color liquid crystal display panel and a backlight device that has light emitting diodes of red, green and blue as a light source. The backlight device synthesizes light emitted from the light emitting diodes of each color to produce white light. The transparent color liquid crystal display panel is irradiated with the produced white light from a backside of the transparent color liquid crystal display panel. The backlight device includes a chromaticity sensor that senses a chromaticity of the white light, and a temperature sensor that senses temperature of the light source. The backlight device also includes drive control means that supplies a current to the light emitting diodes of each color to drive the light emitting diodes, and implements feedback control of an amount of a current to the light emitting diodes of each color based on a value sensed by the chromaticity sensor so that the white light has a certain chromaticity. The drive control means fixes an amount of a current flowing through the light emitting diodes of blue and adjusts amounts of currents flowing through the light emitting diodes of red and green to thereby implement the feedback control so that the white light has a certain chromaticity.

The aspects of the present invention can shorten the time period from powering on the backlight device to convergence of chromaticity of emitted white light on a certain chromaticity irrespective of the temperature when the device is powered up.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic perspective view illustrating the configuration of a color liquid crystal display unit with a backlight system in a color liquid crystal display apparatus to which the present invention is applied;

FIG. 2 is a diagram schematically illustrating, by means of pattern expression with light emitting diodes of each color, a unit cell obtained by using two red light emitting diodes, two green light emitting diodes and two blue light emitting diodes, and arranging the six light emitting diodes in series;

FIG. 3 is a diagram schematically illustrating an example of actual coupling of light emitting diodes in a light source of a backlight device;

FIG. 4 is a block diagram illustrating the entire configuration of the color liquid crystal display apparatus;

FIG. 5 is a diagram illustrating the backlight device, a sensor and a cooling fan that are provided for the backlight device;

FIG. 6 is a diagram illustrating groups of light emitting diodes coupled in series along the horizontal direction and a plurality of LED driving circuits for driving each group of the light emitting diodes;

FIG. 7 is a block configuration diagram of the LED driving circuit;

FIG. 8 is a flowchart of control processing for causing the chromaticity of white light to converge on a certain chromaticity and be stabilized thereat;

FIG. 9 is a diagram illustrating ratios of luminous power values sensed by a luminous power/chromaticity sensor based on the luminous power of the blue LEDs (PhtG/PhtB and PhtR/PhtB) obtained when optical characteristics of the LEDs are constant irrespective of temperature;

FIG. 10 is a diagram illustrating brightness of each of red (R), green (G) and blue (B) LED elements as a function of wavelength of emitted light therefrom;

FIG. 11 is a diagram illustrating sensed outputs from the chromaticity sensor as a function of temperature;

FIG. 12 is a diagram illustrating amounts of current for obtaining a certain chromaticity as a function of temperature; and

FIG. 13 is a diagram illustrating differences between amounts of current for obtaining a certain chromaticity when the backlight device is powered up and initial current amounts.

DETAILED DESCRIPTION

Embodiments of the present invention will be described in detail below with reference to the accompanying drawings.

The present invention is applied to a color liquid crystal display apparatus having a backlight type liquid crystal display unit 1 with a structure like that shown in FIG. 1, for example.

(Structure of Liquid Crystal Display Unit)

The liquid crystal display unit 1 includes a transparent color liquid crystal display panel 10 and a backlight device 20 provided on the backside of the color liquid crystal display panel 10.

(Panel)

The transparent color liquid crystal display panel 10 includes a TFT substrate 11, a counter electrode substrate 12 that face each other, and a liquid crystal layer 13 having, for example, twisted-nematic (TN) liquid crystal enclosed in a gap between the TFT substrates 11 and the counter electrode substrate 12. Formed on the TFT substrate 11 are signal lines 14, scan lines 15 that are disposed in a matrix, thin film transistors 16 as switching elements disposed at intersections between the signal lines 14 and the scan lines 15, and pixel electrodes 17. The thin film transistors 16 are sequentially selected by the scan lines 15, and write to the pixel electrodes 17 video signals supplied from the signal lines 14. On the inner surface of the counter electrode substrate 12, a counter electrode 18 and a color filter 19 are formed.

In the liquid crystal display unit 1, the transparent color liquid crystal display panel 10 having such a structure is interposed between two polarizing plates. The liquid crystal display unit 1 is driven by an active matrix method while the backlight device 20 emits white light from the backside of the color liquid crystal display panel 10, to thereby achieve desired full-color video displaying.

(Backlight)

The backlight device 20 includes a light source 21 and a wavelength selection filter 22. The backlight device 20 illuminates, from the backside of the color liquid crystal display panel 10 via the wavelength selection filter 22, the color liquid crystal display panel 10 with light emitted from the light source 21. Such a backlight device 20 is a directly-under type backlight, which is provided on the back surface of the transparent color liquid crystal display panel 10, and illuminates the color liquid crystal display panel 10 from directly under the back surface of the color liquid crystal display panel 10.

A large number of light emitting diodes (LEDs) 3 are provided in the light source 21 of the backlight device 20. The backlight device 20 outputs light emitted from the LEDs. Provided in the light source 21 are a large number of LEDs 3R for emitting red light, a large number of LEDs 3G for emitting green light, and a large number of LEDs 3B for emitting blue light. The light source 21 mixes the red, blue and green light

rays to produce white light, and emits the white light to the color liquid crystal display panel 10.

The arrangement of the LEDs 3 in the light source 21 of the backlight device 20 is as follows, for example.

Initially, as shown in FIG. 2, two red LEDs 3R, two green LEDs 3G and two blue LEDs 3B are arranged. Specifically, the six LEDs are arranged in series to constitute a unit cell (2G 2R 2B). Subsequently, three unit cells (2G 2R 2B) are arranged laterally to constitute a medium unit cell (6G 6R 6B). The medium unit cells (6G 6R 6B) are coupled in series along the horizontal direction as shown in FIG. 3. Groups of the serially coupled cells are arranged across the vertical direction to cover the entire screen.

Such arrangement of the LEDs allows mixing of the three colors of light from the red, green and blue LEDs, and thus allows emission of well-balanced white light. The arrangement of the LEDs is not limited to that shown in FIGS. 2 and 3, but any arrangement is available as long as well-balanced color mixing is ensured.

(Entire Configuration of Color Liquid Crystal Display Apparatus)

FIG. 4 illustrates an example of the entire configuration of a color liquid crystal display apparatus 30. The color liquid crystal display apparatus 30 includes a power supply unit 31 for supplying a driving voltage of the color liquid crystal display panel 10 and the backlight device 20, an X driver 32 and a Y driver 33 that drive the color liquid crystal display panel 10. The color liquid crystal display apparatus 30 also includes an RGB processing unit 35 externally supplied with a video signal via an input terminal 34, a video memory 36, a control unit 37 that are coupled to the RGB processing unit 35, and a backlight drive control unit 38 for controlling the driving of the backlight device 20.

The video signal input via the input terminal 34 is subjected to signal processing, such as chroma processing, by the RGB processing unit 35. Furthermore, the signal is converted from a composite signal to an RGB separate signal adequate for driving of the color liquid crystal display panel 10, and then is supplied to the control unit 37, and to the X driver 32 via the video memory 36. The control unit 37 controls the X and Y drivers 32 and 33 at predetermined timing in accordance with the RGB separate signal, and thus drives the color liquid crystal display panel 10 with the RGB separate signal supplied via the video memory 36 to the X driver 32, to thereby display a video according to the RGB separate signal.

In addition, as shown in FIGS. 4 and 5, the color liquid crystal display apparatus 30 includes a temperature sensor 41, a luminous power/chromaticity sensor 42 (42R, 42G, 42B) senses luminous power or chromaticity of light of each of R, G and B from the light source 21 (LEDs) of the backlight device 20. The temperature sensor 41 senses the temperature of the light source 21 (LEDs) of the backlight device 20. The luminous power/chromaticity sensor 42 (42R, 42G, 42B) senses luminous power or chromaticity of light of each of R, G and B from the light source 21 (LEDs) of the backlight device 20.

The sensed values by the temperature sensor 41 and the luminous power/chromaticity sensor 42 are supplied to the backlight drive control unit 38. The backlight drive control unit 38 controls driving currents for the LEDs constituting the light source 21 based on the sensed values.

In addition, the backlight drive control unit 38 controls the rotation rate of the cooling fan 43 according to the temperature value sensed by the temperature sensor 41, to thereby control the temperature of the light source 21 (LEDs) of the backlight device 20.

Furthermore, the backlight drive control unit 38 internally has a non-volatile memory 38a. The non-volatile memory 38a stores various setting values.

(LED Driving Circuit)

Provided in the backlight drive control unit **38** are a plurality of LED driving circuits **50** for driving the light source **21** (LEDs) of the backlight device **20**.

As shown in FIG. **6**, the LEDs **3**, which serve as a light source of the backlight device **20**, of the same color arranged in the horizontal direction are electrically coupled to each other in series. Each LED driving circuit **50** is independently provided for a respective one of groups of the LEDs **3** serially coupled in the horizontal direction.

FIG. **7** illustrates an example of the circuit configuration of the LED driving circuit **50** provided in the backlight drive control unit **38**.

The LED driving circuit **50** includes a DC-DC converter **51**, a constant resistor (R_c) **52**, a field effect transistor (FET) **53**, a PWM control circuit **54**, a capacitor **55**, a sample-and-hold FET **56**, a resistor **57**, a hold timing circuit **58** and a reference power supply **59**.

The DC-DC converter **51** receives a DC voltage V_{IN} generated from the power supply **31** shown in FIG. **4**, and switches the received DC voltage to produce a stabilized DC output voltage V_{cc} . The DC-DC converter **51** produces such a stabilized output voltage V_{cc} that the potential difference between the voltage input from a feedback terminal V_f and the output voltage V_{cc} equals a reference voltage (V_{ref}). The reference voltage (V_{ref}) is supplied from the reference power supply **59**.

The anodes of the serially coupled LEDs **3** are coupled via the constant resistor (R_c) to the output terminal of the output voltage V_{cc} of the DC-DC converter **51**. The anodes of the serially coupled LEDs **3** are also coupled via the source and drain of the sample-and-hold FET **56** to the feedback terminal of the DC-DC converter **51**. The cathodes of the serially coupled LEDs **3** are grounded via the source and drain of the FET **53**.

Input to the gate of the FET **53** is a PWM signal generated from the PWM control circuit **54**. The FET **53** is turned on when the PWM signal is ON, and is turned off when the PWM signal is OFF. Therefore, the FET **53** applies a current to the LEDs **3** when the PWM signal is ON, and applies no current to the LEDs **3** when the PWM signal is OFF. Specifically, the FET **53** causes the LEDs **3** to emit light when the PWM signal is ON, and stops the light emission of the LEDs **3** when the PWM signal is OFF.

The PWM control circuit **54** produces the PWM signal that is a binary signal for adjusting the duty ratio between an On time period and an OFF time period. The PWM control circuit **54** is supplied with a duty control value (PWM), and changes the duty ratio according to the control value (PWM).

The capacitor **55** is provided between the output terminal and the feedback terminal of the DC-DC converter **51**. The resistor **57** is coupled to the output terminal of the DC-DC converter **51** and the gate of the sample-and-hold FET **56**.

The hold timing circuit **58** receives the PWM signal and produces a hold signal. The hold signal is OFF during a certain time period at a rising edge of the PWM signal, and is ON during other time periods.

Input to the gate of the sample-and-hold FET **56** is the hold signal output from the hold timing circuit **58**. The sample-and-hold FET **56** is turned on when the hold signal is OFF, and is turned off when the hold signal is ON.

In the above-described LED driving circuit **50**, a current ILED flows through the LEDs **3** only during the period when the PWM signal generated from the PWM control circuit **54** is ON. The capacitor **55**, the sample-and-hold FET **56** and the resistor **57** constitute a sample-and-hold circuit. The sample-and-hold circuit samples, when the PWM signal is ON, the

voltage value at the anodes of the LEDs **3** (i.e., at one end of the constant resistor **52**, not coupled to the output terminal of the voltage V_{cc}), and supplies the voltage value to the feedback terminal of the DC-DC converter **51**. Since the DC-DC converter **51** stabilizes the output voltage V_{cc} based on the voltage value input to the feedback terminal, the peak value of the current ILED flowing through the constant resistor R_c **52** and the LEDs **3** is kept constant.

Therefore, in the LED driving circuit **50**, pulse driving according to the PWM signal is implemented while the peak value of the current ILED flowing through the LEDs **3** is kept constant.

In this circuit, the amount of current flowing through the LEDs **3** is adjusted by changing the control value (PWM). However, the peak value of the current flowing through the LEDs **3** may be adjusted by changing the reference voltage (V_{ref}) applied to the DC-DC converter **51**. Alternatively, a combination of these changes may be used.

(Control Method for Keeping Chromaticity Constant)

Description will be made about a control method for causing the chromaticity of white light emitted from the backlight device **20** to converge on a specific chromaticity and be stabilized.

Upon powering on the backlight device **20** and emission of white light from the backlight device **20**, the backlight drive control unit **38** controls so that luminous power ratio among the red LEDs **3R**, the green LEDs **3G** and the blue LEDs **3B** becomes a specific ratio, to thereby stabilize the chromaticity of white light emitted from the backlight device **20** at a specific chromaticity.

Specifically, this control is implemented in accordance with the flowchart shown in FIG. **8**.

Initially, in a step S1, upon powering on the backlight device **20**, the backlight drive control unit **38** retrieves initial current values (PWMR0, PWMG0, and PWMB0) stored in the non-volatile memory **38a**, and then activates the red LEDs **3R**, the green LEDs **3G** and the blue LEDs **3B** with the respective initial current values.

The non-volatile memory **38a** stores, as the initial current values, the initial current value PWMR0 for driving the red LEDs **3R**, the initial current value PWMG0 for driving the green LEDs **3G** and the initial current value PWMB0 for driving the LEDs **3B** that are independently of each other. The LEDs **3** are driven by PWM control in the present example. Therefore, the duty ratios of the PWM control are stored as the initial current values. If this circuit is to control the current amounts by changing the peak values of currents, the peak values are stored as the initial current values.

Subsequently, in a step S2, the backlight drive control unit **38** initializes driving of the LEDs **3** of each color with the retrieved initial current values (PWMR0, PWMG0, and PWMB0). Upon start of the driving of the LEDs **3**, light is emitted from the backlight device **20**.

Subsequently, in a step S3, the backlight drive control unit **38** implements feedback control of driving currents (PWM duty ratios) for the red, green and blue LEDs **3R**, **3G** and **3B** according to outputs of sensed values from the luminous power/chromaticity sensor **42**, so that white light (synthetic light of red, green and blue) emitted from the backlight device **20** has a certain chromaticity.

Specifically, the control is implemented so that $P_{htR}:P_{htG}:P_{htB}$ is constant in which P_{htR} , P_{htG} and P_{htB} are luminous power of red, green and blue light, respectively, sensed by the luminous power/chromaticity sensor **42**.

(Reason for Implementing Control Based on Blue Light)

When implementing the feedback control for keeping chromaticity constant, three kinds of current amounts (the

amounts of currents flowing through the red, green and blue LEDs) must be adjusted simultaneously, which greatly complicates the processing. Therefore, in the backlight drive control unit **38**, the value of current flowing through the blue LEDs **3B** is constantly fixed while currents flowing through the LEDs of other colors (i.e., red and green) **3R** and **3G** are varied, to thereby allow adjustment for keeping chromaticity constant.

By thus fixing the current flowing through the blue (B) LEDs, parameters to be used in various computations for the feedback control can be defined more simply. Specifically, for the blue (B) LEDs, the parameter can always be "1", and for the red (R) and green (G) LEDs, the ratios with respect to the blue (B) LEDs can be used as the parameters therefor.

Thus, the number of variables to be treated can be reduced to two, which significantly simplifies the arithmetic processing.

The reason why, of the amounts of currents to the LEDs, the amount of current to the blue LEDs **3B** is fixed is as follows.

If the optical characteristics of the LEDs are constant irrespective of temperature, the ratios of luminous power values based on the luminous power of the blue LEDs (PhtG/PhtB and PhtR/PhtB), sensed by the luminous power/chromaticity sensor **42**, are also constant irrespective of temperature as shown in FIG. **9**.

However, actually, the optical characteristics of the LEDs greatly vary depending on temperature.

For example, FIG. **10** is a graph showing brightness of each of red (R), green (G) and blue (B) LED elements as a function of wavelength of emitted light therefrom. The graph of FIG. **10** illustrates brightness distributions found when temperature is 0° C., 25° C. and 50° C., respectively. In the graph of FIG. **10**, wavelengths of emitted light are plotted on the x-axis while luminous output (brightness) on the y-axis.

As is apparent from FIG. **10**, the luminous power (the area of part surround by the curve) of each LED element varies depending on temperature. In addition, a higher temperature shifts the luminous power curve toward a higher wavelength. In the red (R) LED element in particular, a higher temperature significantly shifts the wavelength corresponding to the brightness peak (peak wavelength) toward a higher wavelength.

Therefore, in the feedback control for keeping constant chromaticity, precise control is not allowed unless temperature characteristics are also taken into consideration.

The backlight drive control unit **38** therefore implements not only control based on sensed outputs from the luminous power/chromaticity sensor **42** but also correction according to sensed outputs from the temperature sensor **41**. Such control in consideration for temperature allows stabilized chromaticity as shown in FIG. **11**.

When the correction relating to temperature is thus also implemented, stable feedback control is allowed if the correction processing is implemented based on the color involving the smallest luminous power changes against temperature changes. In contrast, if a color involving large luminous power changes against temperature changes is used as a reference, the reference value easily varies depending on temperature, which makes it difficult to implement stable feedback control.

Referring to the graph of FIG. **10**, the blue LEDs have the smallest wavelength shifts and the smallest peak value changes against temperature changes.

Thus, the backlight drive control unit **38** implements control with fixing the current amount for the blue LEDs **3B**.

(Temperature Offset at Powering on Backlight)

In addition, the backlight drive control unit **38** corrects the initial current values (PWMR0, PWMG0, and PWMB0) at the time of powering on the backlight device according to the temperature sensed by the temperature sensor **41**.

If the feedback control for keeping chromaticity constant is implemented, the temperature characteristic of current amount (the duty of PWM) for each LED is illustrated by FIG. **12**.

If the initial current values (PWMR0, PWMG0, and PWMB0) are defined based on optimum values obtained when temperature is 65° C. for example, when temperature is 30° C., the red and green LEDs involve the differences of about -20% (Rerr) and -10% (Gerr) relative to the initial values, respectively, as shown in FIG. **13**. The blue LEDs do not involve this difference since the driving current (PWM duty) for the blue LEDs is controlled to be constant. Therefore, the temperature when the backlight device **20** is powered up is 30° C. for example, the feedback control must adjust the current values for these differences (Rerr and Gerr) to achieve the convergence of the chromaticity.

However, since these differences are comparatively large, a time period it takes for the chromaticity to converge is long. If the time period until the convergence is long, the red LEDs, which involve large differences, have effect on the image quality, and therefore a gradual color change from pink to white (white having an aimed chromaticity) is visually recognized.

In order to solve this problem, with taking into consideration the temperature (a value sensed by the temperature sensor **41**) when the backlight device **20** is powered up, the backlight drive control unit **38** corrects the initial values (PWMR0 and PWMG0) retrieved from the non-volatile memory **38a** in accordance with the following Equation 1, for example, and supplies the corrected value as a driving current to each LED.

Equation 1

$$PWMRt = \frac{DrT1 \times PWMR0}{T0 - T1} \times T + \left(1 - \frac{T0}{T0 - T1} \times DrT1\right) \times PWMR0$$

$$PWMGt = \frac{DgT1 \times PWMG0}{T0 - T1} \times T + \left(1 - \frac{T0}{T0 - T1} \times DgT1\right) \times PWMG0$$

Where

$$DrT1 = RerrT1 / PWMR0$$

$$DgT1 = GerrT1 / PWMG0$$

Each parameter in Equation 1 is defined as follows.

PWMRt: current amount set for red LEDs (current value after correction)

PWMGt: current amount set for green LEDs (current value after correction)

T0: temperature (for example, 65° C.) when initial current values (PWMR0, PWMG0, and PWMB0) are calculated

T1: any temperature

T: present temperature of the backlight device **20** sensed by the temperature sensor **41**.

RerrT1: current value difference of the red LEDs when temperature is Ti (i.e., value obtained by subtracting, from PWMR0, the current amount for the red LEDs when the chromaticity of emitted light has converged on a certain chromaticity at the temperature T1)

GerrT1: current value difference of the green LEDs when temperature is T1 (i.e., value obtained by subtracting, from PWMG0, the current amount for the green LEDs when the chromaticity of emitted light has converged on a certain chromaticity at the temperature T1)

By correcting the initial current amounts as described above, the amount of the initially applied current can be brought closer to the convergence value, which can shorten the time period until the convergence (time period until emitted light is stabilized to white light having a certain chromaticity).

Note that RerrT1 and GerrT1 are calculated in advance and stored in the non-volatile memory 38a prior to factory shipment of the backlight device 20. RerrT1 and GerrT1 may be calculated for each backlight device 20. Alternatively, for example, theoretically calculated values may be stored in consideration of productivity.

While a preferred embodiment of the present invention has been described using specific terms, such description is for illustrative purposes only, and it is to be understood that changes and variations may be made without departing from the spirit or scope of the following claims.

The invention claimed is:

1. A backlight device having a plurality of light emitting diodes of at least three colors as a light source, the backlight device synthesizing light emitted from the light emitting diodes of each color to produce white light and emitting the produced white light from a backside of a display unit, the backlight device comprising:

a temperature sensor that senses temperature of the light source;

drive control means that supplies a current to the light emitting diodes of each color to drive the light emitting diodes; and

storage means that stores an initial current amount for the light emitting diodes of each color and a correction amount for the initial current amount, the correction amount depending on temperature, wherein

the drive control means calculates, upon powering on the backlight device, the correction amount based on a value sensed by the temperature sensor, the drive control means adding the calculated correction amount to the initial current amount of the light emitting diodes of each color and activating the light emitting diodes of each color with a corrected initial current amount,

the light emitting diodes as the light source are light emitting diodes of red, green and blue, and

the drive control means implements feedback control, based on chromaticity of the white light using the light emitting diodes of blue as a reference, such that an amount of current flowing through the light emitting diodes of blue is fixed at a constant value while amounts of currents flowing through the light emitting diodes of red and green are varied, so that the white light has a certain chromaticity, wherein the constant value is the corrected initial current amount with which the light emitting diodes of blue are activated, and the corrected initial current amounts with which the light emitting diodes of red and green are activated are based on respective current value differences of the light emitting diodes of red and green and a sensed temperature of the light source,

wherein the current value difference of the light emitting diodes of red is determined by subtracting, from the initial current amount for the light emitting diodes of red obtained at a predetermined temperature, a current amount for the light emitting diodes of red when the

chromaticity of the emitted light is the certain chromaticity at a different predetermined temperature, and the current value difference of the light emitting diodes of green is determined by subtracting, from the initial current amount for the light emitting diodes of green obtained at the predetermined temperature, a current amount for the light emitting diodes of green when the chromaticity of the emitted light is the certain chromaticity at the different predetermined temperature.

2. The backlight device according to claim 1, further comprising:

a chromaticity sensor that senses a chromaticity of the white light, wherein the drive control means implements the feedback control based on a value sensed by the chromaticity sensor.

3. The backlight device according to claim 1, wherein the drive control means controls luminous power of the light emitting diodes by pulse width modulation control, the backlight device adjusting a duty ratio of the pulse width modulation control to thereby adjust an amount of a current supplied to the light emitting diodes.

4. A backlight device having light emitting diodes of red, green and blue as a light source, the backlight device synthesizing light emitted from the light emitting diodes of each color to produce white light and emitting the produced white light from a backside of a display unit, the backlight device comprising:

a chromaticity sensor that senses a chromaticity of the white light;

a temperature sensor that senses temperature of the light source; and

drive control means that supplies a current to the light emitting diodes of each color to drive the light emitting diodes, and implements, using the light emitting diodes of blue as a reference, feedback control of an amount of a current to the light emitting diodes of each color based on a value sensed by the chromaticity sensor so that the white light has a certain chromaticity,

wherein the drive control means, when implementing the feedback control, based on chromaticity of the white light fixes an amount of a current flowing through the light emitting diodes of blue at a constant value while adjusting amounts of currents flowing through the light emitting diodes of red and green, so that the white light has the certain chromaticity, wherein the constant value is an amount of current flowing through the light emitting diodes of blue when the light emitting diodes of blue are activated, and the amounts of current flowing through the light emitting diodes of red and green when the light emitting diodes of red and green are activated are based on respective current value differences of the light emitting diodes of red and green and a sensed temperature of the light source,

wherein the current value difference of the light emitting diodes of red is determined by subtracting, from an initial current amount for the light emitting diodes of red obtained at a predetermined temperature, a current amount for the light emitting diodes of red when the chromaticity of the emitted light is the certain chromaticity at a different predetermined temperature, and the current value difference of the light emitting diodes of green is determined by subtracting, from an initial current amount for the light emitting diodes of green obtained at the predetermined temperature, a current amount for the light emitting diodes of green when the chromaticity of the emitted light is the certain chromaticity at the different predetermined temperature.

13

5. A method of driving a backlight device, the backlight device having a plurality of light emitting diodes of at least three colors as a light source, the light emitting diodes as the light source in the backlight device are light emitting diodes of red, green and blue, the backlight device synthesizing light emitted from the light emitting diodes of each color to produce white light and emitting the produced white light from a backside of a display unit, the method comprising the steps of:

storing an initial current amount for the light emitting diodes of each color and a correction amount for the initial current amount, the correction amount depending on temperature;

calculating, upon powering on the backlight device, the correction amount based on a value sensed by a temperature sensor that senses temperature of the light source; adding the calculated correction amount to the initial current amount of the light emitting diodes of each color; activating the light emitting diodes of each color with a corrected initial current amount; and

implementing feedback control, based on chromaticity of the white light using the light emitting diodes of blue as a reference, such that an amount of current flowing through the light emitting diodes of blue is fixed at a constant value while amounts of currents flowing through the light emitting diodes of red and green are varied, so that the white light has a certain chromaticity, wherein the constant value is the corrected initial current amount with which the light emitting diodes of blue are activated, and the corrected initial current amounts with which the light emitting diodes of red and green are activated are based on respective current value differences of the light emitting diodes of red and green and a sensed temperature of the light source,

wherein the current value difference of the light emitting diodes of red is determined by subtracting, from the initial current amount for the light emitting diodes of red obtained at a predetermined temperature, a current amount for the light emitting diodes of red when the chromaticity of the emitted light is the certain chromaticity at a different predetermined temperature, and the current value difference of the light emitting diodes of green is determined by subtracting, from the initial current amount for the light emitting diodes of green obtained at the predetermined temperature, a current amount for the light emitting diodes of green when the chromaticity of the emitted light is the certain chromaticity at the different predetermined temperature.

6. A method of driving a backlight device, the backlight device having light emitting diodes of red, green and blue as a light source, the backlight device synthesizing light emitted from the light emitting diodes of each color to produce white light and emitting the produced white light from a backside of a display unit, the method comprising step of:

implementing, using the light emitting diodes of blue as a reference, feedback control of an amount of a current to the light emitting diodes of each color based on a value sensed by a chromaticity sensor that senses a chromaticity of the white light so that the white light has a certain chromaticity, wherein

an amount of a current flowing through the light emitting diodes of blue is fixed at a constant value while amounts of currents flowing through the light emitting diodes of red and green are adjusted when implementing the feedback control based on chromaticity of the white light, so that the white light has the certain chromaticity, wherein the constant value is an amount of current flowing

14

through the light emitting diodes of blue when the light emitting diodes of blue are activated, and the amounts of current flowing through the light emitting diodes of red and green when the light emitting diodes of red and green are activated are based on respective current value differences of the light emitting diodes of red and green and a sensed temperature of the light source,

wherein the current value difference of the light emitting diodes of red is determined by subtracting, from an initial current amount for the light emitting diodes of red obtained at a predetermined temperature, a current amount for the light emitting diodes of red when the chromaticity of the emitted light is the certain chromaticity at a different predetermined temperature, and

the current value difference of the light emitting diodes of green is determined by subtracting, from an initial current amount for the light emitting diodes of green obtained at the predetermined temperature, a current amount for the light emitting diodes of green when the chromaticity of the emitted light is the certain chromaticity at the different predetermined temperature.

7. A liquid crystal display apparatus including a backlight device and a transparent color liquid crystal display panel, the backlight device having a plurality of light emitting diodes of at least three colors as a light source and synthesizing light emitted from the light emitting diodes of each color to produce white light, the light emitting diodes as the light source in the backlight device are light emitting diodes of red, green and blue, the transparent color liquid crystal display panel being irradiated with the produced white light from a backside of the transparent color liquid crystal display panel, the backlight device comprising:

a temperature sensor that senses temperature of the light source;

a chromaticity sensor that senses a chromaticity of the white light;

drive control means that supplies a current to the light emitting diodes of each color to drive the light emitting diodes; and

storage means that stores an initial current amount for the light emitting diodes of each color and a correction amount for the initial current amount, the correction amount depending on temperature, wherein:

the drive control means calculates, upon powering on the backlight device, the correction amount based on a value sensed by the temperature sensor, the drive control means adding the calculated correction amount to the initial current amount of the light emitting diodes of each color and activating the light emitting diodes of each color with a corrected initial current amount; and

the drive control means implements feedback control, based on chromaticity of the white light using the light emitting diodes of blue as a reference, based on a value sensed by the chromaticity sensor such that an amount of current flowing through the light emitting diodes of blue is fixed at a constant value while amounts of currents flowing through the light emitting diodes of red and green are varied, so that the white light has a certain chromaticity, wherein the constant value is the corrected initial current amount with which the light emitting diodes of blue are activated, and the corrected initial current amounts with which the light emitting diodes of red and green are activated are based on respective current value differences of the light emitting diodes of red and green and a sensed temperature of the light source,

15

wherein the current value difference of the light emitting diodes of red is determined by subtracting, from the initial current amount for the light emitting diodes of red obtained at a predetermined temperature, a current amount for the light emitting diodes of red when the chromaticity of the emitted light is the certain chromaticity at a different predetermined temperature, and the current value difference of the light emitting diodes of green is determined by subtracting, from the initial current amount for the light emitting diodes of green obtained at the predetermined temperature, a current amount for the light emitting diodes of green when the chromaticity of the emitted light is the certain chromaticity at the different predetermined temperature.

8. A liquid crystal display apparatus including a backlight device and a transparent color liquid crystal display panel, the backlight device having light emitting diodes of red, green and blue as a light source and synthesizing light emitted from the light emitting diodes of each color to produce white light, the transparent color liquid crystal display panel being irradiated with the produced white light from a backside of the transparent color liquid crystal display panel, the backlight device comprising:

a chromaticity sensor that senses a chromaticity of the white light;

a temperature sensor that senses temperature of the light source; and

drive control means that supplies a current to the light emitting diodes of each color to drive the light emitting diodes, and implements, using the light emitting diodes of blue as a reference, feedback control of an amount of a current to the light emitting diodes of each color based

16

on a value sensed by the chromaticity sensor so that the white light has a certain chromaticity, wherein

the drive control means, when implementing the feedback control, based on chromaticity of the white light fixes an amount of a current flowing through the light emitting diodes of blue at a constant value while adjusting amounts of currents flowing through the light emitting diodes of red and green, so that the white light has the certain chromaticity, wherein the constant value is an amount of current flowing through the light emitting diodes of blue when the light emitting diodes of blue are activated, and the amounts of current flowing through the light emitting diodes of red and green when the light emitting diodes of red and green are activated are based on respective current value differences of the light emitting diodes of red and green and a sensed temperature of the light source,

wherein the current value difference of the light emitting diodes of red is determined by subtracting, from an initial current amount for the light emitting diodes of red obtained at a predetermined temperature, a current amount for the light emitting diodes of red when the chromaticity of the emitted light is the certain chromaticity at a different predetermined temperature, and

the current value difference of the light emitting diodes of green is determined by subtracting, from an initial current amount for the light emitting diodes of green obtained at the predetermined temperature, a current amount for the light emitting diodes of green when the chromaticity of the emitted light is the certain chromaticity at the different predetermined temperature.

* * * * *

专利名称(译)	背光装置，驱动背光的方法和液晶显示装置		
公开(公告)号	US7982706	公开(公告)日	2011-07-19
申请号	US11/283148	申请日	2005-11-18
[标]申请(专利权)人(译)	索尼公司		
申请(专利权)人(译)	索尼公司		
当前申请(专利权)人(译)	索尼公司		
[标]发明人	ICHIKAWA HIROAKI KIKUCHI KENICHI HATAJIRI KIMIO		
发明人	ICHIKAWA, HIROAKI KIKUCHI, KENICHI HATAJIRI, KIMIO		
IPC分类号	G09G3/36 C10M109/00 G02F1/133 G02F1/13357 G09G3/20 G09G3/34 H01L33/00 H05B37/02		
CPC分类号	G02F1/133611 G09G3/3413 G09G3/342 G09G2320/041 G09G2320/0633 G09G2320/064 G09G2320/0666 G09G2330/026 G09G2360/145		
优先权	2005232385 2005-08-10 JP 2004336572 2004-11-19 JP		
其他公开文献	US20060125773A1		
外部链接	Espacenet USPTO		

摘要(译)

本发明防止时间段从器件上电延长到发射白光的色度在特定色度上的收敛，而与器件通电时的温度无关。彩色液晶显示装置包括液晶显示单元，采用红色，绿色和蓝色LED作为其光源的背光，用于驱动每种颜色的LED的驱动单元，用于检测LED温度的温度传感器，和色度传感器，用于检测从LED发出的白光的色度。驱动单元向LED提供电流以驱动它们，并且基于由色度传感器感测的值实现每种颜色的LED的电流量的反馈控制，使得白光具有特定的色度。此外，在打开背光源时，驱动单元从非易失性存储器中检索每种颜色的LED的初始电流值，并根据温度传感器检测到的值校正初始电流值，以激活每种颜色的LED。具有修正值。

