



US 2001000128A1

(19) **United States**

(12) **Patent Application Publication**
Ham

(10) **Pub. No.: US 2001/0000128 A1**
(43) **Pub. Date: Apr. 5, 2001**

(54) **IN-PLANE SWITCHING MODE LIQUID
CRYSTAL DISPLAY DEVICE**

(30) **Foreign Application Priority Data**

(76) Inventor: **Yong-Sung Ham**, Kyunki-do (KR)

Jul. 7, 1997 (KR) 1997-31257
May 13, 1998 (KR) 1998-17254

Correspondence Address:
LONG ALDRIDGE & NORMAN LLP
Suite 600
701 Pennsylvania Avenue N.W.
Washington, DC 20004 (US)

Publication Classification

(51) **Int. Cl.⁷** **G02F 1/1337; G02F 1/1343**
(52) **U.S. Cl.** **349/141; 349/129**

(21) Appl. No.: **09/729,083**

(57) ABSTRACT

(22) Filed: **Dec. 5, 2000**

An in-plane switching mode liquid crystal display device (LCD) is disclosed in which a first portion of one pixel region has alignment direction clockwise inclined relative to the extension direction of the data electrode, and a second portion of the pixel region has alignment direction counter-clockwise inclined relative to the extension direction of the data electrode. This in-plane switching mode LCD has an improved viewing angle characteristics.

Related U.S. Application Data

(60) Continuation of application No. 09/110,961, filed on Jul. 7, 1998, Pat. No. 6,184,961.

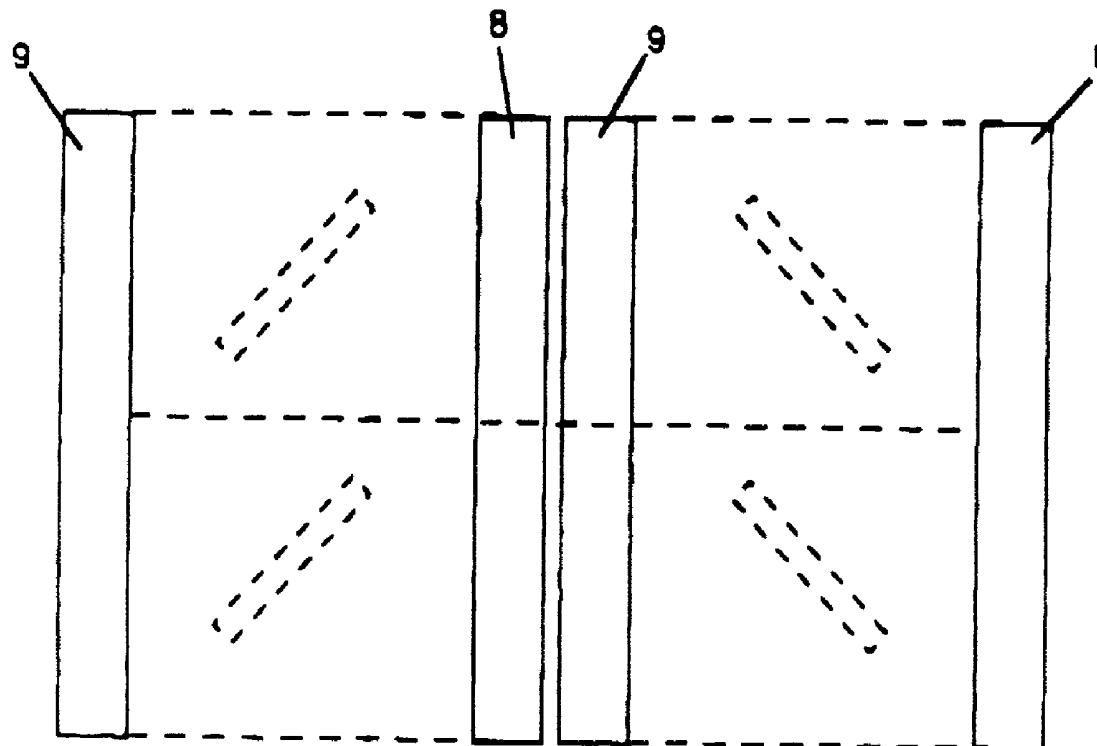


FIG.1
PRIOR ART

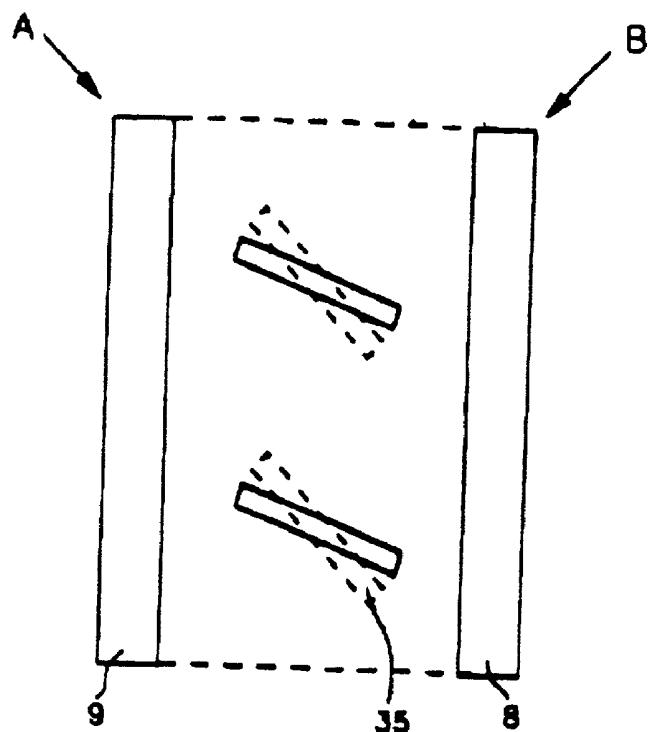


FIG.2
PRIOR ART

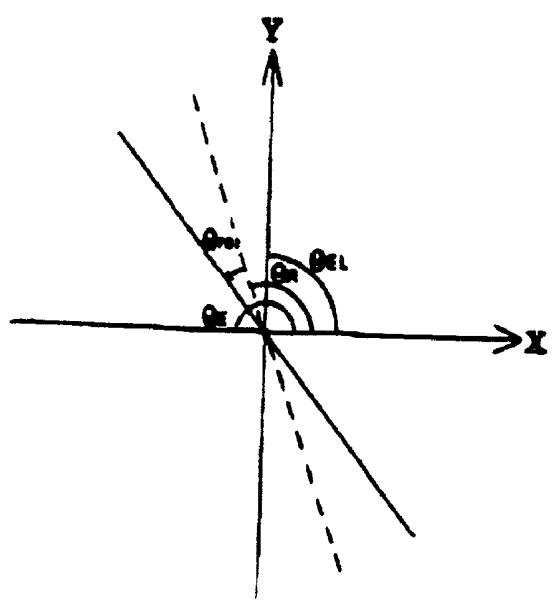


FIG.3a
PRIOR ART

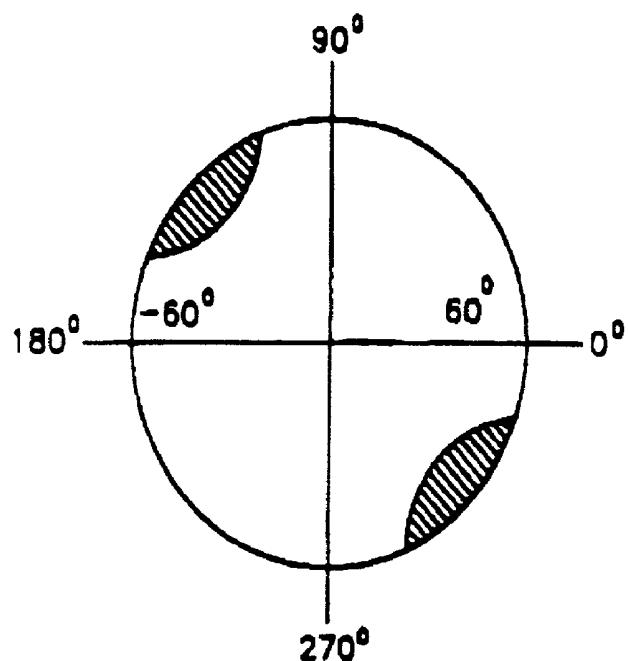


FIG.3b
PRIOR ART

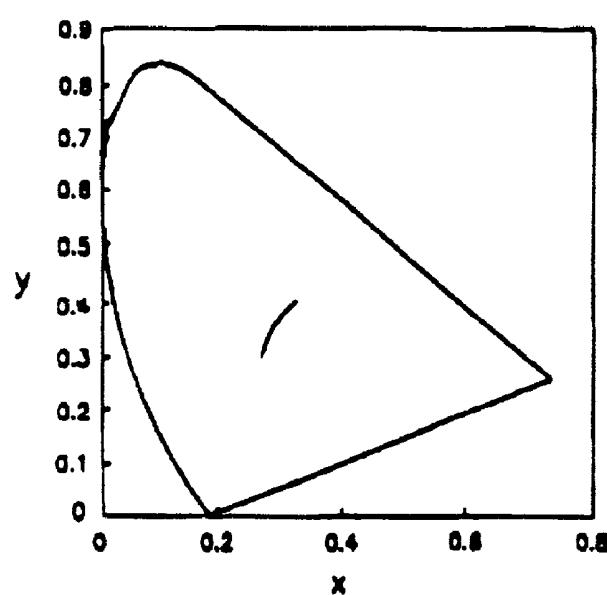


FIG.4a

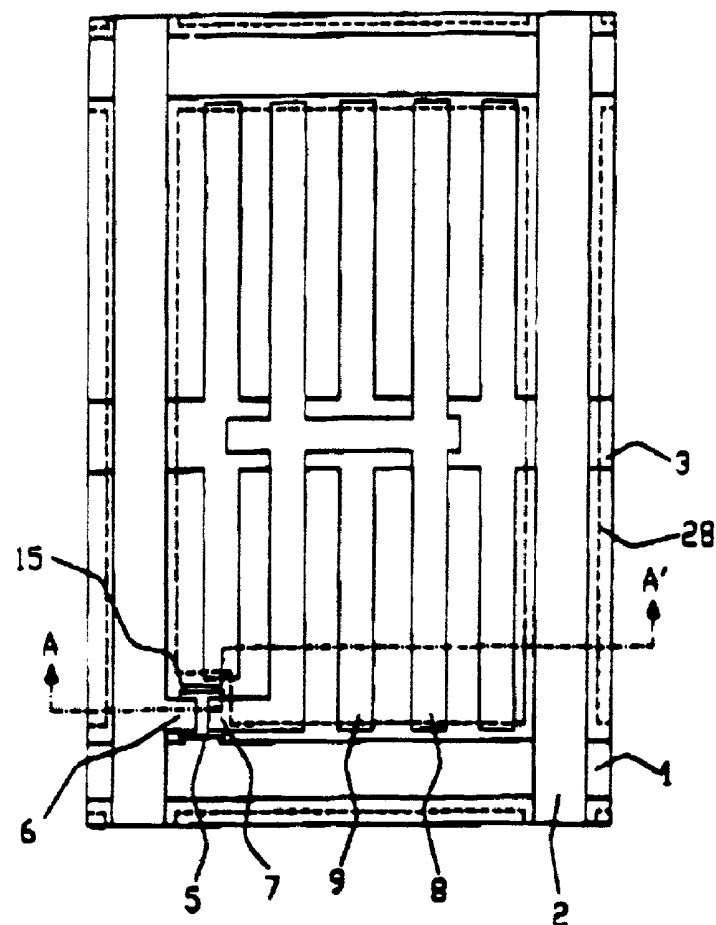


FIG.4b

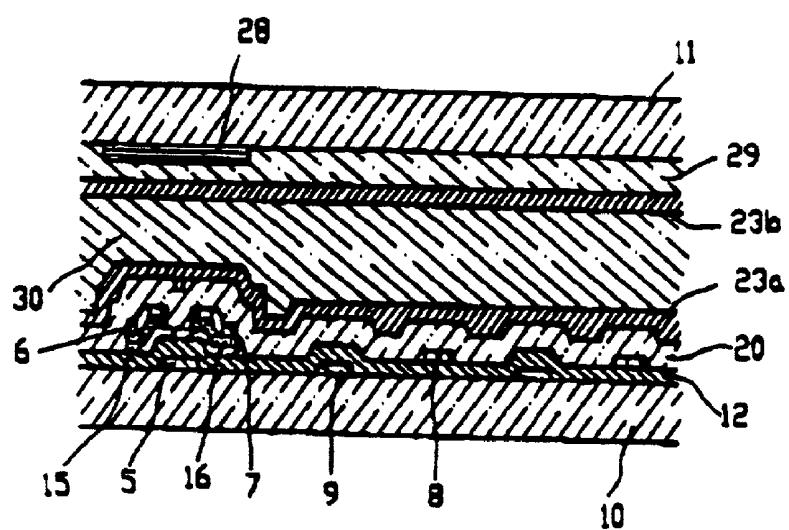


FIG.5

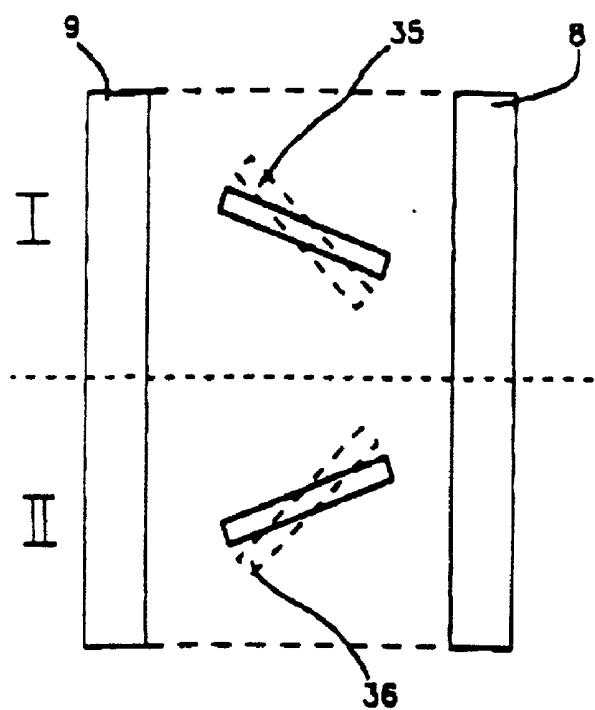


FIG.6

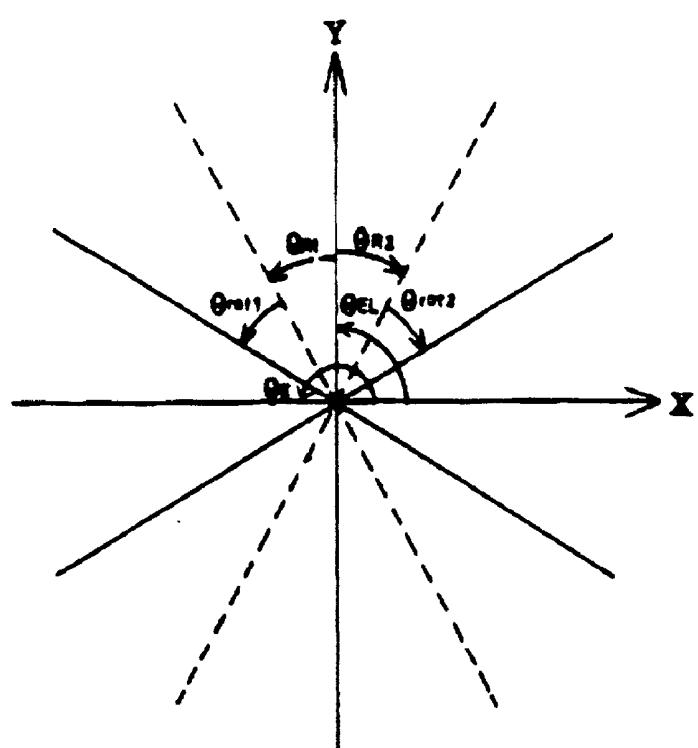


FIG.7a

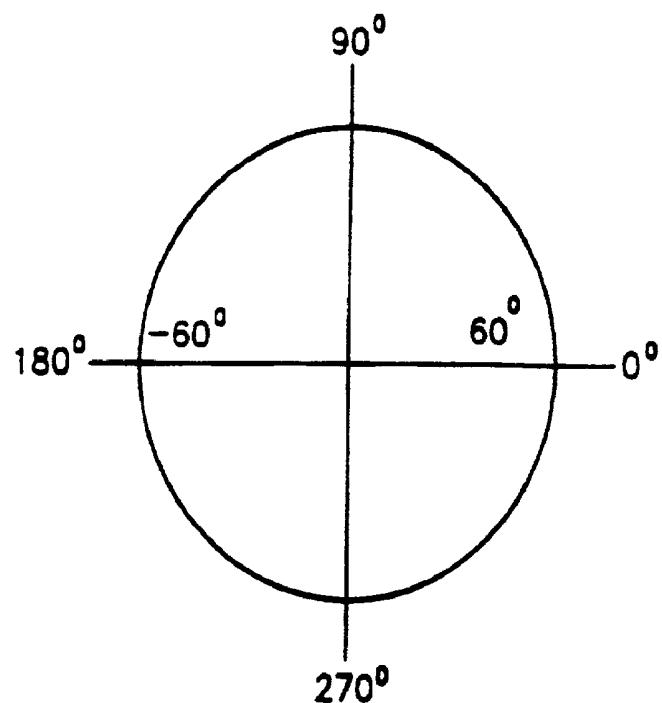


FIG.7b

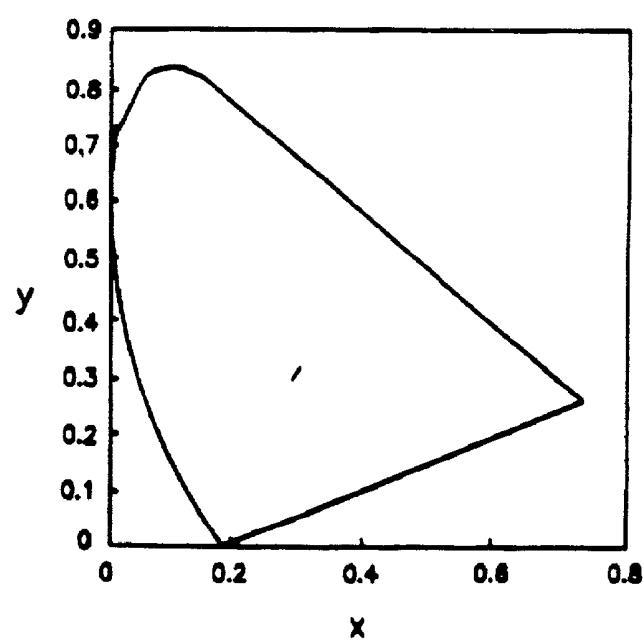


FIG.8

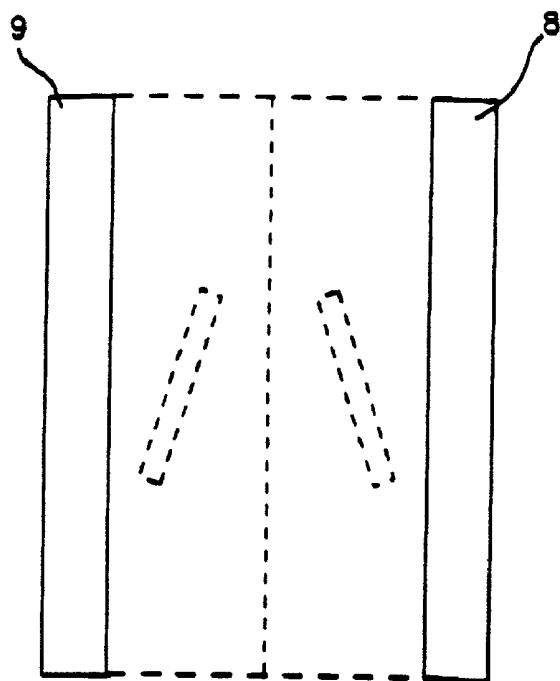


FIG.9


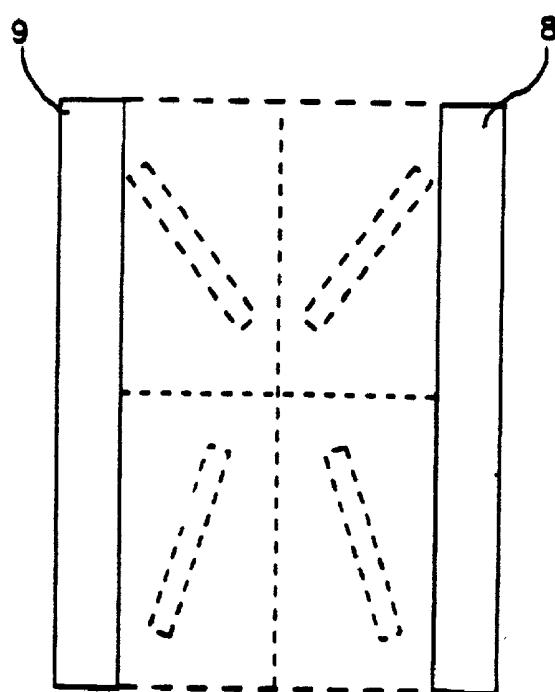


FIG.10

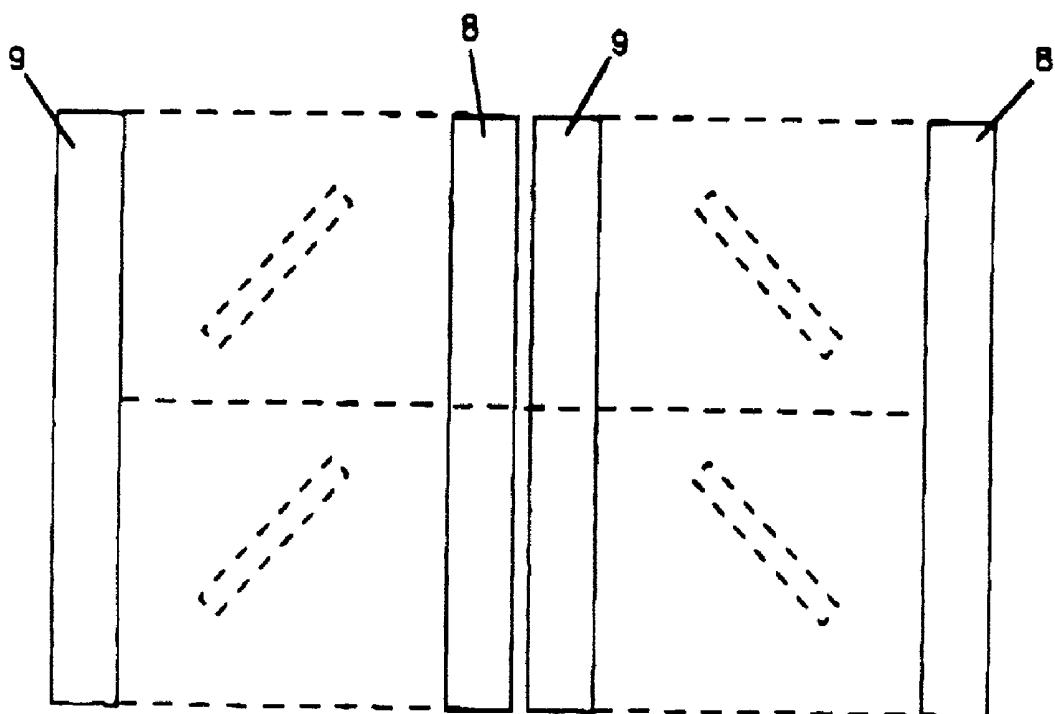

IN-PLANE SWITCHING MODE LIQUID CRYSTAL DISPLAY DEVICE

BACKGROUND OF THE INVENTION

[0001] A. Field of the Invention

[0002] The present invention relates to a liquid crystal display device, and more particularly to an in-plane switching ("IPS") mode liquid crystal display device.

[0003] B. Description of the Related Art

[0004] Recently, the thin film transistor liquid crystal display devices (TFT LCDs) have been used as display devices in such applications as portable televisions and notebook computers, but these TFT LCDs have small viewing angles.

[0005] In order to solve this problem, twisted nematic LCDs having, for example, optical compensation films and multi-domains, have been introduced. In these LCDs, however, the color of the image is largely shifted as the viewing angle direction increases.

[0006] For a wide viewing angle, the IPS mode LCD is disclosed, for example, in JAPAN DISPLAY 92 page 547, Japanese Patent Unexamined Publication No. 7-36058, Japanese Patent Unexamined Publication No. 7-225388, and ASIA DISPLAY 95 page 707.

[0007] FIG. 1 is a view showing the operation of liquid crystal (LC) molecules of the conventional IPS mode LCD. FIG. 2 is a view showing the long axis of the LC molecules shown in FIG. 1. As shown in the figures, a data electrode 8 and a common electrode 9 are aligned in Y axis direction at an angle $\theta_{EL}=90^\circ$ relative to the X axis direction which is the extension direction of a gate bus line (not shown). $\theta_E=180^\circ$ indicates an angle between the direction of electric field and X axis direction. θ_R indicates an angle between the alignment direction and the X axis direction, and angle θ_R is determined by a rubbing process in the range of 90° to 180° . θ_{rot} indicates a rotated angle of liquid crystal molecules 35 by the electric field applied between the two electrodes.

[0008] When a voltage is not applied, liquid crystal molecules 35 denoted by dotted line are aligned according to the alignment direction at angle θ_R . When the voltage is applied, liquid crystal molecules 35 rotate counterclockwise by angle θ_{rot} . In the figures, liquid crystal molecules 35 are denoted by solid line after the voltage is applied, and a positive type liquid crystal is used in which electric permittivity of liquid crystal molecules in the long axis direction is larger than in the short axis direction. On the other hand, when negative type liquid crystal is used, the liquid crystal molecules are aligned perpendicular to the electric field direction.

[0009] However, in the conventional IPS mode LCD, grey level inversion is caused by birefringence of the liquid crystal molecules as shown in FIG. 3a. Further, as shown in FIG. 3b, a white color is shifted to blue and yellow colors respectively in A and B viewing directions shown in FIG. 1.

SUMMARY OF THE INVENTION

[0010] An object of the present invention is to prevent a color shift in an in-plane switching mode liquid crystal display device.

[0011] Another object of the present invention is to prevent a grey level inversion in an in-plane switching mode liquid crystal display device.

[0012] Additional objects and advantages of the invention will be set forth in part in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention will be realized and attained by means of the elements and combinations particularly pointed out in the appended claims.

[0013] To achieve the objects and in accordance with the purpose of the invention, as embodied and broadly described herein, the in-plane switching mode liquid crystal display of the present invention comprises: a first substrate having a plurality of pixels, data and common electrodes over the first substrate and substantially parallel with a reference direction, a first alignment layer over the data and common electrodes, wherein at least one of the plurality of pixels has a plurality of domains, and at least two adjacent domains of the plurality of domains have alignment directions opposite one another with respect to the reference direction.

[0014] In another aspect the in-plane switching mode liquid crystal display of the present invention comprises: a substrate having a plurality of pixels, data and common electrodes over the substrate and substantially parallel with a reference direction, an alignment layer over the data and common electrodes and having first and second domains adjacent one another, each of the first and second domains having at least one of the plurality of pixels and an alignment direction opposite that of the other domain with respect to the reference direction.

[0015] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention, as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description, serve to explain the principles of the invention.

[0017] In the Figures:

[0018] FIG. 1 is a view showing the operation of liquid crystal molecules in the conventional IPS mode LCD;

[0019] FIG. 2 is a view showing the long axis of the LC molecules shown in FIG. 1;

[0020] FIGS. 3a and 3b are views showing a contrast ratio and a color shift of the conventional IPS mode LCD respectively;

[0021] FIGS. 4a and 4b are plan and sectional views showing an IPS mode LCD according to the present invention;

[0022] FIG. 5 is a view showing the operation of liquid crystal molecules in a first embodiment of the present invention;

[0023] FIG. 6 is a view showing a long axis of the LC molecules shown in FIG. 5;

[0024] FIGS. 7a and 7b are views showing a viewing angle characteristic and a color shift of the present invention respectively;

[0025] FIG. 8 is a view showing a second embodiment of the present invention;

[0026] FIG. 9 is a view showing a third embodiment of the present invention; and

[0027] FIG. 10 is a view showing a fourth embodiment of the present invention.

DETAILED DESCRIPTION

[0028] Reference will now be made in detail to the embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0029] FIGS. 4a and 4b are plane and sectional views showing one pixel region of the IPS LCD implemented according to the present invention, where FIG. 4b is a sectional view taken along line A—A' of FIG. 4a. As shown in these figures, a gate bus line 1 and a data bus line 2 are aligned to cross each other on a first substrate 10, defining a pixel region. Although only one pixel region is shown in the figures, a liquid crystal display device generally has a plurality of pixel regions.

[0030] At the cross of gate and data bus lines 1 and 2, a thin film transistor (TFT) is formed, which comprises a gate electrode 5, a gate insulating layer 12, a semiconductor layer 15, an n+ semiconductor layer 16, a source electrode 6 and a drain electrode 7.

[0031] In the pixel region, a data electrode 8 and a common electrode 9 are formed parallel to each other. Gate and common electrodes 5 and 9 are connected electrically to gate and common bus lines 1 and 3 respectively, and source and drain electrodes 6 and 7 are connected electrically to data bus line 2 and data electrode 8 respectively.

[0032] Gate and common electrodes 5 and 9 are formed by etching a metal layer deposited by sputtering a metal such as Al, Mo, Ta or Al alloy. Gate insulating layer 12 is formed by depositing silicon oxide or silicon nitride on the surface of first substrate 10 which includes gate electrode 5, common electrode 9, and gate bus line 1. Semiconductor layer 15 is formed by etching an amorphous silicon layer deposited on gate insulating layer 12. n+ semiconductor layer 16 is formed by depositing an n+ amorphous silicon layer or doping an n+ ion into predetermined regions of the semiconductor layer 15. A passivation layer 20 is formed thereon by depositing silicon oxide or silicon nitride. Data bus line 2, data electrode 8, source electrode 6, and drain electrode 7 are formed thereon by depositing and etching a metal such as Cr.

[0033] On passivation layer 20, a first alignment layer 23a is formed by coating polyimide, polyamide or photo alignment materials. The polyimide or polyamide alignment layer is rubbed to impart an alignment direction. On the other hand, the photo-alignment layer such as polyvinylcinnamate or polysiloxane based materials may also be used and be exposed to an ultraviolet light to impart an alignment direction.

[0034] On a second substrate 11, a black matrix 28 is formed to prevent a leakage of light through the regions of the TFT and gate, data and common bus lines 1, 2 and 3. Black matrix 28 is formed by depositing and patterning a Cr layer, a CrOX layer, or a black resin layer. A color filter layer 29 is formed thereon, which has one of R, G and B color filter elements (not shown) in each of the pixel regions. A second alignment layer 23b is formed thereon by coating polyimide or polyamide, or photo-alignment materials such as polyvinylcinnamate or polysiloxane based materials.

[0035] A liquid crystal layer 30 is formed by injecting liquid crystal between the two substrates.

[0036] FIG. 5 is a view showing the operation of liquid crystal (LC) molecules in a first embodiment of the present invention. FIG. 6 is a view showing the long axis of the LC molecules shown in FIG. 5. Although not illustrated in FIGS. 4a and 4b, this embodiment is characterized in that one pixel region is divided into a first domain I and a second domain II which are arranged parallel to the extension direction of the two electrodes. In FIG. 5, only a pair of electrodes 8 and 9 is illustrated for convenience of explanation.

[0037] As shown in FIGS. 5 and 6, data electrode 8 and common electrode 9 are aligned in Y axis direction at an angle $\theta_{EL}=90^\circ$ relative to the X axis direction that is the extension direction of gate bus line 1 shown in FIG. 4a. $\theta_E=180^\circ$ indicates an angle between the electric field and X axis directions. θ_{R1} and θ_{R2} indicate angles of inclination between the Y axis direction and the first and second alignment directions respectively. θ_{rot1} and θ_{rot2} indicate the rotated angles of LC molecules 35 and 36 in the first and second domains respectively. In this embodiment, it is preferable that the LC molecules 35 and 36 in the two domains are aligned symmetrically relative to the extension directions of electrodes 8 and 9.

[0038] When a voltage is not applied to the device, LC molecules 35 and 36 are aligned according to the alignment directions of the first and second domains. A positive type liquid crystal is used in this embodiment, and therefore the two alignment directions are determined in the ranges of 0° to 45° . On the other hand, when a negative type liquid crystal is used, the two alignment directions are determined in the ranges of 45° to 90° . In order to obtain an untwisted mode LCD, alignment directions of the second alignment layer are determined to be the same as alignment directions of the first alignment layer. On the other hand, the alignment directions of the second alignment layer are determined to be perpendicular to the alignment directions of the first alignment layer to obtain a twisted mode LCD.

[0039] When a voltage is applied to the device, liquid crystal molecules 35 and 36 in the first and second domains are rotated in opposite directions to each other by angles θ_{rot1} and θ_{rot2} respectively, being symmetrical relative to the extension direction of data and common electrode 8 and 9.

[0040] In this embodiment according to the present invention, the grey level inversion and the color shift can be prevented by the rotation of liquid crystal molecules in opposite directions, improving the viewing angle characteristics.

[0041] FIG. 3a and 3b are views showing the contrast ratio and the color shift of the conventional IPS mode LCD

respectively, where grey level inversion regions are denoted by the shaded areas. **FIG. 7a** and **FIG. 7b** are views showing the contrast ratio and the color shift in the present invention respectively. As shown in **FIG. 3a**, the conventional IPS mode LCD has grey level inversion regions at polar viewing angle 60° and at azimuthal viewing angles between 90° and 180° and between 270° and 0°, while there is no grey level inversion in the LCD implemented according to the present invention at polar viewing angle 60° as shown in **FIG. 7a**.

[0042] As shown in **FIG. 3b**, the conventional IPS mode LCD has a wide white color shift, while the present invention has a narrow white color shift as shown in **FIG. 7b**.

[0043] **FIG. 8** is a view showing a second embodiment, wherein one pixel region is divided into two domains which are arranged perpendicular to the extension direction of electrodes 8 and 9.

[0044] **FIG. 9** is a view showing a third embodiment, wherein one pixel region is divided into four domains. Alignment directions in the two upper domains are inclined in opposite directions to each other relative to the extension directions of data and common electrodes 8 and 9. Alignment directions in the two lower domains are also inclined in opposite directions to each other relative to the extension directions. In this embodiment, alignment directions in two left domains and in two right domains are inclined in opposite directions to each other, compensating for grey level inversions and color shifts of each other.

[0045] In the embodiments according to the present invention, one pixel region is divided into a plurality of domains. Generally, it is preferable that half of the plural domains have alignment directions clockwise inclined relative to the extension directions of the data and common electrodes, and the other half of the plural domains have alignment directions counterclockwise inclined relative to the extension directions of the data and common electrodes, so that the alignment directions of the half of the plural domains are symmetrical to those of the other half of the plural domains relative to the extension directions of the data and common electrodes.

[0046] **FIG. 10** is a view showing a fourth embodiment, wherein the alignment directions in adjacent two pixel regions are inclined in symmetrically opposing directions to each other relative to the extension directions of two electrodes 8 and 9. Further, the present invention can provide an IPS mode LCD in which adjacent plural pixel regions of more than two, for example four adjacent pixel regions, are aligned symmetrically relative to the extension directions of data and common electrodes 8 and 9, so that they are rotated in opposite directions to each other. In this case, it is preferable that half of the plural pixel regions have alignment directions inclined clockwise relative to the data and common electrodes, and the other half of the plural pixel regions have alignment directions inclined counterclockwise relative to the data and common electrodes.

[0047] In the IPS mode LCD according to the present invention, because each LC molecules in plural domains or in adjacent plural pixel regions are symmetrically rotated in opposite directions so as to compensate for the angular dependence of each other, grey level inversion and color shift are eliminated to improve the viewing angle characteristics.

[0048] It will be apparent to those skilled in the art that various modifications and variations can be made in the in-plane liquid crystal display device of the present invention and in construction of this device without departing from the scope or spirit of the invention.

[0049] Other embodiments of the invention will be apparent to those skilled in the art from consideration of the specification and practice of the invention disclosed herein. It is intended that the specification and examples be considered as exemplary only, with a true scope and spirit of the invention being indicated by the following claims.

What is claimed:

1. An in-plane switching mode liquid crystal display device, comprising:

a first substrate having a plurality of pixels;

data and common electrodes over the first substrate and substantially parallel with a reference direction; and

a first alignment layer over the data and common electrodes, wherein at least one of said plurality of pixels has a plurality of domains, and at least two adjacent domains of said plurality of domains have alignment directions opposite one another with respect to said reference direction.

2. The device according to claim 1, further comprising:

a second substrate facing the first substrate; and

a second alignment layer over the second substrate.

3. The device according to claim 1, wherein said first alignment layer includes a material selected from the group consisting of polyimide, polyamide, polyvinylcinnamate and polysiloxane based materials.

4. The device according to claim 1, wherein said reference direction includes a longitudinal direction of one of said data and common electrodes.

5. The device according to claim 2, wherein said second alignment layer has an alignment direction parallel with an alignment direction of said first alignment layer.

6. The device according to claim 2, wherein said second alignment layer has an alignment direction perpendicular to an alignment direction of said first alignment layer.

7. The device according to claim 2, wherein said second alignment layer includes a material selected from the group consisting of polyimide, polyamide, polyvinylcinnamate and polysiloxane based materials.

8. An in-plane switching mode liquid crystal display device comprising:

a substrate having a plurality of pixels;

data and common electrodes over the substrate and substantially parallel with a reference direction; and

an alignment layer over the data and common electrodes and having first and second domains adjacent one another, each of said first and second domains having at least one of said plurality of pixels and an alignment direction opposite that of the other domain with respect to said reference direction.

9. The device according to claim 8, wherein said first and second domains have an equal number of pixels.

10. The device according to claim 8, wherein the alignment directions of said first and second domains are symmetrical to one another with respect to said reference direction.

11. The device according to claim 8, wherein said first and second domains each have one pixel.

12. The device according to claim 8, wherein the first and second domains each have two pixels.

13. The device according to claim 8, wherein said reference direction includes a longitudinal direction of one of said data and common electrodes.

14. An in-plane switching mode liquid crystal display device comprising:

a substrate;

data and common electrodes over the substrate and substantially parallel with a reference direction; and

at least one alignment layer over the data and common electrodes, wherein a surface of said alignment layer has first and second domains adjacent one another, and said first and second domains have alignment directions opposite one another with respect to said reference direction.

15. The device according to claim 14, wherein said reference direction includes a longitudinal direction of one of said data and common electrodes.

* * * * *

| | | | |
|----------------|--|---------|------------|
| 专利名称(译) | 面内切换模式液晶显示装置 | | |
| 公开(公告)号 | US20010000128A1 | 公开(公告)日 | 2001-04-05 |
| 申请号 | US09/729083 | 申请日 | 2000-12-05 |
| [标]申请(专利权)人(译) | HAM镛成 | | |
| 申请(专利权)人(译) | HAM永晟 | | |
| 当前申请(专利权)人(译) | LG DISPLAY CO. , LTD. | | |
| [标]发明人 | HAM YONG SUNG | | |
| 发明人 | HAM, YONG-SUNG | | |
| IPC分类号 | G02F1/1337 G02F1/1343 | | |
| CPC分类号 | G02F1/134363 G02F2001/133757 | | |
| 优先权 | 1019970031257 1997-07-07 KR 1019980017254 1998-05-13 KR | | |
| 其他公开文献 | US6466291 | | |
| 外部链接 | Espacenet USPTO | | |

摘要(译)

公开了一种面内切换模式液晶显示装置 (LCD) , 其中一个像素区域的第一部分具有相对于数据电极的延伸方向顺时针倾斜的取向方向 , 并且像素区域的第二部分具有取向方向逆时针相对于数据电极的延伸方向倾斜。该面内切换模式LCD具有改善的视角特性。

