US 20070164948A1

(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2007/0164948 A1

Kim et al. (43) Pub. Date: Jul. 19, 2007

(54) LIQUID CRYSTAL DISPLAY

(76) Inventors: **Jeong Il Kim**, Incheon-Si (KR); **Dong Gyu Kim**, Yongin-Si (KR); **Jong Woong Chang**, Cheonan-Si (KR)

Correspondence Address:
CANTOR COLBURN, LLP
55 GRIFFIN ROAD SOUTH
BLOOMFIELD, CT 06002

(21) Appl. No.: **11/509,902**

(22) Filed: **Aug. 25, 2006**

(30) **Foreign Application Priority Data**

Jan. 13, 2006 (JP) 10-2006-0003995

Publication Classification

(51) **Int. Cl.**
G09G 3/36 (2006.01)

(52) **U.S. Cl.** **345/87**

(57) **ABSTRACT**

A liquid crystal display panel includes a plurality of gate lines, a gate driving unit mounted onto the liquid crystal display panel and connected to the plurality of gate lines and a plurality of lines applying an external signal to the gate driving unit. The plurality of lines are connected to different regions on the gate driving unit in accordance with a voltage level of the signal to be applied thereto.

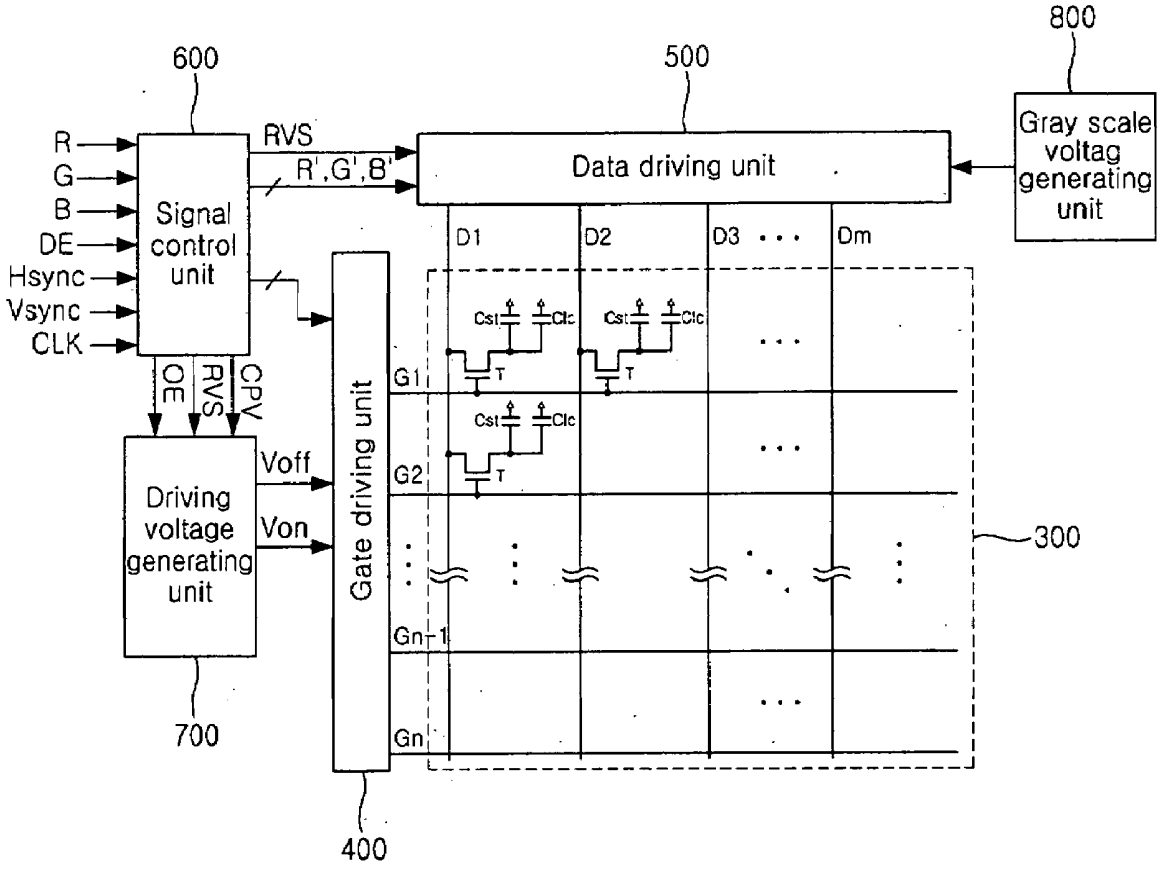

FIG. 1

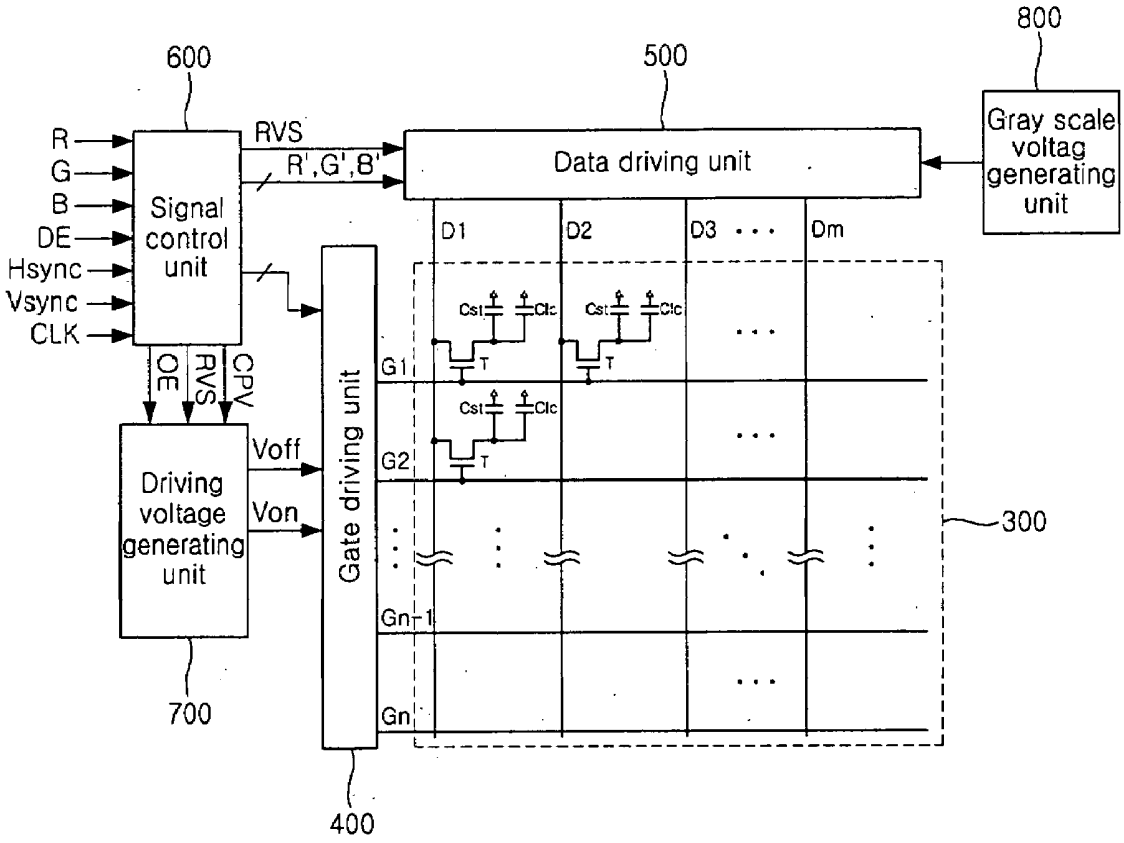
600
500
800
R
G
B
DE
Hsync
Vsync
CLK
Signal control unit
RVS
R',G',B'
Data driving unit
Gray scale voltag generating unit
D1
D2
D3
Dm
Cst
Clc
T
G1
G2
Gn-1
Gn
OE
RVS
CPV
Driving voltage generating unit
Voff
Von
Gate driving unit
300
700
400

FIG. 2

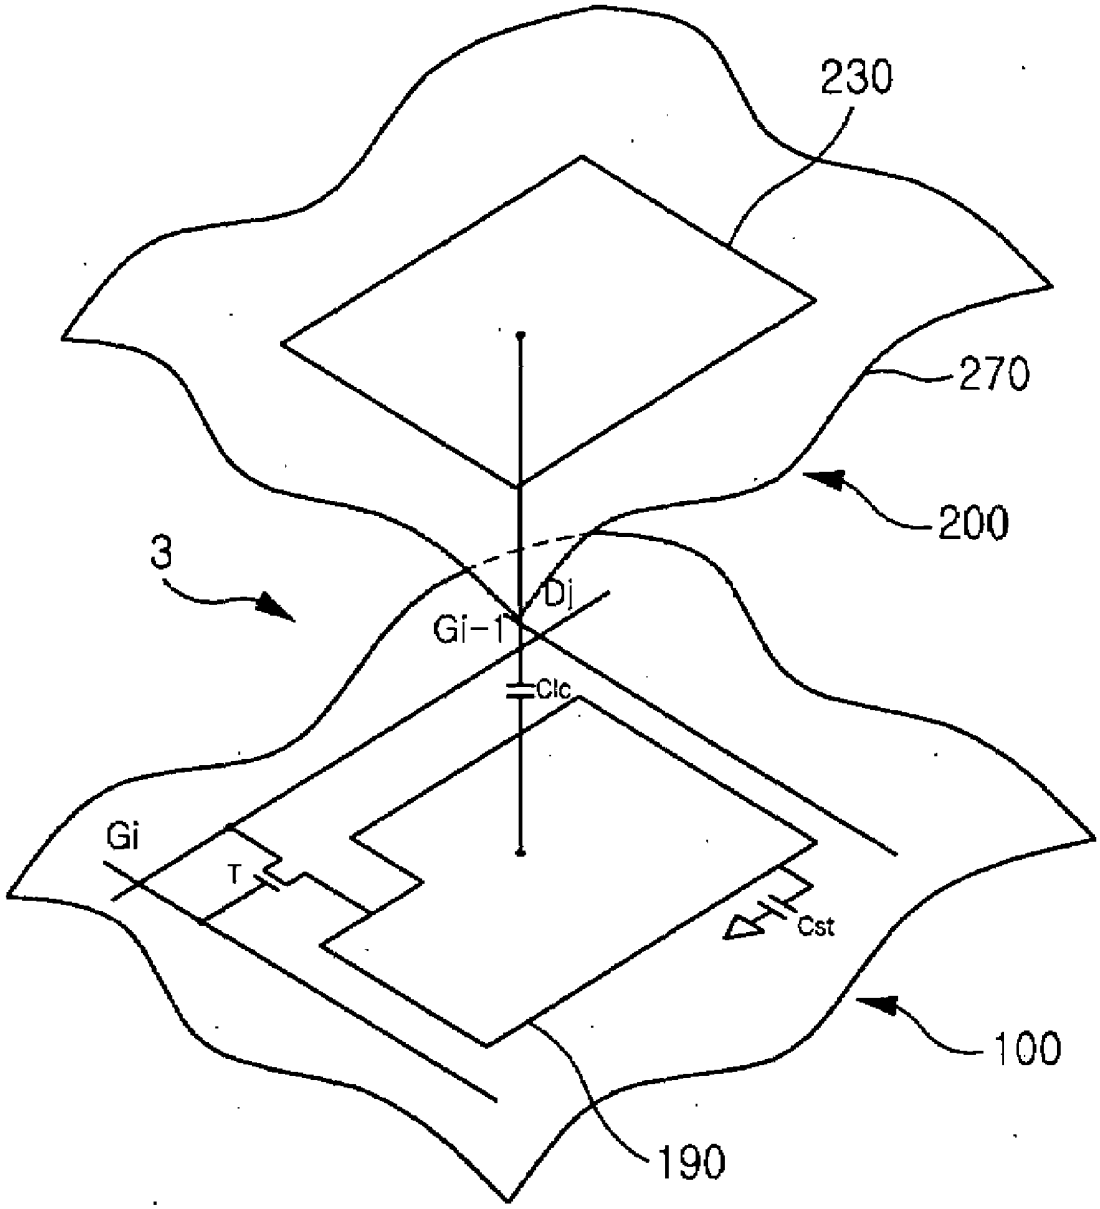

FIG. 3

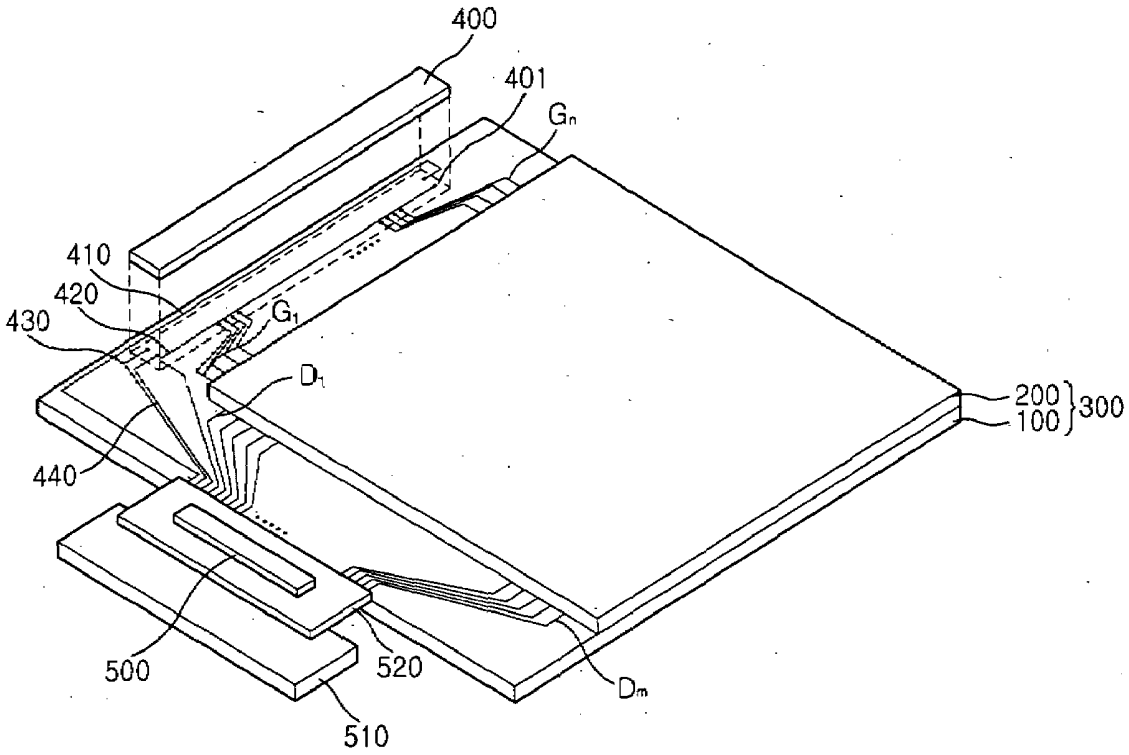

FIG. 4

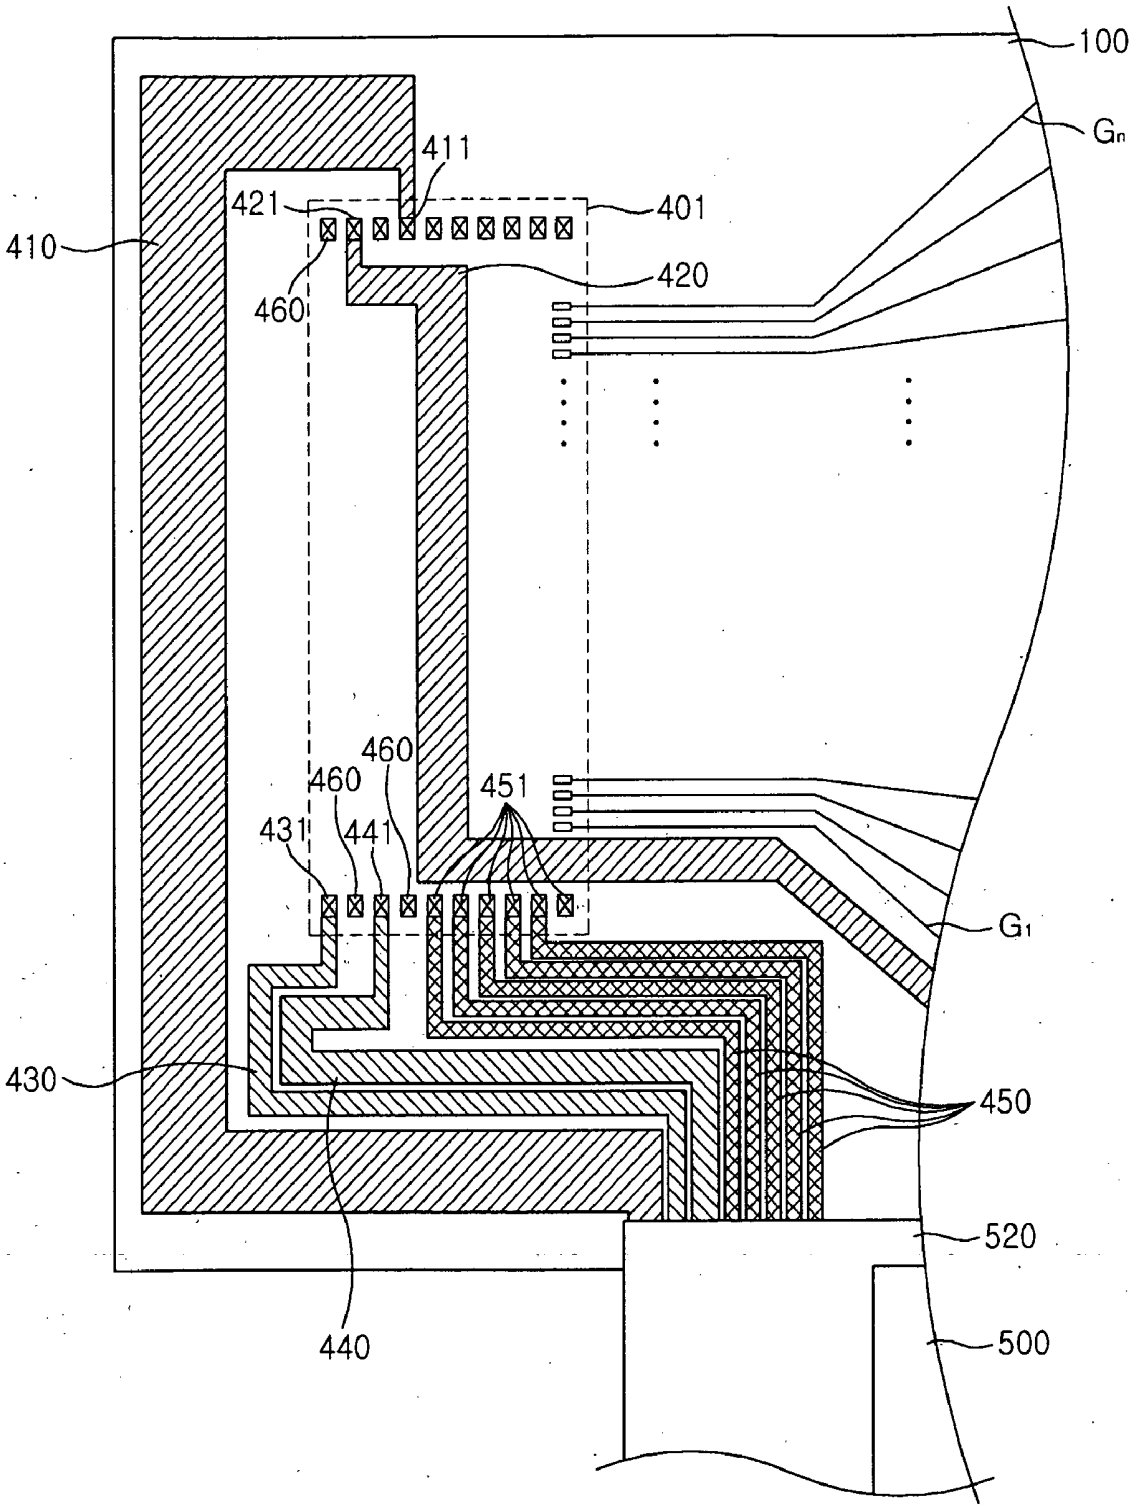
100
Gn
411
421
401
410
420
460
460
460
451
431
441
G1
430
450
520
440
500

FIG. 5

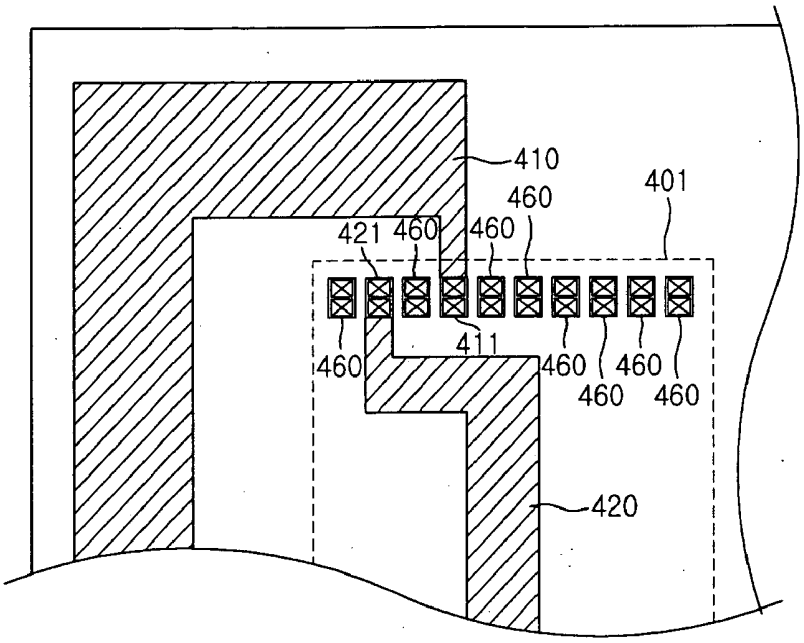
410
401
460
421
460
460
411
460
460
460
460
460
420

FIG. 6

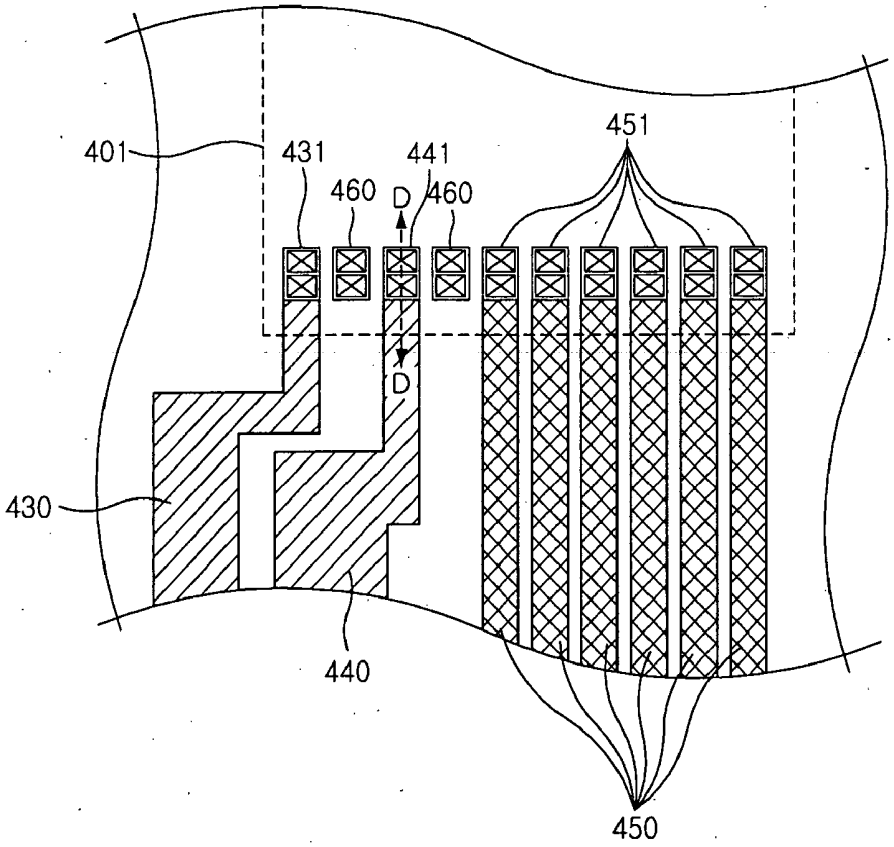
401
431
441
451
460
D
460
D
430
440
450

FIG. 7

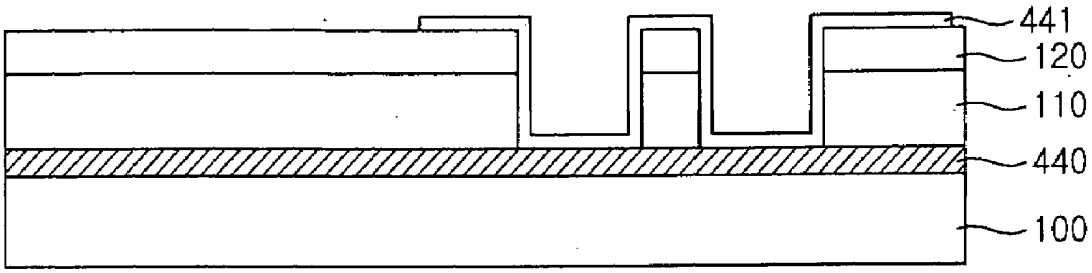

FIG. 8

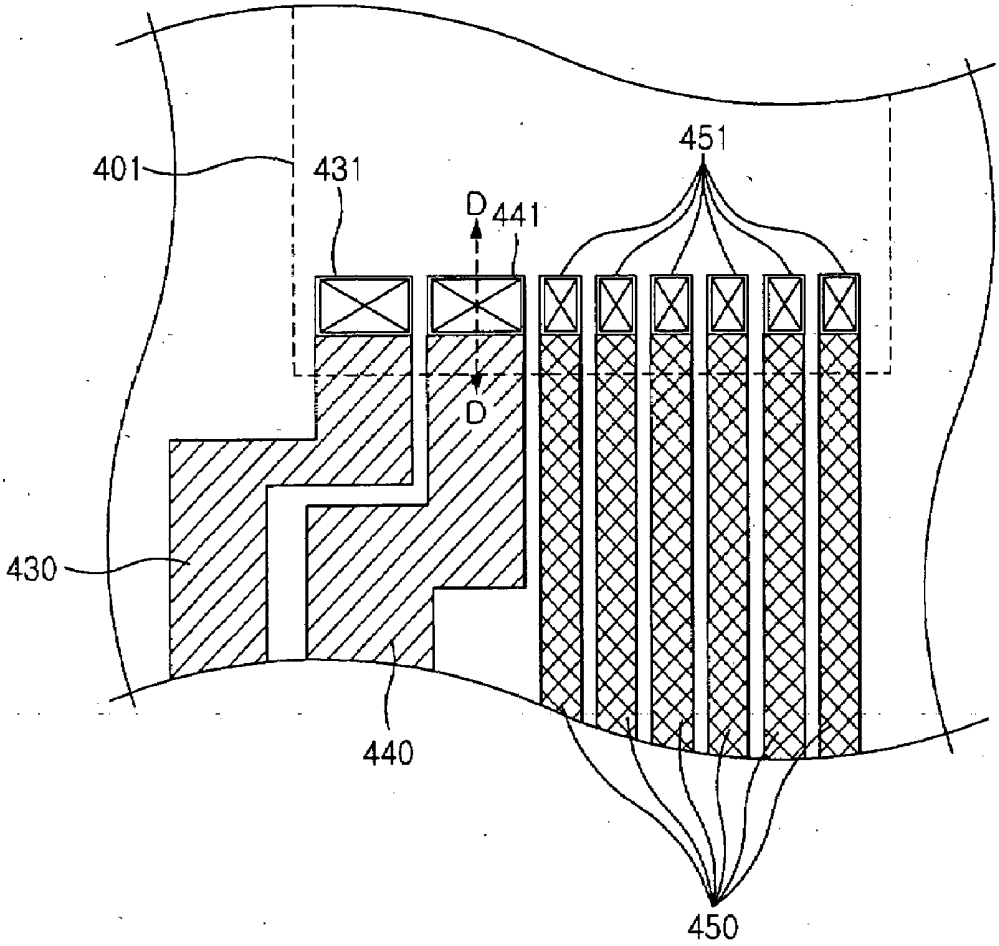

FIG. 9

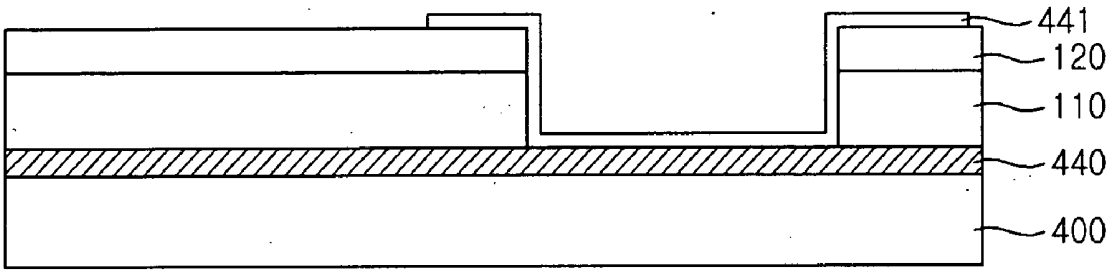
441
120
110
440
400

FIG. 10

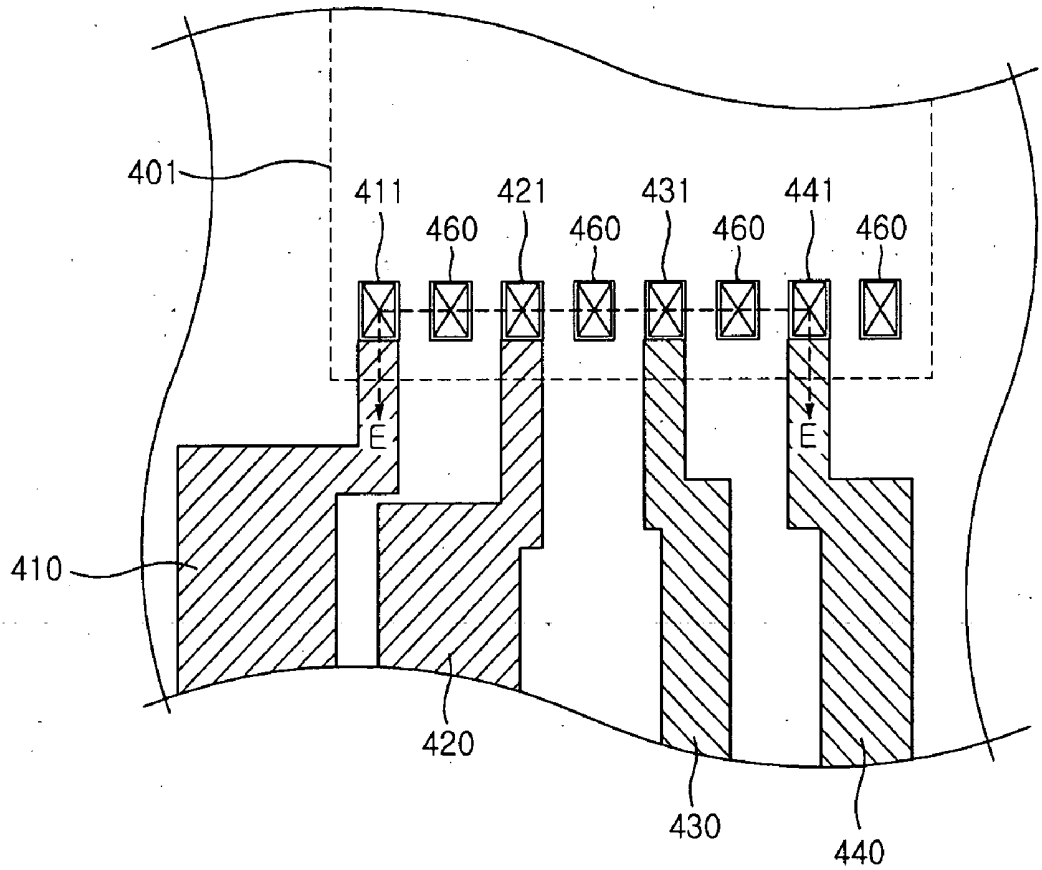
401
411
421
431
441
460
460
460
460
E
E
410
420
430
440

FIG. 11

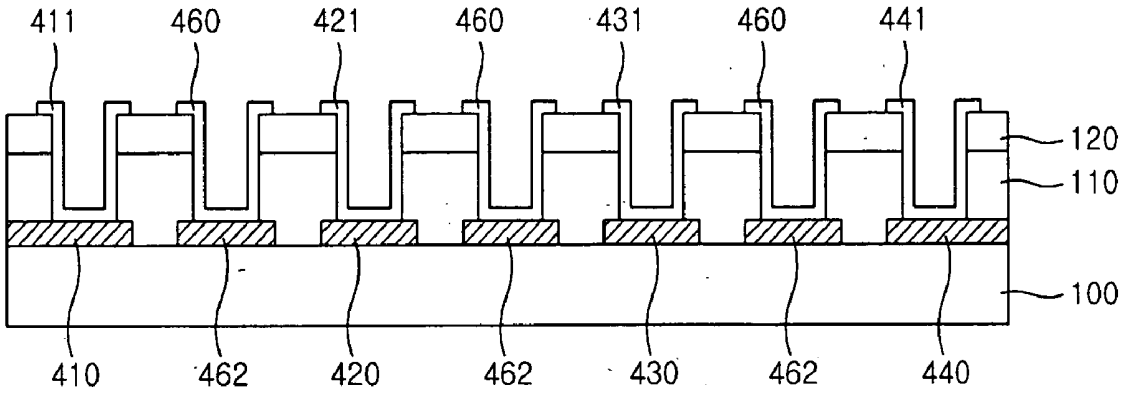
411
460
421
460
431
460
441
120
110
100
410
462
420
462
430
462
440

LIQUID CRYSTAL DISPLAY

[0001] This application claims priority to Korean Patent Application No. 10-2006-0003995 filed on Jan. 13, 2006 and all the benefits accruing therefrom under 35 U.S.C. §119, the contents of which are incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display, and more particularly, to a bonding configuration formed on a substrate and connected to a gate driving IC in a liquid crystal display with a chip on glass (COG) structure.

[0004] 2. Description of the Related Art

[0005] A liquid crystal display (LCD) is a device that includes two opposite substrates formed with electrodes and a liquid crystal material inserted between the two opposite substrates. This LCD allows images to be displayed thereon by applying an electric field between the electrodes of the two opposite substrates and causing liquid crystal molecules to move in the liquid crystal material due to the applied electric field such that the light transmissivity of the liquid crystal material can be changed.

[0006] The liquid crystal display employs the optical anisotropy and polarizability of a liquid crystal. Since the liquid crystal is thin and long in view of its structure, the orientation of the liquid crystal molecules can be adjusted by applying the electric field to an array of the liquid crystal molecules with specific directivity and polarizability. Since the light can be transmitted or blocked in accordance with the orientation of the liquid crystal molecules due to the optical anisotropy of the liquid crystal if the orientation of the liquid crystal molecules is suitably adjusted, colors and images can be represented thereon. A TFT-LCD using a thin film transistor (TFT) as a switching element has been employed.

[0007] A plurality of thin film transistors are formed on a liquid crystal display panel and a plurality of gate lines and data lines are formed on the liquid crystal display panel. A plurality of pixel electrodes connected to the gate lines and the data lines through the thin film transistors are formed on the liquid crystal display panel. The thin film transistors control data signals transmitted through the data lines in accordance with gate signals transmitted through the gate lines and transmit the data signals to the pixel electrodes. The gate signals are supplied from a gate driving integrated circuit (IC) connected to the plurality of gate lines while the data signals are supplied from a data driving integrated circuit (IC) connected to the plurality of data lines.

[0008] The data driving IC is mounted onto a printed circuit board (PCB) and connected to the plurality of data lines through a flexible printed circuit board (FPCB). In the COG structure, the gate driving IC is bonded onto the liquid crystal display panel and connected to the plurality of gate lines.

[0009] The liquid crystal display panel is provided with a plurality of lines for providing external power to the gate driving IC and bonding pad portions connected to bumps of the gate driving IC are formed at the ends of the lines. Further, the bonding pad portions are formed only at one side of the gate driving IC and the corrosion of the bonding pad portions frequently occurs due to the large voltage difference in the electric power applied through the bonding pad portions. Therefore, there is a problem in that a poor operation of the liquid crystal display occurs.

BRIEF SUMMARY OF THE INVENTION

[0010] An exemplary embodiment provides a liquid crystal display wherein corrosion of bonding pad portions can be reduced or effectively prevented by forming lines with a single metal film and separating the bonding pad portions connected to the lines with a large voltage difference from each other.

[0011] One exemplary embodiment provides a liquid crystal display including a liquid crystal display panel including a plurality of gate lines, a gate driving unit mounted onto the liquid crystal display panel and connected to the plurality of gate lines and a plurality of lines applying an external signal to the gate driving portion. The plurality of lines are connected to different regions on the gate driving unit in accordance with a voltage level of the signal to be applied thereto.

[0012] In another exemplary embodiment, the plurality of lines includes a plurality of power lines providing electric power and a plurality of signal lines applying a signal. Each of the plurality of lines includes a bonding pad. A first group of the power lines transmitting a first level of voltage is connected to a first region on the gate driving portion, and a second group of the power lines transmitting a second level of voltage is connected to a second region on the gate driving unit spaced apart from the first region. The first level of voltage may be a positive voltage and the second level of voltage may be a negative voltage.

[0013] In another exemplary embodiment, the first group of power lines includes a first power line transmitting a gate turn on voltage and a second power line transmitting a voltage driving the gate driving portion, and the second group of power lines includes a third power line supplying a ground voltage to the gate driving unit and a fourth power line transmitting a gate turn off voltage. The first and second regions may be formed on upper and lower sides of the gate driving unit, respectively. The first group of power lines may be connected to the first region across outer and inner regions of the gate driving portion. The bonding pads of the first group of power lines may be provided on the first region or a region adjacent to the first region and the bonding pads of the second group of power lines may also provided on the second region or a region adjacent to the second region.

[0014] In another exemplary embodiment, a dummy pad may be formed between the bonding pads.

[0015] In another exemplary embodiment, each of the power lines includes a connecting portion connected to the bonding pad and an extending portion extending from the connecting portion. A width of the extending portion may be in a range of about 1 to 10 times a length of a shorter side of the bonding pad.

[0016] In another exemplary embodiment, the signal lines are connected to any one of the first and second regions.

[0017] In another exemplary embodiment, the plurality of lines may be formed films including Al, Nd, Ag, Cr, Ti, Ta, Mo and a combination including at least one of the foregoing films.

[0018] Another exemplary embodiment provides a liquid crystal display including a liquid crystal display panel including a plurality of gate lines, a gate driving unit mounted onto the liquid crystal display panel and connected

to the plurality of gate lines, and a plurality of lines applying an external signal to the gate driving portion. The plurality of lines are formed of a single metal film.

[0019] In an exemplary embodiment, the metal film may be one of Al, Nd, Ag, Cr, Ti, Ta, Mo and a combination including at least one of the foregoing films.

[0020] In another exemplary embodiment, the plurality of lines includes a plurality of power lines providing electric power and a plurality of signal lines applying a signal and are connected to the different regions on the gate driving unit in accordance with a voltage level of the signal transmitted therethrough. Some of the power lines transmitting a positive voltage are connected to one side of the gate driving unit and the other of the power lines transmitting a negative voltage are connected to the other side of the gate driving portion. The power lines transmitting the positive voltage may include a first power line transmitting a gate turn on voltage and a second power line transmitting a voltage driving the gate driving portion, and the power lines transmitting the negative voltage may include a third power line supplying a ground voltage to the gate driving unit and a fourth power line transmitting a gate turn off voltage. At this time, the power lines transmitting the positive voltage may be connected to the one side across outer and inner regions of the gate driving portion.

[0021] In another exemplary embodiment, the bonding pads of the first and second power lines electrically connected the gate driving unit are provided on the one side or a region adjacent to the one side, and the bonding pads of the third and fourth power lines electrically connected to gate driving unit is connected to the other side or a region adjacent to the other side. A dummy pad may be formed between the bonding pads. In another exemplary embodiment, each of the power lines includes a connecting portion connected to the bonding pad and an extending portion extending from the connecting portion, and a width of the extending portion is in a range of about 1 to 10 times a length of a shorter side of the bonding pad.

[0022] Another exemplary embodiment provides a thin film transistor substrate including a substrate including a plurality of gate lines and a mounting region on which a gate driving unit is mounted, the gate driving unit being connected to the plurality of gate lines, first and second pad portions formed on different sides of the mounting region, and first and second groups of lines formed of a single metal film and connected to the first and second pad portions in accordance with a voltage level of a signal transmitted therethrough.

[0023] In another exemplary embodiment, the metal film may be one of Al, Nd, Ag, Cr, Ti, Ta, Mo and a combination including at least one of the foregoing films.

[0024] In another exemplary embodiment, the first and second pad portions are provided on upper and lower sides of the mounting region, respectively. The first group of lines may be connected to the first pad portion across the outside and inside of the mounting region.

[0025] In another exemplary embodiment, one of the first and second groups of lines includes power lines transmitting a positive voltage, the other of the first and second groups of lines includes power lines transmitting a negative voltage, and at least one of the first and second groups of lines includes signal lines. The power lines transmitting the positive voltage may include a first power line transmitting a gate turn on voltage and a second power line transmitting a voltage driving the gate driving portion. The power lines transmitting the negative voltage may include a third power line supplying a ground voltage to the gate driving unit and a fourth power line transmitting a gate turn off voltage.

[0026] In another exemplary embodiment, the first and second pad portions includes bonding pads connected to the power lines and dummy pad formed between the bonding pads. Each of the power lines includes a connecting portion connected to the bonding pad and an extending portion extending from the connecting portion, and a width of the extending portion is in a range from about 1 to 10 times a length of a shorter side of the bonding pad.

[0027] In another exemplary embodiment, the first and second pad portions may further include bonding pads connected to the signal lines. A size of the bonding pad connected to the power line may be in a range of about 1 to 5 times a size of the bonding pad connected to the signal line.

[0028] Another exemplary embodiment provides a method of forming a liquid crystal display, the method including forming a liquid crystal display panel including a plurality of gate lines, disposing a gate driving unit on the liquid crystal display panel and connecting the gate driving unit to the plurality of gate lines, connecting a plurality of lines to different regions on the gate driving unit in accordance with a voltage level of an external signal to be applied thereto and applying the external signal from a plurality of lines to the gate driving unit.

BRIEF DESCRIPTION OF THE DRAWINGS

[0029] The above and other objects, features and advantages of the present invention will become apparent from the following description of preferred embodiments given in conjunction with the accompanying drawings, in which:

[0030] FIG. **1** is a block diagram of an exemplary embodiment of a liquid crystal display according to the present invention;

[0031] FIG. **2** is an equivalent circuit diagram an exemplary embodiment of a pixel of a liquid crystal display according to the present invention;

[0032] FIG. **3** is a perspective view of an exemplary embodiment of a liquid crystal display according to the present invention;

[0033] FIG. **4** is a plan view illustrating an exemplary embodiment of a bonding region where a gate driving IC of a liquid crystal display according to the present invention is bonded;

[0034] FIGS. **5** and **6** are plan views illustrating exemplary embodiments of upper and lower bonding regions of a liquid crystal display according to the present invention, respectively;

[0035] FIG. **7** is a cross-sectional view of a bonding pad portion taken along line D-D of FIG. **6**;

[0036] FIG. **8** is a plan view illustrating another exemplary embodiment of the lower bonding region of the liquid crystal display according to the present invention;

[0037] FIG. **9** is a cross-sectional view of the liquid crystal display taken along line D-D of FIG. **8**;

[0038] FIG. **10** is a plan view illustrating another exemplary embodiment of the lower bonding region of the liquid crystal display according to the present invention; and

[0039] FIG. **11** is a cross-sectional view of the liquid crystal display taken along line E-E of FIG. **10**.

DETAILED DESCRIPTION OF THE INVENTION

[0040] Hereinafter, preferred embodiments of the present invention will be described in detail with reference to the accompanying drawings. However, the present invention is not limited to the embodiments described below but will be implemented in various different forms. The embodiments are provided only to complete the disclosure of the present invention and fully convey the scope of the present invention to those skilled in the art.

[0041] In the drawings, in order to clearly represent a variety of layers and regions, the thickness thereof have been exaggerated and like reference numerals designate like elements. Further, when a part of a layer, a film, a region, a plate, etc. is positioned on or above the other part, it means that the one part is positioned onto or just above the other part and a third part is interposed between the one part and the other part. Like numbers refer to like elements throughout. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.

[0042] It will be understood that, although the terms first, second, third, etc., may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. These terms are only used to distinguish one element, component, region, layer or section from another region, layer or section. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of the present invention.

[0043] Spatially relative terms, such as "below," "lower", "under," "above", "upper" and the like, may be used herein for ease of description to describe the relationship of one element or feature to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation, in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "below" other elements or features would then be oriented "above" the other elements or features. Thus, the exemplary term "below" can encompass both an orientation of above and below. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

[0044] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0045] Embodiments of the invention are described herein with reference to cross-section illustrations that are schematic illustrations of idealized embodiments (and intermediate structures) of the invention. As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, embodiments of the invention should not be construed as limited to the particular shapes of regions illustrated herein but are to include deviations in shapes that result, for example, from manufacturing.

[0046] For example, an implanted region illustrated as a rectangle will, typically, have rounded or curved features and/or a gradient of implant concentration at its edges rather than a binary change from implanted to non-implanted region. Likewise, a buried region formed by implantation may result in some implantation in the region between the buried region and the surface through which the implantation takes place. Thus, the regions illustrated in the figures are schematic in nature and their shapes are not intended to illustrate the actual shape of a region of a device and are not intended to limit the scope of the invention.

[0047] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

[0048] Hereinafter, the present invention will be described in detail with reference to the accompanying drawings.

[0049] FIG. **1** is a block diagram of an exemplary embodiment of a liquid crystal display according to the present invention, FIG. **2** is an equivalent circuit diagram of an exemplary embodiment of a pixel of a liquid crystal display according to the present invention and FIG. **3** is a perspective view of an exemplary embodiment of a liquid crystal display according to the present invention.

[0050] Referring to FIGS. **1** to **3**, a liquid crystal display includes a liquid crystal display panel **300** including thin film transistors, color filters and a liquid crystal layer to display desired images, a gate driving unit **400** and a data driving unit **500**, each of which is connected to the liquid crystal display panel **300**, a driving voltage generating unit **700** for supplying a driving voltage to the gate driving unit **400**, a gray scale voltage generating unit **800** for supplying a gray scale voltage to the data driving unit **500** and a signal control unit **600** for controlling the above panel and units.

[0051] In one exemplary embodiment, the liquid crystal display panel **300** includes a plurality of display signal lines G**1** to Gn and D**1** to Dm and a plurality of pixels connected thereto. Each of the pixels includes a switching element T connected to each of the display signal lines G**1** to Gn and D**1** to Dm and a liquid crystal capacitor Clc and a storage capacitor Cst each of which is connected to the switching element T.

[0052] The display signal lines G**1** to Gn and D**1** to Dm includes a plurality of scanning signal lines or gate lines G**1** to Gn extending substantially in a row direction and transmitting scanning signals or gate signals and a plurality of data signal lines or data lines D**1** to Dm extending substantially in a column direction and transmitting image signals or data signals. The switching element T may be a three-terminal element including a control terminal connected to one of the gate lines G**1** to Gn, an input terminal connected to one of the data lines D**1** to Dm and an output terminal

connected to a terminal of the liquid crystal capacitor Clc and the storage capacitor Cst.

[0053] Another terminal of the liquid crystal capacitor Clc is supplied a common voltage Vcom or a reference voltage. Another terminal of the storage capacitor Cst is supplied with a reference voltage.

[0054] FIG. **2** schematically shows a structure of a pixel region of the liquid crystal display panel **300** for displaying an image thereon. For illustrative purposes, only one pixel is shown in FIG. **2**.

[0055] As shown in FIG. **2**, the liquid crystal display panel **300** includes lower and upper substrates **100** and **200**, respectively, facing each other and a liquid crystal layer **3** formed between the substrates. The lower substrate **100** may be considered a thin film transistor substrate including a thin film transistor and a pixel electrode **190**. The upper substrate **200** may be considered a reference electrode substrate including a color filter **230** and a reference electrode **270**. The lower substrate **100** is provided with gate lines Gi-l and Gi, the data line Dj, the switching element T and the storage capacitor Cst. The liquid crystal capacitor Clc is connected to and includes the pixel electrode **190** of the lower substrate **100** and the reference electrode **270** of the upper substrate **200** as two terminals. The liquid crystal layer **3** disposed between the two electrodes **190** and **270** functions as a dielectric.

[0056] The pixel electrode **190** is connected to the switching element T, while the reference electrode **270** is formed on an entire surface of the upper substrate **200** and connected to the common voltage Vcom. The orientation of the liquid crystal molecules is changed according to the electric field generated by the pixel electrode **190** and the reference electrode **270**, such that the polarization of light passing through the liquid crystal layer **3** may also be changed.

[0057] In an alternative exemplary embodiment, the lower substrate **100** may be provided with an additional signal line (not shown), a portion of which may be overlapped with the pixel electrode **190** and to which the reference voltage is applied, to construct the storage capacitor Cst.

[0058] In the exemplary embodiment illustrated in FIG. **2**, a MOS transistor is shown as an example of the switching element T and implemented by a thin film transistor employing an amorphous or polycrystalline silicon layer as a channel layer in an actual process.

[0059] In order to implement a color display, the liquid crystal display panel **300** may include the colored filter **230**. The colored filter **230** may include colored filters such as a red, a green and/or a blue color filter **230**, through which each pixel is able to represent colors at a region corresponding to the pixel electrode **190**. As shown in FIG. **2**, the color filter **230** may be formed on a region of the upper substrate **200** corresponding to the pixel electrode **190** in location, size and/or shape. In other exemplary embodiments, the color filter **230** may be formed above or below the pixel electrode **190** of the lower substrate **100**.

[0060] In exemplary embodiments, a polarizer (not shown) for polarizing light may be attached to an outer surface of at least one of the upper and lower substrates **100** and **200** of the liquid crystal display panel **300**.

[0061] Referring again to FIG. **1**, the gray scale voltage generating unit **800** generates two sets of multiple gray scale voltages related to the light transmissivity of the pixel. In one exemplary embodiment, one set of voltages has a positive value relative to the common voltage while the other has a negative value relative to the common voltage. The gate driving unit **400** is connected to the gate lines G**1** to Gn of the liquid crystal display panel **300** to apply the externally provided gate signals including a gate turn on voltage Von and a gate turn off voltage Voff from the outside to the gate lines G**1** to Gn. The gate driving unit **400** may be implemented by a plurality of integrated circuits (ICs). The data driving unit **500** is connected to the data lines D**1** to Dm of the liquid crystal display panel **300** to select the gray scale voltages from: the gray scale voltage generating unit **800** and to apply the selected gray scale voltages to the pixels as data signals. The data driving unit **500** may also be implemented by a plurality of integrated circuits (ICs). The signal control unit **600** generates control signals for controlling the operations of the gate driving unit **400** and the data driving unit **500** and sends relevant control signals to the gate driving unit **400** and the data driving unit **500**, respectively.

[0062] Hereinafter, an exemplary embodiment of a physical structure of the liquid crystal display will be described with reference to FIG. **3**.

[0063] As shown in FIG. **3**, a printed circuit board **510** provided with circuit elements for operating the liquid crystal display is disposed at one side of the liquid crystal display panel **300**. Circuit elements may include, but are not limited to, the signal control unit **600**, the driving voltage generating unit **700**, the gray scale voltage generating unit **800**. In other words, the liquid crystal display panel **300** includes the lower and upper substrates **100** and **200**, as described above, such that the size of the upper substrate **200** is relatively smaller than that of the lower substrate **100**. A portion of one side of the lower substrate **100** is exposed to outside. FIG. **3** illustrates left and lower regions of the lower substrate **100** as being exposed and the printed circuit board **510** is disposed at one side of the exposed lower region.

[0064] The lower substrate **100** and the printed circuit board **510** are electrically and physically connected to each other through a flexible printed circuit board **520**. The data driving unit **500**, i.e. the data driving IC, may be bonded on the flexible printed circuit board **520**. The data driving IC **500** is connected to the plurality of data lines D**1** to Dm of the lower substrate **100** through the flexible printed circuit board **520**. In an alternative exemplary embodiment the data driving IC **500** may be bonded on the lower substrate **100**. In another exemplary embodiment, a plurality of the data driving ICs may be provided. In another exemplary embodiment, the flexible printed circuit board **520** may be provided with a plurality of data driving signal lines for connecting with the data driving unit **500** and a plurality of gate driving signal lines for controlling the gate driving unit **400**.

[0065] A predetermined bonding region **401** is formed on the exposed left region of the lower substrate **100** and the gate driving unit **400**, i.e. the gate driving IC is bonded to the bonding region **401**. The bonding region **401** is illustrates as a substantially rectilinear (or rectangular) region, but may be any of a number of shapes as is suitable for the purpose described herein. The plurality of gate lines G**1** to Gn of the lower substrate **100** are connected to the gate driving IC **400**. The lower substrate **100** is provided with a plurality of lines **410**, **420**, **430** and **440** connecting the gate driving signal lines of the flexible printed circuit board **520** to the gate driving unit **400** in order to apply the gate driving signals to the gate driving IC **400** bonded to the lower substrate **100**.

[0066] The lines **410**, **420**, **430** and **440** are divided, according to the levels of the applied voltages. In one

exemplary embodiment, the lines **430** and **440** extend from the flexible printed circuit board **520** to one side of the gate driving unit **400** and are connected to the gate driving unit **400** The lines **410** and **420** extend from the flexible printed circuit board **520** to another side of the gate driving unit **400** which is across the one side or considered as the inside of the gate driving unit **400** and are connected to the gate driving unit **400**.

[0067] The gate driving unit **400** may include any of a number of shapes as is suitable for the purposes described herein, including substantially in a form of a rectangle. As illustrated in FIG. **3**, some portions of the lines **410**, **420**, **430** and **440** connected from the flexible printed circuit board **520** to the gate driving unit **400** extend in a direction toward the one side of the gate driving unit **400** while the other portions extend in a direction toward an other side of the gate driving unit **400**, such as an opposing side. The lines **410** and **420** extend across the outside and/or inside of the gate driving unit **400**, respectively. Contact pad portions may be formed at the ends of the lines and connected to connecting terminals of the gate driving unit **400**.

[0068] Hereinafter, an exemplary embodiment of a structure of the plurality of lines connected to the gate driving unit will be explained with reference to FIG. **4**.

[0069] FIG. **4** is a plan view illustrating an exemplary embodiment of a bonding region (mounting region) to which a gate driving IC of the liquid crystal display according to the present invention is bonded. FIGS. **5** and **6** are plan views illustrating exemplary embodiments of upper and lower bonding regions of the liquid crystal display according to the present invention, respectively. FIG. **7** is a cross-sectional view of a bonding pad portion taken along line D-D of FIG. **6**.

[0070] Referring to FIGS. **4** to **7**, the lines **410**, **420**, **430**, **440** and **450** include a plurality of power lines **410**, **420**, **430** and **440** for providing electric power and a logic signal line **450** for supplying a logic signal. The power lines **410**, **420**, **430** and **440** include the first power line **410** for supplying the gate turn on voltage, the second power line **420** for supplying a voltage for driving the gate driving unit **400**, the third power line **430** for supplying a ground voltage to the gate driving unit **400** and the fourth power line for supplying the gate turn off voltage. One end of the lines **410**, **420**, **430**, **440** and **450** is connected to the flexible printed circuit board **520** and the other ends thereof extend into the bonding region **401**, to which the gate driving unit **400** will be bonded, such that the lines **410**, **420**, **430**, **440** and **450** may be connected to a plurality of bonding pad portions **411**, **421**, **431**, **441**, **451** and **460** formed in the bonding region **401**.

[0071] In exemplary embodiments, the lines **410**, **420**, **430**, **440** and/or **450** may be formed of a single metal film. Advantageously, it may be possible to prevent the generation of voids which will cause the corrosion of the lines upon the formation of the contacts for forming the bonding pad portions.

[0072] An exemplary embodiment of a method of manufacturing the lines and the bonding pad portions connected to the lines will be briefly explained with reference to FIG. **7**.

[0073] Any one of a number of types and/or material films may be formed on the lower substrate **100** and then patterned to form the power lines **410**, **420**, **430** and **440** and the signal line **450**. The films may include, but are not limited to, Al, Nd, Ag, Cr, Ti, Ta and Mo. A plurality of gate electrodes (not shown) and the gate lines G**1** to Gn may be simultaneously patterned on the inside of the lower substrate **100**. In one preferred exemplary embodiment, the Cr film with a thickness of 500 to 5000 Å may be used to form the lines **410**, **420**, **430**, **440** and **450**.

[0074] Referring to FIG. **7**, a gate insulating film **110** is formed on the lower substrate **100**, an active layer (not shown) is formed on the gate electrode, and a source electrode (not shown) and a drain electrode (not shown) are formed such that the thin film transistor can be formed. The plurality of data lines D**1** to Dm connected to the source electrodes are formed. A passivation film **120** is formed on the resultant structure and then patterned to form contact holes through which some portions of the lines **410**, **420**, **430**, **440** and **450** may be exposed. Areas for connecting the lines to the bonding pad portions may be increased by forming first and second contact holes through which some portions of the lines are exposed. A transparent conductive film including, but not limited to, indium tin oxide (ITO) or indium zinc oxide (IZO) may be formed on the resultant structure and then patterned to form the pixel electrodes and the bonding pad portions **411**, **421**, **431**, **441**, **451** and **460**.

[0075] In one exemplary embodiment, since each of the lines **410**, **420**, **430**, **440** and **450** may be formed of a single Cr film, the interfacial resistance between the lines **410**, **420**, **430**, **440** and **450** and the ITO film used as the bonding pad portions **411**, **421**, **431**, **441**, **451** and **460** may be lowered. In preferred exemplary embodiments, the thickness of the Cr film is increased to reduce the resistances of the lines **410**, **420**, **430**, **440** and **450**.

[0076] Resistances of the lines **410**, **420**, **430**, **440** and **450** may be further reduced by increasing the widths of the power lines **410**, **420**, **430** and **440** for providing electric power. As illustrated in FIGS. **4** to **6**, some of the lines **410**, **420**, **430**, **440** and **450** have a relatively larger width compared to others of the lines **410**, **420**, **430**, **440** and **450**. A width may be considered in substantially left-to-right and/or top-to-bottom directions of the lines taken from a top view. Further, the bonding pad portions **411**, **421**, **431**, **441**, **451** and **460** may be simply brought contact with the gate driving unit **400** due to substantially similar or essentially identical sizes. In one exemplary embodiment, referring to FIGS. **5** and **6**, a left-to-right width of the bonding pad portions **411**, **421**, **431**, **441**, **451** and **460** may range from about 0.1 μm to about 100 μm and the length (top-to-bottom distance) of the bonding pad portions may range from about 10 μm to about 900 μm.

[0077] The bonding pad portions **411**, **421**, **431**, **441**, **451** and **460** are disposed in the rectangular bonding region **401**. Some of the bonding pad portions may be formed at an edge of one side of the bonding region adjacent to the flexible printed circuit board **520** and other of the bonding pad portions may be formed at another edge of the bonding region such as at an opposite side of the bonding region.

[0078] The lines **410**, **420**, **430**, **440** and **450** may be divided according to the levels of the voltages applied to the lines. In one exemplary embodiment, some of the lines are connected to the lower bonding pad portions **431**, **441** and **460** formed at the edge of one side of the bonding region **401** or the other of the lines may be connected to the upper bonding pad portions **411**, **421** and **460** formed at the edge of the other (opposite) side of the bonding region **401**.

[0079] As shown in FIG. **4**, the first and second power lines **410** and **420** at a first voltage level extend across an

outside and an inside of the bonding region **401** to connect to the first and second bonding pad portions **411** and **421** formed at the other side of the bonding region **401**. The third and fourth power lines **430** and **440** at a second voltage level are connected to the third and fourth bonding pad portions **431** and **441** formed at the one side of the bonding region **401** adjacent to the flexible printed circuit board **520**.

[0080] In exemplary embodiments, the first voltage level may be a positive voltage and the second voltage level may be a negative voltage. In one exemplary embodiment, the positive voltage is a voltage of 1 V or more and the negative voltage is a voltage of 0 V or lower. Since the potential difference between adjacent lines can be reduced by allowing the bonding pad portions, which are formed by partially exposing the first and second power lines **410** and **420** for applying the positive voltages, to be spaced apart from the bonding pad portions, which are formed by partially exposing the third and fourth power lines **430** and **440** for applying the negative voltages, the electron transfer between two metals with larger potential difference and the crosstalk can be avoided. Advantageously, the corrosion of the lines in the bonding pad portions may also be reduced or effectively prevented.

[0081] The first power line **410** is connected to the flexible printed circuit board **520** and extends across the other side, i.e. the left side of the bonding region **401** to connect to the first bonding pad portion **411** formed at the other side of the bonding region **401**. The first power line **410** may be considered as including a first connecting portion connected to the flexible printed circuit board **520**, a second connecting portion connected to the first boding pad portion **411** and an extending portion extending between the first and second connecting portions. In a preferred exemplary embodiment, the first and second connecting portions have substantially the same widths as that of the first bonding pad portion **411** and the extending portion have a width greater than that of the first bonding pad portion **411**. In another preferred exemplary embodiment, when the length of the shorter side of the first bonding pad portion **411** is set to 1, the widths of the first and second connecting portions may be set in a range of about 1 to 2 and the width of the extending portion may be set in a range of about 1 to 10. Even though the first power line **410** is formed of a single metal film, the resistance of the line can be reduced. In one exemplary embodiment, the first power line **410** may transmit the gate turn on voltage of 10 to 40 V.

[0082] The second power line **420** is connected to the flexible printed circuit board **520** and extends across the inside of the bonding region **401** to connect to the second bonding pad portion **421** formed at the other side of the bonding region **401**. The second power line **420** may be considered as including a first connecting portion connected to the flexible printed circuit board **520**, a second connecting portion connected to the second bonding pad portion **421** and an extending portion extending between the first and second connecting portions. In a preferred exemplary embodiment, when the length of the shorter side of the second bonding pad portion **421** is set to 1, the widths of the first and second connecting portions may be set in a range of about 1 to 2 and the width of the extending portion may be set in a range of about 1 to 10. In one exemplary embodiment, the second power line **420** may transmit the driving voltage of 3 to 10 V for driving the gate driving unit **400**.

[0083] The third power line **430** is connected to the flexible printed circuit board **520** and also to the third bonding pad portion **431** formed at the one side of the bonding region **401** adjacent to the flexible printed circuit board **520**. The third power line **430** may be considered as including a first connecting portion connected to the flexible printed circuit board **520**, a second connecting portion connected to the third bonding pad portion **431** and an extending portion extending between the first and second connecting portions. In a preferred exemplary embodiment, when the length of the shorter side of the third bonding pad portion **431** is set to 1, the widths of the first and second connecting portions may be set in a range of about 1 to 2 and the width of the extending portion may be set in a range of about 1 to 10. In one exemplary embodiment, the third power line **430** may transmit the ground voltage of 0 V to the gate driving unit **400**.

[0084] The fourth power line **440** is connected to the flexible printed circuit board **520** and also to the fourth bonding pad portion **441** formed at the one side of the bonding region **401**. The fourth power line **440** may be considered as including a first connecting portion connected to the flexible printed circuit board **520**, a second connecting portion connected to the fourth bonding pad portion **441** and an extending portion extending between the first and second connecting portions. In a preferred exemplary embodiment, when the length of the shorter side of the fourth bonding pad portion **441** is set to 1, the widths of the first and second connecting portions may be set in a range of about 1 to 2 and the width of the extending portion may be set in a range from about 1 to 10. In one exemplary embodiment, the fourth power line **440** transmits the gate turn off voltage of −30 to −10 V.

[0085] The plurality of signal lines **450** shown in FIG. **4** are formed at one side of the flexible printed circuit board **520** and the bonding region **401** and connected to a plurality of the fifth bonding pad portions **451**. Alternative exemplary embodiments include configurations where the signal lines **450** may also be formed at all the other sides including one side and the other side of the bonding region **401**.

[0086] The first to fourth power lines **410**, **420**, **430** and **440** and the signal lines **450** may be bent in multiple locations, such as starting from the flexible printed circuit board **520** and at connections to the first to fifth bonding pad portions **411**, **421**, **431**, **441** and **451**. The third and fourth power lines **430** and **440** and the signal lines **450** are disposed between the first and second lines **410** and **420**. The right edge of the bonding region **401**, i.e. a bonding region adjacent to the upper substrate **200**, is provided with a plurality of gate pad portions connected to the gate lines G1 to Gn.

[0087] As shown in the exemplary embodiments in FIGS. **5** and **6**, the voltage difference between the bonding pad portions **411**, **421**, **431**, **441** and **451** may also be reduced by forming the dummy pad portions **460** between the first to fifth bonding pad portions **411**, **421**, **431**, **441** and **451**. As shown in FIG. **5**, the dummy pad portions **460** can be formed between the first and second bonding pad portions **411** and **421**. As shown in FIG. **6**, the dummy pad portions **460** can be formed between the third and fourth bonding pad portions **431** and **441** and the dummy pad portions **460** can also be formed between the fourth and fifth bonding pad portions **441** and **451**.

[0088] In exemplary embodiments, one dummy pad portion **460** may be disposed between the bonding pad portions **411**, **421**, **431**, **441** and/or **451**, but the present invention is not limited thereto. In alternative exemplary embodiments, a plurality of dummy pad portions **460** may be formed between the respective bonding pad portions. In other alternative exemplary embodiments, the dummy pad portions **460** may be used in a state where they have been connected to the adjacent bonding pad portions.

[0089] In the illustrated exemplary embodiments, the plurality of bonding pad portions are formed within the bonding region, to which the gate driving unit is connected, to be connected to bumps of the gate driving unit. However, the present invention is not limited thereto, and the first to fourth bonding pad portions connected to the power lines may be disposed outside of the bonding region and then connected to the gate driving unit through wires.

[0090] Additionally, the bonding pad portions connected to the power lines are formed at one side and the other side of the bonding region (the upper and lower sides as viewed from the figure). In preferred illustrated exemplary embodiments, a plurality of power input terminals of the gate driving portion, i.e. the bumps, are formed at one side and the other side on a bottom surface of the gate driving unit such that the bumps correspond to the bonding pad portions.

[0091] Further, the power lines and bonding pad portions of the present invention is not limited thereto, but may be modified in various ways. Another exemplary embodiment is described below wherein the gate driving unit of the liquid crystal display is connected to one side, i.e. a lower side, of the bonding region will be explained. In this exemplary. embodiment, the descriptions same as those in the previous embodiment will be omitted herein.

[0092] FIG. **8** is a plan view illustrating another exemplary embodiment of the lower bonding region of the liquid crystal display according to the present invention and FIG. **9** is a cross-sectional view of the liquid crystal display taken along line D-D of FIG. **8**.

[0093] Referring to FIGS. **8** and **9**, the third and fourth bonding pad portions **431** and **441** are formed larger than the fifth bonding pad portion **451**. The first and second bonding pad portions **411** and **421** may also be formed larger than the fifth bonding pad portion **451**. In other words, the bonding pad portions **411**, **421**, **431** and **441** connected to the power lines **410**, **420**, **430** and **440** are formed larger than the bonding pad portion **451** connected to the signal line **450**. In one exemplary embodiment, the third and fourth bonding pad portions **431** and **441** are formed 1 to 5 times larger than the fifth bonding pad portion **451**. Of course, the present invention is not limited thereto, and the first to fourth bonding pad portions **411**, **421**, **431** and **441** may be formed in such a manner that the left-to-right width of the first and fourth bonding pad portions are equal to the widths of the first to fourth power lines **410**, **420**, **430** and **440**. In one exemplary embodiment, the power lines can be connected to the bonding pad portions in a state where the power lines are not bent.

[0094] As shown in FIG. **9**, since the power lines are formed of a single metal film, the width of the metal film can be increased. Therefore, the internal resistances of the lines can be reduced. Since the size of the bonding pad portions may then be, the connection area between the bonding pad portions and the power lines can be increased. Advantageously, the contact resistance between the bonding pad portions and the power lines can also be reduced.

[0095] FIG. **10** is a plan view illustrating another exemplary embodiment of the lower bonding region of the liquid crystal display according to the present invention and FIG. **11** is a cross-sectional view of the liquid crystal display taken along line E-E of FIG. **10**.

[0096] In FIGS. **10** and **11**, the first to fourth bonding pad portions **411**, **421**, **431** and **441** connected to the first to fourth power lines **410**, **420**, **430** and **440** are formed at one side of the bonding region. A dummy pad portion **460** is formed between the first to fourth bonding pad portions **411**, **421**, **431** and **441**, respectively, such that the dummy pad portions **460** alternate with the first to fourth bonding pad portions **411**, **421**, **431** and **441**.

[0097] In exemplary embodiments, the bonding pad portions **411**, **421**, **431** and **441** are formed at the one side of the bonding region **401** adjacent to the flexible printed circuit board **520**. The extension lengths of the first to fourth power lines **410**, **420**, **430** and **440** may be reduced. In one exemplary embodiment, the fifth bonding pad portions **451** for use in the plurality of signal lines **450** be formed at another side of the bonding region **401**. In another exemplary embodiment, the fifth bonding pad portions **451** for use in the signal lines **450** may be formed at a side corresponding to the region where the bonding pad portions for the gate connection are formed.

[0098] Since the dummy pad portions **460** are formed between the first to fourth bonding pad portions **411**, **421**, **431** and **441**, respectively, the electrical interference due to the voltage difference between the power lines exposed through the bonding pad portions can be reduced.

[0099] Another exemplary embodiment of a method of manufacturing the liquid crystal display panel having the dummy pad portions **460** will be explained with reference to FIG. **11**. A single metal film is formed on the lower substrate **100** and then patterned to form the plurality of power lines **410**, **420**, **430** and **440**, the signal lines **450**, the gate lines G1 to Gn, the gate electrodes and dummy line patterns **462**. The dummy line patterns **462** are formed between the power lines **410**, **420**, **430** and **440**, respectively.

[0100] The gate insulating film **110**, the active layer, the ohmic contact layer and the conductive film are formed on the resultant structure and then patterned to form the source and drain electrodes on the gate electrode and the data lines D1 to Dm connected to the source electrode. The passivation film **120** is formed on the resultant structure and then patterned to form the contact holes through which some portions of the power lines **410**, **420**, **430** and **440**, the signal lines **450** and the dummy line patterns **462** are exposed, and a contact hole through a portion of the drain electrode is exposed.

[0101] A film, such as an ITO film, is applied onto the resultant structure and then patterned to form the pixel electrode connected to the drain electrode through the contact hole and to form the bonding pad portions **411**, **421**, **431**, **441** and **451** and the dummy pad portions **460** that are connected to the power lines **410**, **420**, **430** and **440**, the signal lines **450** and the dummy line patterns **462**, respectively.

[0102] As the dummy pad portions **460** are formed between the first to fourth bonding pad portions **411**, **421**, **431** and **441**, respectively, a space corresponding to an area of the dummy pad portions is provided at the outside edge

of the bonding region **401** between the first to fourth bonding pad portions **411**, **421**, **431** and **441**. In this space, the first to fourth power lines **410**, **420**, **430** and **440** can be more widely patterned. As shown in FIG. **10**, since the first and second power lines **410** and **420** can be bent in a direction opposite to the third and fourth power lines **430** and **440**, the widths of the first to fourth power lines **410**, **420**, **430** and **440** can be sufficiently increased. Advantageously, the internal resistances of the lines made of the single metal film can also be reduced.

[0103] In exemplary embodiments, since the plurality of lines are formed of a single metal film, the corrosion of the lines in the bonding pad region where the lines are exposed can be prevented. Advantageously, the signal distortion and the breakage or disconnection of lines may be reduced or effectively prevented.

[0104] In another exemplary embodiment, since regions where the bonding pad portions connected to the gate driving unit are formed are changed in accordance with the voltage levels of the lines for supplying external power to the gate driving portion, the corrosion of the bonding pad portions may be reduced or effectively prevented.

[0105] In another exemplary embodiment, the resistance of the lines may also be reduced by increasing the sectional areas of the lines.

[0106] In another exemplary embodiment, since the dummy pads are formed between the bonding pads, respectively, the electric interference between the exposed lines and the corrosion of the lines due to the electric interference may be reduced or effectively prevented.

[0107] Although the present invention has been described with reference to the preferred embodiments illustrated in connection with the accompanying drawings, the present invention is not limited thereto but is defined by the appended claims. Therefore, it will be readily understood by those skilled in the art that various modifications and changes can be made thereto without departing from the spirit and scope of the present invention defined by the appended claims.

What is claimed is:

1. A liquid crystal display, comprising:

a liquid crystal display panel comprising a plurality of gate lines;

a gate driving unit disposed on the liquid crystal display panel and connected to the plurality of gate lines; and

a plurality of lines applying an external signal to the gate driving unit,

wherein the plurality of lines are connected to different regions on the gate driving unit in accordance with a voltage level of the signal to be applied thereto.

2. The liquid crystal display as claimed in claim **1**, wherein the plurality of lines comprises a plurality of power lines providing electric power and a plurality of signal lines applying a signal, each of the plurality of lines comprising a bonding pad.

3. The liquid crystal display as claimed in claim **2**, wherein a first group of the power lines transmitting a first level of voltage are connected to a first region on the gate driving unit and a second group of the power lines transmitting a second level of voltage are connected to a second region on the gate driving unit spaced apart from the first region.

4. The liquid crystal display as claimed in claim **3**, wherein the first level of voltage is a positive voltage and the second level of voltage is a negative voltage.

5. The liquid crystal display as claimed in claim **3**, wherein the first group of power lines comprises a first power line transmitting a gate turn on voltage and a second power line transmitting a voltage driving the gate driving unit and the second group of power lines comprises a third power line supplying a ground voltage to the gate driving unit and a fourth power line transmitting a gate turn off voltage.

6. The liquid crystal display as claimed in claim **3**, wherein the first and second regions are formed on upper and lower sides of the gate driving unit, respectively.

7. The liquid crystal display as claimed in claim **6**, wherein the first group of power lines is connected to the first region across outer and/or inner regions of the gate driving unit.

8. The liquid crystal display as claimed in claim **3**, wherein the bonding pads of the first group of power lines are provided on the first region or a region adjacent to the first region and the bonding pads of the second group of power lines are provided on the second region or a region adjacent to the second region.

9. The liquid crystal display as claimed in claim **2**, wherein a dummy pad can be formed between bonding pads.

10. The liquid crystal display as claimed in claim **2**, wherein each of the power lines comprises a connecting portion connected to the bonding pad and an extending portion extending from the connecting portion; and

wherein a width of the extending portion is in a range of 1 to 10 times a length of a shorter side of the bonding pad.

11. The liquid crystal display as claimed in claim **2**, wherein the signal lines are connected to any one of the first and second regions.

12. The liquid crystal display as claimed in claim **1**, wherein the plurality of lines are formed of films comprising one of Al, Nd, Ag, Cr, Ti, Ta, Mo and a combination including at least one of the foregoing.

13. A liquid crystal display, comprising:

a liquid crystal display panel comprising a plurality of gate lines;

a gate driving unit mounted onto the liquid crystal display panel and connected to the plurality of gate lines; and

a plurality of lines applying an external signal to the gate driving unit,

wherein the plurality of lines are formed of a single metal film.

14. The liquid crystal display as claimed in claim **13**, wherein the metal film is one of Al, Nd, Ag, Cr, Ti, Ta, Mo and a combination including at least one of the foregoing films.

15. The liquid crystal display as claimed in claim **13**, wherein the plurality of lines comprises a plurality of power lines providing electric power and a plurality of signal lines applying a signal, wherein the plurality of power lines are connected to different regions on the gate driving unit in accordance with a voltage level of the signal transmitted therethrough.

16. The liquid crystal display as claimed in claim **15**, wherein some of the power lines transmit a positive voltage and are connected to one side of the gate driving unit and

other of the power lines transmit a negative voltage and are connected to the other side of the gate driving unit.

17. The liquid crystal display as claimed in claim **16**, wherein the power lines transmitting the positive voltage comprise a first power line transmitting a gate turn on voltage and a second power line transmitting a voltage driving the gate driving unit and the power lines transmitting the negative voltage comprise a third power line supplying a ground voltage to the gate driving unit and a fourth power line transmitting a gate turn off voltage.

18. The liquid crystal display as claimed in claim **16**, wherein the power lines transmitting the positive voltage are connected to the one side across outer and/or inner regions of the gate driving unit.

19. The liquid crystal display as claimed in claim **15**, wherein the bonding pads of the first and second power lines electrically connected the gate driving unit are provided on the one side or a region adjacent to the one side and the bonding pads of the third and fourth power lines electrically connected to gate driving unit are connected to the other side or a region adjacent to the other side.

20. The liquid crystal display as claimed in claim **19**, wherein a dummy pad is formed between bonding pads.

21. The liquid crystal display as claimed in claim **19**, wherein each of the power lines comprises a connecting portion connected to the bonding pad and an extending portion extending from the connecting portion and a width of the extending portion is in a range of about 1 to 10 times a length of a shorter side of the bonding pads.

22. A thin film transistor substrate, comprising:

a substrate comprising a plurality of gate lines and a mounting region on which a gate driving unit is mounted, the gate driving unit being connected to the plurality of gate lines;

first and second pad portions formed on different sides of the mounting region; and

first and second groups of lines formed of a single metal film and respectively connected to the first and second pad portions in accordance with a voltage level of a signal transmitted therethrough.

23. The thin film transistor substrate as claimed in claim **22**, wherein the metal film is one of Al, Nd, Ag, Cr, Ti, Ta, Mo and a combination including at least one of the foregoing films.

24. The thin film transistor substrate as claimed in claim **22**, wherein the first and second pad portions are provided on upper and lower sides of the mounting region, respectively.

25. The thin film transistor substrate as claimed in claim **24**, wherein the first group of lines is connected to the first pad portion across the outside and/or inside of the mounting region.

26. The thin film transistor substrate as claimed in claim **22**, wherein one of the first and second groups of lines comprises power lines and transmits a positive voltage, the other of the first and second groups of lines comprises power lines and transmits a negative voltage and at least one of the first and second groups of lines comprises signal lines.

27. The thin film transistor substrate as claimed in claim **26**, wherein the power lines transmitting the positive voltage comprise a first power line transmitting a gate turn on voltage and a second power line transmitting a voltage driving the gate driving unit and the power lines transmitting the negative voltage comprise a third power line supplying a ground voltage to the gate driving unit and a fourth power line transmitting a gate turn off voltage.

28. The thin film transistor substrate as claimed in claim **26**, wherein the first and second pad portions comprise bonding pads connected to the power lines and dummy pads formed between the bonding pads.

29. The thin film transistor substrate as claimed in claim **28**, wherein each of the power lines comprises a connecting portion connected to the bonding pad and an extending portion extending from the connecting portion, and a width of the extending portion is in a range of about 1 to 10 times a length of a shorter side of the bonding pad.

30. The thin film transistor substrate as claimed in claim **26**, wherein the first and second pad portions further comprises bonding pads connected to the signal lines, and a size of the bonding pad connected to the power lines is in a range of about 1 to 5 times a size of the bonding pad connected to the signal line.

31. A method of forming a liquid crystal display, the method comprising:

forming a liquid crystal display panel comprising a plurality of gate lines;

disposing a gate driving unit on the liquid crystal display panel and connecting the gate driving unit to the plurality of gate lines;

connecting a plurality of lines to different regions on the gate driving unit in accordance with a voltage level of an external signal to be applied thereto.

* * * * *

专利名称(译)	液晶显示器		
公开(公告)号	US20070164948A1	公开(公告)日	2007-07-19
申请号	US11/509902	申请日	2006-08-25
[标]申请(专利权)人(译)	金桢IL 金东GYU 常JONG WOONG		
申请(专利权)人(译)	金桢IL 金东GYU 常JONG WOONG		
当前申请(专利权)人(译)	金桢IL 金东GYU 常JONG WOONG		
[标]发明人	KIM JEONG IL KIM DONG GYU CHANG JONG WOONG		
发明人	KIM, JEONG IL KIM, DONG GYU CHANG, JONG WOONG		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3611 G09G3/3648 G09G2330/06 G09G2330/04 G09G2300/0426		
优先权	1020060003995 2006-01-13 KR		
外部链接	Espacenet USPTO		

摘要(译)
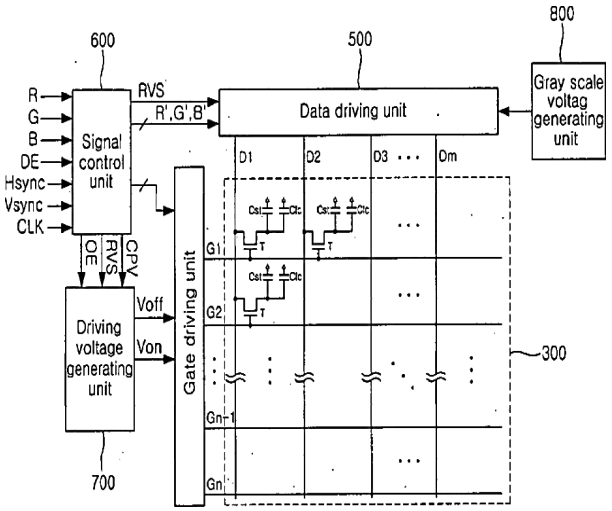
液晶显示面板包括多条栅极线，安装在液晶显示面板上并连接到多条栅极线的栅极驱动单元和将外部信号施加到栅极驱动单元的多条线。多条线根据要施加到其上的信号的电压电平连接到栅极驱动单元上的不同区域。