



(12) **Patent Application Publication**
Tanno et al.

(43) **Pub. Date:** Feb. 12, 2009

Publication Classification

(51) **Int. Cl.**
G02F 1/1335 (2006.01)
G02F 1/133 (2006.01)

(52) **U.S. Cl.** 349/114; 349/138

(57) **ABSTRACT**

REED SMITH LLP

**Suite 1400, 3110 Fairview Park Drive
Falls Church, VA 22042 (US)**

(73) Assignee: **Hitachi Displays, Ltd.**

(21) Appl. No.: **12/219,500**

(22) Filed: **Jul. 23, 2008**

(30) **Foreign Application Priority Data**

Aug. 6, 2007 (JP) 2007-204330

A liquid crystal display device comprising a liquid crystal display panel that has a first substrate (SUB1), a second substrate (SUB2) disposed so as to oppose the first substrate (SUB1), and a liquid crystal layer (LC) sandwiched between the first substrate (SUB1) and the second substrate (SUB2); wherein the first substrate (SUB1) has a reflective electrode (RAL) having a surface formed in an irregular shape; an organic insulation film (18) formed in a layer above the reflective electrode (RAL); a transparent electrode (19) formed in a layer above the organic insulation film (18); an inorganic insulation film (20) formed in a layer above the transparent electrode (19); and a pixel electrode (PIX) formed in a layer above the inorganic insulation film (20).

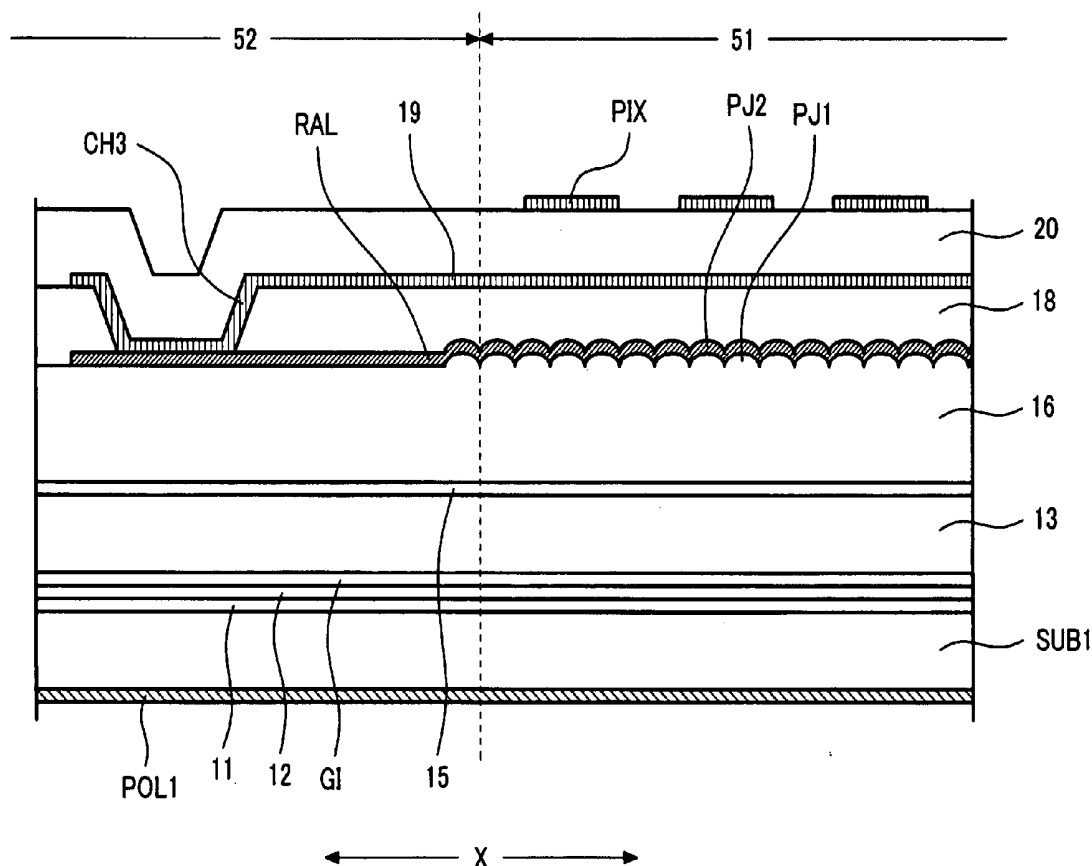


FIG. 1


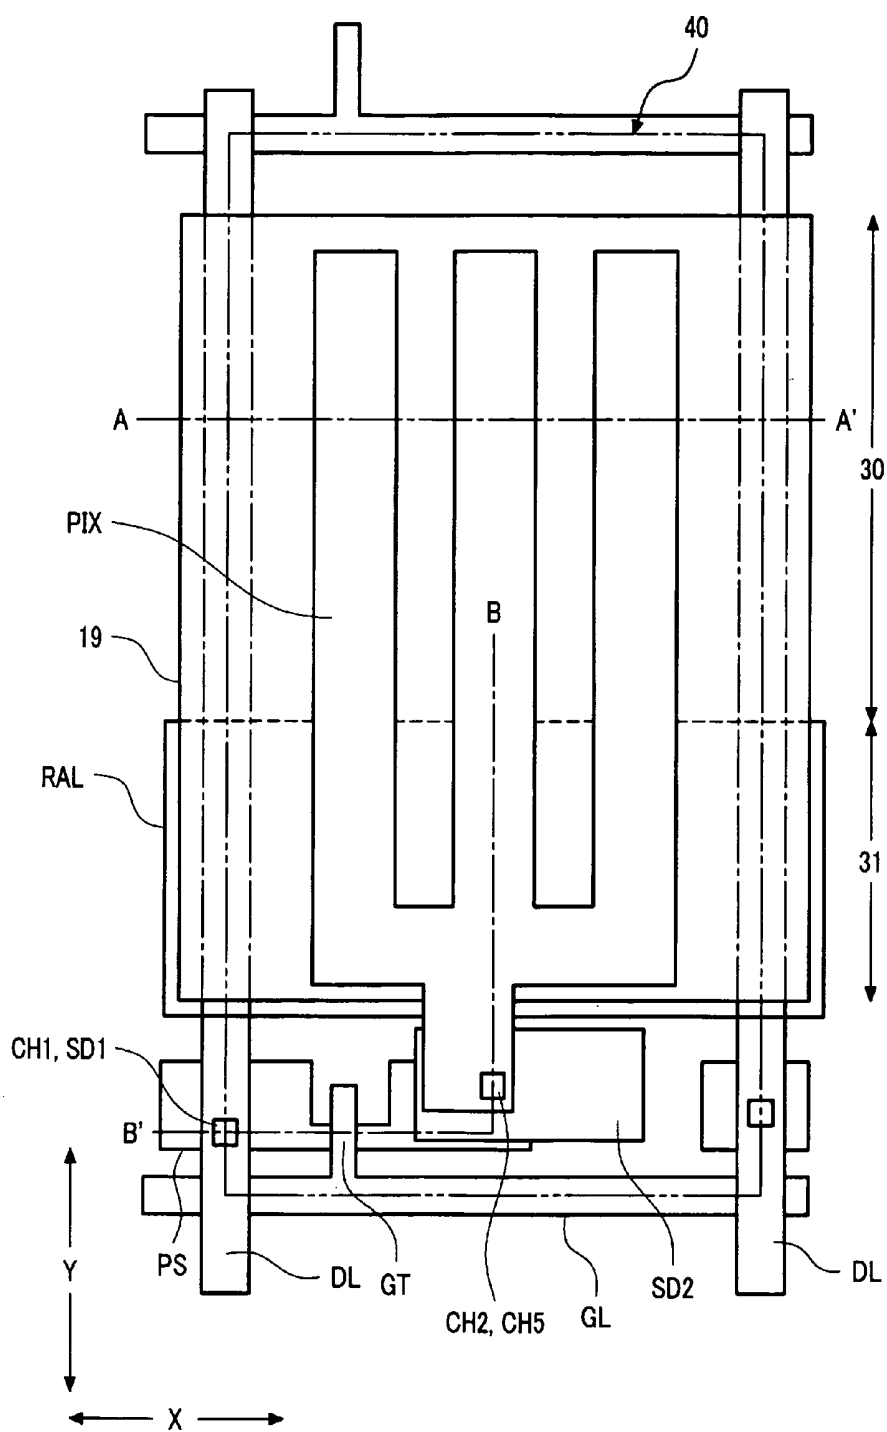


FIG.2

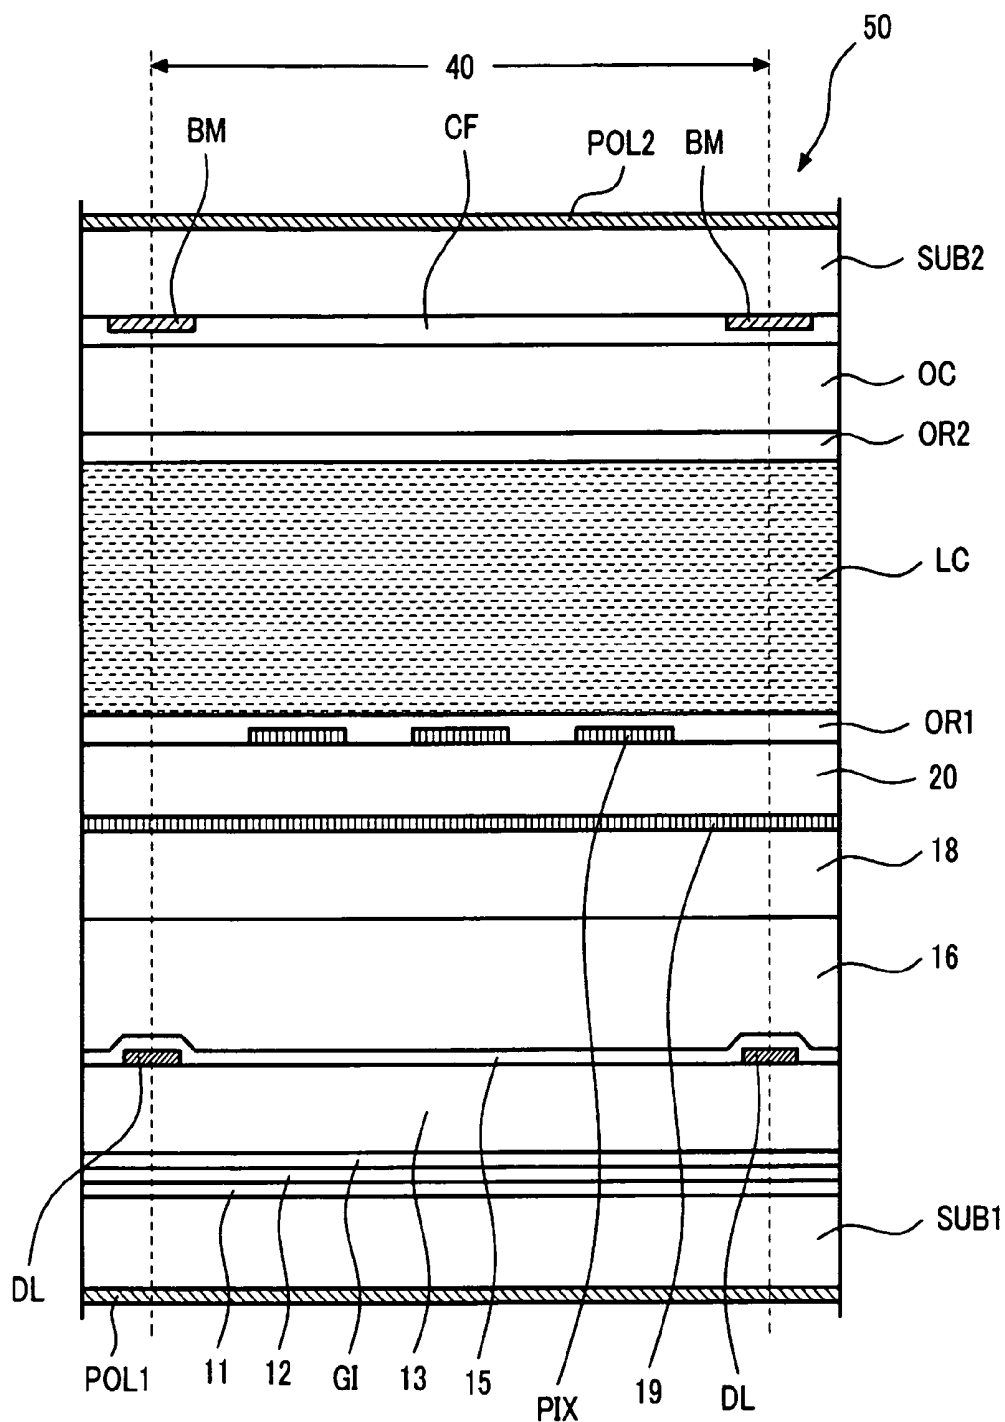

A ——— A'

FIG.3

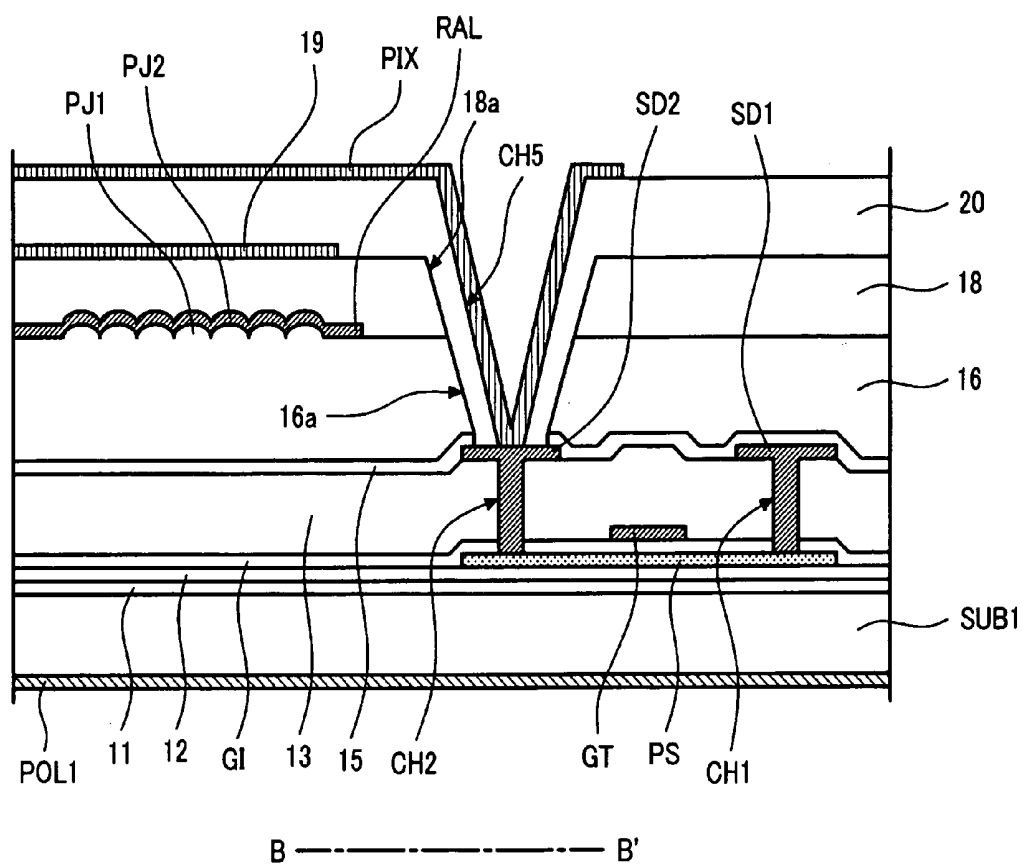


FIG.4

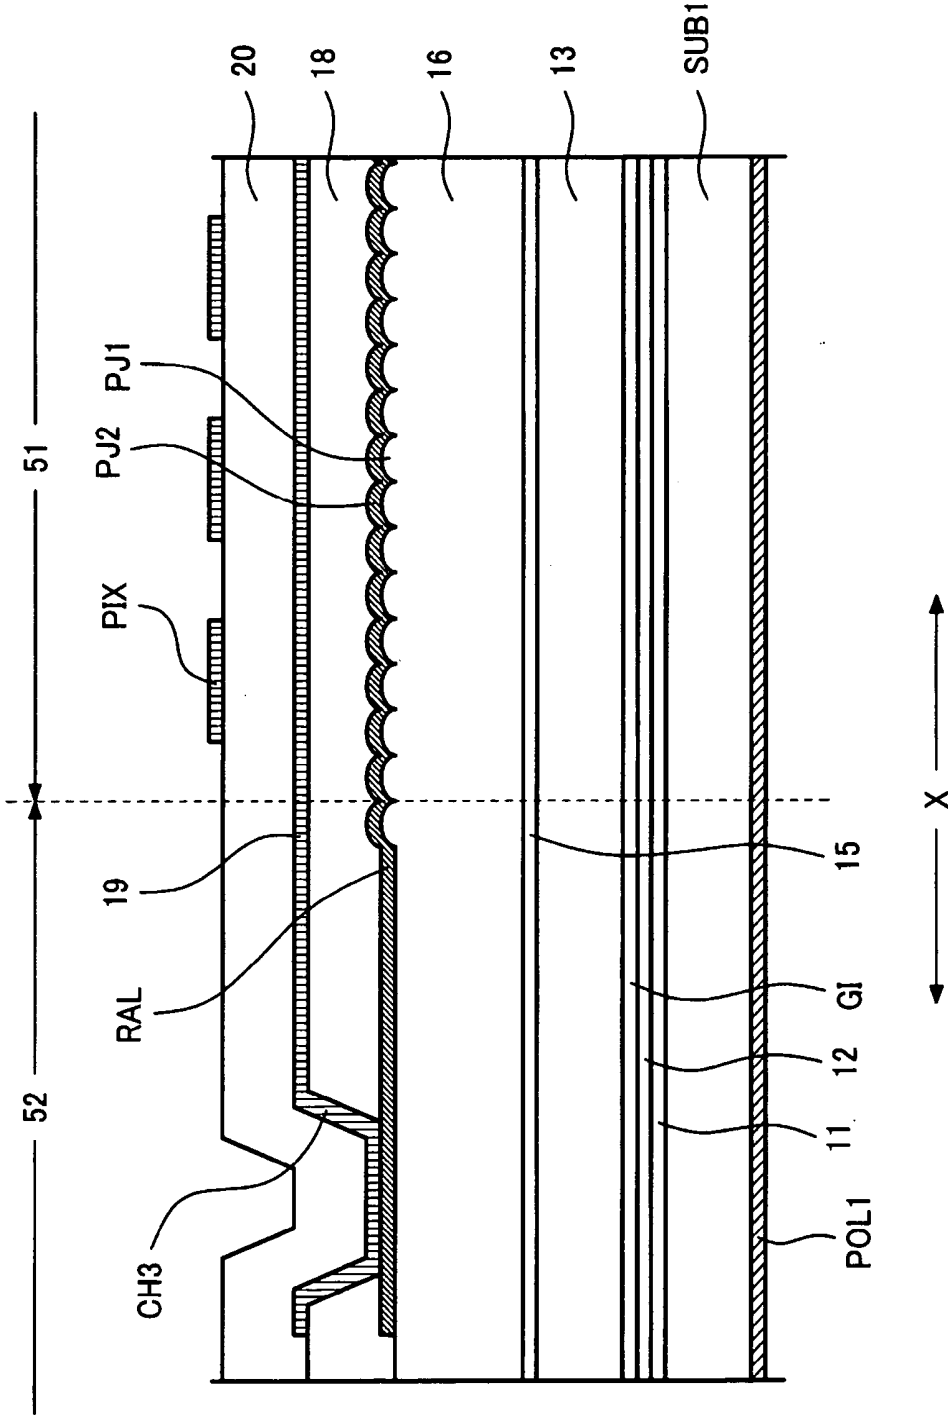


FIG.5

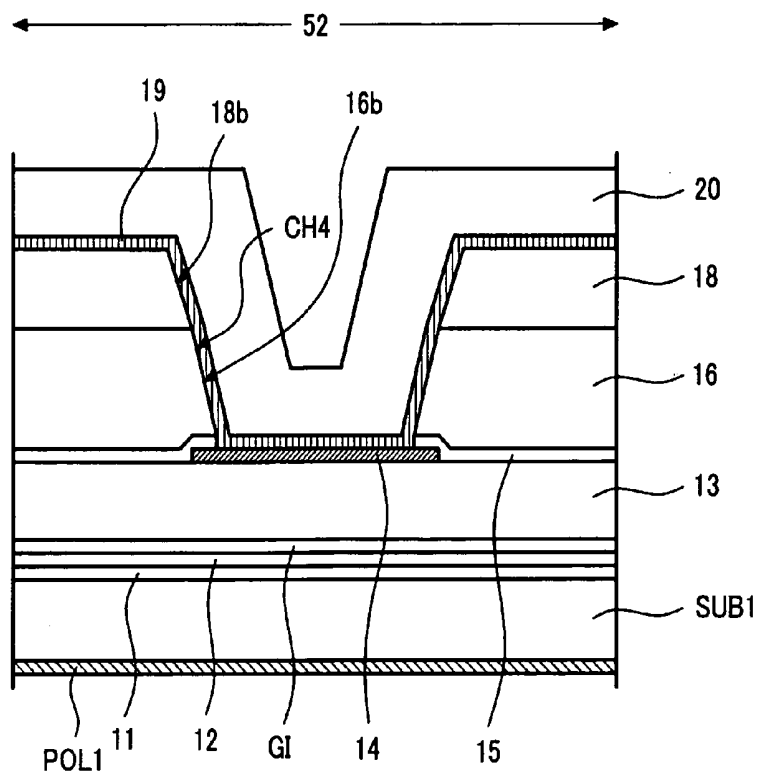


FIG.6A

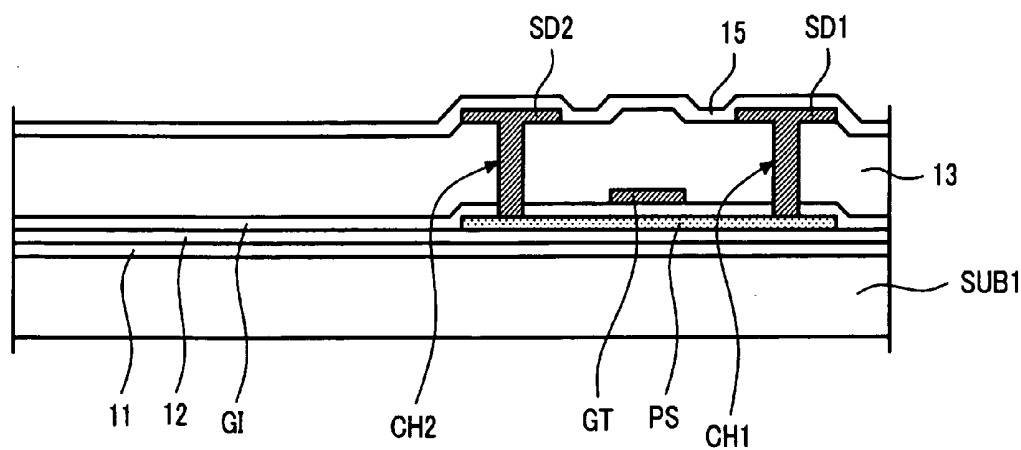


FIG.6B

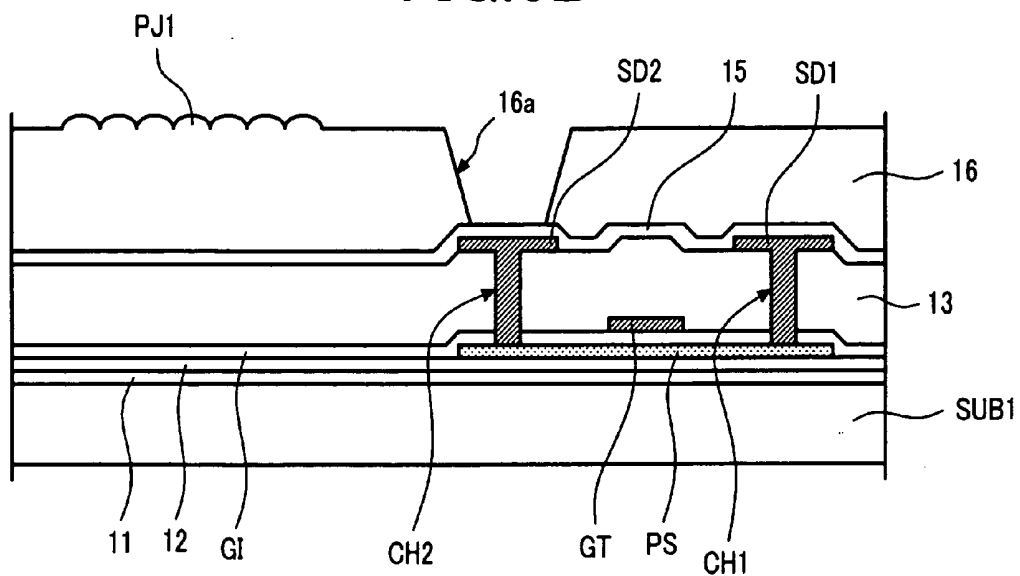


FIG.6C

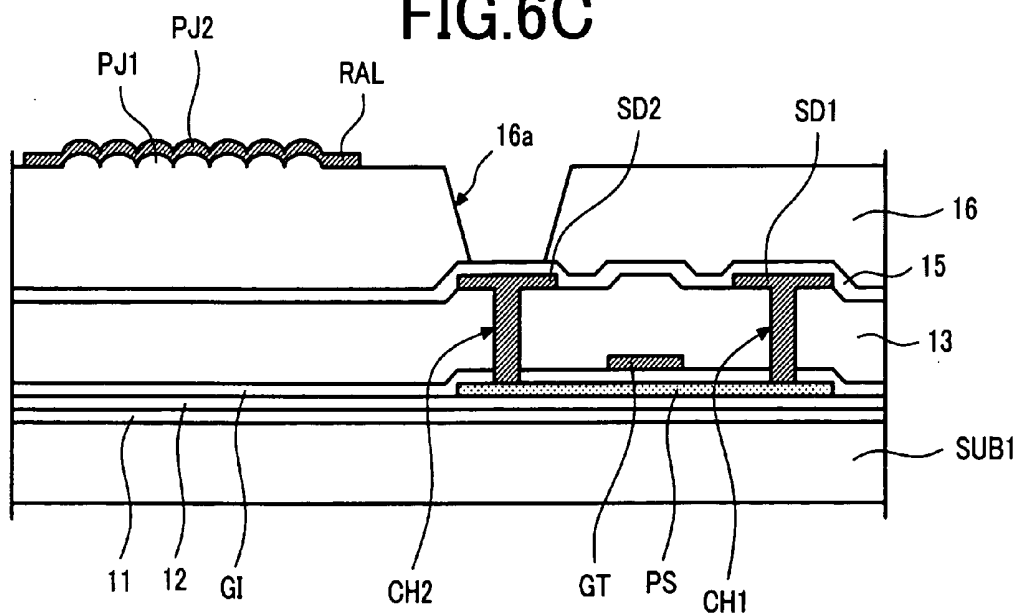


FIG.6D

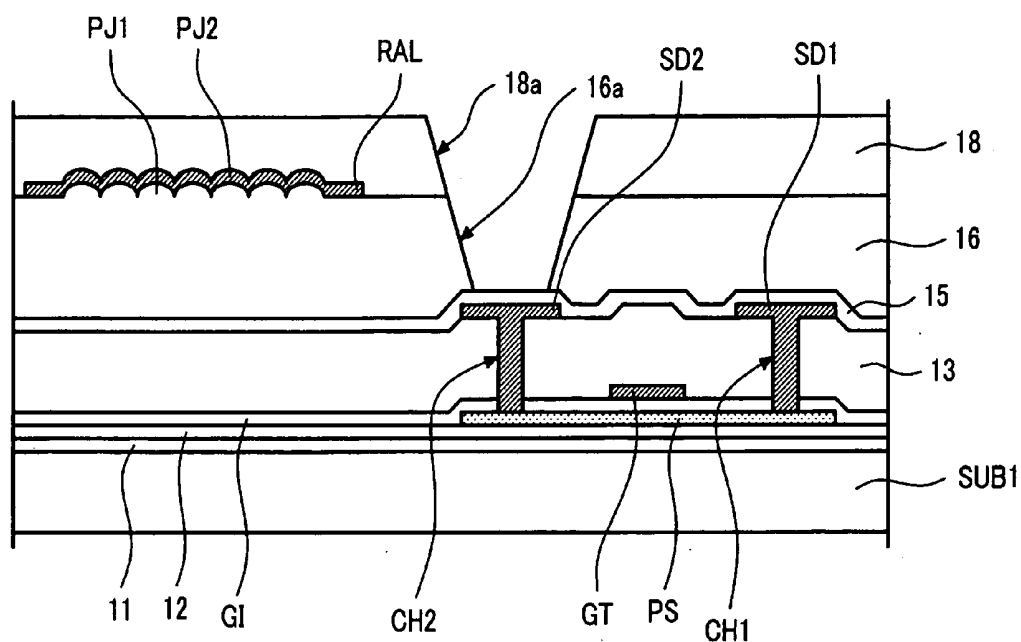
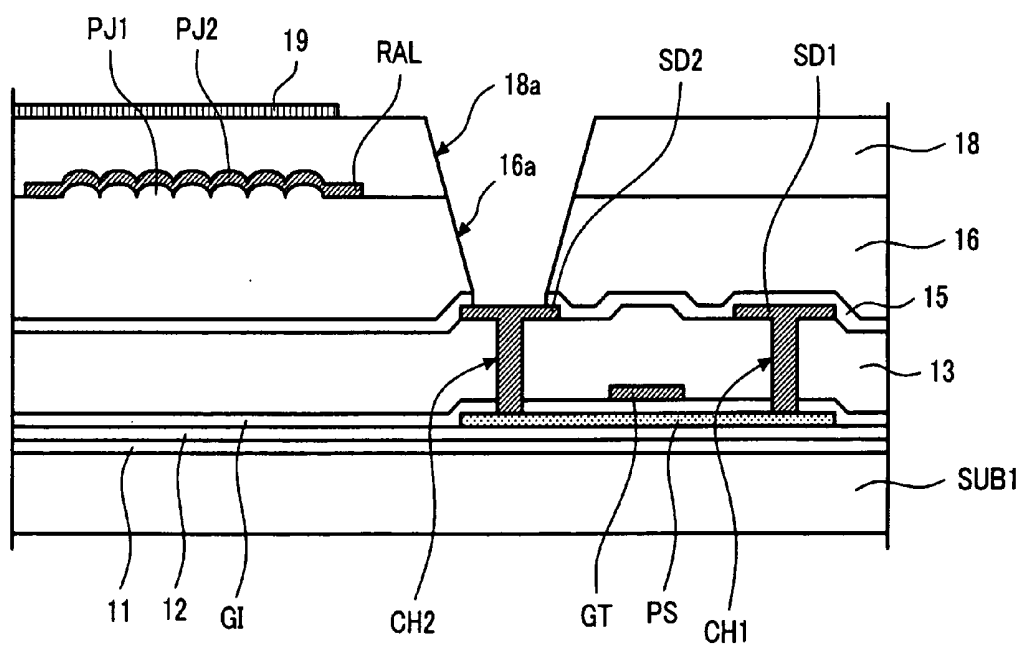


FIG.6E



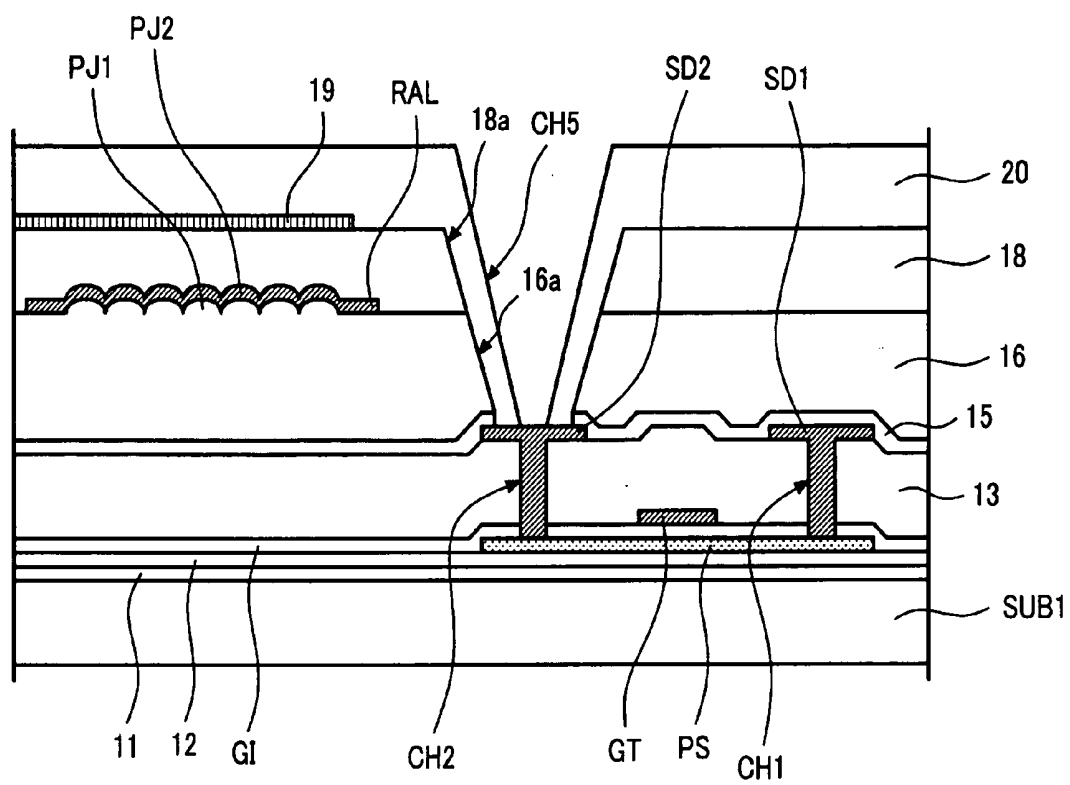


FIG.6G

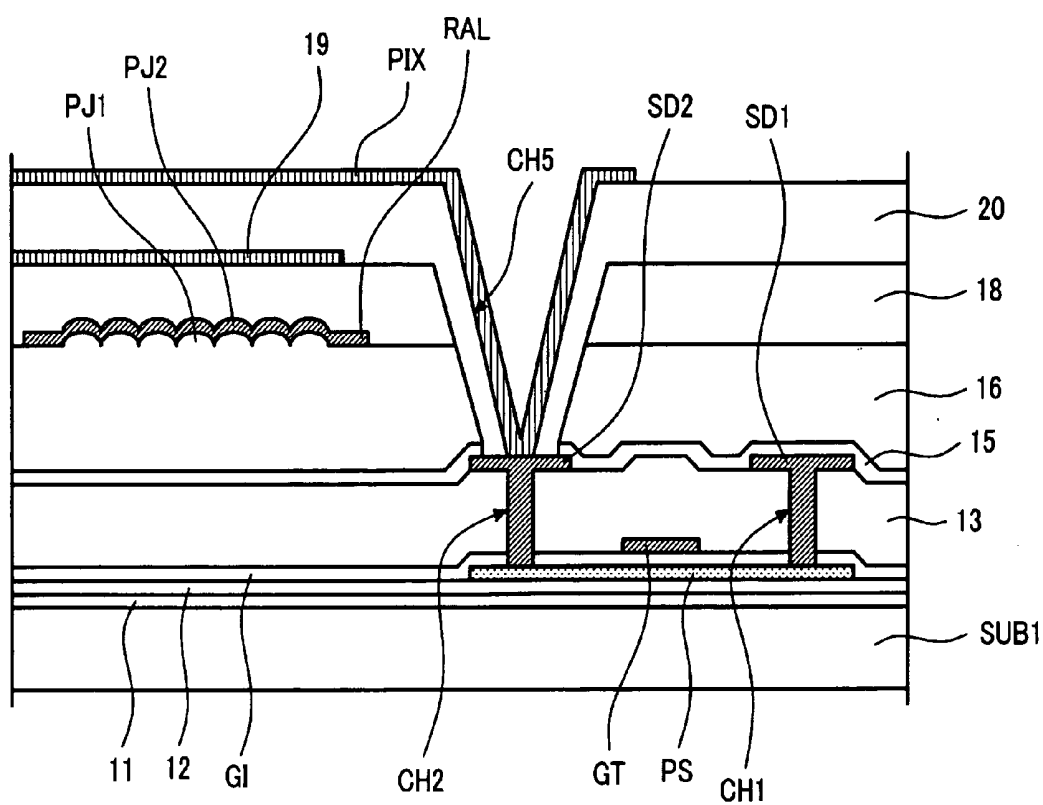


FIG.9A

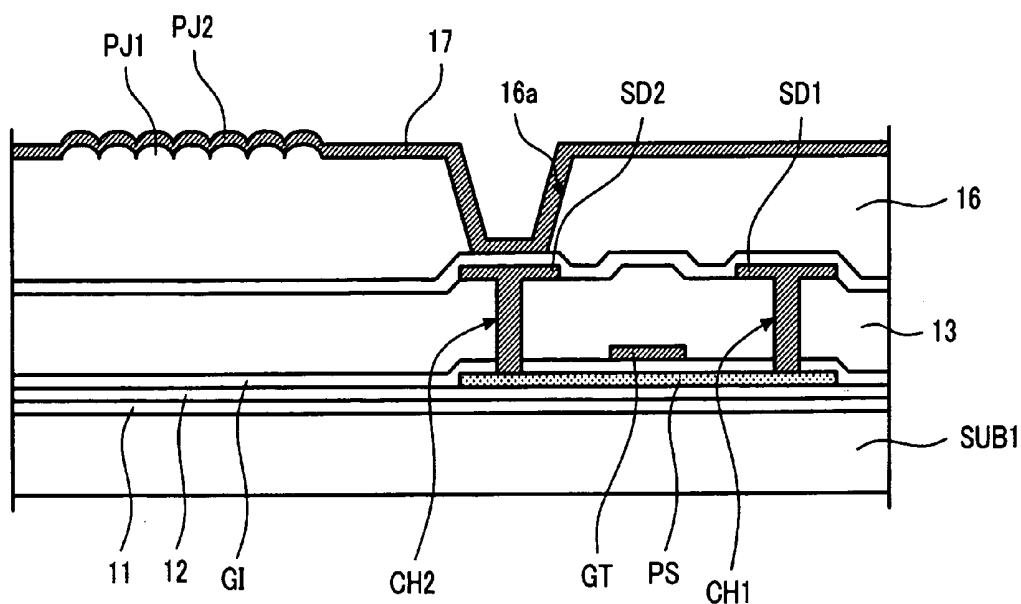


FIG.9B

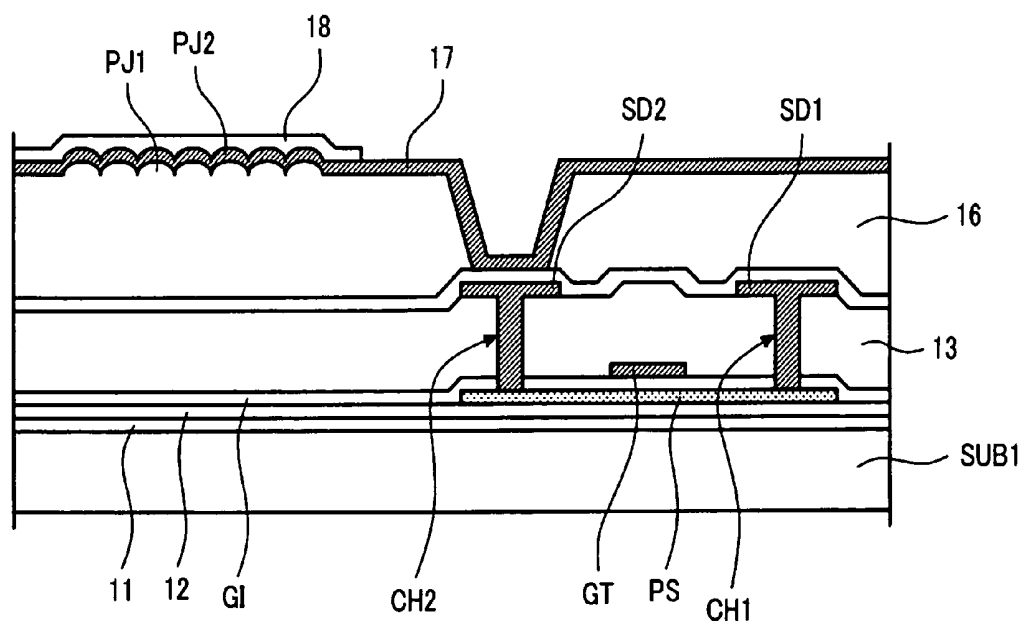


FIG.9C

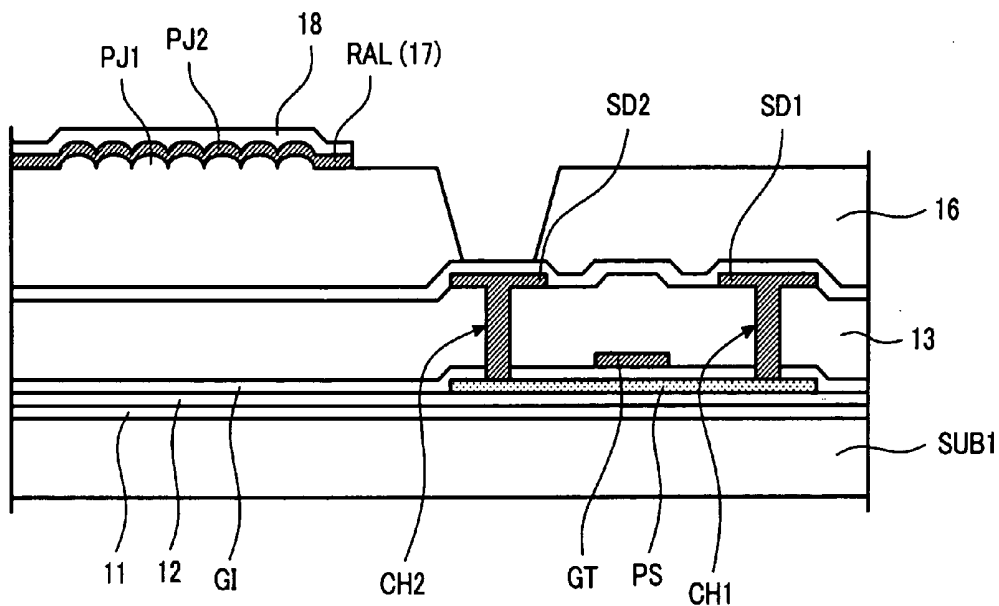


FIG.9D


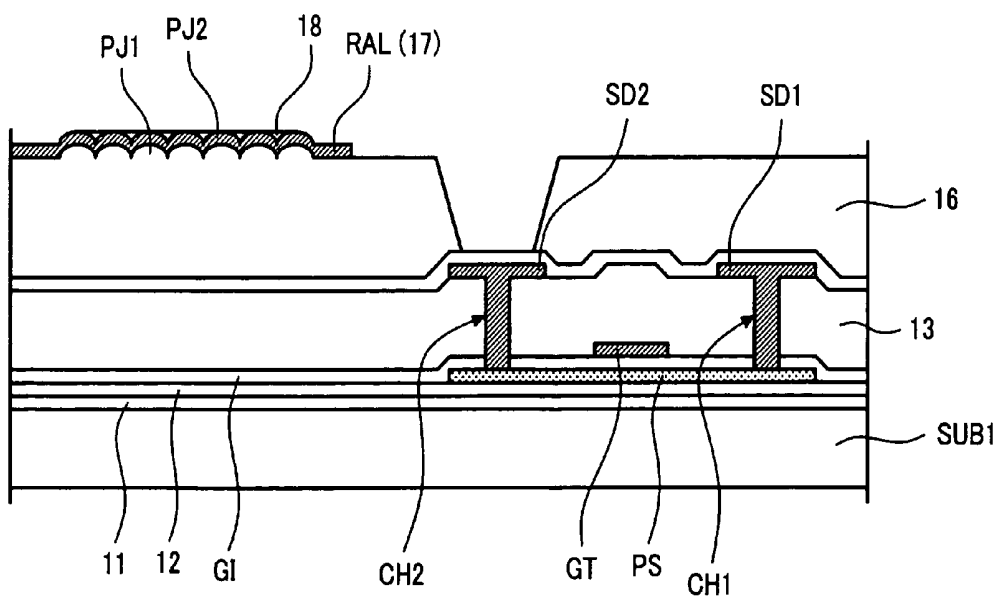


FIG.9E

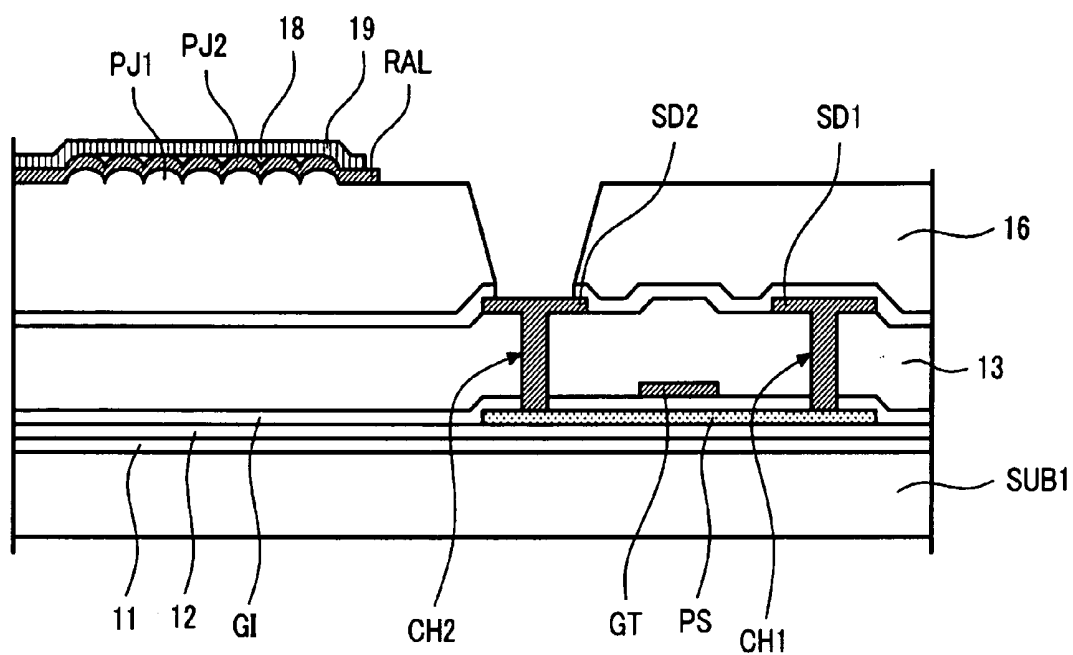

LIQUID CRYSTAL DISPLAY DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present application claims priority from Japanese application JP2007-204330 filed on Aug. 6, 2007, the content of which is hereby incorporated by reference into this application.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display device, and particularly relates to a technique effective for application to a liquid crystal display device having a reflective electrode whose surface is irregular.

[0004] 2. Description of the Related Art

[0005] A semi-transparent liquid crystal display device that operates according to an IPS (In-Plane Switching) scheme is known as an example of an active-matrix liquid crystal display device. In this IPS semi-transparent liquid crystal display device, a reflective electrode is formed in a region that is a portion of a single sub-pixel, whereby semi-transparent (partially transparent) display having a transparent portion and a reflective portion is possible in a single sub-pixel. In an IPS semi-transparent liquid crystal display device, an opposing electrode and a pixel electrode are layered via an insulation film, and a retention capacitor for relatively long retention of a video signal written into the sub-pixel is formed by the insulation film, the opposing electrode, and the pixel electrode.

[0006] A reflective electrode is also known in which surface irregularities are formed for diffuse reflection during reflective display. The present invention relates to a liquid crystal display device having a reflective electrode in which surface irregularities are formed for diffuse reflection, and examples of technical references relating to the present invention include Japanese Laid-open Patent Application No. 2007-121587 and Japanese Patent Application No. 2006-160428.

SUMMARY OF THE INVENTION

[0007] In an IPS semi-transparent liquid crystal display device, the cell gap length of the liquid crystal layer must be made uniform in order to enhance reflective contrast. However, when the reflective electrode is formed in an irregular shape to perform diffuse reflection, the surface irregularities of the reflective electrode are reflected by the pixel electrode in the upper layer, and the cell gap length of the liquid crystal layer is prevented from being made uniform.

[0008] Therefore, when the reflective electrode is formed in an irregular shape, an organic insulation film is effective for use as the insulation film (capacitance insulation film) between the opposing electrode and the pixel electrode. The reason for this is that because an organic insulation film is formed by a coating application method, the irregularities of the base layer can be absorbed, and the surface can be made smooth, i.e., the surface can be flattened, in comparison to an inorganic insulation film formed by CVD or another deposition method. This principle is disclosed in Japanese Laid-open Patent Application No. 2007-121587.

[0009] However, an afterimage easily occurs when an organic insulation film is used as the insulation film (capacitance insulation film) between the opposing electrode and the

pixel electrode. Since afterimages cause degradation of the display quality, the occurrence of afterimages must be suppressed to the greatest extent possible.

[0010] Japanese Patent Application No. 2006-160428 discloses a technique in which retention capacity is increased by using a silicon nitride film having a high dielectric constant in comparison to a photosensitive acrylic resin film as an organic insulation film, or a silicon oxide film as an inorganic insulation film, as the insulation film (capacitance insulation film) between the opposing electrode and the pixel electrode.

[0011] An object of the present invention is to provide a technique capable of enhancing reflective contrast and suppressing the occurrence of afterimages in a liquid crystal display device.

[0012] This and other objects and novel features of the present invention will become apparent from the description and accompanying drawings in the present specification.

[0013] A summary of the main features of the invention disclosed in the present application is given below.

[0014] (1) A liquid crystal display device comprising a liquid crystal display panel that has a first substrate, a second substrate disposed so as to oppose the first substrate, and a liquid crystal layer sandwiched between the first substrate and the second substrate; wherein the first substrate has a reflective electrode having a surface formed in an irregular shape; an organic insulation film formed in a layer above the reflective electrode; a transparent electrode formed in a layer above the organic insulation film; an inorganic insulation film formed in a layer above the transparent electrode; and a pixel electrode formed in a layer above the inorganic insulation film; and the reflective electrode is electrically connected to the transparent electrode.

[0015] (2) In (1), the organic insulation film is a coating-type insulation film, and the inorganic insulation film is a silicon nitride film.

[0016] (3) In (2), the silicon nitride film is a deposited film.

[0017] (4) In any of (1) through (3), the organic insulation film is a film for flattening surface irregularities of the reflective electrode.

[0018] (5) In any of (1) through (4), the transparent electrode functions as an opposing electrode and a retention capacitor electrode; and an electric field is generated by the pixel electrode and the transparent electrode, and liquid crystals of the liquid crystal layer are driven.

[0019] (6) In any of (1) through (4), the transparent electrode functions as a retention capacitor electrode; the second substrate has an opposing electrode; and an electric field is generated by the pixel electrode of the first substrate, and the opposing electrode of the second substrate, and liquid crystals of the liquid crystal layer are driven.

[0020] (7) In any of (1) through (6), the liquid crystal display panel has a plurality of sub-pixels and each of sub-pixels has a transparent portion and a reflective portion; each sub-pixel of the plurality of sub-pixels has the reflective electrode, the organic insulation film, the transparent electrode, the inorganic insulation film, and the pixel electrode; and the reflective electrode is disposed in the reflective portion.

[0021] (8) In (7), a portion of the organic insulation film is removed in each sub-pixel of the plurality of sub-pixels; and the reflective electrode is electrically connected to the transparent electrode in the portion in which the organic insulation film is removed.

[0022] (9) In (7), the liquid crystal display panel has a display portion in which the plurality of sub-pixels is

arranged, and a peripheral portion disposed on a periphery of the display portion; and the electrical connection between the reflective electrode and the transparent electrode is made by the peripheral portion.

[0023] Below is a brief description of the effects obtained by a typical example of the invention disclosed in the present application.

[0024] According to the liquid crystal display device of the present invention, enhanced reflective contrast can be anticipated, and the occurrence of afterimages can be suppressed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] FIG. 1 is a plan view showing the electrode structure of one sub-pixel on the side of the TFT substrate in the IPS semi-transparent liquid crystal display device according to Example 1 of the present invention;

[0026] FIG. 2 is a sectional view showing the cross-sectional structure along line A-A' in FIG. 1;

[0027] FIG. 3 is a sectional view showing the cross-sectional structure along line B-B' in FIG. 1;

[0028] FIG. 4 is a sectional view showing the state of connection between the opposing electrode and the reflective electrode in Example 1 of the present invention;

[0029] FIG. 5 is a sectional view showing the state of connection between the opposing electrode and the lower-layer wiring in Example 1 of the present invention;

[0030] FIG. 6A is a sectional view showing the first step in the manufacturing method according to Example 1 of the present invention;

[0031] FIG. 6B is a sectional view showing the second step subsequent to FIG. 6A;

[0032] FIG. 6C is a sectional view showing the third step subsequent to FIG. 6B;

[0033] FIG. 6D is a sectional view showing the fourth step subsequent to FIG. 6C;

[0034] FIG. 6E is a sectional view showing the fifth step subsequent to FIG. 6D;

[0035] FIG. 6F is a sectional view showing the sixth step subsequent to FIG. 6E;

[0036] FIG. 6G is a sectional view showing the seventh step subsequent to FIG. 6F;

[0037] FIG. 7 is a sectional view showing the manufacturing method according to a modification of Example 1 of the present invention;

[0038] FIG. 8 is a sectional view showing the cross-sectional structure of the liquid crystal display panel on the side of the TFT substrate in the IPS semi-transparent liquid crystal display device according to Example 2 of the present invention;

[0039] FIG. 9A is a sectional view showing the first step in the manufacturing method according to Example 2 of the present invention;

[0040] FIG. 9B is a sectional view showing the second step subsequent to FIG. 9A;

[0041] FIG. 9C is a sectional view showing the third step subsequent to FIG. 9B;

[0042] FIG. 9D is a sectional view showing the fourth step subsequent to FIG. 9C; and

[0043] FIG. 9E is a sectional view showing the fifth step subsequent to FIG. 9D.

DETAILED DESCRIPTION OF THE INVENTION

[0044] Examples of the present invention will be described in detail hereinafter with reference to the drawings. In all of the drawings used to describe the examples of the present invention, the same reference symbols are used to refer to elements that have the same function, and descriptions thereof will not be repeated.

[0045] The present example is one in which the present invention is applied to an IPS semi-transparent liquid crystal display device, which is an active matrix liquid crystal display device.

EXAMPLE 1

[0046] FIGS. 1 through 5, and FIGS. 6A through 6G are drawings relating to the IPS semi-transparent liquid crystal display device according to Example 1 of the present invention, wherein FIG. 1 is a plan view showing the electrode structure of a single sub-pixel on the side of the TFT substrate; FIG. 2 is a sectional view showing the cross-sectional structure along line A-A' in FIG. 1; FIG. 3 is a sectional view showing the cross-sectional structure along line B-B' in FIG. 1; FIG. 4 is a sectional view showing the state of connection between the opposing electrode and the reflective electrode; FIG. 5 is a sectional view showing the state of connection between the opposing electrode and the lower-layer wiring; and FIGS. 6A through 6G are sectional views showing an example (first example) of the manufacturing method.

[0047] In FIG. 1, the reference numeral 30 refers to a transparent portion constituting a transmissive liquid crystal display panel, and 31 refers to a reflective portion constituting a reflective liquid crystal display panel. FIG. 2 shows the cross-sectional structure that includes a TFT substrate, a liquid crystal layer, and a CF substrate, and FIGS. 3, 4, and 5 show the cross-sectional structure on the side of the TFT substrate. In FIGS. 3 through 5 the orientation film (OR1) described hereinafter is not shown.

[0048] The IPS semi-transparent liquid crystal display device of Example 1 is provided with a liquid crystal display panel 50 (see FIG. 2). As shown in FIG. 2, the liquid crystal display panel 50 has a structure in which a liquid crystal layer (LC) composed of numerous liquid crystal molecules is sandwiched between a first substrate (SUB1) and a second substrate (SUB2), and the side of the principal surface of the second substrate (SUB2) is the observation side. Specifically, the liquid crystal display panel 50 is configured so as to have a first substrate (SUB1), a second substrate (SUB2) disposed facing the first substrate (SUB1), and a liquid crystal layer (LC) sandwiched between the first substrate (SUB1) and the second substrate (SUB2). Glass or another transparent insulating substrate, for example, is used as the first and second substrates (SUB1, SUB2). Positive liquid crystal or negative liquid crystal, for example, is used as the liquid crystal of the liquid crystal layer (LC).

[0049] The liquid crystal display panel 50 is configured so as to have a display portion 51 (see FIG. 4) in which a plurality of sub-pixels 40 shown in FIG. 1 is arranged in a matrix, and a peripheral portion 52 (see FIG. 4) disposed on the periphery of the display portion 51. Each of the plurality of sub-pixels 40 has a transparent portion 30 and a reflective portion 31, and furthermore has a pixel electrode (PIX), a transparent electrode 19, and a reflective electrode (RAL). The transparent electrode 19 of Example 1 functions (works) as the opposing electrode and the retention capacitor electrode.

[0050] As viewed in a plane, the liquid crystal display panel **50** has scan lines (GL) extending along the X direction, and display lines (DL) extending along the Y direction orthogonal to the X direction in the same plane, as shown in FIG. 1. A plurality of scan lines (GL) is arranged at prescribed intervals in the Y direction, and a plurality of display lines (DL) is arranged at prescribed intervals in the X direction. The plurality of scan lines (GL) intersect with the plurality of display lines (DL) via an insulation film, and thin-film transistors (TFT) used as switching elements of the sub-pixels **40** are provided near the intersections where the scan lines (GL) and the display lines (DL) intersect with each other.

[0051] Each of the plurality of sub-pixels **40** is arranged in a matrix in the X direction and the Y direction, a single display line is composed of a plurality of sub-pixels **40** arranged in the X direction, and a plurality of display lines is provided in the Y direction.

[0052] As shown in FIGS. 2 and 3, a base film **11**, a base film **12**, a semiconductor layer (PS), a gate insulation film (GI), a gate electrode (GT), the scan lines (GL), and an insulation film **13** are formed in sequence from the first substrate (SUB1) to the liquid crystal layer (LC) on the side of the liquid crystal layer of the first substrate (SUB1; also referred to as the TFT substrate). A drain electrode (SD1) and a source electrode (SD2) of a thin-film transistor, and the display lines (DL) are formed on the insulation film **13**. The SD1 is sometimes referred to as the source electrode, and in this case, the SD2 is referred to as the drain electrode. In the present specification, SD1 is referred to as the drain electrode.

[0053] The gate electrode (GT) is integrally formed with the scan lines (GL). Portions of the display lines (DL) double as the drain electrode (SD1), and both are connected in the structure. The drain electrode (SD1) is electrically connected with the drain region (one of a pair of semiconductor regions formed in the semiconductor layer (PS)) of the thin-film transistor via a contact hole (CH1) that reaches from the surface of the insulation film **13** to the semiconductor layer (PS). The source electrode (SD2) is electrically connected with the source region (the other of the pair of semiconductor regions formed in the semiconductor layer (PS)) of the thin-film transistor via a contact hole (CH2) that reaches from the surface of the insulation film **13** to the semiconductor layer (PS).

[0054] A silicon nitride film formed by CVD, for example, is used as the base film **11**. Silicon oxide films formed by CVD, for example, are used as the base film **12**, the gate insulation film (GI), and the insulation film **13**. The scan lines (GL) and gate electrode (GT), the drain electrode (SD1) and source electrode (SD2), and the display lines (DL) are formed by conductive films composed of aluminum or another metal, for example.

[0055] An inorganic insulation film **15** is formed on the drain electrode (SD1), the source electrode (SD2), and the display lines (DL). An organic insulation film **16** is formed on the inorganic insulation film **15**. A reflective electrode (RAL) is formed on the organic insulation film **16**. An organic insulation film **18** is formed on the reflective electrode (RAL). The transparent electrode **19** for functioning as the opposing electrode and the retention capacitor electrode is formed on the organic insulation film **18**. An inorganic insulation film **20** is formed on the transparent electrode **19**. The pixel electrode (PIX) is formed on the inorganic insulation film **20**. The pixel electrode (PIX) is electrically connected to the source elec-

trode (SD2) via a contact hole (CH5) that reaches from the surface of the inorganic insulation film **20** to the source electrode (SD2).

[0056] Openings (**16a**, **18a**) corresponding to the source electrode (SD2) are formed in the organic insulation film **16** and the organic insulation film **18**, respectively, and the inorganic insulation film **20** is formed in the openings (**16a**, **18a**). The contact hole (CH5) is formed in the inorganic insulation film **20** in the openings **16a** and **18a**.

[0057] An orientation film (OR1) is formed on the pixel electrode (PIX). A polarizing plate (POL1) is disposed on the side of the first substrate (SUB1) opposite that of the liquid crystal layer.

[0058] Silicon nitride films formed by CVD, for example, are used as the inorganic insulation film **15** and the inorganic insulation film **20**. A coating-type insulation films formed by applying, exposing, and patterning a photosensitive acrylic resin, for example, are used as the organic insulation film **16** and the organic insulation film **18**.

[0059] As shown in FIG. 2, a light-blocking film (BM), a red/green/blue color filter (CF), a protective film (OC), an orientation film (OR2), and the like are formed in sequence from the second substrate (SUB2) to the liquid crystal layer (LC) on the side of the second substrate (SUB2; also referred to as the CF substrate and color filter substrate) towards the liquid crystal layer. A polarizing plate (POL2) is disposed on the side of the second substrate (SUB2) opposite that of the liquid crystal layer.

[0060] A phase difference plate or a coating-type phase difference layer may be disposed on at least one of the first substrate (SUB1) and second substrate (SUB2) as needed.

[0061] In Example 1, the pixel electrode (PIX) is in a comb electrode structure in which a plurality of linear portions is arranged in a comb pattern at prescribed intervals, for example, but this configuration is not limiting. The transparent electrode **19** is formed so as to be planar. The liquid crystal of the liquid crystal layer (LC) is driven by an electric field generated by the pixel electrode (PIX) and the transparent electrode **19**, and a display is created.

[0062] The pixel electrode (PIX) and the transparent electrode **19** are formed by ITO (Indium Tin Oxide) or another transparent conductive film, for example. The reflective electrode (RAL) is formed in part of a region of a single sub-pixel **40**, whereby a semi-transparent (partially transparent) display can be created that has a transparent portion **30** and a reflective portion **31** in a single sub-pixel **40**. Through this configuration, the light from a backlight can be used to perform transparent display in a dark environment, and ambient light can be reflected to perform reflective display in a bright environment.

[0063] The reflective electrode (RAL) has a two-layer structure in which the lower layer is a molybdenum tungsten alloy (MoW), and the upper layer is an aluminum silicon alloy (AlSi) containing 1% Si, for example, and the reflective electrode (RAL) is electrically connected to the transparent electrode **19**. The electrical connection between the reflective electrode (RAL) and the transparent electrode **19** is formed, for example, via a contact hole (CH3) that reaches from the surface of the organic insulation film **18** to the reflective electrode (RAL) in the peripheral portion **52** of the liquid crystal display panel **50**, as shown in FIG. 4.

[0064] When the thickness of the liquid crystal layer (LC) must be varied between the transparent portion **30** and the

reflective portion 31, a step formation layer is preferably provided to the second substrate (SUB2), for example.

[0065] A common potential that differs from the potential applied to the pixel electrode (PIX) is applied to the transparent electrode 19. Consequently, the transparent electrode 19, the pixel electrode (PIX), and the inorganic insulation film 20 constitute a retention capacitor. Specifically, the transparent electrode 19 also functions as a retention capacitor electrode.

[0066] The transparent electrode 19 is divided and formed for each display line, for example, and each transparent electrode 19 is electrically connected to wiring 14 to which the common potential is fed, via a contact hole (CH4) that reaches from the surface of the organic insulation film 18 to a connection part of the wiring 14, as shown in FIG. 5. The electrical connection between the transparent electrode 19 and the wiring 14 is formed in the peripheral portion 52 of the liquid crystal display panel 50, for example. The wiring 14 is formed in the same layer as the display lines (DL), for example.

[0067] Openings (16b, 18b) that correspond to the connection parts of the transparent electrode 19 and the wiring 14 are formed in the organic insulation films 16 and 18, respectively, and the contact hole (CH4) is formed by the openings 16b and 18b.

[0068] As shown in FIG. 3, the reflective electrode (RAL) has an irregular shape having surface irregularities (PJ2) for diffusing and reflecting. The surface irregularities (PJ2) of the reflective electrode (RAL) are formed in reflection of surface irregularities (PJ1) formed in a portion of the organic insulation film 16 that corresponds to the reflective electrode (RAL). The surface irregularities (PJ1) of the organic insulation film 16 can be formed using halftone exposure or the like, for example. Forming a reflective electrode (RAL) having such an irregular shape makes it possible to perform diffuse reflection during reflective display, and enhances display quality.

[0069] The inorganic insulation film 20 is formed in a higher layer than the organic insulation films 16 and 18. The organic insulation films 16 and 18 generally do not have high thermal resistance, and the inorganic insulation film 20 in Example 1 is therefore formed by a CVD method at a lower temperature than the film formation temperature of the inorganic insulation film 15. A silicon nitride film having a higher dielectric constant than an organic insulation film or a silicon oxide film is used as the inorganic insulation film 20 in order to increase the retention capacitance.

[0070] The organic insulation films 16 and 18 are formed by a coating application method, and the irregularities of the base layer can therefore be absorbed, and the surface can be made smooth, i.e., the surface can be flattened, in comparison to an inorganic insulation film formed by CVD or another deposition method. In Example 1, since the organic insulation film 18 is provided between the reflective electrode (RAL) in which the surface irregularities (PJ2) for diffuse reflection are formed, and the transparent electrode 19 for functioning as the opposing electrode and retention capacitor electrode, the surface irregularities (PJ2) of the reflective electrode (RAL) are absorbed by the organic insulation film 18, and the surface of the organic insulation film 18 is flattened. Specifically, by forming the organic insulation film 18 in a higher layer than the reflective electrode (RAL), and forming the transparent electrode 19 in a higher layer than the organic insulation film 18, the reflection of the surface irregularities (PJ2) of the reflective electrode (RAL) by the higher

pixel electrode (PIX) can be suppressed by the organic insulation film. The cell gap length of the liquid crystal layer (LC) can thereby be made uniform, and enhanced reflective contrast can be anticipated even when the reflective electrode (RAL) having the surface irregularities (PJ2) for diffuse reflection formed is used.

[0071] In Example 1, since the inorganic insulation film 20 is used as an insulation film between the pixel electrode (PIX) and the transparent electrode 19 that functions as the opposing electrode and the retention capacitor electrode, the occurrence of afterimages can be suppressed in comparison to a case in which an organic insulation film is used. Consequently, enhanced reflective contrast can be anticipated, and the occurrence of afterimages can be suppressed in Example 1.

[0072] An example of the manufacturing method of Example 1 will next be described using FIGS. 6A through 6G.

[0073] First, as shown in FIG. 6A, the base films (11, 12), the semiconductor layer (PS), the gate insulation film (GI), the scan lines (GL), the gate electrode (GT), the insulation film 13, the display lines (DL), the drain electrode and source electrode (SD1, SD2), the inorganic insulation film 15, and other components are formed on the first substrate (SUB1).

[0074] The organic insulation film 16 is then formed on the inorganic insulation film 15, as shown in FIG. 6B. The organic insulation film 16 has the surface irregularities (PJ1) in the portion corresponding to the reflective electrode (RAL). The organic insulation film 16 also has the opening 16a in the portion corresponding to the source electrode (SD2), and the opening 16b (see FIG. 5) in the portion corresponding to the connection with the wiring 14. The organic insulation film 16 is formed by application, exposure, and patterning of a photosensitive resin, for example. The surface irregularities (PJ1) of the organic insulation film 16 are formed using halftone exposure or the like, for example. The reflective electrode (RAL) is then formed on the organic insulation film 16, as shown in FIG. 6C. The reflective electrode (RAL) is formed by forming a conductive film composed of a two-layer structure in which the lower layer is a molybdenum tungsten alloy (MoW), and the upper layer is an aluminum silicon alloy (AlSi) containing about 1% Si so that the conductive film covers the surface irregularities (PJ1) of the organic insulation film 16, and then patterning the conductive film. The reflective electrode (RAL) has the surface irregularities (PJ2) for diffuse reflection, and the surface irregularities (PJ2) are formed in reflection of the surface irregularities (PJ1) of the organic insulation film 16.

[0075] The organic insulation film 18 is then formed on the organic insulation film 16 so as to cover the reflective electrode (RAL), as shown in FIG. 6D. The organic insulation film 18 has the opening 18a in the portion corresponding to the source electrode (SD2). The organic insulation film 18 has the contact hole (CH3) in the portion corresponding to the connection part of the reflective electrode (RAL), and has the opening 18b in the portion corresponding to the connection part of the wiring 14 in the peripheral portion 52 of the liquid crystal display panel 50, (see FIG. 5). The organic insulation film 18 is formed by applying, exposing, and patterning a photosensitive resin, for example.

[0076] In this step, the organic insulation film 18 is formed by a coating application method, and the irregularities of the base layer can therefore be absorbed, and the surface can be made smooth, i.e., the surface can be flattened, in comparison to an inorganic insulation film formed by CVD or another

deposition method. The transparent electrode **19** composed of ITO or another transparent conductive film is then formed on the organic insulation film **18**, as shown in FIG. 6E. The transparent electrode **19** is formed by a process in which the inorganic insulation film **15** in the openings **16a** and **18a**, and the inorganic insulation film **15** in the openings **16b** and **18b** (see FIG. 5), are selectively removed, and the connection parts of the source electrode (SD2) and the wiring **14** are exposed, after which a transparent conductive film is formed, and then the transparent conductive film is patterned. The transparent electrode **19** is electrically connected to the connection part of the reflective electrode (RAL) via the contact hole (CH3) in the peripheral portion **52** of the liquid crystal display panel **50**, as shown in FIG. 4. The transparent electrode **19** is also electrically connected to the connection part of the wiring **14** via the contact hole (CH4) composed of the opening **16b** and the opening **18b** in the peripheral portion **52** of the liquid crystal display panel **50**, as shown in FIG. 5.

[0077] The inorganic insulation film **20** composed of a silicon nitride film, for example, is then formed by a plasma CVD method on the organic insulation film **18** so as to cover the transparent electrode **19**. The inorganic insulation film **20** is also formed in the openings (**16a**, **18a**) and the openings (**16b**, **18b**). The organic insulation films **16** and **18** generally do not have high thermal resistance, and the inorganic insulation film **20** in Example 1 is therefore formed by a CVD method at a lower temperature than the film formation temperature of the inorganic insulation film **15**. A silicon nitride film having a higher dielectric constant than an organic insulation film or a silicon oxide film is used as the inorganic insulation film **20** in order to increase the retention capacitance.

[0078] The inorganic insulation film **20** is then patterned, and the contact hole (CH5) is formed in the portion corresponding to the source electrode (SD2) of the inorganic insulation film **20**, as shown in FIG. 6F.

[0079] The pixel electrode (PIX) composed of ITO or another transparent conductive film is then formed on the inorganic insulation film **20**, as shown in FIG. 6G. The pixel electrode (PIX) is electrically connected to the source electrode (SD2) via the contact hole (CH5).

[0080] In Example 1 as described above, the transparent electrode **19** for functioning as the opposing electrode and retention capacitor electrode is formed via the organic insulation film **18** on the reflective electrode (RAL), which has surface irregularities for diffuse reflection, and the pixel electrode (PIX) is formed on the transparent electrode **19** via the inorganic insulation film **20**. Enhanced reflective contrast can therefore be anticipated, and the occurrence of afterimages can be suppressed.

[0081] FIG. 7 is a sectional view showing another example (second example) of the manufacturing method of Example 1.

[0082] In the previously described manufacturing method (first example), removal of the portion of the inorganic insulation film **15** corresponding to the source electrode (SD2), and removal of the portion of the inorganic insulation film **20** corresponding to the source electrode (SD2) are performed in separate steps, but because silicon nitride films are used for both the inorganic insulation film **15** and the inorganic insulation film **20**, the contact hole (CH5) may be formed by dry etching both films at once, as shown in FIG. 7.

EXAMPLE 2

[0083] FIG. 8 and FIGS. 9A through 9E are diagrams relating to the IPS semi-transparent liquid crystal display device

according to Example 2 of the present invention, wherein FIG. 8 is a sectional view showing the cross-sectional structure of the liquid crystal display panel on the side of the TFT substrate, and FIGS. 9A through 9E are sectional views showing an example of the manufacturing method.

[0084] The orientation film (OR1) is also not shown in FIG. 8, the same as in FIG. 3.

[0085] The IPS semi-transparent liquid crystal display device according to Example 2 has basically the same configuration as that of Example 1 described above, but differs in the respects described below.

[0086] Specifically, in the previously described Example 1, the electrical connection between the transparent electrode **19** and the reflective electrode (RAL) is made in the peripheral portion **52** of the liquid crystal display panel **50**, as shown in FIG. 4, but in Example 2, the electrical connection is made in the single sub-pixel **40**, as shown in FIG. 8. An example of the manufacturing method according to Example 2 will be described below using FIGS. 9A through 9E.

[0087] First, after the organic insulation film **16** is formed on the inorganic insulation film **15** in the same manner as in Example 1, a conductive film **17** is formed on the organic insulation film **16** so as to cover the surface irregularities (PJ1) of the organic insulation film **16**, as shown in FIG. 9A. The conductive film **17** has the surface irregularities (PJ2) formed in reflection of the surface irregularities (PJ1) of the organic insulation film **16**.

[0088] The organic insulation film **18** is then formed on the conductive film **17** so as to cover the surface irregularities (PJ2) of the conductive film **17**, as shown in FIG. 9B. The organic insulation film **18** is formed by applying, exposing, and patterning a photosensitive resin, for example, but is halftone exposed to reduce the film thickness.

[0089] The conductive film **17** not covered by the organic insulation film **18** is then etched, and the reflective electrode (RAL) composed of the conductive film **17** is formed as shown in FIG. 9C. The reflective electrode (RAL) has surface irregularities (PJ2) for diffuse reflection, and the surface irregularities (PJ2) are formed in reflection of the surface irregularities (PJ1) of the organic insulation film **16**.

[0090] Ashing is then performed in an O₂ asher, the thickness of the organic insulation film **18** is reduced, and the surface of the reflective electrode (RAL) is exposed, as shown in FIG. 9D. The organic insulation film **18** is ashed so that a flat surface is obtained by filling the organic insulation film **18** in between the peaks of the surface irregularities (PJ2) of the reflective electrode (RAL).

[0091] The transparent electrode **19** composed of ITO or another transparent conductive film is then formed on the reflective electrode (RAL) so as to cover the organic insulation film **18** on the surface irregularities (PJ2) of the reflective electrode (RAL), as shown in FIG. 9E. The transparent electrode **19** is electrically connected to the reflective electrode (RAL) in the portion where the reflective electrode (RAL) is exposed from the organic insulation film **18**.

[0092] The inorganic insulation film **20** composed of a silicon nitride film, for example, is then formed by a plasma CVD method on the organic insulation film **16** so as to cover the transparent electrode **19**, and the inorganic insulation film **20** is then patterned, and the contact hole (CH5) is formed in the portion corresponding to the drain electrode (SD1) of the inorganic insulation film **20**.

[0093] When the reflective electrode (RAL) is oxidized, and there is a possibility that contact with the transparent

electrode 19 is not made, a contact metal may be placed under the reflective electrode (RAL), and the exposed portion (excess portion) of the reflective electrode after treatment in the O₂ asher may be re-etched so that contact with the transparent electrode 19 is established.

[0094] The same effects as those obtained in Example 1 are also obtained in Example 2.

[0095] The invention developed by the inventors was specifically described above based on the examples, but the present invention is not limited by the examples, and may include various modifications within ranges that do not depart from the intent of the present invention.

[0096] For example, the examples described above were of applications of the present invention to an IPS semi-transparent liquid crystal display device, but the present invention may also be applied to a vertical-field semi-transparent liquid crystal display device. In a vertical-field semi-transparent liquid crystal display device, the transparent electrode 19 functions as a retention capacitor electrode, and has an opposing electrode on the side of the second substrate (SUB2), an electric field is generated by the pixel electrode (PIX) of the first substrate (SUB1) and the opposing electrode of the second substrate (SUB2), and the liquid crystal of the liquid crystal layer (LC) is driven.

[0097] The present invention also is not limited to a semi-transparent device, and may be applied to a liquid crystal display device having a reflective electrode in which surface irregularities for diffuse reflection are formed.

[0098] While there have been described what are at present considered to be certain embodiments of the invention, it will be understood that various modifications may be made thereto, and it is intended that the appended claims cover all such modifications as fall within the true spirit and scope of the invention.

What is claimed is:

1. A liquid crystal display device comprising a liquid crystal display panel that has a first substrate, a second substrate disposed so as to oppose the first substrate, and a liquid crystal layer sandwiched between the first substrate and the second substrate; wherein:

the first substrate has a reflective electrode having a surface formed in an irregular shape; an organic insulation film formed in a layer above the reflective electrode; a transparent electrode formed in a layer above the organic insulation film; an inorganic insulation film formed in a layer above the transparent electrode; and a pixel electrode formed in a layer above the inorganic insulation film; and

the reflective electrode is electrically connected to the transparent electrode.

2. The liquid crystal display device according to claim 1, wherein

the organic insulation film is a coating-type insulation film; and

the inorganic insulation film is a silicon nitride film.

3. The liquid crystal display device according to claim 2, wherein

the silicon nitride film is a deposited film.

4. The liquid crystal display device according to claim 1, wherein

the organic insulation film is a film for flattening surface irregularities of the reflective electrode.

5. The liquid crystal display device according to claim 1, wherein

the transparent electrode functions as an opposing electrode and a retention capacitor electrode; and

an electric field is generated by the pixel electrode and the transparent electrode, and liquid crystals of the liquid crystal layer are driven.

6. The liquid crystal display device according to claim 1, wherein

the transparent electrode functions as a retention capacitor electrode;

the second substrate has an opposing electrode; and

an electric field is generated by the pixel electrode of the first substrate, and the opposing electrode of the second substrate, and liquid crystals of the liquid crystal layer are driven.

7. The liquid crystal display device according to claim 1, wherein

the liquid crystal display panel has a plurality of sub-pixels and each of sub-pixels has a transparent portion and a reflective portion;

each sub-pixel of the plurality of sub-pixels has the reflective electrode, the organic insulation film, the transparent electrode, the inorganic insulation film, and the pixel electrode; and

the reflective electrode is disposed in the reflective portion.

8. The liquid crystal display device according to claim 7, wherein

a portion of the organic insulation film is removed in each sub-pixel of the plurality of sub-pixels; and

the reflective electrode is electrically connected to the transparent electrode in the portion in which the organic insulation film is removed.

9. The liquid crystal display device according to claim 7, wherein

the liquid crystal display panel has a display portion in which the plurality of sub-pixels is arranged, and a peripheral portion disposed on a periphery of the display portion; and

the electrical connection between the reflective electrode and the transparent electrode is made by the peripheral portion.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US20090040442A1	公开(公告)日	2009-02-12
申请号	US12/219500	申请日	2008-07-23
[标]申请(专利权)人(译)	株式会社日立显示器		
申请(专利权)人(译)	日立显示器有限公司.		
当前申请(专利权)人(译)	松下液晶显示CO., LTD. 日立显示器有限公司.		
[标]发明人	TANNO JUNJI OCHIAI TAKAHIRO		
发明人	TANNO, JUNJI OCHIAI, TAKAHIRO		
IPC分类号	G02F1/1335 G02F1/133		
CPC分类号	G02F1/133555 G02F2001/133397 G02F1/136227 G02F1/134363		
优先权	2007204330 2007-08-06 JP		
其他公开文献	US7990500		
外部链接	Espacenet USPTO		

摘要(译)

一种液晶显示装置，包括：液晶显示面板，具有第一基板（SUB1）；第二基板（SUB2），设置为与第一基板（SUB1）相对；以及液晶层（LC），夹在第一基板（SUB1）之间基板（SUB1）和第二基板（SUB2）；其中，第一基板（SUB1）具有反射电极（RAL），该反射电极具有形成不规则形状的表面；形成在反射电极（RAL）上方的层中的有机绝缘膜（18）；透明电极（19）形成在有机绝缘膜（18）上方的层中；无机绝缘膜（20），形成在透明电极（19）上方的层中；形成在无机绝缘膜（20）上方的层中的像素电极（PIX）。

