



US 20090109170A1

(19) **United States**(12) **Patent Application Publication**
Kwon et al.(10) **Pub. No.: US 2009/0109170 A1**(43) **Pub. Date: Apr. 30, 2009**(54) **METHOD OF DRIVING LIQUID CRYSTAL
DISPLAY DEVICE****Publication Classification**(51) **Int. Cl.**
G09G 3/36 (2006.01)(52) **U.S. Cl.** **345/102**(57) **ABSTRACT**


A method of driving a liquid crystal display device includes inputting source image data, each of which has one of m gray level values, wherein m is a natural number, defining T error data from the source image data, wherein the error data have top k gray level values, and T and k are a natural number, generating conversion image data having larger gray level values than the source image data using one having a largest gray level value from the source image data excluding the error data, inputting the conversion image data to a liquid crystal panel, controlling a brightness of a backlight unit in accordance with the conversion image data, forming a bitmap corresponding to the conversion image data, wherein the bitmap shows positional distribution of pixels with the error data, counting error areas by scanning the bitmap, wherein each of the error areas includes the predetermined number of the pixels having the error data, and controlling the T according to the number of the error.

(75) **Inventors:** **Kyung-Joon Kwon**, Seoul (KR);
Hee-Won Ahn, Gyeonggi (KR);
Sung-Soo Kim, Gyeonggi (KR)

Correspondence Address:

HOLLAND & KNIGHT LLP
2099 PENNSYLVANIA AVE, SUITE 100
WASHINGTON, DC 20006 (US)(73) **Assignee:** **LG.DISPLAY CO., LTD.**, Seoul
(KR)(21) **Appl. No.:** **12/289,212**(22) **Filed:** **Oct. 22, 2008**(30) **Foreign Application Priority Data**

Oct. 25, 2007 (KR) 10-2007-0107878

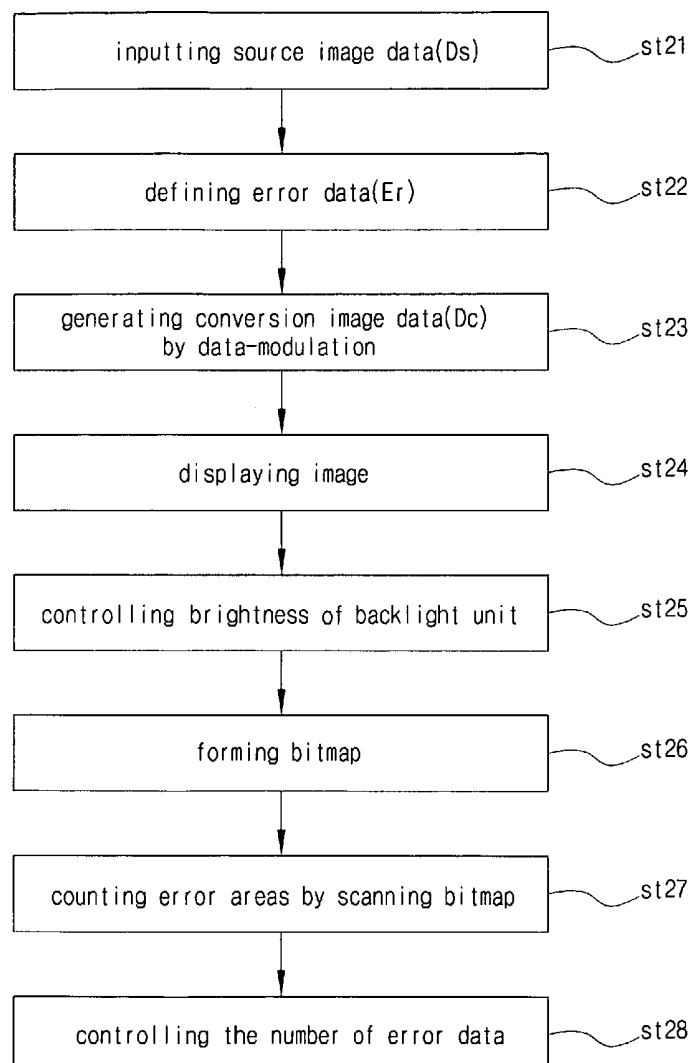

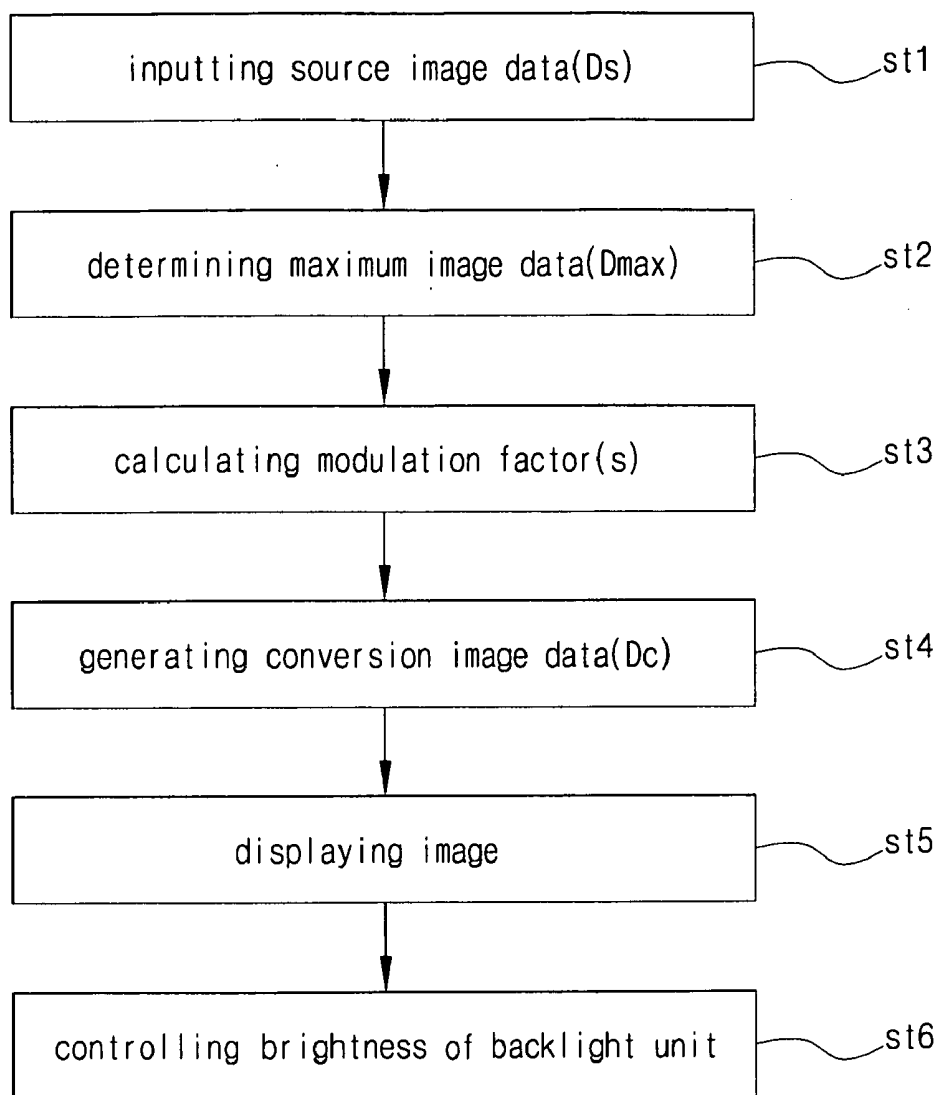


FIG. 1
RELATED ART

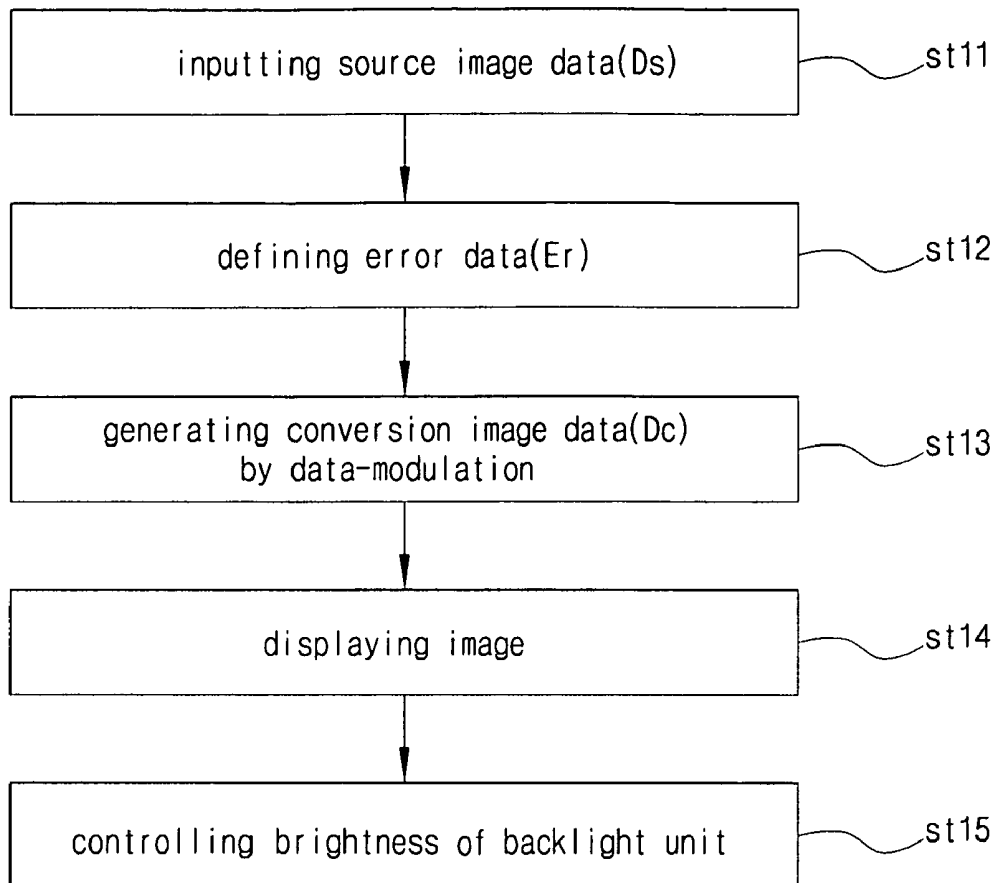


FIG. 2
RELATED ART

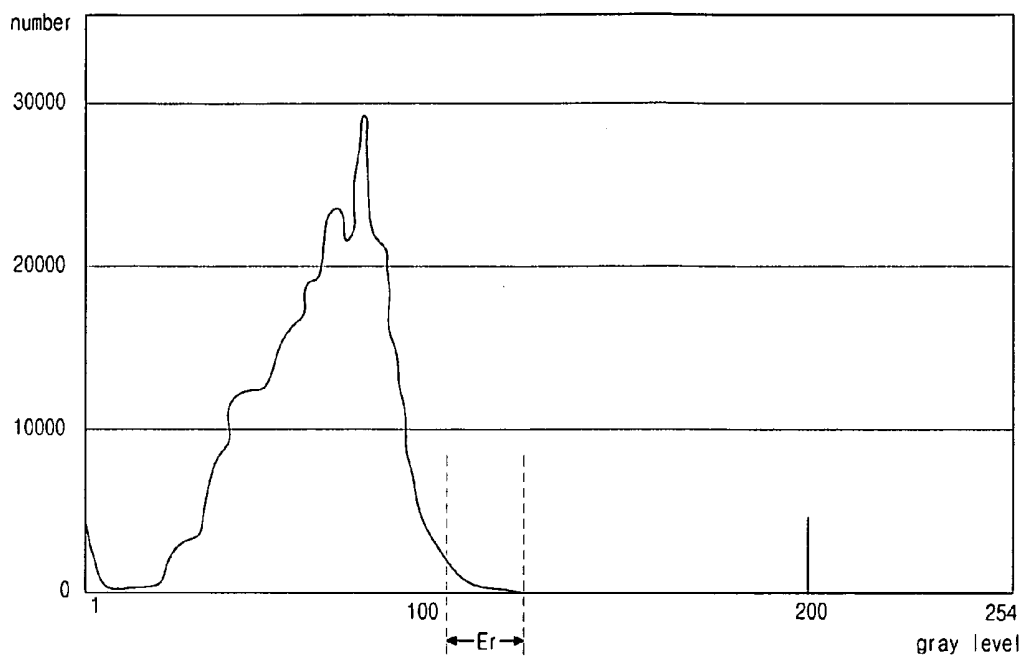


FIG. 3
RELATED ART

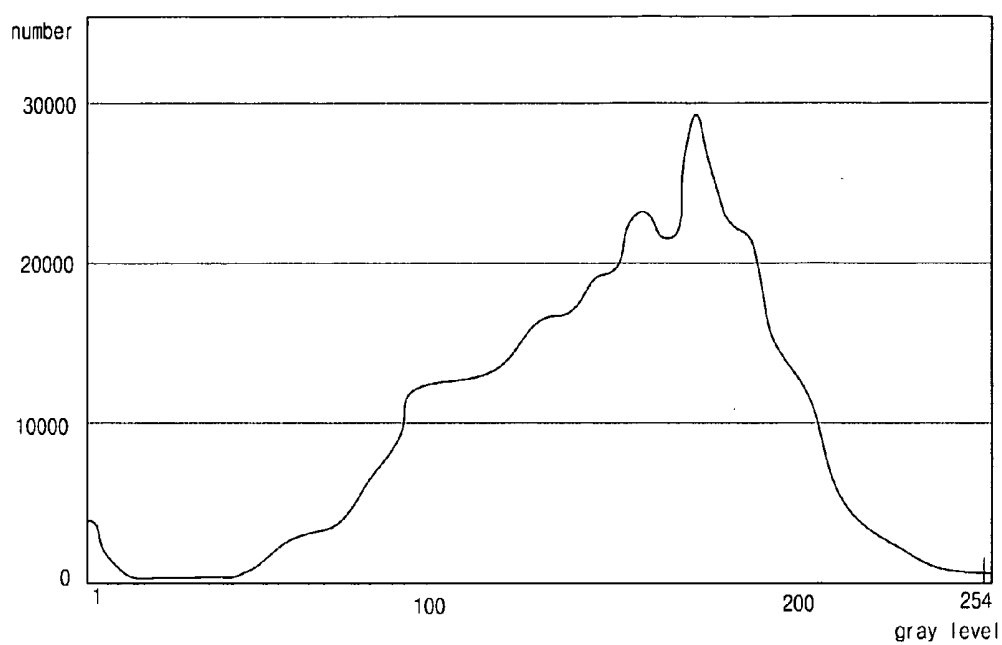


FIG. 4
RELATED ART

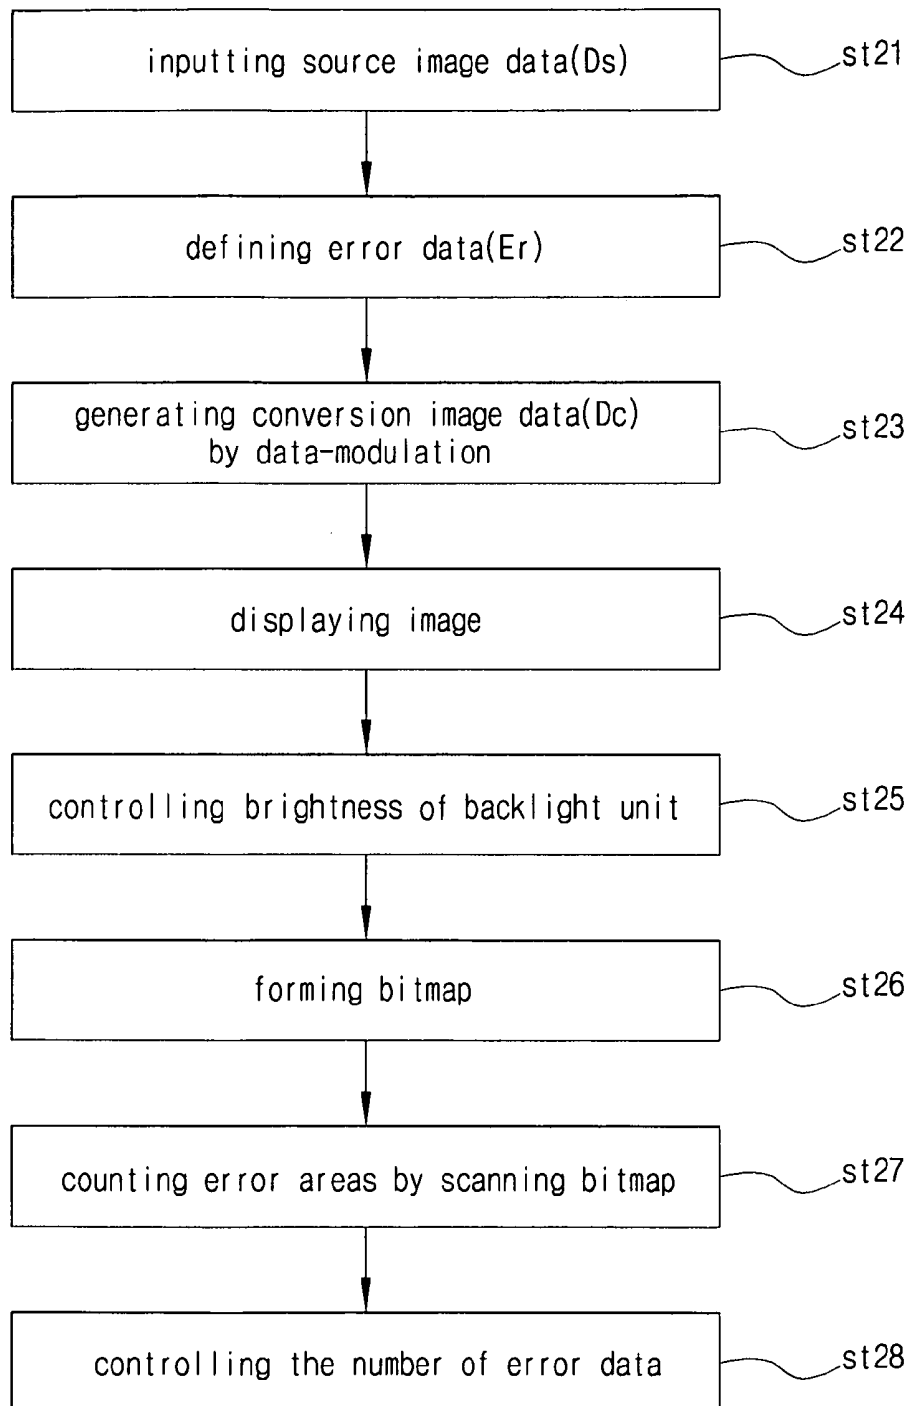


FIG.. 5

0	0	1	1	0	0	0	0	1	0	0
0	1	0	0	1	1	0	0	1	0	0
1	0	0	0	0	0	0	0	0	1	1
1	1	1	0	0	0	1	0	1	0	0
0	1	1	0	0	0	1	0	1	0	0
1	0	0	0	0	0	0	1	0	0	0
0	0	0	0	0	0	0	1	0	0	0

FIG. 6

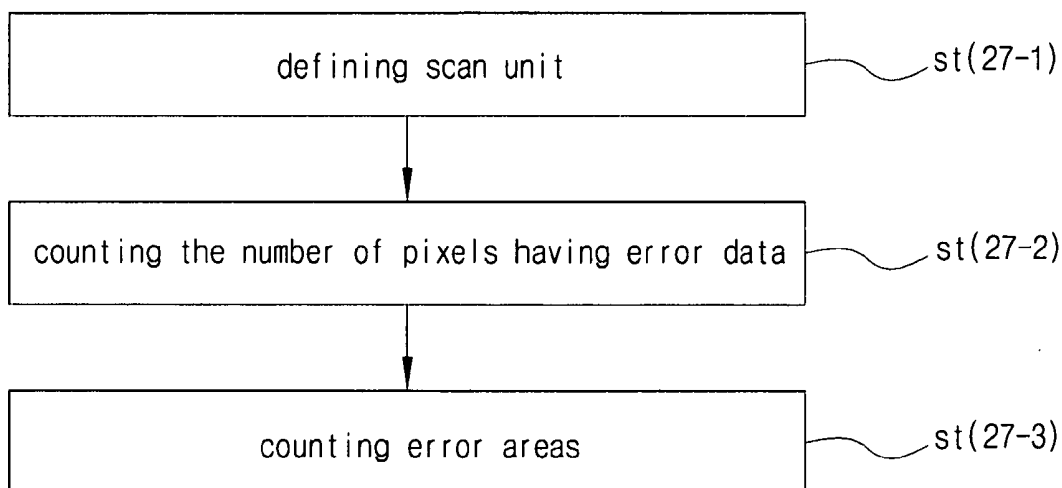


FIG. 7

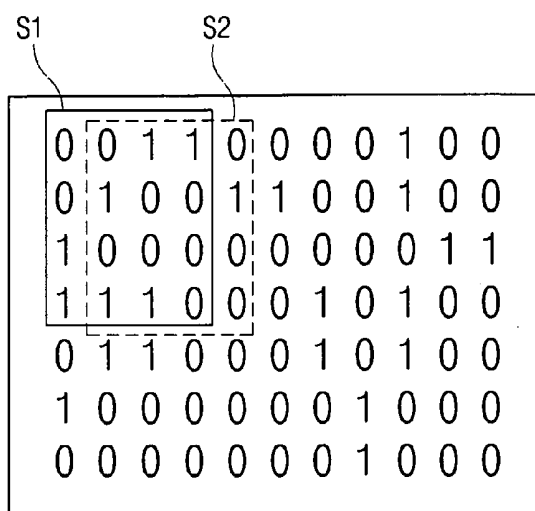


FIG. 8

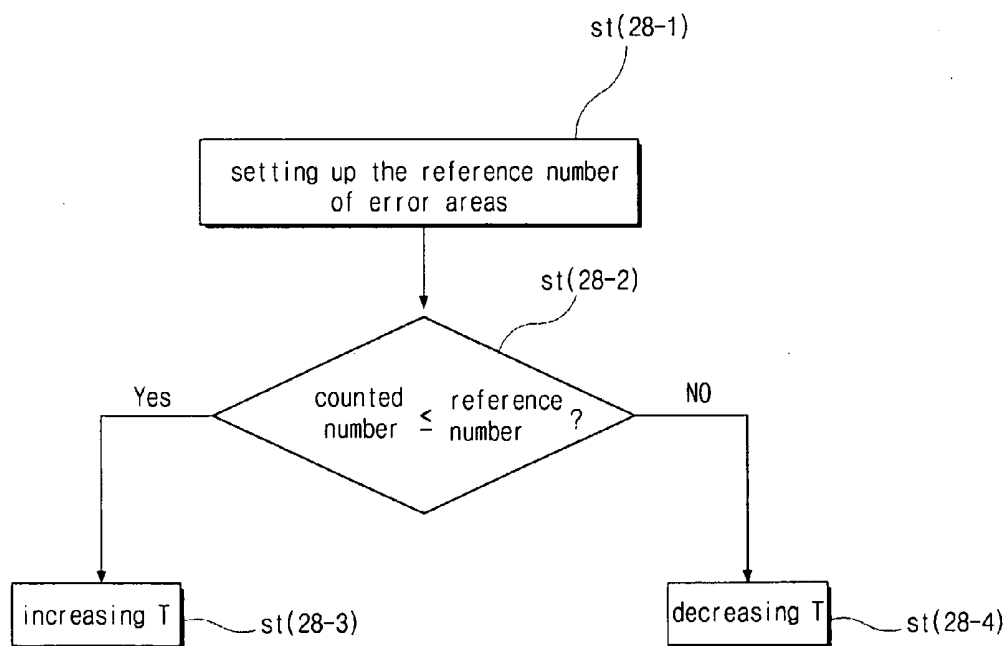


FIG. 9

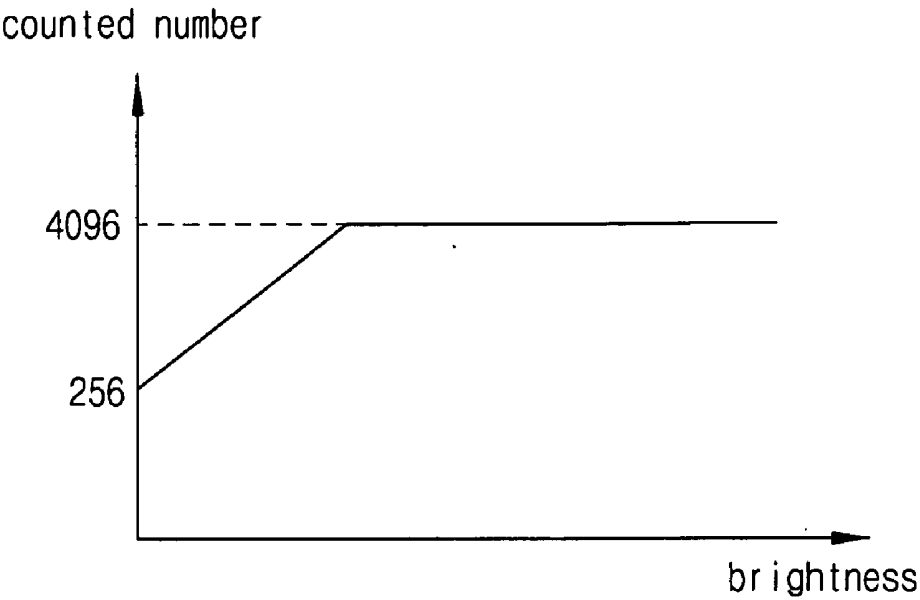


FIG. 10

METHOD OF DRIVING LIQUID CRYSTAL DISPLAY DEVICE

[0001] This application claims the benefit of Korean Patent Application No. 10-2007-0107878, filed on Oct. 25, 2007, which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a method of driving a display device, and more particularly, to a method of driving a liquid crystal display device that improves degradation of an image quality and reduces power consumption of a backlight unit.

[0004] 2. Discussion of the Related Art

[0005] Liquid crystal display (LCD) devices produce images by applying an electric field to a liquid crystal material, which has dielectric anisotropy and is interposed between two substrates, controlling intensity of the electric field, and adjusting an amount of light transmitted through the substrates.

[0006] An LCD device includes a liquid crystal panel having two substrates and a liquid crystal layer interposed therebetween. A plurality of gate lines are formed on one of the two substrates, and a plurality of data lines are insulated from and cross the plurality of gate lines. Pixels are defined by the gate lines and the data lines. A thin film transistor is disposed at each crossing of the gate lines and the data lines.

[0007] The LCD device further includes a backlight unit for providing light to the liquid crystal panel. Power consumption of the backlight unit is as high as the backlight unit occupies about 70 to 80 percent of a total power of a liquid crystal display device in small devices of less than 10 inches such as cellular phones.

[0008] Recently, to reduce the power consumption of the backlight unit, various methods have been proposed. Hereinafter, a method of driving a liquid crystal display device according to a first embodiment of the related art, which may be referred to as "frame maximum data method," will be described with reference to FIG. 1. FIG. 1 is a flow chart of illustrating a method of driving an LCD device according to a first embodiment of the related art.

[0009] At step st1, source image data D_s corresponding to one frame, each of which has one of m gray level values (m is a natural number), are inputted as n bit digital data (n is a natural number) from exterior circuits such as a timing controller. Here, m is 2ⁿ, and the inputted source image data D_s are R, G, and B color image data that are supplied to a liquid crystal panel to produce an image. For example, in a QVGA (Quarter Video Graphics Array) model having 320×240 pixels, each of which includes three sub-pixels, the number of the source image data D_s is 76,800×3.

[0010] At step st2, a maximum image data D_{max} is determined by detecting one having the largest gray level value from the source image data D_s.

[0011] Next, at step st3, the maximum image data D_{max} is data-modulated such that the maximum image data D_{max} has the maximum gray level value, that is, the mth gray level value, and thus a modulation factor s is calculated. The modulation factor s has the same meaning as a gain.

[0012] At step st4, conversion image data D_c are generated by data-modulating each of the source image data D_s s times.

For example, in the QVGA model, each of 76,800×3 source image data is data-modulated by s times.

[0013] Through the steps st1 to st4, the source image data D_s are converted to the conversion image data D_c having increased gray level values.

[0014] At step st5, the conversion image data D_c are inputted into the liquid crystal panel to display an image. Accordingly, the image displayed on the liquid crystal panel by the conversion image data D_c has a higher brightness than an image by the source image data D_s.

[0015] At step st6, a brightness of a backlight unit is controlled by the modulation factor s, which is used for generating the conversion image data D_c. Here, the brightness of the backlight unit may be controlled to decrease by 1/s times or more than 1/s times.

[0016] According to the method of driving an LCD device of the first embodiment of the related art, the power consumption of the LCD device decreases by about 20 percent without lowering the image quality. Thus, driving time of the LCD device in small models can be further extended.

[0017] FIG. 2 is a flow chart of illustrating a method of driving an LCD device according to a second embodiment of the related art. FIG. 3 is a view of illustrating a histogram for source image data in a method of driving an LCD device according to the second embodiment of the related art, and FIG. 4 is a view of illustrating a histogram for conversion image data in a method of driving an LCD device according to the second embodiment of the related art.

[0018] At step st11, source image data D_s corresponding to one frame, each of which has one of m gray level values (m is a natural number), are inputted as n bit digital data (n is a natural number) from exterior circuits such as a timing controller. Here, m is 2ⁿ, and the inputted source image data D_s are R, G, and B color image data that are supplied to a liquid crystal panel to produce an image. For example, the source image data D_s may be 8 bit digital image data for 256 gray levels. That is, n may be 8, and m may be 256.

[0019] Next, at step st12, referring to FIG. 3, T source image data (T is a natural number), which have top some gray level values from the largest gray level value, are defined as error data E_r. The number of the error data E_r, that is, T can be changed according to a designer.

[0020] At step st13, a modulation factor s is calculated by a maximum image data D_{max} having the largest gray level value from the source image data D_s excluding the error data E_r, and conversion image data D_c are generated through the above-mentioned steps st3 and st4. A histogram of the conversion image data D_c is shown in FIG. 4.

[0021] At step st14, the conversion image data D_c are inputted into the liquid crystal panel to display an image.

[0022] At step st15, a brightness of a backlight unit is controlled by the modulation factor s.

[0023] In the second embodiment of the related art, since the inputted data are data-modulated after the error data E_r are determined from the inputted data, the modulation factor is larger than that of the first embodiment of the related art. In proportion to this, the power consumption of the backlight unit is further reduced as compared with the first embodiment of the related art.

[0024] By the way, the error data E_r are data-modulated such that the data-modulated error data have the maximum gray level value, that is, the mth gray level value due to gray saturation properties.

[0025] If the error data are densely disposed in a certain region of the liquid crystal panel, the region may be displayed relatively brightly and may be easily recognized by a viewer. This may cause degradation of the image quality.

SUMMARY OF THE INVENTION

[0026] Accordingly, the present invention is directed to a method of driving a liquid crystal display device that substantially obviates one or more problem due to limitations and disadvantages of the related art.

[0027] An advantage of the invention is to provide a method of driving a liquid crystal display device that further decreases the power consumption of the backlight unit and improves degradation of an image quality.

[0028] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0029] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, the method of driving a liquid crystal display device includes inputting source image data, each of which has one of m gray level values, wherein m is a natural number, defining T error data from the source image data, wherein the error data have top k gray level values, and T and k are a natural number, generating conversion image data having larger gray level values than the source image data using one having a largest gray level value from the source image data excluding the error data, inputting the conversion image data to a liquid crystal panel, controlling a brightness of a backlight unit in accordance with the conversion image data, forming a bitmap corresponding to the conversion image data, wherein the bitmap shows positional distribution of pixels with the error data, counting error areas by scanning the bitmap, wherein each of the error areas includes the predetermined number of the pixels having the error data, and controlling the T according to the number of the error.

[0030] In another aspect, a method of driving a liquid crystal display device includes receiving one of ON and OFF signals, wherein when the ON signal is received, the method includes inputting source image data, each of which has one of m gray level values, wherein m is a natural number, defining T error data from the source image data, wherein the error data have top k gray level values, and T and k are a natural number, generating conversion image data having larger gray level values than the source image data using one having a largest gray level value from the source image data excluding the error data, inputting the conversion image data to a liquid crystal panel, controlling a brightness of a backlight unit in accordance with the conversion image data, forming a bitmap corresponding to the conversion image data, wherein the bitmap shows positional distribution of pixels with the error data, counting error areas by scanning the bitmap, wherein each of the error areas includes the predetermined number of the pixels having the error data, and controlling the T according to the number of the error areas, and wherein when the OFF signal is received, the method includes inputting source image data to the liquid crystal panel.

[0031] In another aspect, a liquid crystal display device comprising a means for changing a method of driving the liquid crystal display device according to ON and OFF signals.

[0032] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of embodiments of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0033] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0034] In the drawings:

[0035] FIG. 1 is a flow chart of illustrating a method of driving a liquid crystal display (LCD) device according to a first embodiment of the related art;

[0036] FIG. 2 is a flow chart of illustrating a method of driving an LCD device according to a second embodiment of the related art;

[0037] FIG. 3 is a view of illustrating a histogram for source image data in a method of driving an LCD device according to the second embodiment of the related art;

[0038] FIG. 4 is a view of illustrating a histogram for conversion image data in a method of driving an LCD device according to the second embodiment of the related art;

[0039] FIG. 5 is a flow chart of illustrating a method of driving a liquid crystal display (LCD) device according to an exemplary embodiment of the present invention;

[0040] FIG. 6 is a view of illustrating a bitmap for explaining a method of driving an LCD device according to the present invention;

[0041] FIG. 7 is a flow chart of illustrating a step of counting error areas in a method of driving an LCD device according to the present invention;

[0042] FIG. 8 is a view of illustrating a step of scanning a bitmap in a method of driving an LCD device according to the present invention;

[0043] FIG. 9 is a flow chart of illustrating a step of controlling error data in a method of driving an LCD device according to the present invention; and

[0044] FIG. 10 is a view of illustrating an example of setting up the number of error areas in a method of driving an LCD device.

DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0045] Reference will now be made in detail to an embodiment of the present invention, an example of which is illustrated in the accompanying drawings.

[0046] FIG. 5 is a flow chart of illustrating a method of driving a liquid crystal display (LCD) device according to an exemplary embodiment of the present invention.

[0047] Referring to FIG. 5, at step st21, source image data D_s corresponding to one frame, each of which has one of m gray level values (m is a natural number), are inputted as n bit digital data (n is a natural number) from exterior circuits such as a timing controller. Here, m is 2^n , and the inputted source image data D_s are R, G, and B color image data that are supplied to a liquid crystal panel to produce an image. For example, the source image data D_s may be 8 bit digital image

data for 256 gray levels. That is, n may be 8, and m may be 256. In a QVGA (Quarter Video Graphics Array) model having 320×240 pixels, each of which includes three sub-pixels, the number of the source image data D_s is $76,800 \times 3$.

[0048] Next, at step **st22**, T source image data (T is a natural number), which have top some gray level values from the largest gray level value, are defined as error data E_r . The number of the error data E_r , that is, T can be changed according to the property and size of the liquid crystal panel and the characteristics of the image.

[0049] At step **st23**, a maximum image data D_{max} is determined by detecting one having the largest gray level value from the source image data D_s excluding the error data E_r . The maximum image data D_{max} is data-modulated such that the maximum image data D_{max} has the maximum gray level value, that is, the m th gray level value, and thus a modulation factor is calculated. The modulation factor s has the same meaning as a gain. Next, conversion image data D_c are generated by data-modulating each of the source image data D_s , that is, by multiplying each of the source image data D_s by the modulation factor s . For example, in the QVGA model, each of $76,800 \times 3$ source image data is data-modulated by s times. Here, the error data E_r may be data-modulated such that the data-modulated error data have the maximum gray level value, that is, the m th gray level value. The error data E_r have gray saturation properties.

[0050] Through the steps **st21** to **st23**, the source image data D_s are converted into the conversion image data D_c having increased gray level values.

[0051] At step **st24**, the conversion image data D_c are inputted into the liquid crystal panel to display an image. Accordingly, the image displayed on the liquid crystal panel by the conversion image data D_c has a higher brightness than an image by the source image data D_s .

[0052] At step **st25**, a brightness of a backlight unit is controlled by the modulation factor s , which is used for generating the conversion image data D_c , simultaneously with inputting the conversion image data D_c into the liquid crystal panel. Here, the brightness of the backlight unit is decreased by more than $1/s$ times. Therefore, the power consumption is reduced.

[0053] As step **st26**, a bitmap for showing positional distribution of pixels corresponding to the error data E_r is made out by receiving feedback from the conversion image data D_c , which are inputted into the liquid crystal panel to display the image.

[0054] FIG. 6 is a view of illustrating a bitmap for explaining a method of driving an LCD device according to the present invention. In the bitmap of FIG. 6, pixels receiving the error data E_r are displayed as 1, and pixels receiving the data excluding the error data E_r are displayed as 0. The bitmap shows positional distribution of the error data E_r , which are included in the conversion image data D_c inputted into the liquid crystal panel, more particularly, the positional distribution of pixels receiving the error data E_r . Since the image quality may be degraded when the error data E_r having the gray saturation properties are densely disposed around a specific position, the bitmap is used to detect a position that is able to be degraded.

[0055] Next, at step **st27**, to detect an area, in which the pixels receiving the error data E_r are concentrated on the bitmap and may be degraded, the bitmap is scanned, and error areas are counted. The bitmap may be scanned by a resolution of $A \times B$.

[0056] The step **st27** will be explained in more detail with reference to FIG. 7. FIG. 7 is a flow chart of illustrating a step of counting error areas in a method of driving an LCD device according to the present invention.

[0057] At step **st(27-1)**, to scan the bitmap, a size of an area to be scanned, that is, a scan unit, is determined. The scan unit may have a resolution of $A \times B$, for example, a resolution of 4×4 . Here, the resolution of 4×4 is a minimum size in which the image degradation due to the gray saturation can be recognized by eyes of a viewer.

[0058] At step **st(27-2)**, while the bitmap is scanned by the scan unit of 4×4 , the number of the pixels having the error data E_r is counted in each scan unit.

[0059] FIG. 8 is a view of illustrating a step of scanning a bitmap in a method of driving an LCD device according to the present invention. In FIG. 8, the bitmap is scanned by the scan unit of 4×4 such that a first scan unit $S1$ and a second scan unit $S2$ next to the first scan unit $S1$ have a maximum overlap region. According to this, a crowded rate of the pixels having the error data E_r can be identified.

[0060] At step **st(27-3)**, error areas are judged and counted by numbering the pixels having the error data E_r in each scan unit. In the scan unit of 4×4 , 16 bitmap data, that is, 16 pixels are included. When there are 14 pixels having the error data E_r in the scan unit, the image quality is able to be readily degraded, and thus the corresponding area can be determined as an error area.

[0061] The error area can be defined by the following equation (1).

$$(A \times B) / 2 \leq Q \leq (A \times B) \quad \text{equation (1)}$$

Here, $(A \times B)$ is a resolution of the scan unit, and Q is the number of the pixels having the error data E_r in the scan unit. When the pixels having the error data E_r are more than 50% of the bitmap data in a scan unit, for example, more than 8, the scan unit may be defined and counted as an error area.

[0062] In the present invention, every scan unit in the bitmap is scanned and considered because first and second bitmaps of the same resolution have difference in the number of the error areas even if the first and second bitmaps include the same number of pixels having the error data E_r . That is, the denser the pixels having the error data E_r are, the more error areas are counted. Thus, the image quality may be readily degraded. Accordingly, the scanning method of the present invention enables the possibility of degradation of the image quality to be easily recognized.

[0063] Next, at step **st28**, after counting the number of the error areas in the bitmap by the above-mentioned method, the number of the error data E_r , that is, T is controlled according to the number of the error areas. Many error areas mean that the pixels having the error data E_r are densely disposed in a specific region and there are many gray saturation areas. This also means high possibility of degradation of the image quality. Accordingly, to prevent degradation of the image quality and reduce power consumption, the error data E_r are newly set up.

[0064] A step of controlling the error data E_r will be explained with reference to FIG. 9. FIG. 9 is a flow chart of illustrating a step of controlling error data in a method of driving an LCD device according to the present invention.

[0065] In FIG. 9, at step **st(28-1)**, the reference number of the error areas is set up by a designer.

[0066] At step st(28-2), the number of the error areas counted by the bitmap scan is compared with the reference number.

[0067] At step st(28-3), when the number of the counted error areas, that is, the counted number is less than the reference number, the number of the error data E_r , that is, T is increased. At step st(28-4), when the counted number is above the reference number, the T is decreased.

[0068] Since the number of the error areas is proportional to the measure of recognizing degradation of the image quality, the number of the error data E_r is decreased, and the number of the error areas is reduced to thereby lower the measure of recognizing degradation of the image quality.

[0069] The less the number of the error data E_r is, the more the number of displayed gray level is. In addition, the number of the error areas is reduced. Therefore, the image quality is improved.

[0070] Alternatively, when the number of the error areas is less than the reference number, the system satisfies the intention of the designer, and thus there is a margin for increasing the number of the error areas. Accordingly, the number of the error data E_r , i.e., T is increased, and the modulation factor s can be larger. The power consumption of the backlight unit is further decreased without lowering the image quality.

[0071] The number of the error areas can be varied according to the size of the liquid crystal panel or the feature of the displayed image. FIG. 10 is a view of illustrating an example of setting up the number of error areas in a method of driving an LCD device. Referring to FIG. 10, in a liquid crystal panel having a resolution of $1,366 \times 768$, when the number of the error areas is more than 256, brightness of the liquid crystal panel is increased, and when the number of the error areas is more than 4,096, the brightness of the liquid crystal panel is little changed and is saturated. Accordingly, in the liquid crystal panel of $1,366 \times 768$, it is desirable to control the number of the error areas within a range of 256 to 4,096.

[0072] In the present invention, the source image data are converted into the conversion image data such that the conversion image data have increased gray level values, and an image is displayed by the conversion image data. Therefore, the power consumption of the backlight unit is decreased.

[0073] Moreover, by controlling the number of the error data using a bitmap, degradation of the image quality is effectively prevented.

[0074] Meanwhile, a user can select a driving mode of an LCD device according to their purposes. That is, the user may choose an advanced mode explained above or a normal mode. For example, when the user watches moving images, etc., the user may choose the advanced mode and drive the LCD device to improve the brightness and reduce the power consumption. Alternatively, when the user performs graphics which require accurate expressions in gray level, the user may choose the normal mode and drive the LCD device, whereby exact images are displayed without data-modulation and change in an output signal for the backlight unit.

[0075] Therefore, when the user uses the LCD device with the advanced mode, to improve the brightness and power consumption, the source image data are data-modulated, and a control signal for the backlight unit is generated. On the other hand, when the user uses the LCD device with the normal mode, the LCD device is driven without control of the backlight unit and the data-modulation of the source image data. To do this, a pin for controlling the advanced mode and the normal mode may be included in the LCD device.

[0076] In a detail driving method of the advanced mode, when the user chooses the advanced mode, the pin in the LCD device receives an ON control signal. Then, the source image data are data-modulated, and it is controlled for the backlight unit to emit light. More particularly, the source image data, each of which has one of m gray level values (m is natural number), are inputted, and the conversion image data are generated from the source image data. The step of generating the conversion image data includes defining T error data (T is natural number) from T source image data which have top k gray level values (k is natural number) from the largest gray level value, generating the conversion image data such that one having the largest gray level value from the source image data D_s excluding the error data has the maximum gray level value, inputting the conversion image data into the liquid crystal panel and controlling the backlight unit according to the conversion image data, forming the bitmap which shows positional distribution of the pixels having the error data corresponding to the conversion image data, counting the error areas which include more than the predetermined number of the pixels having the error data by scanning the bitmap, and controlling the number of the error data, T , according to the number of the error areas.

[0077] In a detail driving method of the normal mode, when the user chooses the normal mode, the pin in the LCD device receives an OFF control signal. Differently from the advanced mode, the source image data are not data-modulated and are inputted into the liquid crystal panel. In addition, light-emitting in the backlight unit is not controlled.

[0078] In the LCD device according to the present invention, the driving mode can be selectively chosen as occasion demands, and when the LCD device is driven as the advanced mode for increasing the brightness and reducing the power consumption, degradation of the image quality can be improved to thereby display more natural images.

[0079] It will be apparent to those skilled in the art that various modifications and variations can be made in the method of driving a liquid crystal display device of the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A method of driving a liquid crystal display device, comprising:

inputting source image data, each of which has one of m gray level values, wherein m is a natural number;

defining T error data from the source image data, wherein the error data have top k gray level values, and T and k are a natural number;

generating conversion image data having larger gray level values than the source image data using one having a largest gray level value from the source image data excluding the error data;

inputting the conversion image data to a liquid crystal panel;

controlling a brightness of a backlight unit in accordance with the conversion image data;

forming a bitmap corresponding to the conversion image data, wherein the bitmap shows positional distribution of pixels with the error data;

counting error areas by scanning the bitmap, wherein each of the error areas includes the predetermined number of the pixels having the error data; and

controlling the T according to the number of the error areas.

2. The method according to claim 1, wherein the source image data are n bit digital data, n is a natural number, and m equals to 2^n .

3. The method according to claim 1, wherein the step of generating the conversion image data includes:

determining a maximum image data by detecting the one having a largest gray level value from the source image data excluding the error data;

calculating a modulation factor by data-modulating the maximum image data such that the maximum image data has the mth gray level value; and

generating the conversion image data by multiplying the source image data by the modulation factor.

4. The method according to claim 1, wherein the brightness of the backlight unit is controlled by the modulation factor.

5. The method according to claim 1, wherein the step of controlling the brightness of the backlight unit includes decreasing the brightness of the backlight unit.

6. The method according to claim 1, wherein the step of forming the bitmap includes displaying the pixels with the error data as 1 and displaying pixels without the error data as 0.

7. The method according to claim 1, wherein the step of counting the error area includes:

defining a scan unit having a resolution of $A \times B$, wherein A and B are a natural number;

counting the number of the pixels with the error data in each scan unit of the bitmap; and

counting the error areas when the number of the pixels with the error data in each scan unit is more than Q, wherein Q is a natural number.

8. The method according to claim 7, wherein the A and B are 4.

9. The method according to claim 7, wherein the Q is more than $(A \times B)/2$ and less than $A \times B$.

10. The method according to claim 1, wherein controlling the T includes:

setting up the reference number of the error areas; and increasing the T when the number of the counted error areas is less than the reference number and decreasing the T when the number of the counted error areas is above the reference number.

11. The method according to claim 1, wherein the source image data correspond to one frame of the liquid crystal panel.

12. A method of driving a liquid crystal display device, comprising:

receiving one of ON and OFF signals,

wherein when the ON signal is received, the method includes inputting source image data, each of which has one of m gray level values, wherein m is a natural number;

defining T error data from the source image data, wherein the error data have top k gray level values, and T and k are a natural number;

generating conversion image data having larger gray level values than the source image data using one having a largest gray level value from the source image data excluding the error data;

inputting the conversion image data to a liquid crystal panel;

controlling a brightness of a backlight unit in accordance with the conversion image data;

forming a bitmap corresponding to the conversion image data, wherein the bitmap shows positional distribution of pixels with the error data;

counting error areas by scanning the bitmap, wherein each of the error areas includes the predetermined number of the pixels having the error data; and

controlling the T according to the number of the error areas, and

wherein when the OFF signal is received, the method includes inputting source image data to the liquid crystal panel.

13. A liquid crystal display device comprising a means for changing the method of driving the liquid crystal display device of claim 12 according to the ON and OFF signals.

* * * * *

专利名称(译)	驱动液晶显示装置的方法		
公开(公告)号	US20090109170A1	公开(公告)日	2009-04-30
申请号	US12/289212	申请日	2008-10-22
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG.DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KWON KYUNG JOON AHN HEE WON KIM SUNG SOO		
发明人	KWON, KYUNG-JOON AHN, HEE-WON KIM, SUNG-SOO		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3406 G09G3/3611 G09G2360/16 G09G2330/021 G09G2320/0646		
优先权	1020070107878 2007-10-25 KR		
其他公开文献	US8363003		
外部链接	Espacenet USPTO		

摘要(译)

一种驱动液晶显示装置的方法，包括输入源图像数据，每个源图像数据具有m个灰度值中的一个，其中m是自然数，从源图像数据定义T误差数据，其中误差数据具有前k个灰度值，并且T和k是自然数，生成具有比源图像数据更大的灰度值的转换图像数据，使用具有来自源图像数据的最大灰度值的一个，不包括错误数据，输入转换图像数据液晶面板，根据转换图像数据控制背光单元的亮度，形成对应于转换图像数据的位图，其中位图显示具有误差数据的像素的位置分布，通过扫描计算误差区域位图，其中每个误差区域包括具有误差数据的预定数量的像素，并根据误差的数量控制T。

