



US 20060202935A1

(19) **United States**(12) **Patent Application Publication**
Yi(10) **Pub. No.: US 2006/0202935 A1**(43) **Pub. Date: Sep. 14, 2006**(54) **DISPALY PANEL FOR LIQUID CRYSTAL
DISPLAY****Publication Classification**(75) Inventor: **Chien-Yu Yi**, Gueishan Township (TW)(51) **Int. Cl.****G09G 3/36** (2006.01)(52) **U.S. Cl.** **345/98**

Correspondence Address:

**THOMAS, KAYDEN, HORSTEMEYER &
RISLEY, LLP****100 GALLERIA PARKWAY, NW****STE 1750****ATLANTA, GA 30339-5948 (US)**


(57)

ABSTRACT

A display panel for a liquid crystal display comprising a timing controller and a plurality of source drivers is provided. The timing controller receives a differential signal (LVDS/TMDS/DVI) to generate a plurality of TTL signals and a sync signal. Each of the source drivers comprises at least one bus directly connected to the timing controller to receive corresponding TTL signal. The timing controller comprises a clock line, coupled to the source drivers for transmission of the sync signal. Each TTL signal comprises a corresponding image information. The TTL signals, sequentially transmitted by the bus, conform to the transistor-to-transistor logic (TTL) standard.

(73) Assignee: **Quanta Display Inc.**(21) Appl. No.: **11/292,625**(22) Filed: **Dec. 2, 2005**(30) **Foreign Application Priority Data**

Mar. 8, 2005 (TW)..... 94106951

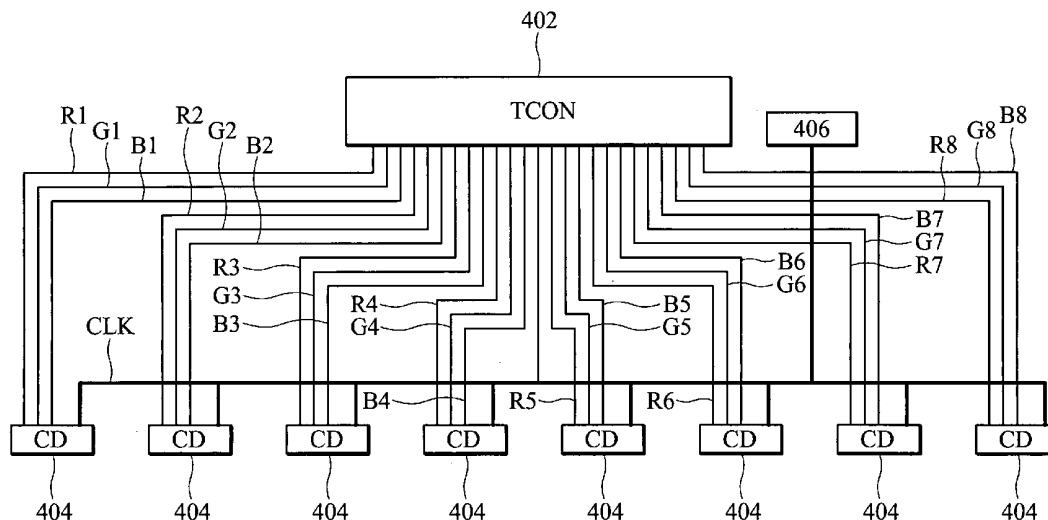

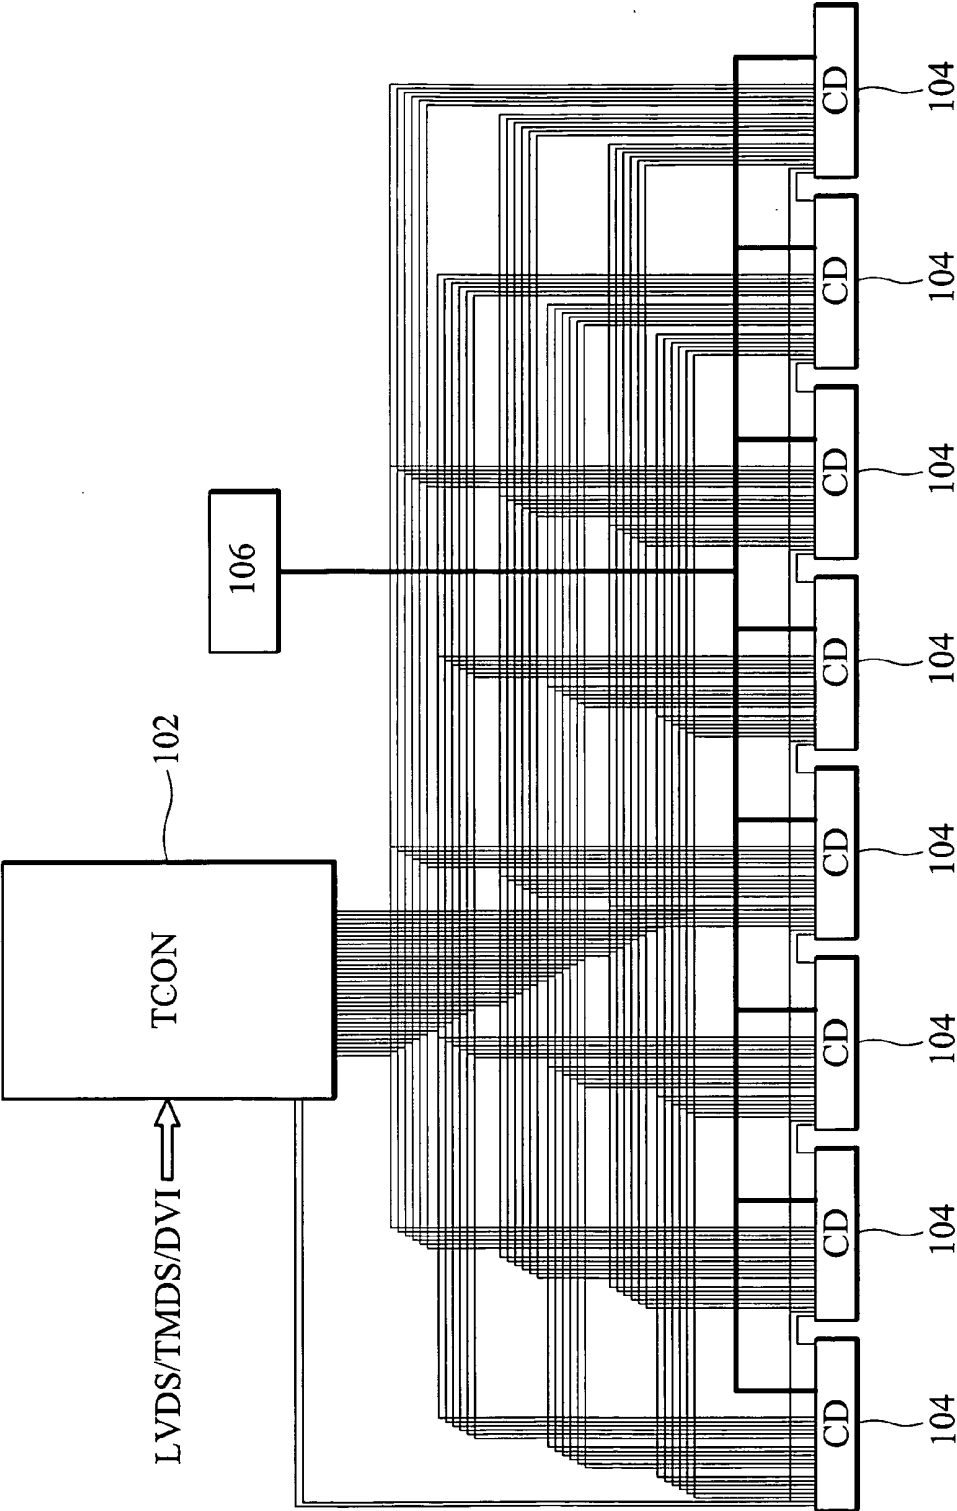


FIG. 1 (RELATED ART)

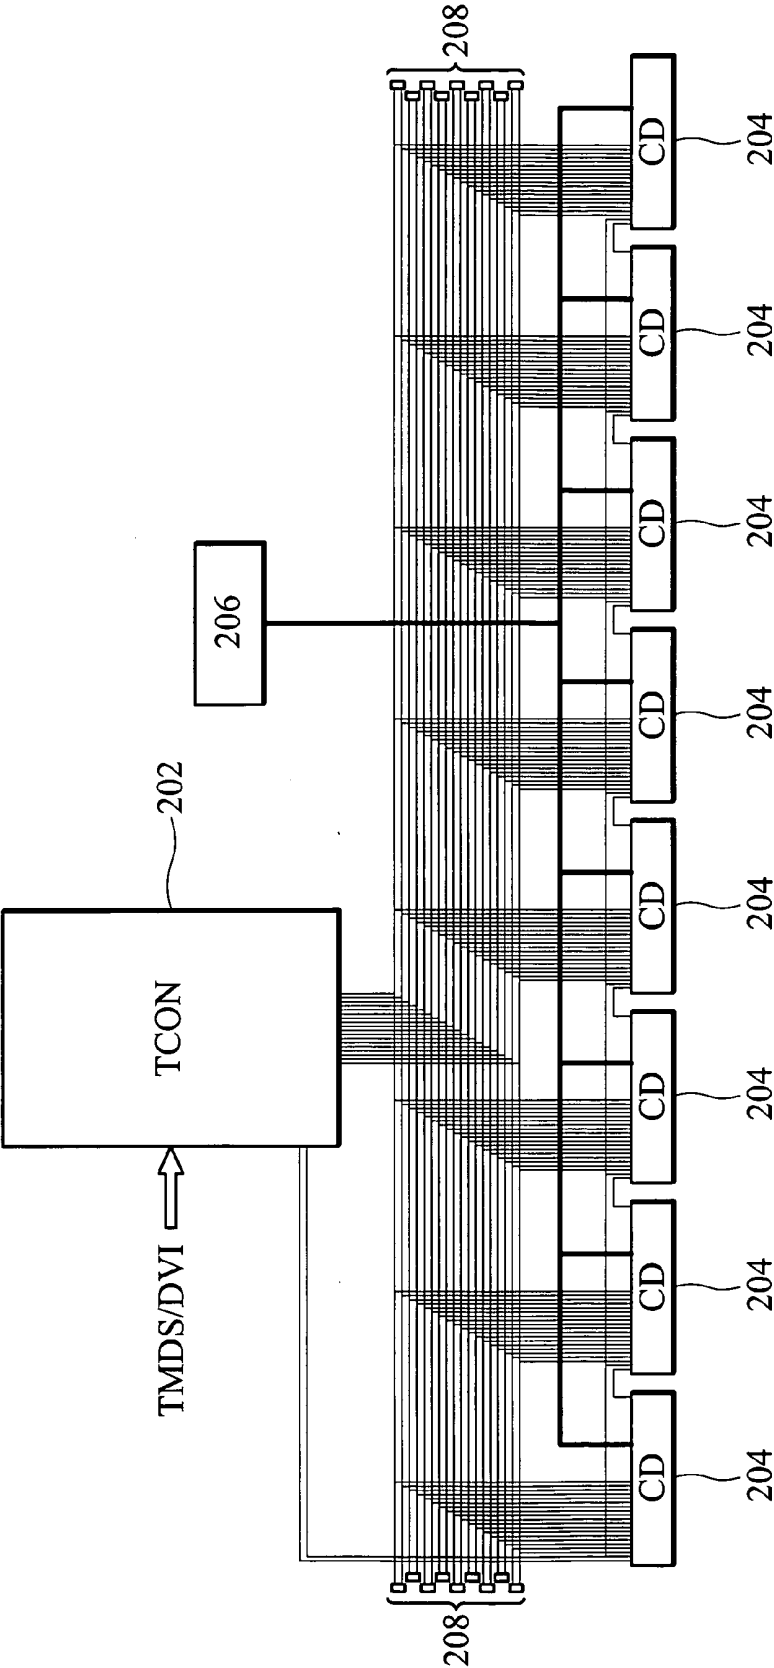


FIG. 2 (RELATED ART)

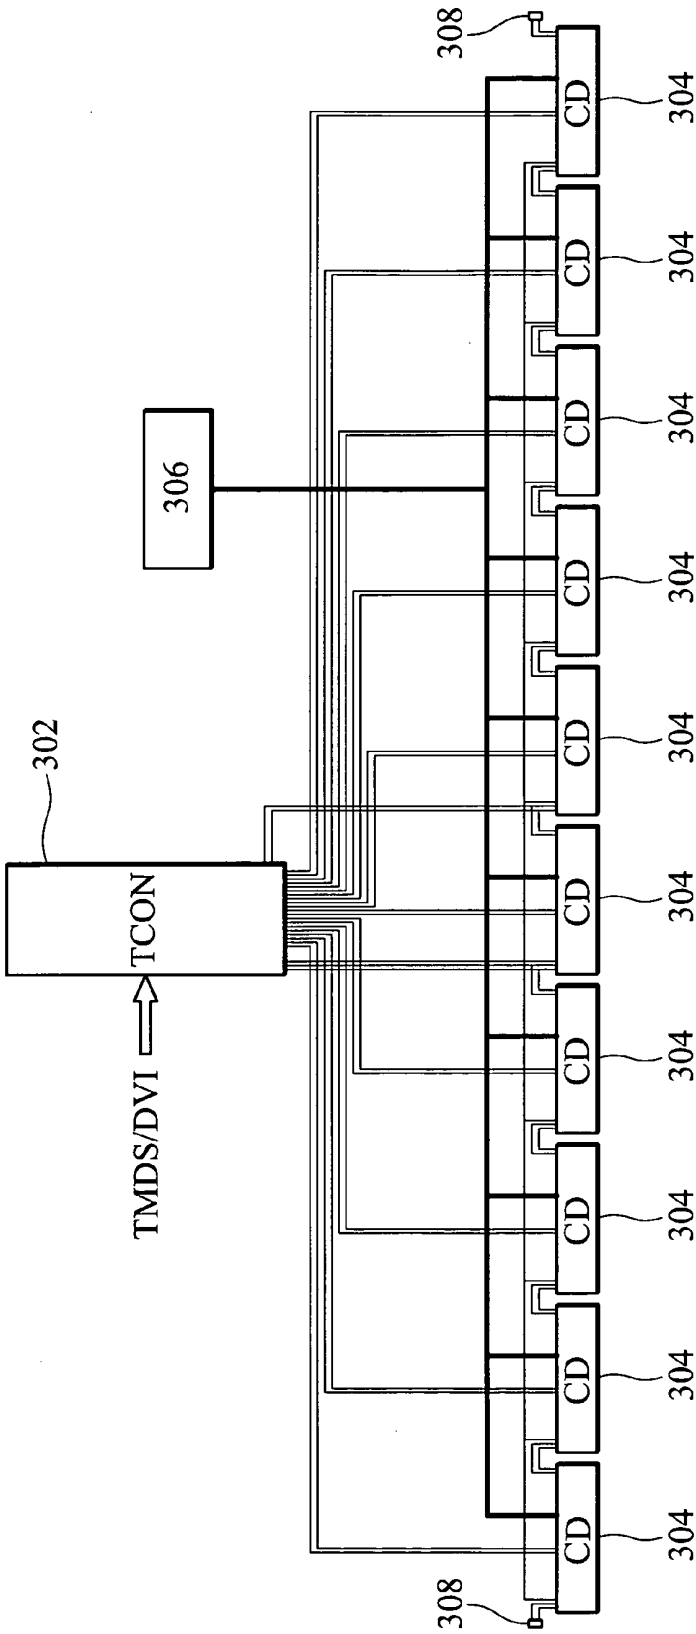


FIG. 3 (RELATED ART)

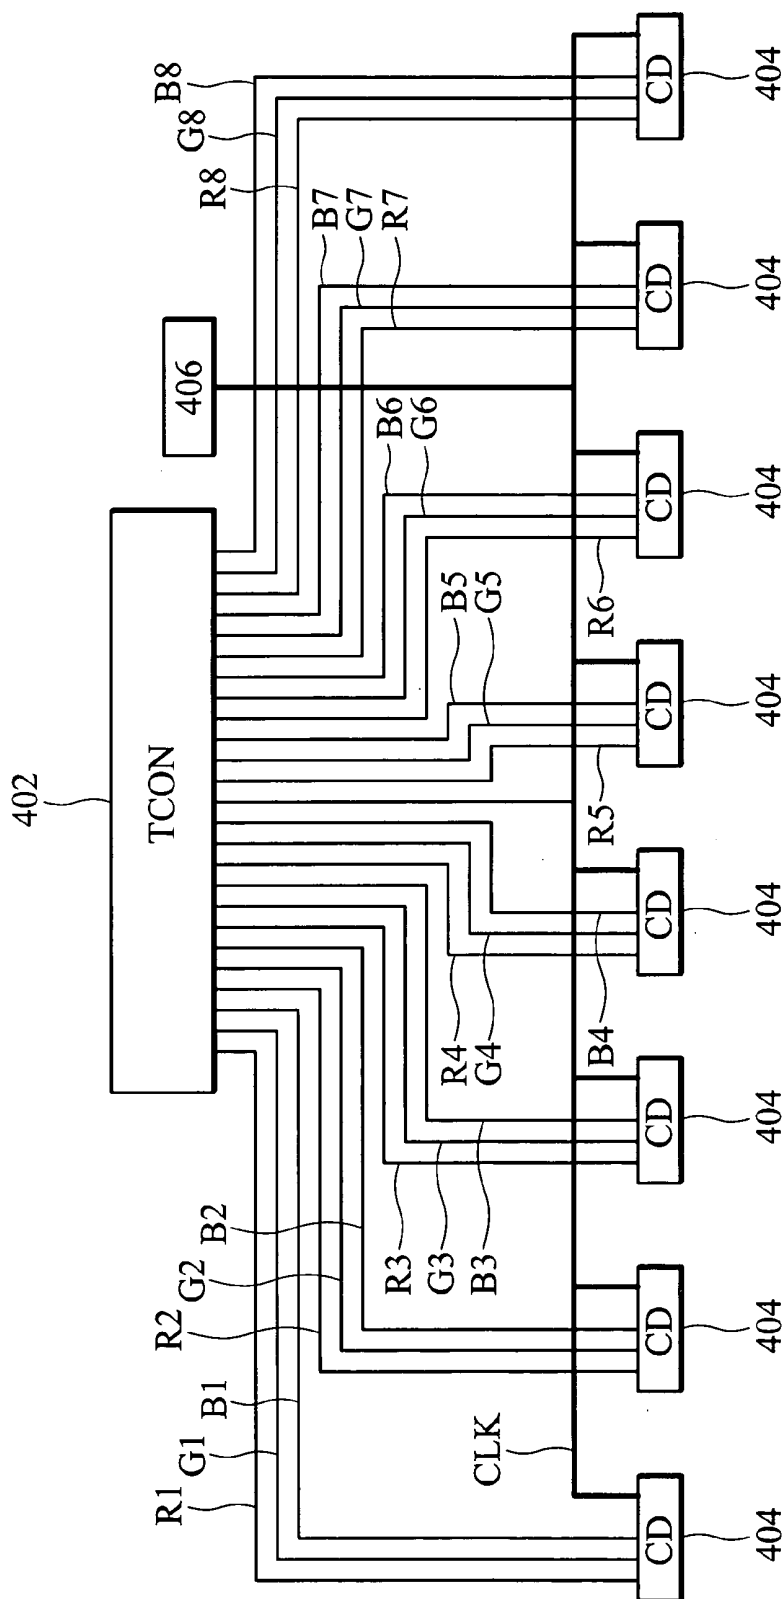


FIG. 4a

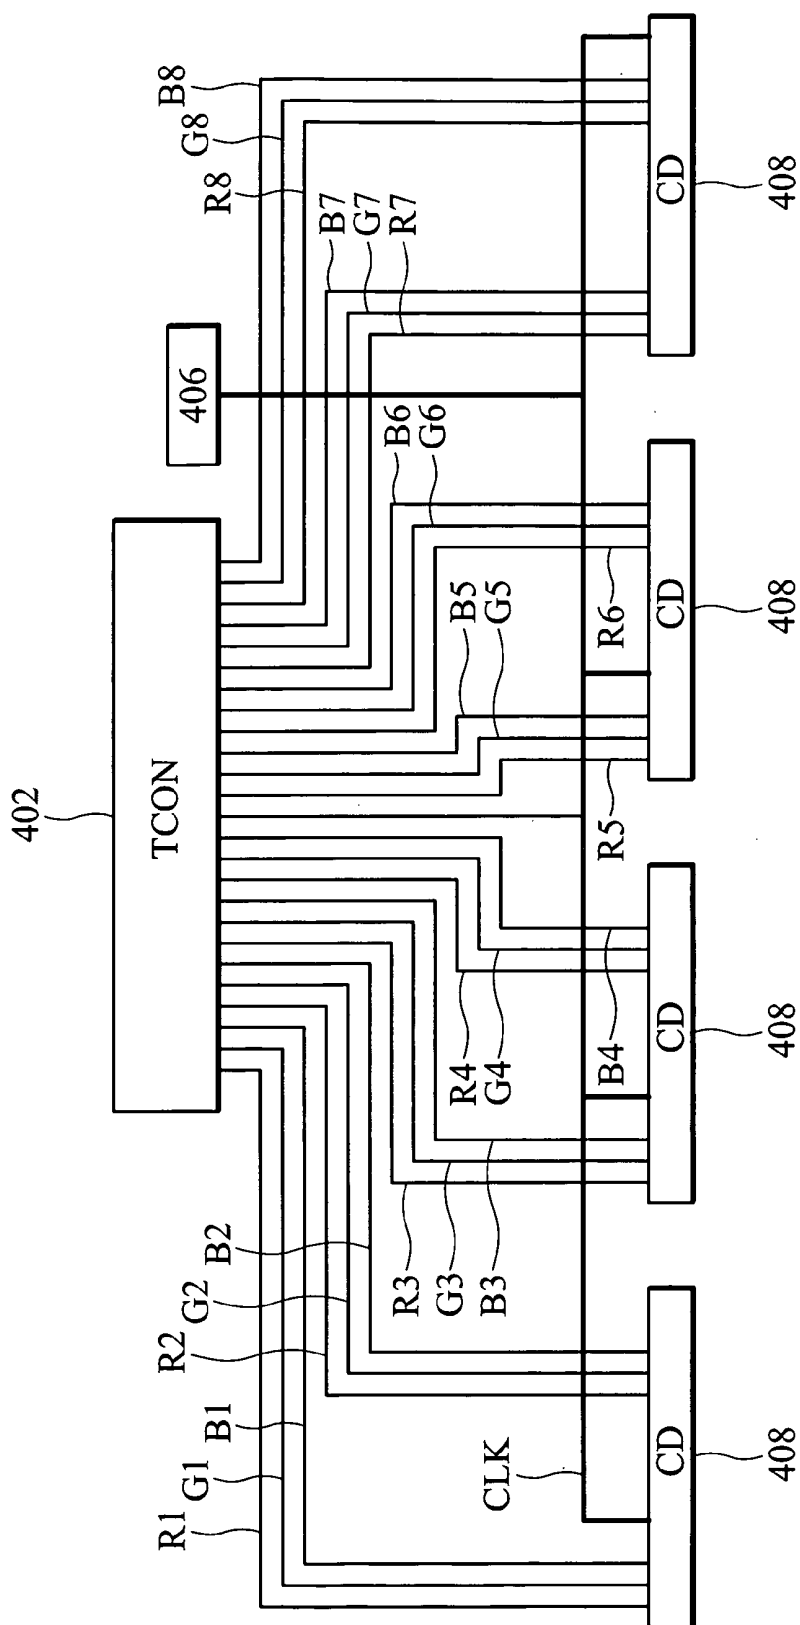


FIG. 4b

Resolution	Bit Width	Data CLK Freq. @60Hz	CD No.	Serial CLK Freq.
XGA	6	65MHz	8	24.375MHz
WXGA	6	82MHz	10	24.6MHz
SXGA	6	108MHz	10	32.4MHz
SXGA+	6	122MHz	10	36.6MHz

FIG. 5

DISPALY PANEL FOR LIQUID CRYSTAL DISPLAY**BACKGROUND OF THE INVENTION**

[0001] 1. Field of the Invention

[0002] The invention relates to a liquid crystal display, and in particular, to a liquid crystal display circuit design.

[0003] 2. Description of the Related Art

[0004] **FIG. 1** shows a conventional display panel. The display panel comprises a timing controller (TCON) **102** for receiving differential signals like LVDS/TMDS/DVI, and two buses each coupled to a plurality of source drivers **104**. For example, all of the odd source drivers **104** may couple to the one bus, while all the even source drivers **104** may couple to the other bus. Given a 6-bits gray level, a total of 18 transmission lines is required to deliver red, blue and green information from the TCON **102** to each source driver **104**. Thus two buses utilize 36 transmission lines in total. If the gray level is 8 bits, 48 transmission lines are required. After the TCON **102** receives the LVDS/TMDS/DVI signals, the corresponding image information is transmitted to the source drivers **104** via the transmission lines. Signals on the transmission lines electrically conform to the TTL logic standard, and have a voltage of 3.3 V or 5V. The display panel also comprises a reference voltage generator **106**, providing voltages based on gamma correction parameters.

[0005] **FIG. 2** shows a conventional advanced display panel. The TCON **202** comprises a bus, both ends of which are equipped with terminators **208**. All source drivers **204** simultaneously couple to the bus, thus the number of required transmission lines is reduced by half that of **FIG. 1**. Given a 6-bits gray level, the TCON **202** only requires 18 transmission lines to couple all source drivers **204**. After the TCON **202** receives the LVDS/TMDS/DVI signals, image information is delivered to the source drivers **204** via the transmission lines, and signals on the transmission lines electrically conform to the reduced swing differential signal standard (RSDS). Similarly, the display panel also comprises a reference voltage generator **206**, providing voltages based on gamma correction parameters.

[0006] **FIG. 3** shows a conventional point-to-point display panel. The TCON **302** connects to each source driver **304** with individual transmission lines, and signals on the transmission lines conform to the point-to-point differential signal (PPDS) standard. The transmission lines are exclusive for each individual source driver **304**, therefore the bus clock need not be shared, and the transmission rate can be significantly increased. Moreover, only a few transmission lines are required to deliver red, green, blue, and additional data. Similarly, the display panel also comprises a reference voltage generator **306**, providing voltages based on gamma correction parameters.

[0007] Although PPDS reduces the number of transmission lines and the cost of PCBs, additional DC biased current is still required, thus, the power provided is inadequate for portable products. Additionally, with the progress of current technology, logic voltage requirement have been reduced from 5V to 1.8V/1.5V, making the implementation of differential signal will be more difficult.

BRIEF SUMMARY OF INVENTION

[0008] A detailed description is given in the following embodiments with reference to the accompanying drawings.

[0009] An exemplary embodiment of a display panel for a liquid crystal display circuit comprises a timing controller and a plurality of source drivers. The timing controller receives a LVDS/TMDS/DVI signal to generate a plurality of TTL signals and a sync signal. Each source driver comprises at least one bus directly connected to the timing controller for receiving a corresponding TTL signal. The timing controller comprises a clock line, coupled to the source drivers for transmission of the sync signal. Each TTL signal carries corresponding image information. The TTL signals, sequentially transmitted on the bus, conform to transistor-to-transistor logic (TTL) standard.

[0010] Each bus comprises three transmission lines that transmit a first TTL signal, a second TTL signal and a third TTL signal conforming to the TTL standard respectively. The first TTL signal, sequentially transmitted in one of the transmission lines, may carry red information. The second TTL signal, sequentially transmitted in another of the transmission lines, may carry green information. The third TTL signal, sequentially transmitted in the other of the transmission lines, may carry blue information.

[0011] A gamma reference table, coupled to the source drivers for providing gamma correction parameters, may be provided in the display panel. DC voltages of the first, second and third TTL signals are zero biased. The frequency of the first, second and third TTL signals is determined by the equation:

$$\text{Frequency} = (\text{the clock of the timing controller} \times \text{the number of the bit of the gray level}) / (\text{the number of the source drivers} \times 2)$$

[0012] Each source driver may comprise two buses directly connected to the timing controller.

BRIEF DESCRIPTION OF DRAWINGS

[0013] The following detailed description, given by way of example and not intended to limit the invention solely to the embodiments described herein, will best be understood in conjunction with the accompanying drawings, in which:

[0014] **FIG. 1** shows a conventional display panel;

[0015] **FIG. 2** shows a conventional advanced display panel;

[0016] **FIG. 3** shows a conventional point-to-point display panel;

[0017] **FIG. 4a** shows an embodiment of the display panel according to the invention;

[0018] **FIG. 4b** shows another embodiment of the display panel according to the invention; and

[0019] **FIG. 5** is a transmitted rate table respective to display resolution.

DETAILED DESCRIPTION OF INVENTION

[0020] A detailed description of the present invention is provided in the following.

[0021] **FIG. 4a** shows an embodiment of the display panel according to the invention. Each source driver **404** is individually connected a TCON **402** via exclusive transmission lines, such as R1, G1, and B1 to R8, G8, and B8. Each transmission line exclusively delivers the information of red, green or blue. The TCON **402** also comprises a clock line

CLK coupled to each source driver **404**, providing a sync signal for sync control. The display panel also comprises a reference voltage generator **406** coupled to each source driver **404**, providing gamma correction parameters. In this case, the TCON **402** utilizes a total of 24 transmission lines. The number of the transmission lines of the embodiment is more than the number of the transmission lines of the **FIG. 2**, however, the number of the bits of the gray level is not limited to 6 bits. The transmission lines Rx, Gx and Rx are not limited to delivering red, green and blue information. Specifically in this architecture, the reference voltage generator **406** can be eliminated, and the corresponding gamma correction parameters can be generated from the TCON **402** and delivered to the source drivers **404** via the transmission lines.

[0022] **FIG. 4b** shows another embodiment of the display panel according to the invention. The display panel comprises four source drivers **408**, each comprises two set of RGB transmission lines coupled to the TCON **402**. The source driver **408** is a merged version of the source driver **404** in **FIG. 4a**, therefore a total number of required source drivers is reduced.

[0023] **FIG. 5** is a transmitted rate table of display resolution. Since the number of transmission lines each source driver replies on is fixed, the transmission rate is proportional to the data quantity. Typically, the clock rate of a TCON varies from screen resolution. For example, the TCON clock rate is 65 MHz under a 60Hz XGA mode, where 6 bits of gray level of red, green, or blue is given, and the source driver number is 8. Consider that both a rising edge and a falling edge of the TCON clock are effective triggers, therefore the transmission rate for each transmission line can be derived by the following equation to obtain 24.375 MHz:

$$\text{Transmission rate} = \frac{\text{(the clock of the timing controller} \times \text{the number of the bits of the gray level)}}{\text{(the number of the Source drivers} \times 2)}$$

[0024] In summary, additional DC biased voltage is not required to utilize TTL logic signal, thus providing a significant advantage when implementing low voltage products such as a 1.8V system. The transmission lines are reduced while providing unlimited bits of gray level, and the power consumption is reduced.

[0025] While the invention has been described by way of example and in terms of the preferred embodiment, it is to be understood that the invention is not limited thereto. To the contrary, it is intended to cover various modifications and similar arrangements (as would be apparent to those skilled in the art). Therefore, the scope of the appended claims

should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements.

What is claimed is:

1. A display panel for a liquid crystal display, comprising:

a timing controller, receiving a LVDS/TMDS/DVI differential signal, to generate a plurality of TTL signals and a sync signal; and

a plurality of source drivers, each comprising at least one bus directly connected to the timing controller to receive the corresponding TTL signal; wherein:

the timing controller comprises a clock line, coupled to the source drivers for a transmission of the sync signal; and

the TTL signals, sequentially transmitted in the bus, conform to the transistor-to-transistor logic standard.

2. The display panel as claimed in claim 1, wherein:

each bus comprises three transmission lines which transmit a first TTL signal, a second TTL signal or a third TTL signal respectively.

3. The display panel as claimed in claim 2, wherein:

the first TTL signal, sequentially transmitted by one of the transmission lines, comprises red information;

the second TTL signal, sequentially transmitted by one of the transmission lines, comprises green information; and

the third TTL signal, sequentially transmitted by one of the transmission lines, comprises blue information.

4. The display panel as claimed in claim 1, further comprising a gamma reference table, coupled to the source drivers to provide voltages based on gamma correction parameters.

5. The display panel as claimed in claim 2, wherein DC biased voltages of the first TTL signal, the second TTL signal and the third TTL signal are zero biased.

6. The display panel as claimed in claim 2, wherein the frequency of the first, second and third TTL signals is determined by the equation:

$$\text{frequency} = \frac{\text{(the clock of the timing controller} \times \text{the number of bits of a gray level)}}{\text{(a number of the source driver} \times 2)}$$

7. The display panel as claimed in claim 1, wherein each source driver comprises two buses directly connected to the timing controller.

* * * * *

专利名称(译)	用于液晶显示器的显示板		
公开(公告)号	US20060202935A1	公开(公告)日	2006-09-14
申请号	US11/292625	申请日	2005-12-02
[标]申请(专利权)人(译)	广辉电子股份有限公司		
申请(专利权)人(译)	广辉INC.		
当前申请(专利权)人(译)	友达光电.		
[标]发明人	YI CHIEN YU		
发明人	YI, CHIEN-YU		
IPC分类号	G09G3/36		
CPC分类号	G09G3/20 G09G3/3611 G09G2300/0426 G09G2352/00		
优先权	094106951 2005-03-08 TW		
其他公开文献	US7724225		
外部链接	Espacenet USPTO		

摘要(译)

提供一种用于液晶显示器的显示面板，包括定时控制器和多个源极驱动器。定时控制器接收差分信号 (LVDS / TMDS / DVI) 以产生多个TTL信号和同步信号。每个源极驱动器包括至少一个直接连接到定时控制器的总线，以接收相应的TTL信号。定时控制器包括时钟线，耦合到源驱动器以传输同步信号。每个TTL信号包括相应的图像信息。由总线顺序发送的TTL信号符合晶体管到晶体管逻辑 (TTL) 标准。

