



(12) **Patent Application Publication**
Lee

(10) **Pub. No.:** US 2008/0062104 A1
(43) **Pub. Date:** Mar. 13, 2008

Publication Classification

(51) **Int. Cl.**
G09G 3/36 (2006.01)

(52) U.S. Cl. 345/90

(57) **ABSTRACT**

A display device includes a plurality of gate lines transmitting gate signals wherein each gate signal has a gate-on voltage and a gate-off voltage, a plurality of data lines intersecting the gate lines and transmitting data voltages, a plurality of storage electrode lines extending in parallel to the gate lines and transmitting storage signals, a plurality of pixels arranged in a matrix wherein each pixel includes a switching element connected to a gate line and a data line, a liquid crystal capacitor connected to the switching element and a common voltage, a storage capacitor connected to the switching element and a storage electrode line, and a plurality of storage signal generators generating the storage signals based on the gate signals. The storage signal applied to each pixel has a changed voltage level immediately after the charging the data voltage into the liquid crystal capacitor and the storage capacitor is completed.

(22) Filed: **Dec. 7, 2006**

(30) **Foreign Application Priority Data**

Sep. 12, 2006 (KR) 10-2005-0120740

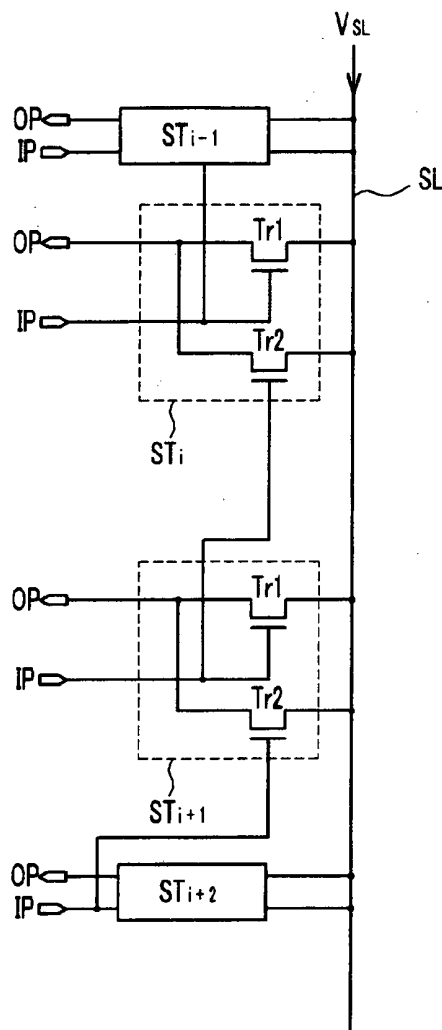


FIG. 1

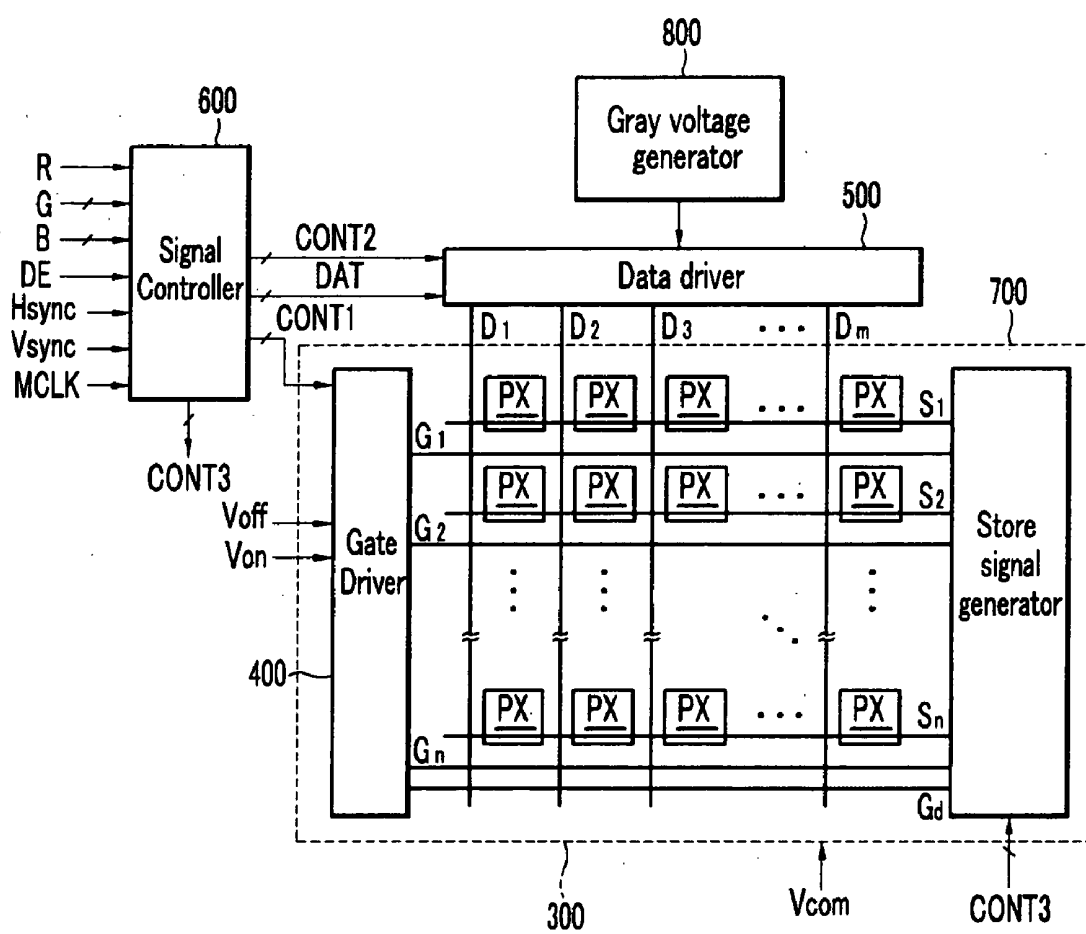


FIG.2

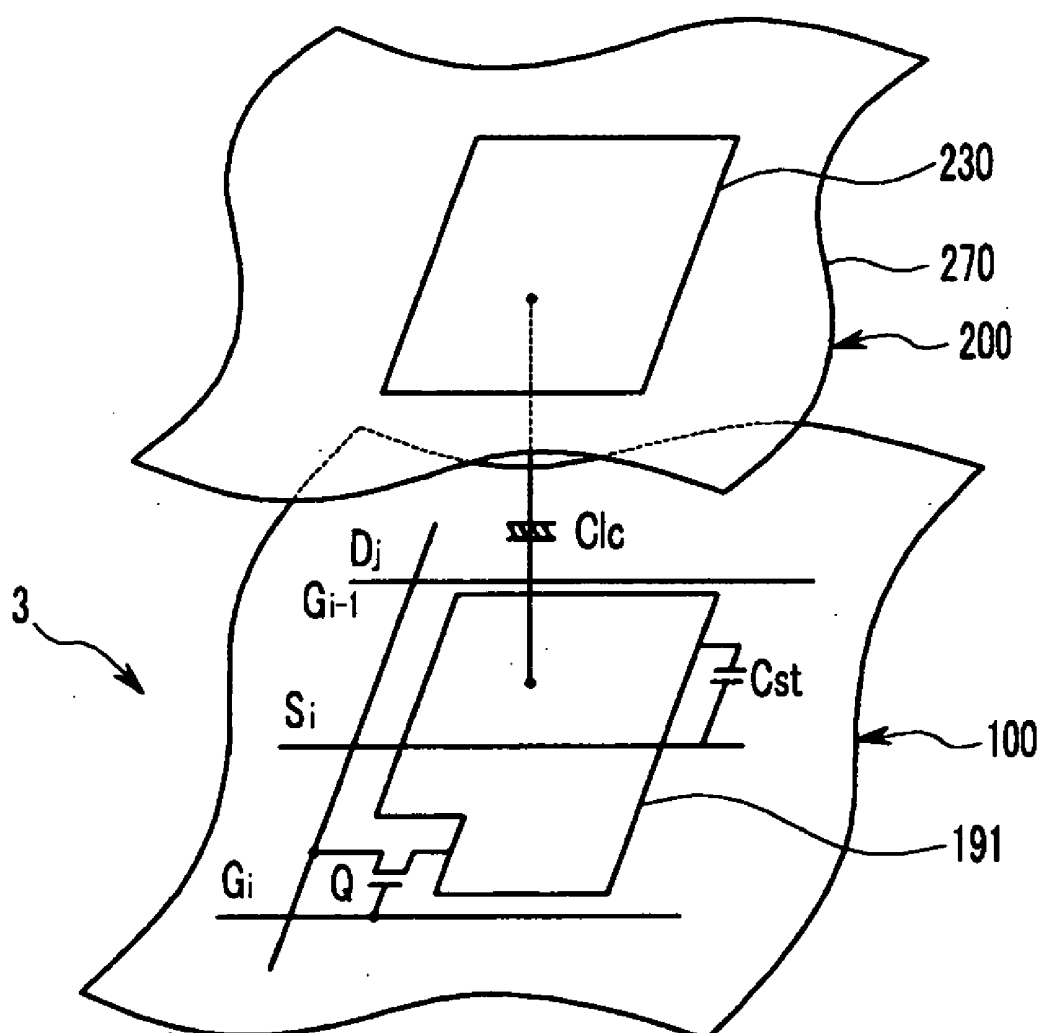


FIG.3

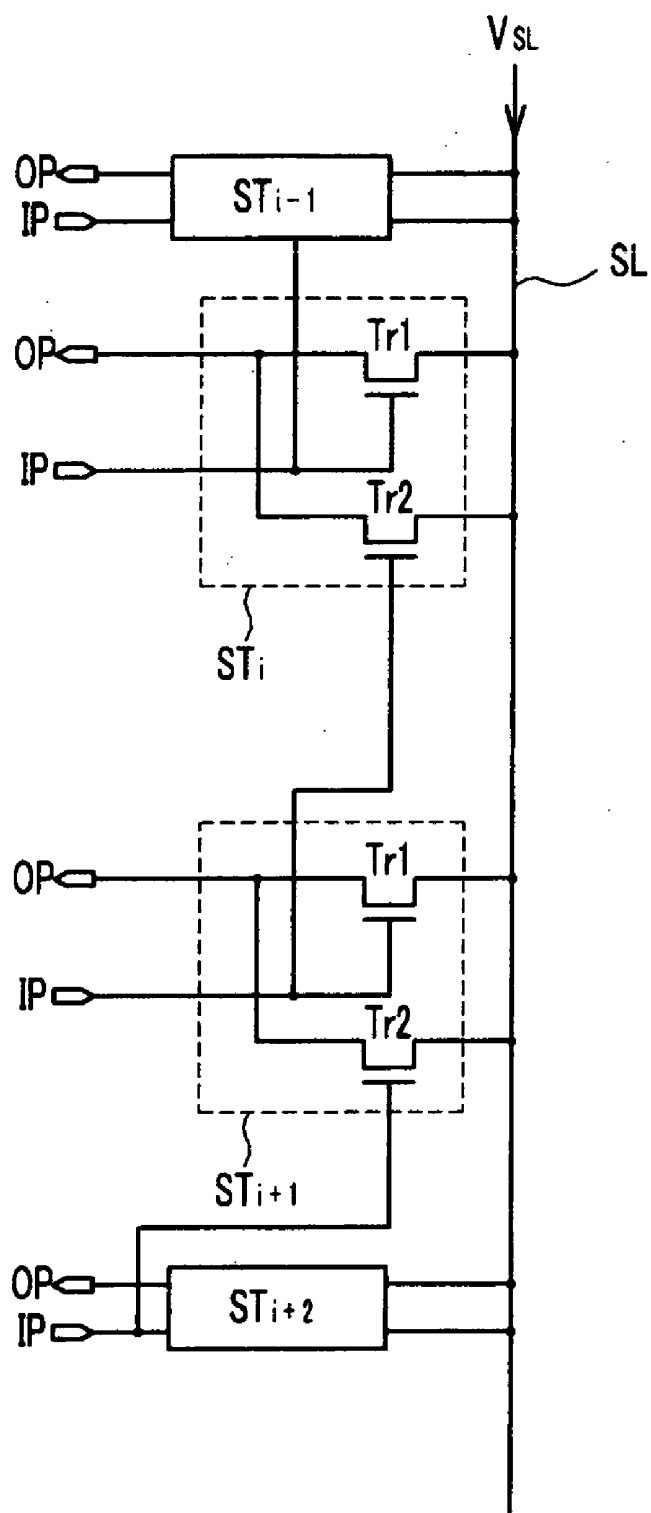


FIG.4

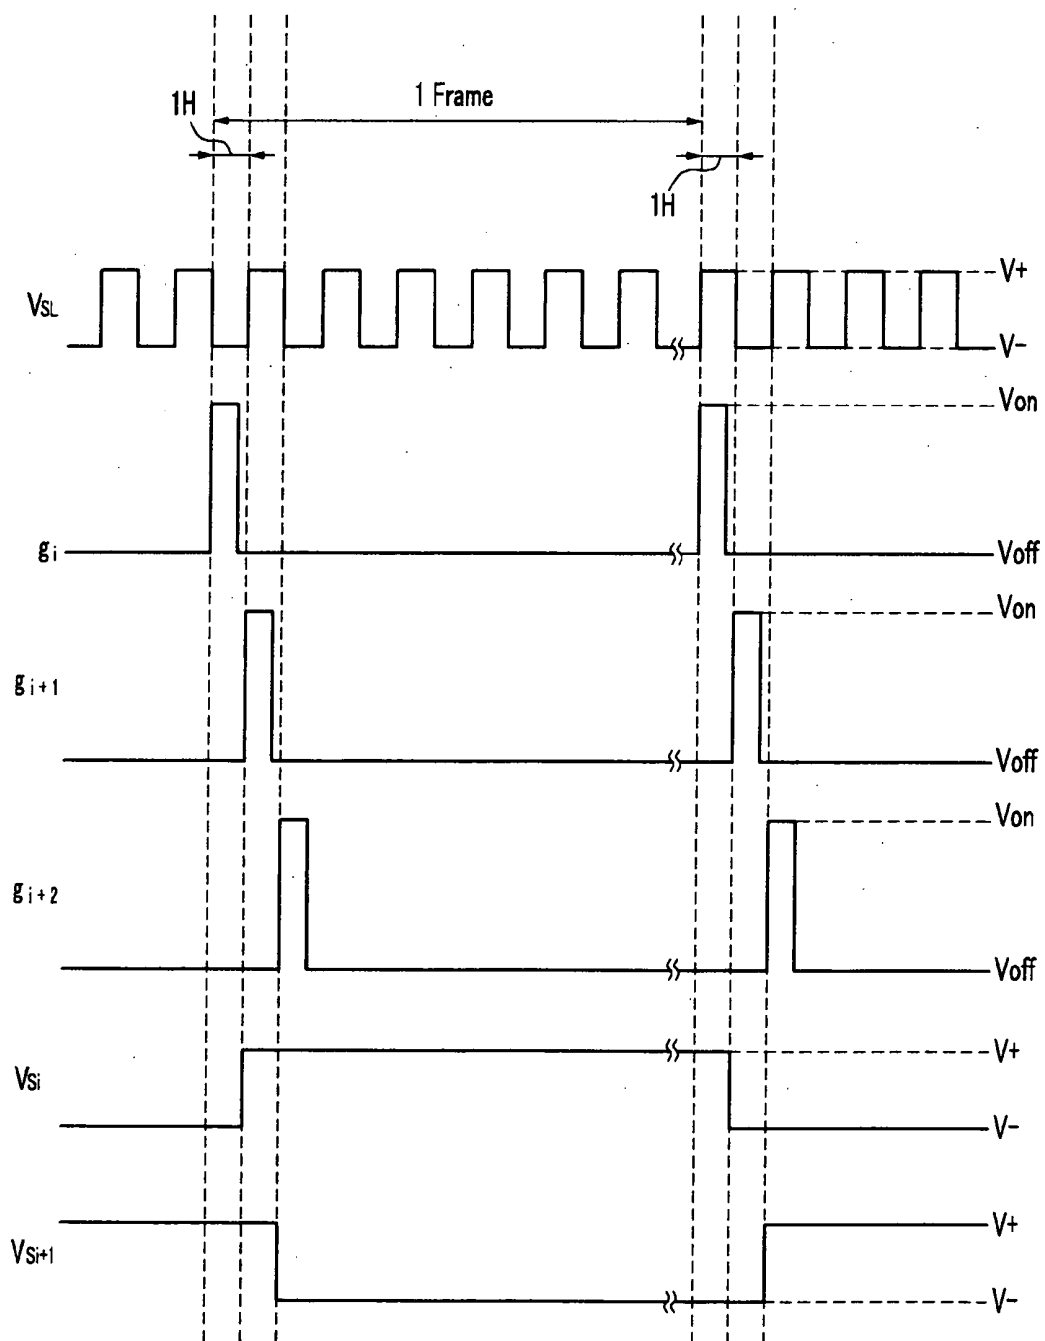


FIG. 5A

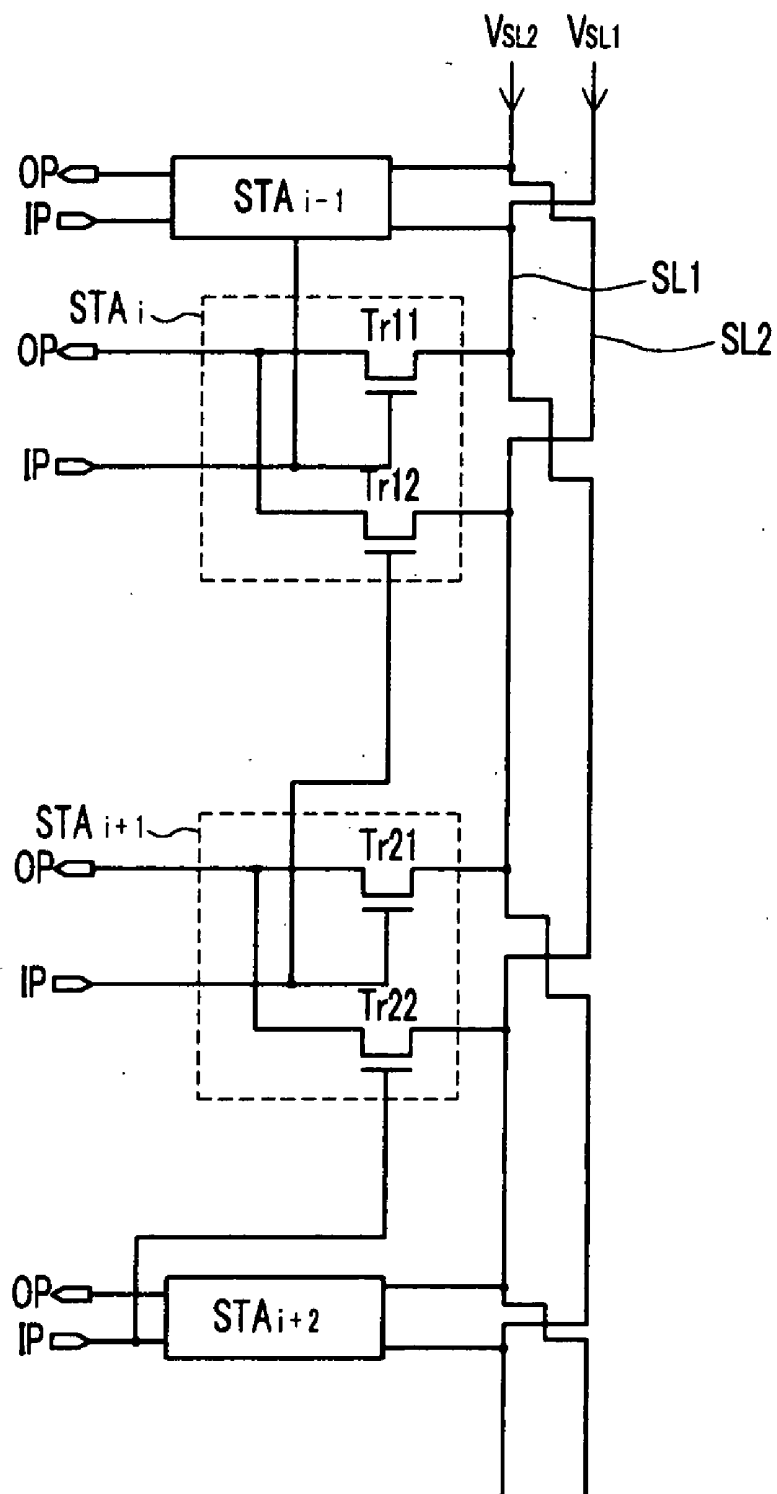


FIG. 5B

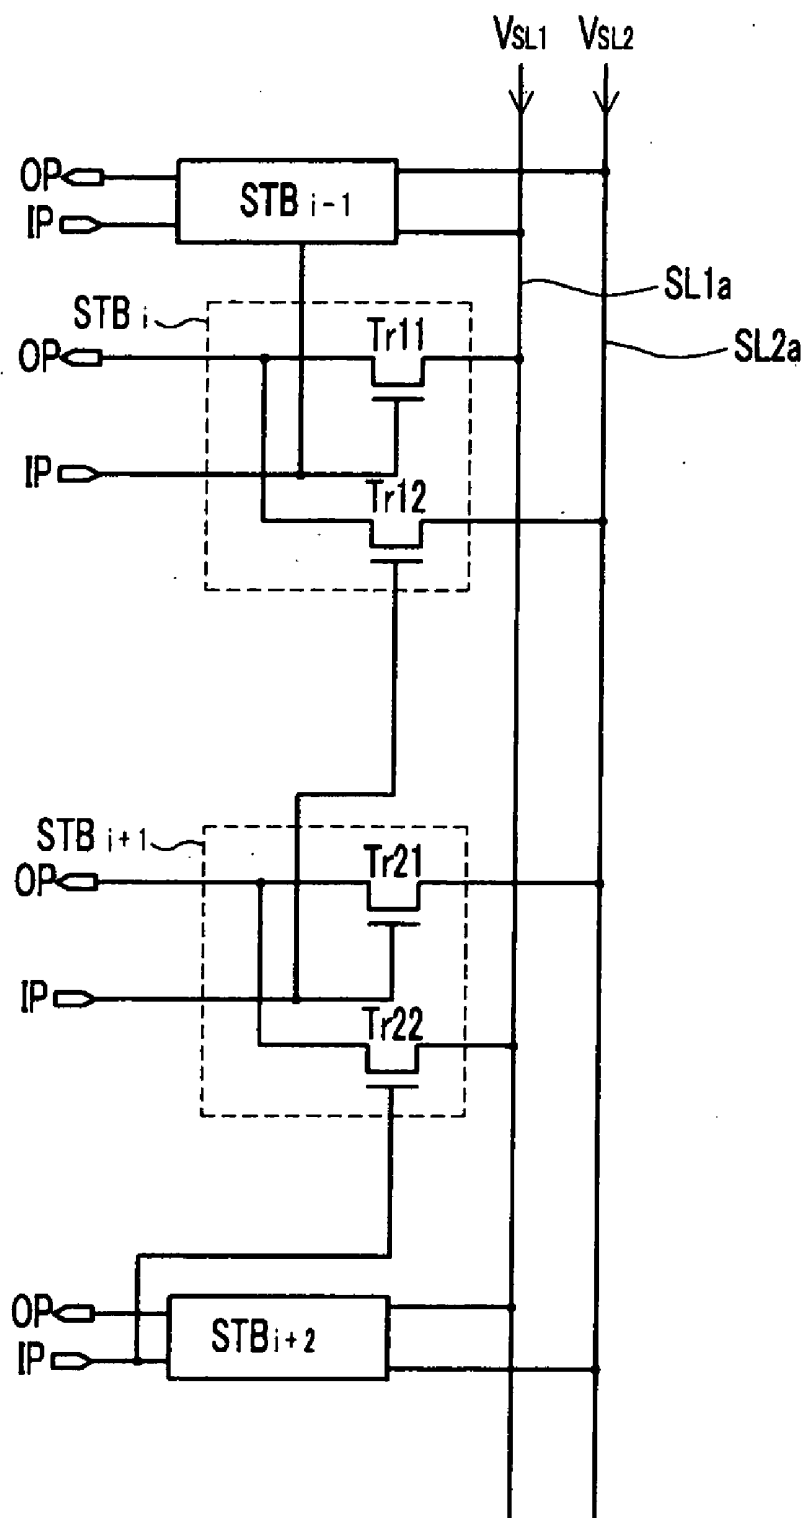


FIG. 6

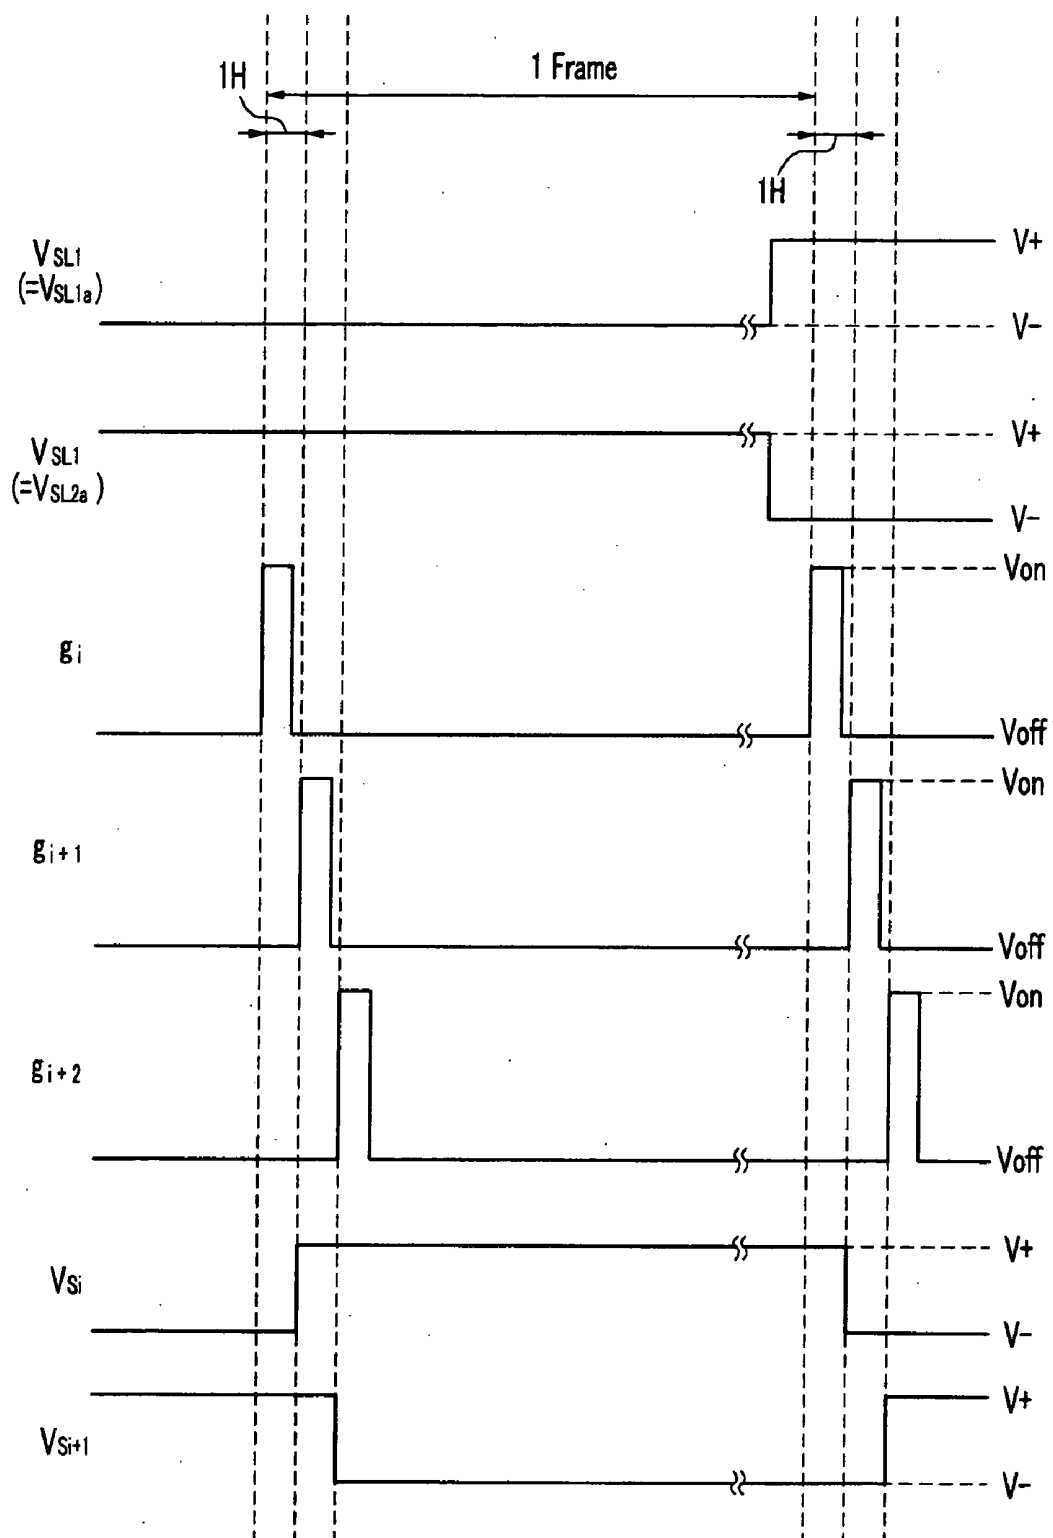


FIG. 7

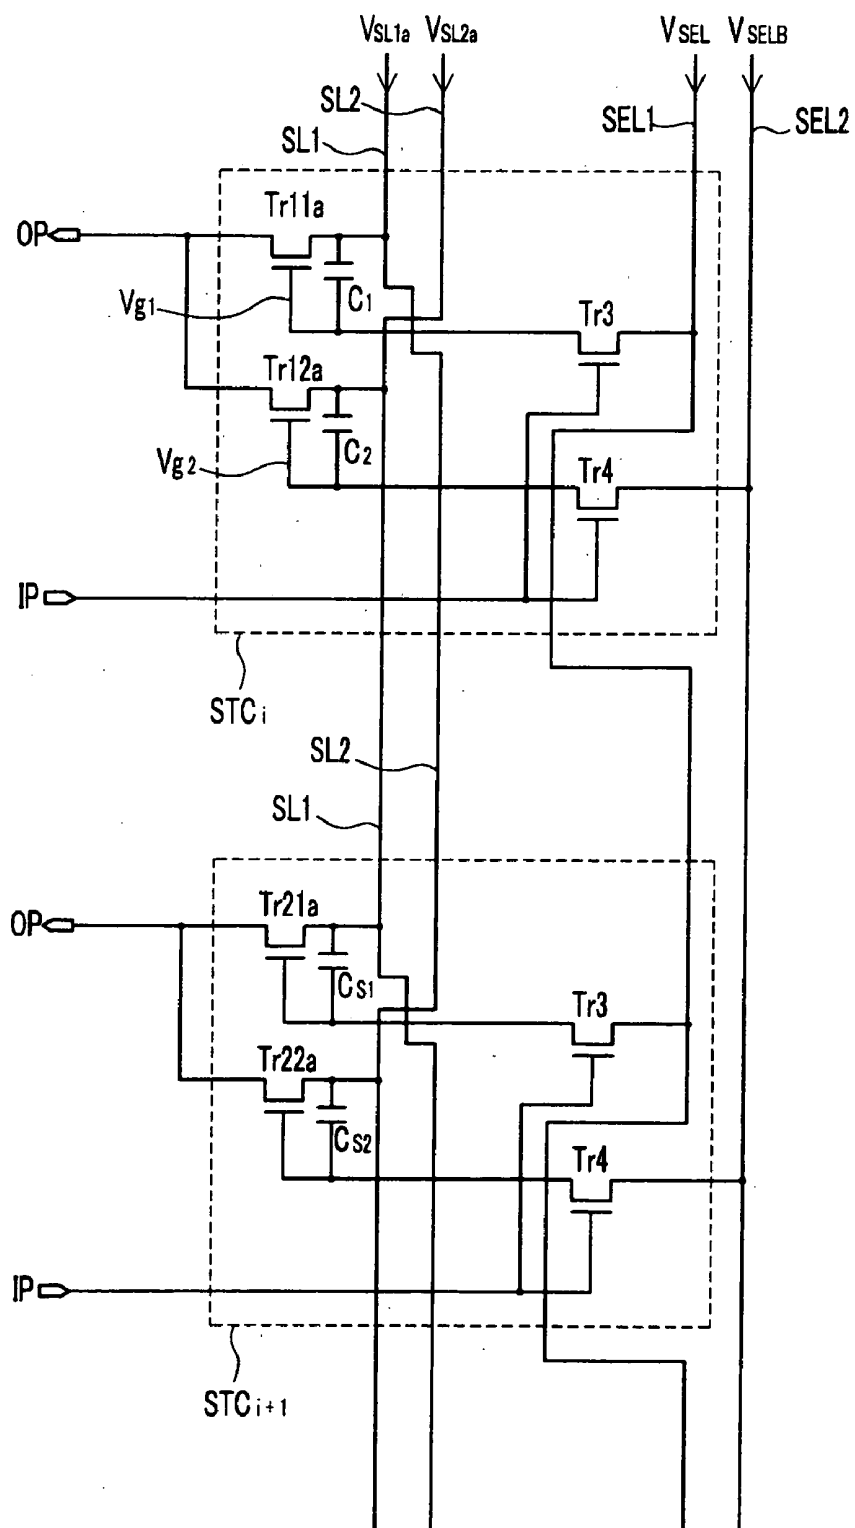


FIG.8

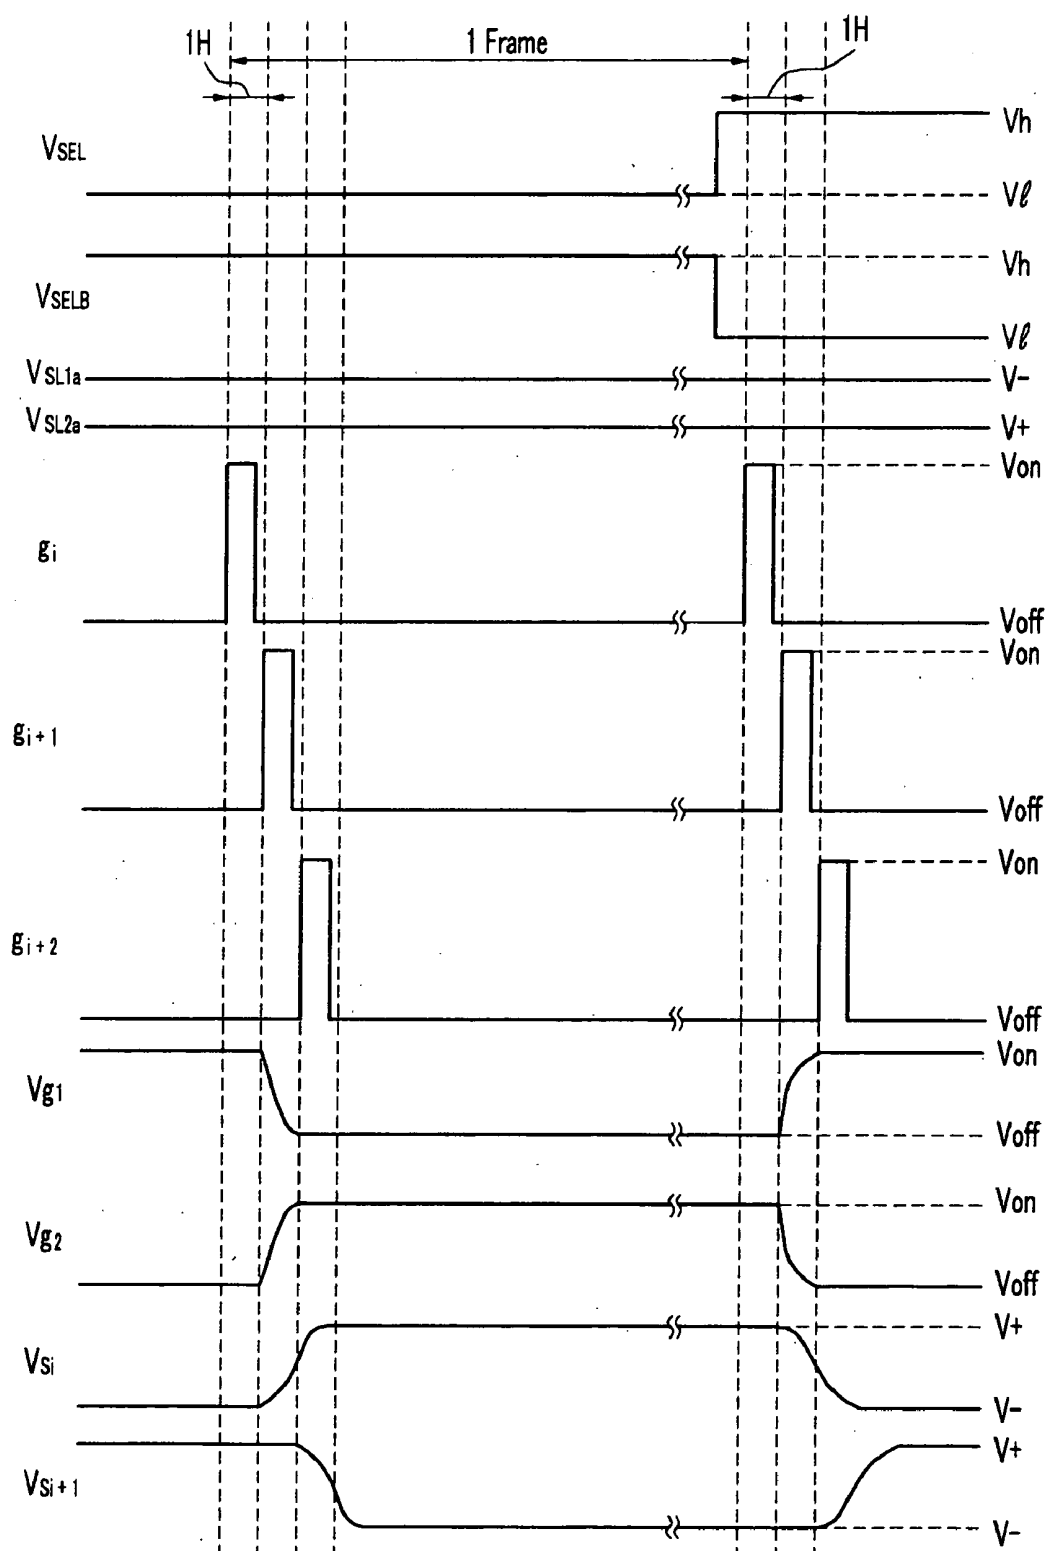


FIG.9

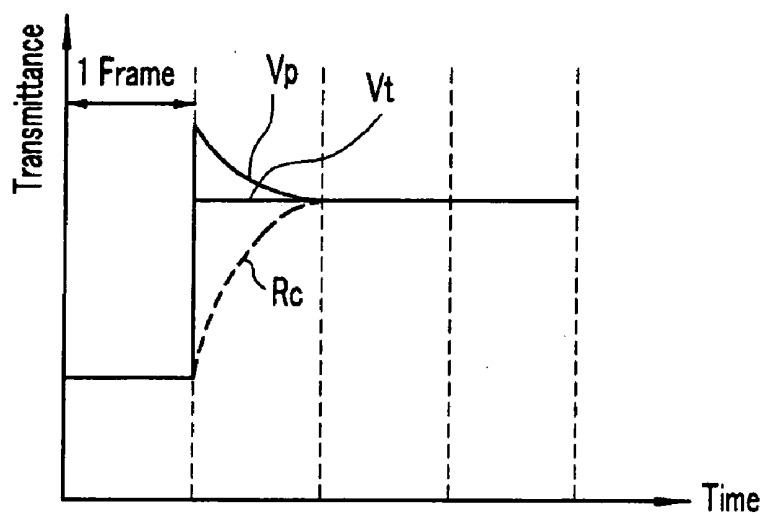


FIG.10

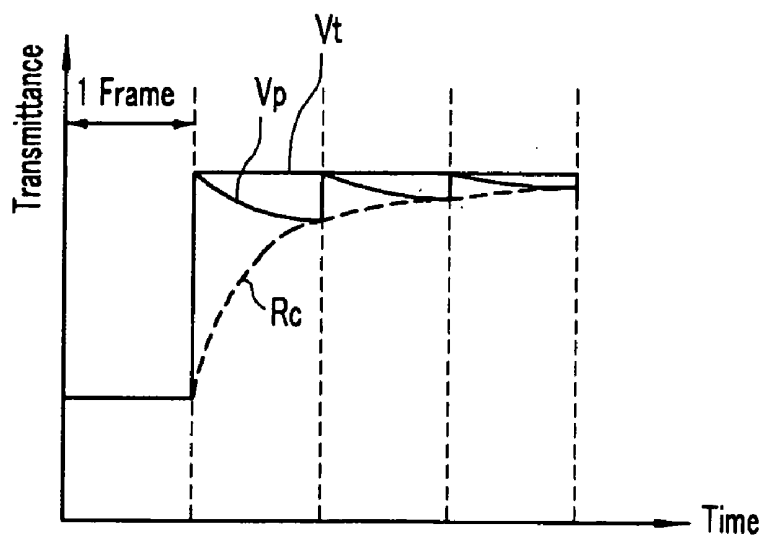


FIG.11

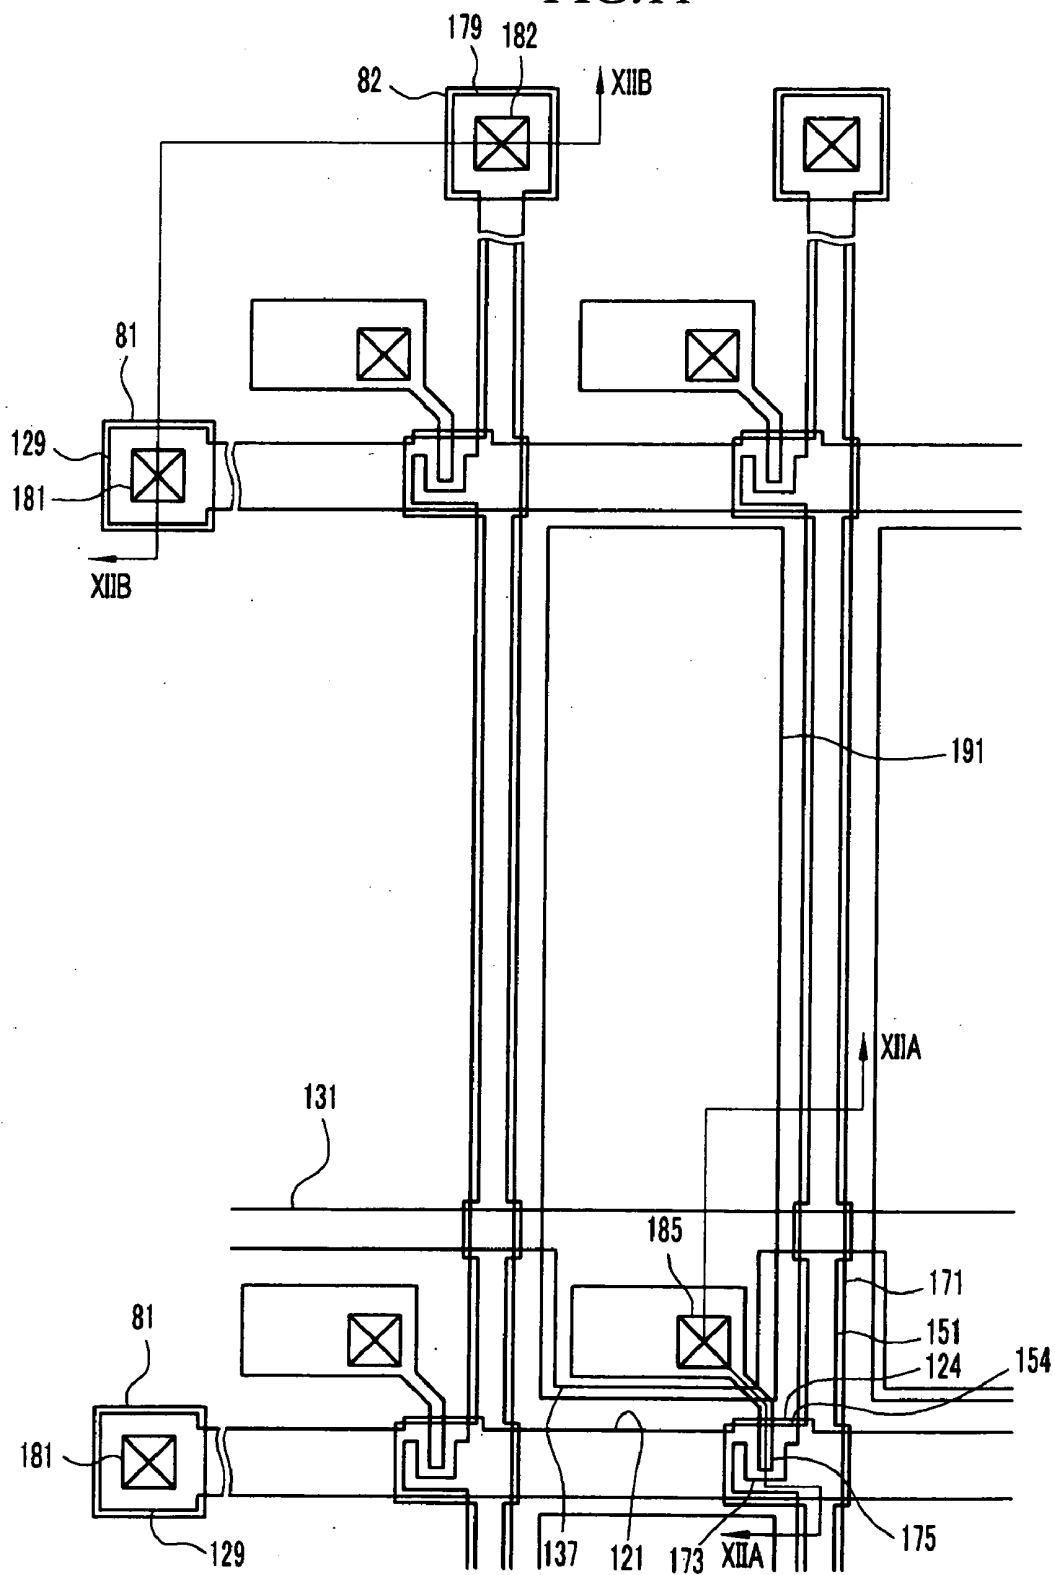


FIG.12A

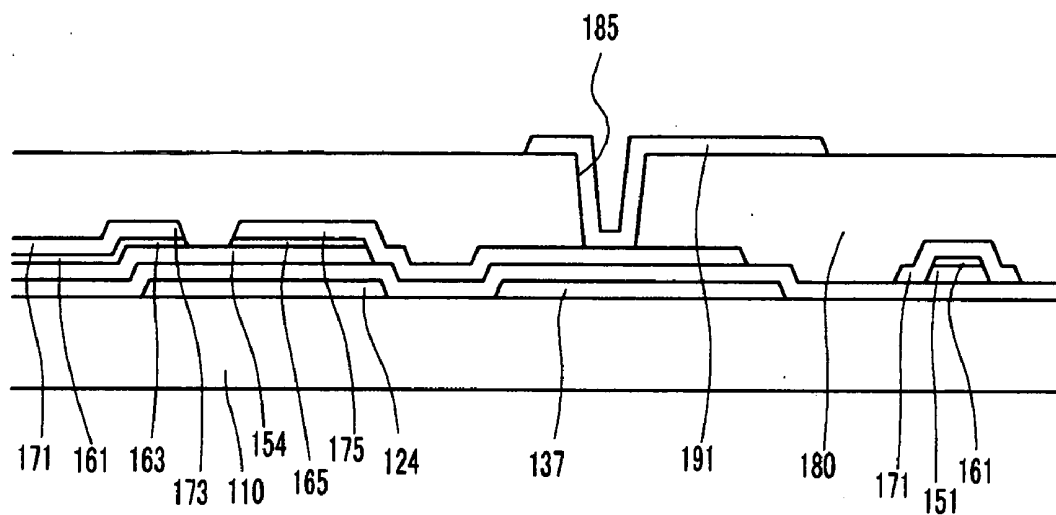


FIG.12B

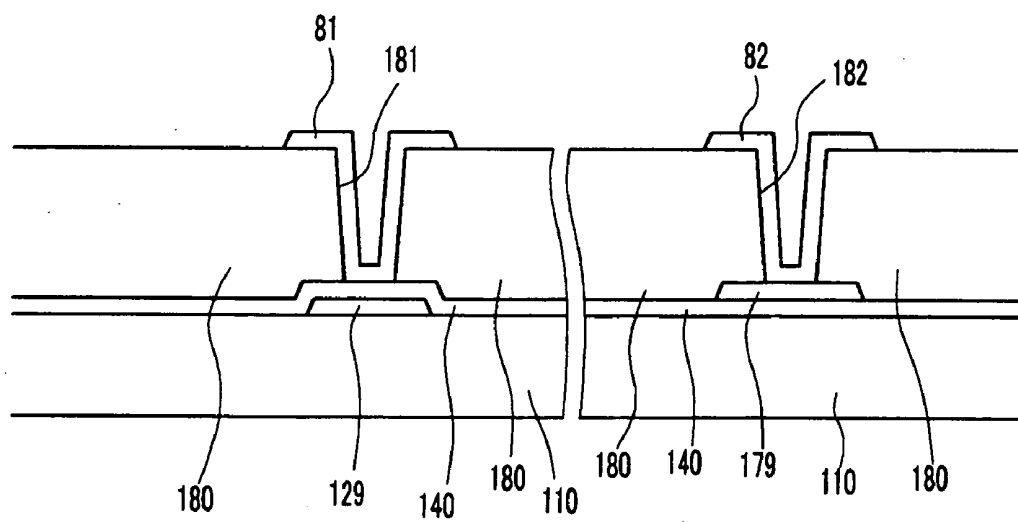


FIG.13

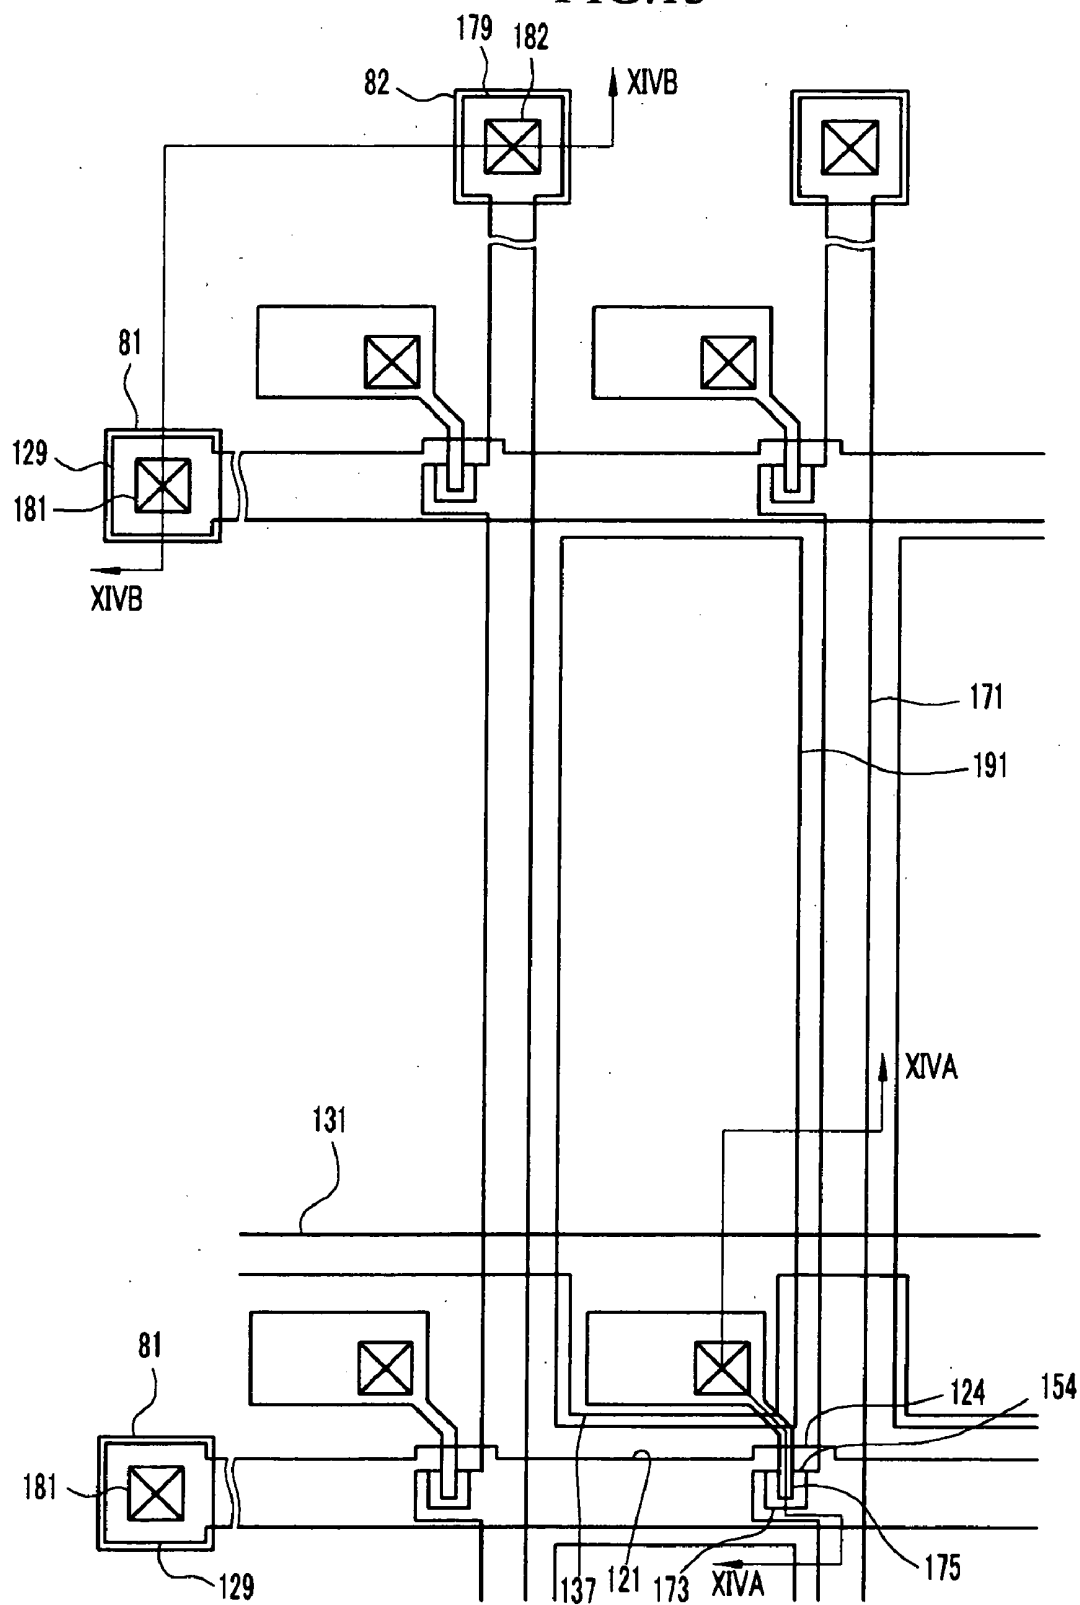


FIG.14A


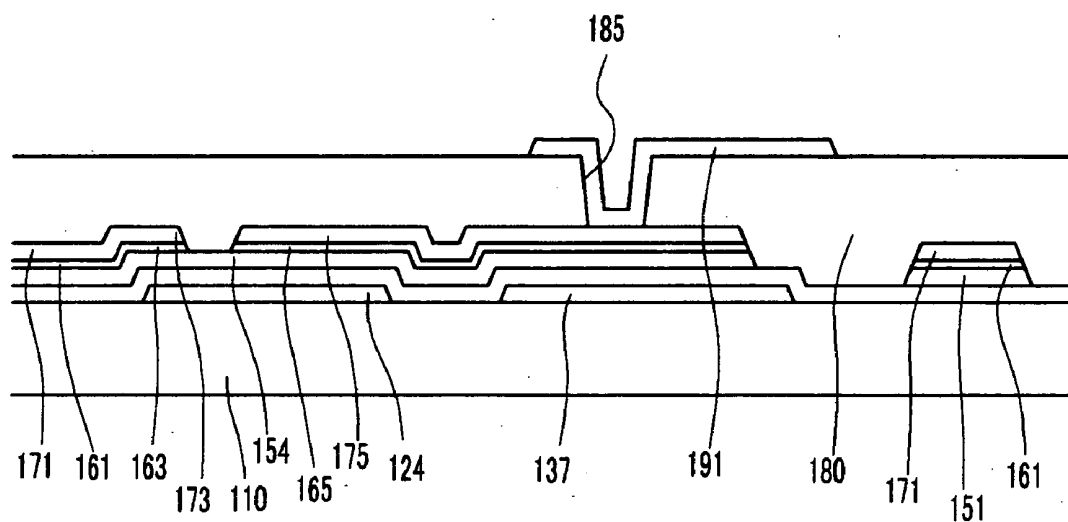


FIG.14B

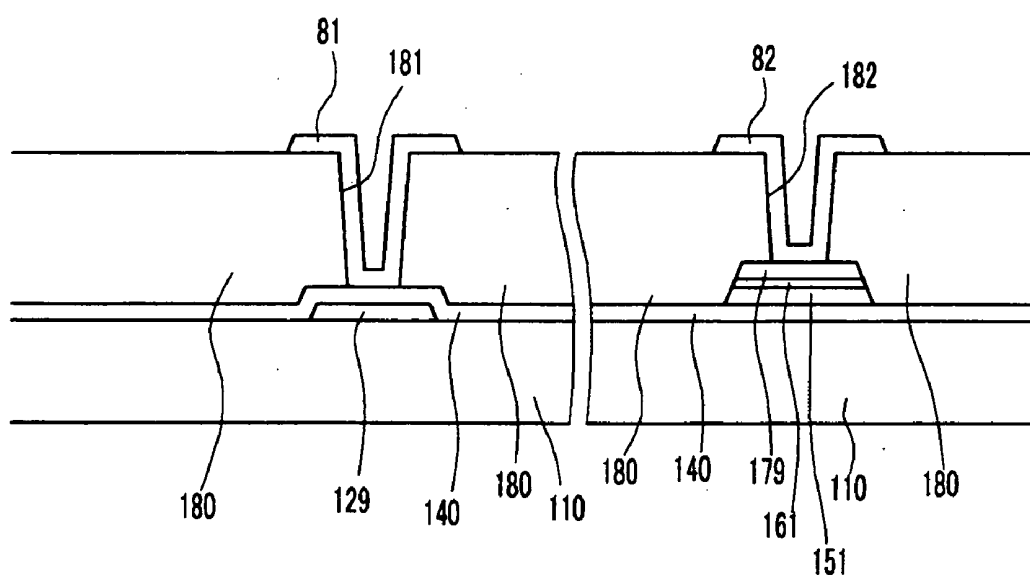

DISPLAY DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to and the benefit of Korean Patent Application No. 10-2005-0120740 filed in the Korean Intellectual Property Office on Dec. 9, 2005, the entire contents of which are incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present invention relates to a display device.

DESCRIPTION OF THE RELATED ART

[0003] In general, a liquid crystal display includes two display panels having pixel electrodes, a common electrode, and a liquid crystal layer having dielectric anisotropy between the panels. The pixel electrodes are arranged in a matrix and connected to switching devices such as thin film transistors (TFTs) which sequentially apply data voltages to the pixels. The common electrode is disposed over the entire surface of the display panel and supplied with a common voltage. The pixel electrode, the common electrode, and the liquid crystal layer constitute a liquid crystal capacitor. The liquid crystal capacitor together with the switching element is a pixel unit.

[0004] The image data voltages vary the strength of the electric field applied to the liquid crystal layer between the two panels thereby controlling the transmittance of light passing through the liquid crystal layer to display images corresponding to the data voltages. To prevent the degradation of the liquid crystal, the polarities of the data voltages with respect to the common voltage are inverted for each frame, pixel row, or pixel.

[0005] However, since the response speed of the liquid crystal molecules is low, it takes time for a voltage (hereinafter referred to as a pixel voltage) charged in the liquid crystal capacitor to reach the target voltage. The target voltage is the voltage that effects a desired luminance. The time depends on the difference between the target voltage and the voltage previously charged on the liquid crystal capacitor. Therefore, when the difference between the target voltage and the previously-charged voltage is large, application of only the target voltage will not be enough to cause the pixel voltage to reach the target voltage during the time when the switching element is turned on.

[0006] In order to solve the problem, a DCC (dynamic capacitance compensation) scheme has been proposed. The DCC scheme employs the fact that charging speed is proportional to the voltage across the liquid crystal capacitor. The data voltage (actually the difference between the data voltage and the common voltage, usually assumed to be 0V), applied to the pixel is chosen to be higher than the target voltage so as to shorten the time taken for the pixel voltage to reach the target voltage. However, in the DCC scheme, frame memories and driving circuits for performing DCC calculation are needed. Therefore, there are problems of a difficulty in circuit design and increased production cost.

[0007] To reduce power consumption in display devices of medium or small size, such as mobile phones, row inversion is performed. However, as the resolution of medium or small size display devices increases, so does power consumption.

In particular, when the DCC calculation is performed, power consumption is greatly increased due to the additional calculations and circuitry.

[0008] The range of data voltage available for image display using row inversion is small in comparison with dot inversion where the polarities of the data voltages are inverted for each pixel. Therefore, in a VA (vertical alignment) mode liquid crystal display, if the threshold voltage for driving the liquid crystal is high, the available range of the data voltage to represent grayscales for image display is reduced by the amount of the threshold voltage. Therefore, the desired luminance cannot be obtained.

SUMMARY OF THE INVENTION

[0009] In accordance with an aspect of the present invention a display device offers improved response speed and image quality without increasing power consumption. According to an embodiment of the present invention, a display device includes a plurality of gate lines transmitting gate signals, each gate signal having a gate-on voltage and a gate-off voltage, a plurality of data lines intersecting the gate lines and transmitting data voltages, a plurality of storage electrode lines extending in parallel to the gate lines and transmitting storage signals, a plurality of pixels arranged in a matrix, each pixel including a switching element connected to a gate line and a data line, a liquid crystal capacitor, a storage capacitor connected to the switching element and a storage electrode line, and a plurality of storage signal generators generating the storage signals based on the gate signals. The voltage level of the storage signal applied to each pixel is changed immediately after charging the liquid crystal capacitor and the storage capacitor with the data voltage, as follows: when the charged data voltage has a positive polarity, the storage signal is changed from a low level to a high level, and when the charged data voltage has a negative polarity, the storage signal is changed from the high level to a low level. The gate-on voltage may be maintained for about 1 H.

[0010] The storage signals applied to adjacent storage electrode lines may have different levels from each other, and the storage signal applied to the same storage electrode line may be inverted every frame.

[0011] The display device may perform row inversion. The storage signal generator may be formed along with the gate lines, the data lines, and the storage electrode lines. The storage signal generator may include a plurality of signal generating circuits that respectively output the storage signals to the storage electrode lines. The driving voltage may include a first level and a second level less than the first level, and the level of the driving voltage may be inverted every about 1 H.

[0012] The first and second driving voltages may include a first level and a second level less than the first level, respectively, the first driving voltage has a waveform that is inverted with respect to a waveform of the second driving voltage, and the first and second driving voltages are inverted every frame.

[0013] The display device may further include a first conductor transmitting the first driving voltage and a second conductor transmitting the second driving voltage and that is adjacent to the first conductor in a longitudinal direction, the positions of the first conductor and the second conductor are

changed every pixel row, and the input terminals of the first and second switching elements are connected to the adjacent conductor, respectively.

[0014] The display device may further include a first conductor transmitting the first driving voltage and a second conductor transmitting the second driving voltage and that is parallel to the first conductor in a longitudinal direction, and the connection between the input terminals of the first and second switching elements and the first and second conductors are changed ever pixel row.

[0015] The respective signal generating circuits may include a first driving voltage having a first level, a second driving voltage having a second level different from the first level, a first selection voltage, a second selection voltage having a waveform that is inverted with respect to a waveform of the first selection voltage, a first switching element having an input terminal connected to the first selection voltage and a control terminal connected to a gate line, a second switching element having an input terminal connected to the second selection voltage and a control terminal connected to the gate line, a third switching element having a control terminal connected to an output terminal of the first switching element and an output terminal connected to a corresponding storage electrode line, and a fourth switching element having a control terminal connected to an output terminal of the second switching element and an output terminal connected to the storage electrode line. The third switching element has an input terminal connected to one of the first and second driving voltages, and the fourth switching element has an input terminal connected to another of the first and second driving voltages.

[0016] The first and second selection voltages may include a third level and a fourth level less than the third level, respectively, the first selection voltage has a waveform that is inverted with respect to a waveform of the second selection voltage, and the first and second selection voltages are inverted every frame.

[0017] The display device may further include a first conductor transmitting the first driving voltage and a second conductor transmitting the second driving voltage and that is adjacent to the first conductor in a longitudinal direction, the positions of the first conductor and the second conductor are changed every pixel row, and the input terminals of the third and fourth switching elements are connected to the adjacent conductor, respectively.

[0018] The storage signal generator may include a shift register having a plurality of stages that are connected to the storage electrode lines, respectively.

[0019] The storage signal generator may further include a plurality of inverters connected to odd-numbered stages or even-numbered stages.

[0020] The shift register may be an integrated circuit.

BRIEF DESCRIPTION OF THE DRAWING

[0021] An exemplary embodiment of the present invention will be described in detail with reference to the accompanying drawing, in which:

[0022] FIG. 1 is a block diagram of a liquid crystal display according to an exemplary embodiment of the present invention;

[0023] FIG. 2 is an equivalent circuit diagram of one pixel in the liquid crystal display according to an exemplary embodiment of the present invention;

[0024] FIG. 3 is a circuit diagram of an example of a signal generating circuit according to an exemplary embodiment of the present invention;

[0025] FIG. 4 is a timing diagram of signals used in the liquid crystal display including the signal generating circuit shown in FIG. 3;

[0026] FIGS. 5A and 5B are circuit diagrams of further examples of a signal generating circuit according to an exemplary embodiment of the present invention;

[0027] FIG. 6 is a timing diagram of signals used in the liquid crystal display including the signal generating circuit shown in FIG. 5A or 5B;

[0028] FIG. 7 is a circuit diagram of a further example of a signal generating circuit according to a further exemplary embodiment of the present invention;

[0029] FIG. 8 is a timing diagram of signals used in the liquid crystal display including the signal generating circuit shown in FIG. 7;

[0030] FIG. 9 is a graph showing a change in a response speed of liquid crystal and a pixel electrode voltage according to the operation of the signal generating circuit according to exemplary embodiments of the present invention;

[0031] FIG. 10 is a graph showing a change in a response speed and pixel electrode voltage in a liquid crystal display of the prior art;

[0032] FIG. 11 is a layout view of an example of a thin film transistor array panel in a liquid crystal display according to embodiments of the present invention;

[0033] FIGS. 12A and 12B are cross-sectional views of the thin film transistor array panel taken along lines XIIA-XIIA and XIIB-XIIB of FIG. 11, respectively;

[0034] FIG. 13 is a layout view of another example of a thin film transistor array panel in a liquid crystal display according to embodiments of the present invention; and

[0035] FIGS. 14A and 14B are cross-sectional views of the thin film transistor array panel taken along lines XIVA-XIVA and XIVB-XIVB of FIG. 13, respectively.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0036] In the drawings, the thickness of layers, films, panels, regions, etc., are exaggerated for clarity. It will be understood that when an element such as a layer, film, region, or substrate is referred to as being "on" another element, it can be directly on the other element or intervening elements may also be present. In contrast, when an element is referred to as being "directly on" another element, there are no intervening elements present. A liquid crystal display according to an exemplary embodiment of the present invention will be described in detail with reference to FIGS. 1 and 2.

[0037] FIG. 1 is a block diagram of a liquid crystal display according to an exemplary embodiment of the present invention, and FIG. 2 is an equivalent circuit diagram of one pixel in the liquid crystal display according to an exemplary embodiment of the present invention.

[0038] As shown in FIG. 1, the liquid crystal display includes a liquid crystal panel assembly 300, a gate driver 400, a data driver 500, a storage signal generator 700, a gray voltage generator 800 connected to the data driver 500, and a signal controller 600 that controls these components.

[0039] The liquid crystal panel assembly 300 includes a plurality of signal lines G_1 - G_m , G_d , D_1 - D_m , and S_1 - S_m , and a plurality of pixels PX connected to the signal lines G_1 - G_m ,

G_d , D_1 - D_m , and S_1 - S_n and arranged substantially in a matrix. In the structural view shown in FIG. 2, the liquid crystal panel assembly 300 includes lower and upper panels 100 and 200 facing each other and a liquid crystal layer 3 interposed between the panels 100 and 200. The signal lines include a plurality of gate lines G_1 - G_n and G_d , a plurality of data lines D_1 - D_m , and a plurality of storage electrode lines S_1 - S_n .

[0040] The gate lines G_1 - G_n and G_d include a plurality of normal gate lines G_1 - G_n and an additional gate line G_d transmitting gate signals (also referred to as “scanning signals” hereinafter). The storage electrode lines S_1 - S_n are alternately connected to the normal gate lines G_1 - G_n and transmit storage signals. The data lines D_1 - D_m transmitting data voltages.

[0041] The gate lines G_1 - G_n and G_d and the storage electrode lines S_1 - S_n extend substantially in a row direction and substantially parallel to each other, while the data lines D_1 - D_m extend substantially in a column direction and substantially parallel to each other.

[0042] Referring to FIG. 2, each pixel PX, for example a pixel PX connected to the i -th normal gate line G_i ($i=1, 2, \dots, 2n$) and the j -th data line D_j ($j=1, 2, \dots, m$), includes a switching element Q connected to the signal lines G_i and D_j , and a liquid crystal capacitor Clc and a storage capacitor Cst that are connected to the switching element Q.

[0043] Switching element Q is a three terminal element such as a thin film transistor, and is disposed on the lower panel 100. Switching element Q has a control terminal connected to the normal gate line G_i , an input terminal connected to the data line D_j , and an output terminal connected to the liquid crystal capacitor Clc and storage capacitor Cst.

[0044] Liquid crystal capacitor Clc includes pixel electrode 191 of the lower panel 100 and common electrode 270 of the upper panel 200 as two terminals, and liquid crystal layer 3 interposed between the two electrodes as a dielectric. Pixel electrode 191 is connected to switching element Q. Common electrode 270 is disposed on the entire surface of the upper panel 200 and supplied with a common voltage Vcom which is a DC voltage having a predetermined value.

Unlike FIG. 2, common electrode 270 may be disposed on the lower panel 100, and in this case, at least one of the two electrodes 191 and 270 may be formed in a shape of a line or bar.

[0045] Storage capacitor Cst, serves as an auxiliary capacitor to liquid crystal capacitor Clc and is constructed by overlapping of pixel electrode 191 and storage electrode lines S_1 with an insulator between them.

[0046] In order to implement color display, each of the pixels uniquely displays one of the primary colors (spatial division), or each of the pixels alternately displays the primary colors in turn (temporal division). A desired color can be obtained by the spatial or temporal combination of the primary colors. An example of the primary colors is the three primary colors of red, green, and blue. FIG. 2 is an example of spatial division in which each of the pixels PX includes a color filter 230 representing one of the primary colors. Unlike FIG. 2, color filter 230 may be provided above or below pixel electrode 191 of the lower panel 100. At least one polarizer (not shown) for polarizing light is attached on an outer surface of the liquid crystal panel assembly 300.

[0047] Referring to FIG. 1, gray voltage generator 800 generates either a full number of gate voltages or a limited number of gray voltages (referred to as “reference gray voltages” hereinafter) related to the transmittance of the pixels PX. Some of the (reference) gray voltages have a positive polarity relative to the common voltage Vcom, while the other of the (reference) gray voltages have a negative polarity relative to the common voltage Vcom.

[0048] Gate driver 400 synthesizes a gate-on voltage Von and a gate-off voltage Voff to generate the gate signals for application to the gate lines G_1 - G_n and G_d . Gate driver 400 is integrated into the liquid crystal panel assembly 300 along with the signal lines G_1 - G_n , G_d , D_1 - D_m , and S_1 - S_n and the switching elements Q. However, gate driver 400 may include at least one integrated circuit (IC) chip mounted on the LC panel assembly 300 or on a flexible printed circuit (FPC) film in a tape carrier package (TCP) type, which are attached to the panel assembly 300. Alternatively, gate driver 400 may be mounted on a separate printed circuit board (not shown).

[0049] Storage signal generator 700 is connected to storage electrode lines S_1 - S_n and gate lines G_1 - G_n , and applies storage signals having a high level voltage and a low level voltage.

[0050] Instead of storage signal generator 700 being supplied with a signal from the additional gate line G_d connected to gate driver 400, storage signal generator 700 may be supplied with a signal from a separate unit such as signal controller 600 or a separate signal generator (not shown). In this case, the additional gate line G_d is not necessarily formed on the liquid crystal panel assembly 300.

[0051] Storage signal generator 700 is integrated into the liquid crystal panel assembly 300 along with the signal lines G_1 - G_n , G_d , D_1 - D_m , and S_1 - S_n and switching elements Q, but gate driver 400 may include at least one integrated circuit (IC) chip mounted on the LC panel assembly 300 or on a flexible printed circuit (FPC) film in a tape carrier package (TCP) type which are attached to the panel assembly 300. Alternatively, gate driver 400 may be mounted on a separate printed circuit board (not shown).

[0052] Signal controller 600 controls gate driver 400, data driver 500, and storage signal generator 700. Each of units 500, 600, and 800 may include at least one integrated circuit (IC) chip mounted on the LC panel assembly 300 or on a flexible printed circuit (FPC) film in a tape carrier package (TCP) type, which are attached to the panel assembly 300. Alternately, at least one of the units 500, 600, and 800 may be integrated into the panel assembly 300 along with the signal lines G_1 - G_n and D_1 - D_m and the switching elements Q. Alternatively, all the units 500, 600, and 800 may be integrated into a single IC chip, but at least one of the units 500, 600, and 800 or at least one circuit element in at least one of the units 500, 600, and 800 may be disposed out of the single IC chip.

[0053] Now, the operation of the liquid crystal display will be described in detail. Signal controller 600 receives input image signals R, G, and B and input control signals from an external graphics controller (not shown). The input image signals R, G, and B contain luminance information of pixels PX. The luminance has a predetermined number of gray levels, for example 1024 ($=2^{10}$), 256 ($=2^8$), or 64 ($=2^6$) grays. The input control signals include a vertical synchro-

nization signal Vsync, a horizontal synchronization signal Hsync, a main clock signal MCLK, and a data enable signal DE.

[0054] Signal controller 600 processes the image signals R, G, and B according to the operating requirements of the liquid display panel assembly 300 based on the input control signals and the input image signals R, G, and B to generate gate control signals CONT1, data control signals CONT2, and storage control signals CONT3, and then transmits the gate control signals CONT1 to the gate driver 400, the data control signals CONT2 and the processed image signals DAT to the data driver 500, and the storage control signals CONT3 to the storage signal generator 700.

[0055] Gate control signals CONT1 include a scanning start signal STV for indicating scanning start, and at least one clock signal for controlling an output period of the gate-on voltage Von. Gate control signals CONT1 may also include an output enable signal OE for defining the duration of the gate-on voltage Von.

[0056] Data control signals CONT2 include a horizontal synchronization start signal STH for indicating data transmission for a row of pixels PX, a load signal LOAD for commanding to apply data voltages to the data lines D₁ to D_m, and a data clock signal HCLK. Data control signals CONT2 may further include an inversion signal RVS for inverting a polarity of the data voltages with respect to the common voltage Vcom.

[0057] In response to the data control signals CONT2 from signal controller 600, data driver 500 receives a packet of the digital image signals DAT for a row of the pixels PX, converts the digital image signals DAT to analog data voltages selected from the gray voltages, and applies the analog data voltages to data lines D₁ to D_m.

[0058] Gate driver 400 applies the gate-on voltage Von to a corresponding one of the normal gate lines G₁-G_n, for example an i-th normal gate line G_i, in response to the gate control signals CONT1 from the signal controller 600, and turns on the switching elements Q that are connected to the normal gate line G_i (except the additional gate line G_a that is not connected to the switching elements Q). The data voltages applied to the data lines D₁-D_m are then supplied to the pixels PX of the i-th row through the activated switching transistors Q such that the liquid crystal capacitor Clc and storage capacitor Cst in the pixels PX are charged.

[0059] The difference between the magnitude of a data voltage and the common voltage Vcom applied to a pixel PX is represented as a voltage across the liquid crystal capacitor Clc of the pixel PX, which is referred to as a pixel voltage. The liquid crystal molecules in the liquid crystal capacitor Clc have orientations depending on the magnitude of the pixel voltage, and the molecular orientations determine the polarization of light passing through the liquid crystal layer 3. The polarizer(s) converts light polarization to light transmittance such that the pixel PX has a luminance represented by a gray of the data voltage.

[0060] With the elapse of a horizontal period (also referred to as "1 H" and is equal to one period of the horizontal synchronization signal Hsync and the data enable signal DE), data driver 500 applies data voltages to pixels PX of the (i+1)-th row, and then gate driver 400 changes the gate signal applied to the i-th normal gate line G_i to a gate-off voltage Voff and changes the gate signal applied to the next normal gate line G_{i+1} to a gate-on voltage Von.

[0061] Then the switching elements Q of the i-th row are turned off such that pixel electrodes 191 are in a floating state.

[0062] Storage signal generator 700 changes the voltage level of a storage signal applied to a corresponding storage electrode line based on the storage control signals CONT3 of the signal controller 600 and the voltage variation of the gate signal applied to a corresponding gate line. Thereby, the voltage of pixel electrode 191 is varied in accordance with the voltage variation of the storage electrode line. By repeating this procedure for all pixel rows, the liquid crystal display displays an image for a frame.

[0063] When the next frame starts after one frame finishes, the inversion signal RVS applied to the data driver 500 is controlled such that the polarity of the data voltages is reversed (which is referred to as "frame inversion"). In addition, the polarity of the data voltages applied to pixels PX of a row is substantially the same while the polarity of the data voltages applied to pixels PX of the two adjacent rows is reversed (for example, row inversion).

[0064] Since the liquid crystal display according to an exemplary embodiment of the present invention performs frame inversion and row inversion, the polarity of all data voltages applied to pixels PX of one row is positive or negative and is changed every frame. At this time, the storage signal applied to a storage electrode line S₁-S_n is changed from a low to a high level voltage when pixel electrode 191 is charged by a positive polarity of data voltage. On the other hand, the storage signal is changed from a high to a low level voltage when pixel electrode 191 is charged by a negative polarity of data voltage. As a result, the voltage of pixel electrode 191 is increased more when pixel electrode 191 is charged by a data voltage of positive polarity and is decreased more when pixel electrode 191 is charged by a data voltage of negative polarity. Thereby, the voltage range of pixel electrode 191 is wider than the range of the gray voltages that are the basis of data voltages such that the luminance range using a low basic voltage is increased.

[0065] Storage signal generator 700 may include a plurality of signal generating circuits connected to the storage electrode lines S₁-S_n, respectively. An example of the signal generating circuits is described with reference to FIGS. 3 and 4.

[0066] FIG. 3 is a circuit diagram of a signal generating circuit according to an exemplary embodiment of the present invention, and FIG. 4 shows timing diagram signals used in a liquid crystal display including the signal generating circuit shown in FIG. 3.

[0067] Referring to FIG. 3, a signal generating circuit includes an input terminal IP and an output terminal OP. In an i-th signal generating circuit ST_i, the input terminal IP is connected to an i-th gate line G_i to be supplied with an i-th gate signal g_i (hereinafter referred to as "an input signal"), and the output terminal OP is connected to an i-th storage electrode line S_i to output an i-th storage signal Vs_i. Similarly, in an (i+1)-th signal generating circuit, the input terminal IP is connected to an (i+2)-th gate line G_{i+2} to be supplied with an (i+2)-th gate signal g_{i+2} as an input signal, and the output terminal OP is connected to an (i+1)-th storage electrode line S_{i+1} to output an (i+1)-th storage signal Vs_{i+1}.

[0068] The signal generating circuit is supplied with a driving signal V_{SL} of the storage control signals CONT3 from signal controller 600.

[0069] As shown in FIG. 4, the driving signal V_{SL} has a low level voltage V_- and a high level voltage V_+ . The period of the driving signal V_{SL} may be about 2 H, and the duty ratio thereof may be about 50%. Further, the driving signal V_{SL} is reversed every frame. The driving signal V_{SL} may have a high level voltage V_+ of about 5V and a low level voltage V_- of about 0V.

[0070] As shown in FIG. 3, the signal generating circuit includes two transistors Tr1 and Tr2, each of which has a control terminal, an input terminal, and an output terminal. Transistors Tr1 and Tr2 may be amorphous silicon transistors or polycrystalline silicon thin film transistors.

[0071] The control terminal of transistor Tr1 of each of the signal generating circuits is connected to an input terminal IP and to the control terminal of transistor Tr2 of the immediately preceding signal generating circuit. The input terminals of transistor Tr1 and Tr2 are connected to line SL to receive signals V_{sl} . The output terminals of transistors Tr1 and Tr2 are connected to the output terminals OP.

[0072] The additional gate line G_d (FIG. 1) transmits a gate signal to the last signal generating circuit connected to the last storage electrode line S_n , but this may be varied. Alternatively, the last signal generating circuit may be supplied with a control signal from a separate unit such as the signal controller 600 or an external device.

[0073] The signal generating circuits have the same construction except for input signals. The operation of the i -th and $(i+1)$ -th signal generating circuits ST_i and ST_{i+1} that apply storage signals V_{s_i} and $V_{s_{i+1}}$ to i -th and $(i+1)$ -th storage electrode lines S_i and S_{i+1} , respectively, will be described with reference to FIG. 3. The liquid crystal display according to the present invention performs one row inversion and frame inversion.

[0074] When an input signal, that is, a gate-on voltage V_{on} is applied to the input terminal IP of an i -th gate line G_i , transistor Tr1 of the i -th signal generating circuit ST_i is turned-on. At this time, the driving signal V_{SL} has a low voltage level V_- . The low level voltage V_- of the driving signal V_{SL} is applied to the output terminal OP, and thereby the storage signal V_{s_i} has the low level voltage V_- .

[0075] After about 1 H, the gate signal g_i is changed from the gate-on voltage V_{on} to a gate-off voltage V_{off} , and the gate signal g_{i+1} applied to the $(i+1)$ -th gate line G_{i+1} has the gate-on voltage V_{on} . At this time, the driving signal V_{SL} is changed from the low level voltage V_- to a high level voltage V_+ . Thereby, in the i -th signal generating circuit ST_i , the transistor Tr1 is turned off, but the transistor Tr2 is turned on, such that the driving signal V_{SL} of the high level voltage V_+ is applied to the output terminal OP through the turned-on transistor Tr2. That is, after finishing the charging of a pixel row by the application of the gate-on voltage V_{on} to the gate line G_i , the storage signal V_{s_i} is changed from the low level voltage V_- to the high level voltage V_+ .

[0076] Further, transistor Tr1 of the $(i+1)$ -th signal generating circuit ST_{i+1} is turned-on, such that the high voltage V_+ of the driving signal V_{SL} is applied to output terminal OP as storage signal $V_{s_{i+1}}$.

[0077] After about 1 H, the gate signal g_{i+1} has the gate-off voltage V_{off} and a gate signal g_{i+2} applied to the $(i+2)$ -th gate line G_{i+2} has the gate-on voltage V_{on} . Thereby, transistor Tr1 is turned-off, but transistor Tr2 of the $(i+1)$ -th signal gen-

erating circuit ST_{i+1} is turned on, such that the storage signal $V_{s_{i+1}}$ is changed from the high level voltage V_+ to the low level voltage V_- .

[0078] Next, the change of the pixel electrode voltage V_p caused by voltage variation of the storage signal is illustrated. Hereinafter, each of the capacitors and the capacitance thereof are denoted as the same reference characters.

[0079] Firstly, the pixel electrode voltage V_p is obtained by Equation 1. In Equation 1, C_{lc} and C_{st} represent a liquid crystal capacitor and a storage capacitor and the capacitance thereof, respectively, V_+ represents a high level and V_- represents a low level voltage of a storage signal V_s .

[0080] As shown in Equation 1, the pixel electrode voltage V_p is defined by adding or subtracting a variation amount Δ , which is defined by the capacitances C_{lc} and C_{st} of the liquid crystal capacitor and the storage capacitor and the voltage variation of the storage signal V_s , from the data voltage V_D .

$$V_p = V_D \pm \Delta = V_D \pm \frac{C_{st}}{C_{st} + C_{lc}} (V_+ - V_-) \quad [\text{Equation 1}]$$

[0081] The pixel is designed so that the data voltage V_D is in a range of from about 0V to about 5V, and the C_{st} and C_{lc} are equal to each other. When $V_+ - V_- = 5V$, $V_p = V_D \pm 2.5$ in Equation 1.

[0082] As a result, when the voltage of the storage signal V_s is changed, the pixel electrode voltage V_p increases or decreases by about $\pm 2.5V$ from the data voltage V_D applied through the associated data line among the data lines D_1 to D_m according to the polarity of the data voltage V_D . Namely, when the polarity is positive the pixel electrode voltage V_p increases by about $+2.5V$, and when the polarity is negative the pixel electrode voltage V_p decreases by about $-2.5V$. Due to the change in the pixel electrode voltage V_p , the range of the pixel voltage is also widened. For example, when the common voltage V_{com} is fixed to about 2.5V, the pixel voltage is in a range of from about $-2.5V$ to about $+2.5V$ due to the data voltage V_D ranging from about 0V to about 5V applied to the pixel voltage. However, when the storage signal V_s is changed from the high level voltage V_+ to the low level voltage V_- , the range of the pixel voltage is widened such as to a range of about $-5V$ to about $+5V$.

[0083] In this manner, the range of the pixel voltage is widened by a value of as much as the variation amount Δ of the pixel electrode voltage V_p caused from the change $V_+ - V_-$ in the storage signal. Therefore, the range of the voltage for representing the grayscale is widened, so that the luminance can be improved.

[0084] In addition, since the common voltage is fixed at a constant voltage, power consumption is reduced in comparison with a case where the high and lower voltages are alternately applied. Namely, when the common voltage applied to the common electrode is about 0V or 5V, the voltage applied to a parasitic capacitor formed between the data line and the common electrode has a maximum of about $\pm 5V$. However, when the common voltage is fixed to be about 2.5V, the voltage applied to the parasitic capacitor formed between the data line and the common electrode is reduced to a maximum of about $\pm 2.5V$. Since the power consumption in the parasitic capacitor formed between the

data line and the common electrode is reduced, total power consumption in the liquid crystal display is also reduced.

[0085] However, since the response speed of the liquid crystal is low, the liquid crystal molecules do not rapidly respond to the pixel voltage. Therefore, the electrostatic capacitance of the liquid crystal capacitor C_{lc} depends on the pixel voltage across the liquid crystal capacitor C_{lc} and varies with whether or not the liquid crystal molecules reach the re-aligned and stabilized state. As a result, the pixel electrode voltage V_p varies with whether or not the liquid crystal molecules reach a stabilized state.

[0086] Next, the change in the pixel electrode voltage V_p according to whether or not the liquid crystal molecules reach a stabilized state is described.

[0087] The electrostatic capacitance of the liquid crystal capacitor C_{lc} , after a maximum pixel voltage is applied to the liquid crystal capacitor C_{lc} and the liquid crystal molecules reach the stabilized state, is assumed to be three times the electrostatic capacitance of the liquid crystal capacitor C_{lc} after a minimum pixel voltage is applied and the liquid crystal molecules reach the stabilized state. The maximum pixel voltage is the maximum grayscale (white grayscale in the normally black type) pixel voltage. The minimum pixel voltage is the minimum grayscale (black grayscale in the normally black type) pixel voltage. In addition, it is assumed that $V_+ - V_- = 5V$ and $C_{lc} = C_{st}$.

[0088] The pixel electrode voltage V_p after the maximum grayscale pixel voltage is applied to the liquid crystal capacitor C_{lc} when the liquid crystal molecules reach the stabilized state is represented by Equation 1. Since $V_+ - V_- = \text{about } 5V$ and $C_{lc} = C_{st}$, the pixel electrode voltage V_p is $V_p = V_{D\pm} \pm 2.5$.

[0089] However, in a case where after the maximum grayscale pixel voltage is applied to the liquid crystal capacitor C_{lc} , the liquid crystal molecules do not reach the stabilized state, the pixel electrode voltage V_p is represented by Equation 2.

$$\begin{aligned} V_p &= V_{D\pm} \Delta & [\text{Equation 2}] \\ &= V_{D\pm} \frac{C_{st}}{C_{st} + C_{lc}} (V_+ - V_-) \\ &= V_{D\pm} \frac{C_{st}}{C_{st} + \frac{1}{3}C_{st}} (V_+ - V_-) \\ &= V_{D\pm} \frac{3}{4} (V_+ - V_-) \end{aligned}$$

$$\text{Since } V_+ - V_- = 5V, V_p = V_{D\pm} \pm 3.75$$

[0090] In a case where after the maximum grayscale pixel voltage is applied to the liquid crystal capacitor C_{lc} , the liquid crystal molecules do not reach the stabilized state, and the pixel electrode voltage V_p is sustained in the pixel electrode voltage after the minimum grayscale pixel voltage is applied to the liquid crystal capacitor C_{lc} when the liquid crystal molecules reach the stabilized state. Namely, the pixel electrode voltage V_p is sustained in the last frame state. Therefore, the variation amount Δ of the pixel electrode voltage V_p caused by the change $V_+ - V_-$ of the storage signal increases from about $\pm 2.5V$ to about $\pm 3.75V$.

[0091] In the case of changing from the pixel electrode voltage of the minimum gray to the pixel electrode voltage

of another gray, the variation amount Δ of the pixel electrode voltage V_p caused from the change $V_+ - V_-$ of the storage signal further increases until the liquid crystal molecules reach the stabilized state. When $V_+ - V_- = \text{about } 5V$, the variation amount Δ increases to a maximum of about $\pm 3.75V$.

[0092] Therefore, conventionally, as shown in FIG. 6, although the pixel electrode voltage V_p corresponding to the target pixel electrode voltage V_T is applied to the pixel electrode in all the frames, the pixel electrode voltage charged in the pixel electrode is reduced due to the influence of the adjacent data voltage after the completion of the charging operation so as to not reach the target pixel electrode voltage V_T in one frame, so that the pixel electrode voltage V_p can reach the target pixel electrode voltage V_T after several frames.

[0093] However, according to the exemplary embodiment of the invention, as shown in FIG. 5, since the pixel electrode voltage V_p applied to the pixel electrode is higher than the target pixel electrode voltage V_T , the pixel electrode can reach the target pixel electrode voltage V_T in one frame. As a result, in comparison with the prior art, the response speed RC of the liquid crystal can be improved.

[0094] Accordingly, by adding the voltage variation of the storage signal V_s to or subtracting it from a data voltage V_D , the pixel electrode voltage V_p increases by the voltage variation when a pixel has been charged with a data voltage of a positive polarity, and, on the contrary, the pixel electrode voltage V_p decreases by the voltage variation when a pixel has been charged with a data voltage of a negative polarity. Thereby, the variation of a pixel voltage becomes wider than the range of a gray voltage by the increased or decreased pixel electrode voltage V_p such that the range of the represented luminance also increases.

[0095] Further, since a common voltage is fixed at a predetermined value, the power consumption is reduced as compared with a common voltage of a high value and a low value alternates.

[0096] Next, another examples of the signal generating circuits according to the exemplary embodiment of the present invention will be describe with reference to FIGS. 5A, 5B, and FIG. 6.

[0097] As compared with FIG. 3, elements performing the same operations are indicated by the same reference numerals, and the detailed description thereof is omitted.

[0098] FIGS. 5A and 5B are circuit diagrams of further examples of a signal generating circuit according to an exemplary embodiment of the present invention, and FIG. 6 is a timing diagram of signals used in the liquid crystal display including the signal generating circuit shown in FIG. 5A or 5B.

[0099] Like the signal generating circuits shown in FIG. 3, each of the signal generating circuits shown in FIGS. 5A and 5B includes two transistors Tr11 and Tr12, or Tr21 and Tr22, each of which has a control signal, an input terminal, and an output terminal.

[0100] However, unlike FIG. 3, the signal generating circuits shown in FIGS. 5A and 5B are supplied with two driving signals VSL1 and VSL2 of the storage control signals CONT3 through two conductors SL1 and SL2, or SL1a and SL2a. The driving signals V_{SL1} and V_{SL2} have a low level voltage V_- and a high level voltage V_+ , respectively. The driving signals V_{SL1} and V_{SL2} have a phase difference of about 180° , and thereby are a reversed wave-

form with respect to each other. The waveforms of the driving signals V_{SL1} and V_{SL2} are reversed every frame. At this time, the waveforms of the driving signals V_{SL1} and V_{SL2} may be reversed in the blank section between two adjacent frames. The low level voltage V_- of the driving signals V_{SL1} and V_{SL2} may be about 0V, and the high level voltage V_+ of the driving signals V_{SL1} and V_{SL2} may be about 5V.

[0101] Thereby, as compared with FIG. 3, the signal generating circuits shown in FIGS. 5A and 5B have the different connection between input terminals of the two transistors Tr11 and Tr12, or Tr21 and Tr22 and the driving signals V_{SL1} and V_{SL2} .

[0102] In detail, the conductors SL1 and SL2 of FIG. 5A alternate every row such that left and right positions are changed every row.

[0103] Thereby, the input terminals of the transistors Tr11, Tr21, Tr12, and Tr22 are connected to immediately adjacent conductors SL1 and SL2, but the input driving voltages V_{SL1} and V_{SL2} are changed every row. For example, when the input terminals of the transistors of the odd signal generating circuits are connected to the driving signal V_{SL1} , the input terminals of the transistors of the even signal generating circuits are connected to the driving signal V_{SL2} . On the contrary, when the input terminals of the transistors of the odd signal generating circuits are connected to the driving signal V_{SL2} , the input terminals of the transistors of the even signal generating circuits are connected to the driving signal V_{SL1} .

[0104] Unlike FIG. 5A, the conductors SL1a and SL2a of the signal generating circuits shown FIG. 5B extend in parallel in a longitudinal direction, and the driving signal V_{SL1} and V_{SL2} inputted to the input terminals of the transistors Tr11, Tr12, Tr21, and Tr22 are changed every row due to the changing of the connections between the transistors Tr11, Tr21, Tr12, and Tr22 and the conductors SL1a and SL2a. For example, when the input terminals of the odd signal generating circuits are connected to the immediately adjacent conductor SL1a to be supplied with the driving signal V_{SL1} , the input terminals of the even signal generating circuits are connected to the next adjacent conductor SL2a to be supplied with the driving signal V_{SL2} . On the contrary, when the input terminals of the odd signal generating circuits are connected to the next adjacent conductor SL1b to be supplied with the driving signal V_{SL1} , the input terminals of the even signal generating circuits are connected to the immediately adjacent conductor SL1a to be supplied with the driving signal V_{SL2} .

[0105] Operations of the signal generating circuits shown in FIGS. 5A and 5B are the same, and operations of the i -th and $(i+1)$ -th signal generating circuits STA_{*i*}, STA_{*i+1*}, STB_{*i*}, and STB_{*i+1*} will be described with reference to FIG. 6.

[0106] The operations of the i -th and $(i+1)$ -th signal generating circuits STA_{*i*}, STA_{*i+1*}, STB_{*i*}, and STB_{*i+1*} are similar to those of FIG. 3.

[0107] That is, when a gate signal g_i applied to an i -th gate line G_i becomes a gate-on voltage Von, the transistor Tr11 is turned on. At this time, the driving signal V_{SL1} has a low level voltage V_- and the driving signal V_{SL2} has a high level voltage V_+ . Thereby, the driving signal V_{SL1} of the low level signal V_- is applied to the output terminal OP as a storage signal V_s through the turned-on transistor Tr11.

[0108] After about 1 H, the gate signal g_i is changed from the gate-on voltage Von to a gate-off voltage Voff, and a gate

signal g_{i+1} applied to the $(i+1)$ -th gate line G_{i+1} has the gate-on voltage Von. Thereby, the transistor Tr11 is turned off and the transistor Tr12 is turned on, such that the driving signal V_{SL2} of the high level signal V_+ is applied to the output terminal OP as a storage signal V_s through the turned-on transistor Tr12. That is, after the charging of a pixel row connected to the gate line G_i by the application of the gate-on voltage Von, the storage signal V_s is changed from the low level voltage V_- to the high level voltage V_+ , and thereby the pixel electrode voltage V_p increases by the variation amount Δ defined by Equation 1 or 2.

[0109] At this time, transistor Tr21 of the $(i+1)$ -th signal generating circuit, STA_{*i+1*}, or STB_{*i+1*} are turned on, the driving signal V_{SL2} of the high level voltage V_+ is applied to the output terminal OP to output an $(i+1)$ -th storage signal $V_{s_{i+1}}$.

[0110] After about 1 H, the gate signal g_{i+1} is changed from the gate-on voltage Von to a gate-off voltage Voff, and a gate signal g_{i+2} applied to the $(i+2)$ -th gate line G_{i+2} has the gate-on voltage Von. Thereby, transistor Tr21 is turned off and transistor Tr22 is turned on, such that the driving signal V_{SL2} of the low level signal V_- is applied to the output terminal OP as a storage signal $V_{s_{i+1}}$.

[0111] After the charging of a pixel row connected to the gate line G_{i+1} by the application of the gate-on voltage Von, the storage signal $V_{s_{i+1}}$ is changed from the high level voltage V_+ to the low level voltage V_- , and thereby the pixel electrode voltage V_p decreases by the variation amount Δ defined by Equation 1 or 2.

[0112] The driving signal V_{SL} of FIGS. 3 and 4 is inverted by about 1 H, but the driving signals V_{SL1} and V_{SL2} are inverted every frame. Thereby the stable application of the driving signals V_{SL1} and V_{SL2} is possible and the power consumption is reduced, as compared with the signal generating circuits shown in FIG. 3.

[0113] Next, a further example of signal generating circuits according to the embodiment of the present invention will be described with reference to FIGS. 7 and 8.

[0114] FIG. 7 is a circuit diagram of the further example of a signal generating circuit according to another exemplary embodiment of the present invention, and FIG. 8 is a timing diagram of signals used in the liquid crystal display including the signal generating circuit shown in FIG. 7.

[0115] Each of signal generating circuits shown in FIG. 7 includes an input terminal IP and an output terminal OP. However, differently from the signal generating circuit shown in FIG. 5A, for example in an i -th signal generating circuit 73_{*i*}, the input terminal IP is supplied with an $(i+1)$ -th gate signal g_{i+1} applied to the $(i+1)$ -th gate line G_{i+1} as an input signal, and the output terminal outputs an i -th storage signal V_{s_i} connected to an i -th storage electrode line S_i . Similarly, the input terminal IP is supplied with an $(i+2)$ -th gate signal g_{i+2} applied to the $(i+2)$ -th gate line G_{i+2} as an input signal, and the output terminal outputs an $(i+1)$ -th storage signal $V_{s_{i+1}}$ connected to an $(i+1)$ -th storage electrode line S_{i+1} .

[0116] Further, the signal generating circuits are supplied with driving signals V_{SL1a} and V_{SL2a} and selection signals V_- and V_{SELB} of the storage control signals CONT3 of the controller 600 through the conductors SL1, SL2, SEL1, and SEL2, respectively.

[0117] As in FIG. 5A, the conductors SL1 and SL2 alternate every row, and thereby the left and right positions

are changed. However, the conductors SL1 and SL2 may be formed as in FIG. 5B to transmit the driving signals V_{SL1a} and V_{SL2a} .

[0118] The conductor SEL1 extends in the longitudinal direction, is projected to a left direction to enclose the transistors Tr4, and then again extends in the longitudinal direction. However the conductor SEL1 may extend in the longitudinal direction without the projections in parallel with the conductor SEL2.

[0119] As shown in FIG. 8, the driving signals V_{SL1a} and V_{SL2a} have constant DC voltages. For example, the driving signal V_{SL1a} maintains a low level voltage V- such as about 0V, and the driving signal V_{SL2a} maintains a high level voltage V+ such as about 5V. The selection signals have a low level voltages VL and a high level voltage Vh, and the low level voltage VL may be the same as the gate-off voltage Voff. The high level voltage Vh may be the same as the gate-on voltage Von. The selection signals V_{SEL} and V_{SELB} have a phase difference of about 180° to be inverted with respect to each other, and the waveforms of the selection signals V_{SEL} and V_{SELB} are inverted every frame. At this time, the waveforms of the selection signals V_{SEL} and V_{SELB} may be reversed in the blank section between two adjacent frames.

[0120] Each of the signal generating circuits includes four transistors Tr11a and Tr12a, or Tr21a and Tr22a, Tr3, and Tr4, and two capacitors C1 and C2.

[0121] As shown in FIG. 7, like in FIGS. 5A and 5B, the transistor Tr11a has an input terminal and an output terminal connected to the driving signal V_{SL1a} and the output terminal OP, respectively, and the transistor Tr12a has an input terminal and an output terminal connected to the driving signal V_{SL2a} and the output terminal OP, respectively. The transistor Tr21a has an input terminal and an output terminal connected to driving signal V_{SL2a} and the output signal OP, respectively, and the transistor Tr22a has an input terminal and an output terminal connected to the driving signal V_{SL1a} and the output terminal OP, respectively. However, unlike in FIGS. 5A and 5B, control terminals of the transistors Tr11a and Tr21a are connected to an output terminal of the transistor Tr3, and control terminals of the transistors Tr12a and Tr22a are connected to an output terminal of the transistor Tr4. As described above, when the odd signal generating circuits include the transistors Tr11a and Tr12a, the even signal generating circuits include the transistors Tr21a and Tr22a. Conversely, when the odd signal generating circuits include the transistors Tr21a and Tr22a, the even signal generating circuits include the transistors Tr11a and Tr12a.

[0122] The transistors Tr3 and Tr4 also have input terminals connected to the selection signal V_{SEL} , V_{SELB} , respectively, and control terminals connected to the input terminal IP.

[0123] The transistors Tr11a, Tr12a, Tr21a, and Tr22a may be amorphous silicon transistors or polycrystalline silicon thin film transistors.

[0124] Operation of the signal generating circuits will be described with reference to FIG. 8.

[0125] The construction of the signal generating circuits connected to the storage electrode lines S1-Sn, respectively, are the same except for the input signal and the driving voltages V_{SL1a} and V_{SL2a} , and thereby operations of the i-th and (i+1)-th signal generating circuits 73_i and 73_{i+1} will be described.

[0126] First, when a gate-on voltage Von of an (i+1)-th gate signal g_{i+1} is applied to the input terminal IP of the i-th signal generating circuit 73_i, the transistors Tr3 and Tr4 are turned on.

[0127] Thereby, as shown in FIG. 8, a low level voltage V1 of the selection signal V_{SEL} is applied to the control terminal of the transistor Tr11a as a gate driving signal Vg1 and makes the capacitor C1 charge. In addition, a high level voltage Vh of the selection signal V_{SELB} is applied to the control terminal of the transistor Tr12a as a gate driving signal Vg2 and makes the capacitor C2 charge. A different voltage between the gate driving voltage Vg1 and the driving voltage V_{SL1a} and a different voltage between the gate driving voltage Vg2 and the driving voltage V_{SL2a} are charged into the capacitors C1 and C2, respectively.

[0128] The maximum level voltage Von' and the minimum level voltage Voff' of the gate driving voltages Vg1 and Vg2 are different from the high level voltage Vh and the low level voltage V1 of the selection signals V_{SEL} and V_{SELB} . That is, the maximum level voltage Von' of the gate driving voltages Vg1 and Vg2 is less than the gate-on voltage Von, and the minimum level voltage Voff' of the gate driving voltages Vg1 and Vg2 is more than the gate-off voltage Voff.

[0129] The states of the transistors Tr11a and Tr12a are maintain to the next frame by the charging operations of the capacitors C1 and C2.

[0130] Thereby, the driving signal V_{SL2a} of the high level voltage V+ is applied to the output terminal OP as the storage signal Vs_i via the turned-on transistor Tr12a.

[0131] As a result, since the storage signals Vs_i is changed from the low level voltage V- to the high level voltage V+, the pixel electrode voltage Vp of the corresponding pixel row increases by the variation amount defined by Equation 1 or 2.

[0132] Next, operation of the (i+1)-th signal generating circuit 73_{i+1} will be described.

[0133] When a gate-on voltage Von of an (i+1)-th gate signal g_{i+1} is applied to the (i+1)-th signal generating circuit 73_{i+1}, the operation of the (i+1)-th signal generating circuit 73_{i+1} starts.

[0134] That is, when the gate-on voltage Von of an (i+1)-th gate signal g_{i+1} is applied to the input terminal IP, the transistors Tr3 and Tr4 are turned on, and thereby the low level voltage V1 of the selection signal V_{SEL} and the high level voltage Vh of the selection signal V_{SELB} are applied via the turned-on transistors Tr3 and Tr4, respectively, to turn on the transistor Tr21a and to turn on the transistor Tr22a. Thereby, the driving signal V_{SL1a} of the low level voltage V- is outputted to the output terminal OP as a storage signal Vs_{i+1}, and the states of the transistors Tr21a and Tr22a are maintained to the next frame by the charging operations of the capacitors C1 and C2.

[0135] As a result, since the storage signals Vs_{i+1} is changed from the high level voltage V+ to the low level voltage V-, the pixel electrode voltage Vp of the corresponding pixel row decreases by the variation amount defined by Equation 1 or 2.

[0136] In the example, since a constant voltage is applied as a storage voltage for one frame, voltage variation due to parasitic capacitance is reduced to improve image quality. Since the transistors Tr3 and Tr4 are applied only the voltages having a magnitude for charging the capacitors C1 and C2 and the state of the storage signal is maintained to the next frame, the size of the transistors is reduced.

[0137] Alternatively, like the gate-on voltage, the storage signal that is applied through a separate integrated circuit may be sequentially shifted to the first storage electrode line and to the last storage electrode. At this time, the storage signal generator may be a serial-to-parallel shift resistor, and, by connecting an inverter, etc., to the odd or even storage electrode lines, the voltage level of the storage signal may be inverted every row.

[0138] Now, the construction of the thin film transistor array panel in the liquid crystal display according to the embodiment of the present invention is described in detail with reference to the accompanying drawings.

[0139] A first example of the thin film transistor array panel in the liquid crystal display according to the embodiments of the present invention is described with reference to FIGS. 11 to 12B.

[0140] FIG. 11 is a layout view of an example of the thin film transistor array panel in a liquid crystal display according to embodiments of the present invention, and FIGS. 12A and 12B are cross-sectional views of the thin film transistor array panel taken along lines XIIA-XIIA and XIIB-XIIB of FIG. 11, respectively.

[0141] A plurality of gate lines 121 and a plurality of storage electrode lines 131 are disposed on an insulating substrate 110 made of transparent glass or plastic.

[0142] Gate lines 121 primarily extend in a horizontal direction to transmit the gate signals. Gate lines 121 include a plurality of gate electrode 124 that protrude downwardly, and end portions 129 that have wide surface areas for connection to other layers or an external driving circuit.

[0143] A gate driving circuit (not shown) that generates the gate signals may be mounted on a flexible printed circuit film (not shown) attached on substrate 110. Alternatively, the gate driving circuit may be directly mounted on substrate 110, or it may be integrated into substrate 110. In a case where the gate driving circuit is integrated into substrate 110, gate lines 121 may be directly connected to the gate driving circuit.

[0144] Each of storage electrode lines 131 primarily extends in the horizontal direction and includes a plurality of enlarged portions 137 of which widths are enlarged downwardly. Each of storage electrode lines 131 may further include end portions that have wide areas for connection to other layers or an external driving circuit. However, the shape and arrangement of storage electrode lines 131 may be modified in various manners.

[0145] Each of storage electrode lines 131 is alternately applied with predetermined voltages of the high level voltage $V+$ of about 5V and the low level voltage $V-$ of about 0V in units of a frame.

[0146] A signal generating circuit (not shown) that generates the storage signals may be mounted on a flexible printed circuit film (not shown) attached on substrate 110. Alternatively, the signal generating circuit may be directly mounted on substrate 110, or it may be integrated into substrate 110. In a case where the signal generating circuit is integrated into substrate 110, storage electrode line 131 may extend to be directly connected to the signal generating circuit.

[0147] Gate lines 121 and storage electrode lines 131 may be made of an aluminum-containing metal such as aluminum (Al) and an aluminum alloy, a silver-containing metal such as silver (Ag) and a silver alloy, a copper-containing metal such as copper (Cu) and a copper alloy, a molybde-

num-containing metal such as molybdenum (Mo) and a molybdenum alloy, chromium (Cr), tantalum (Ta), and titanium (Ti). Alternatively, gate lines 121 and storage electrode lines 131 may have a multi-layered structure including two conductive layers (not shown) having different physical properties. One of the two conductive layers is made of a metal having low resistivity, for example an aluminum-containing metal, a silver-containing metal, and a copper-containing metal, in order to reduce signal delay or voltage drop. The other conductive layer is made of a material having good physical, chemical, and electrical contact characteristics with other materials, particularly with ITO (indium tin oxide) and IZO (indium zinc oxide), such as a molybdenum-containing metal, chromium, titanium, and tantalum. As a preferred example of the combination, a combination of a lower chromium layer and an upper aluminum alloy layer, or a combination of a lower molybdenum alloy layer and an upper aluminum layer may be used. Alternatively, gate lines 121 and storage electrode lines 131 may be made of various metals and conductive materials.

[0148] Side surfaces of gate lines 121 and storage electrode lines 131 may be slanted with respect to a surface of substrate 110, and the slanted angle may be in a range of about 30° to about 80°.

[0149] A gate insulating layer 140 made of a silicon nitride SiN_x , a silicon oxide SiO_x , or the like is formed on gate lines 121 and storage electrode lines 131.

[0150] A plurality of semiconductor stripes 151 made of hydrogenated amorphous silicon (abbreviated to a-Si) or polysilicon are formed on the gate insulating film 140. The semiconductor stripes 151 primarily extend in the vertical direction, and include a plurality of projections 154 that extend toward the gate electrodes 124. In addition, the widths of the semiconductor stripes 151 are enlarged at regions near gate lines 121 and storage electrode lines 131 to cover wide areas thereof.

[0151] A plurality of line-shaped and island-shaped ohmic contacts 161 and 165 are formed on the semiconductor stripes 151. The ohmic contacts 161 and 165 may be made of silicide or n+ hydrogenated amorphous silicon that is heavily doped with n-type impurities such as phosphorus (P). The line-shaped ohmic contacts 161 include a plurality of projections 163. Each pair of a projection 163 and an island-shaped ohmic contact 165 is disposed on a protrusion 154 of a semiconductor stripe 151.

[0152] Side surfaces of the semiconductor stripes 151 and the ohmic contacts 161 and 165 are also slanted with respect to the surface of the substrate 110, and the slanted angle may be in a range of about 30° to about 80°.

[0153] A plurality of data lines 171 and a plurality of drain electrodes 175 are formed on the ohmic contacts 161 and 165 and the gate insulating film 140.

[0154] Data lines 171 that transmit data signals primarily extend in the vertical direction to intersect gate lines 121 and storage electrode lines 131. Data lines 171 include a plurality of source electrodes 173 that protrude toward the gate electrodes 124, and end portions 179 that have wide areas for connection to other layers or external driving circuits. A data driving circuit (not shown) that generates the data signals may be mounted on a flexible printed circuit film (not shown) attached on substrate 110. Alternatively, the data driving circuit may be directly mounted on substrate 110, or it may be integrated into substrate 110. If the data driving

circuit is integrated into substrate **110**, data lines **171** may extend to be directly connected to the data driving circuit.

[0155] Drain electrode **175** is separated from data line **171** and faces a source electrode **173** with the gate electrode **124** interposed therebetween. Each of drain electrodes **175** includes a wide end and a bar-shaped end. The wide end overlaps an enlarged portion of storage electrode line **131**, and the bar-shaped end is partially surrounded by the curved source electrode **173**.

[0156] One gate electrode **124**, one source electrode **173**, and one drain electrode **175** together with one protrusion **154** of one semiconductor stripe constitute one thin film transistor (TFT). The channel of the thin film transistor is formed in the protrusion **154** between the source electrode **173** and drain electrode **175**.

[0157] Preferably, data lines **171** and drain electrodes **175** are made of molybdenum (Mo), a refractory metal such as chromium (Cr), tantalum (Ta), and titanium (Ti), or an alloy thereof. Data lines **171** and drain electrodes **175** may have a multi-layered structure including a refractory metal layer (not shown) and a low-resistivity conductive layer (not shown). As an example of the multi-layered structure, there are a double-layered structure of a lower chromium (or molybdenum alloy) layer and an upper aluminum alloy layer, and a triple-layered structure of a lower molybdenum alloy layer, an intermediate aluminum alloy layer, and an upper molybdenum alloy layer. However, instead of the aforementioned materials, data line **171** and drain electrode **175** may be made of various other metals and conductive materials.

[0158] Preferably, side surfaces of data lines **171** and drain electrodes **175** may also be slanted with respect to the surface of substrate **110**, in a slant angle ranging from about 30° to about 80°.

[0159] The ohmic contacts **161** and **165** are interposed only between the underlying semiconductor stripes **151** and the overlying data lines **171** and drain electrodes **175**, and have a function of reducing contact resistance therebetween. Although the widths of the semiconductor stripes **151** are smaller than those of data lines **171** in most regions, the widths of the portions where gate lines **121** and the storage electrode lines **121** intersect each other are enlarged as described above. The semiconductor stripes **151** have exposed portions that are not covered by data lines **171** and drain electrodes **175**, such as portions disposed between the source electrodes **173** and drain electrodes **175**.

[0160] A passivation layer **180** is formed on data line **171**, drain electrode **175**, and the exposed portions of the semiconductor stripes **151**. Passivation layer **180** may be made of an inorganic or organic insulating material and have a planarized surface. As an example of the insulating material, there are a silicon nitride and a silicon oxide. The organic insulating material may have photosensitivity, and the dielectric constant thereof is preferably about 4.0 or less. Alternatively, passivation layer **180** may have a double-layered structure of a lower inorganic layer and an upper organic layer in order to sustain an excellent insulating property of the organic layer and protect the exposed portions of the semiconductor stripes **151**.

[0161] A plurality of contact holes **182** and **185** that expose end portions **179** of data lines **171** and drain electrodes **175**, respectively, are formed on passivation layer **180**. A plurality of contact holes **181** that expose end

portions **129** of gate lines **121** are formed on passivation layer **180** and the gate insulating layer **140**.

[0162] A plurality of pixel electrodes **191** and a plurality of contact assistants **81** and **82** are formed on passivation layer **180**. Pixel electrodes **191** may be made of a transparent conductive material such as ITO and IZO, or a reflective metal such as aluminum, silver, and chromium, or an alloy thereof.

[0163] Pixel electrode **191** is physically and electrically connected to drain electrode **175** through the contact hole **185**, and receives a data voltage applied by drain electrode **175**. Pixel electrode **191** that is supplied with the data voltage together with a common electrode (not shown) that is disposed in the other display panel (not shown) and supplied with a common voltage generates an electric field. The electric field determines alignment of liquid crystal molecules in the liquid crystal layer (not shown) between the two electrodes. The polarization of light passing through the liquid crystal layer varies according to the alignment of the liquid crystal molecules. Pixel electrode **191** and the common electrode constitute a capacitor (hereinafter, referred to as a liquid crystal capacitor) that sustains the applied voltage after the thin film transistor turns off.

[0164] A capacitor formed by overlapping pixel electrode **191** and drain electrode **175** that is electrically connected to pixel electrode **191** with storage electrode line **131** is called a storage capacitor which increases voltage storage capacity. Due to the enlarged portion **137** of storage electrode line **131**, the overlapping area increases, so that electrostatic capacitance of the storage capacitor increases.

[0165] Contact assistants **81** and **82** are connected to the end portions **129** of gate lines **121** and the end portions **179** of data lines **171** through contact holes **181** and **182**, respectively. Therefore, contact assistants **81** and **82** have the function of providing adhesion of end portions **129** and **179** of gate and data lines **121** and **171** to the external devices and protecting the end portions **129** and **179**.

[0166] Next, another example of the thin film transistor array panel in the liquid crystal display according to the embodiments of the present invention is described with reference to FIGS. **13** to **14B**.

[0167] FIG. **13** is a layout view of another example of a thin film transistor array panel in a liquid crystal display according to embodiments of the present invention. FIGS. **14A** and **14B** are cross-sectional views of the thin film transistor array panel taken along lines XIVA-XIVA and XIVB-XIVB of FIG. **13**, respectively.

[0168] The construction of this example of the thin film transistor array panel according to the exemplary embodiment is substantially the same as that shown in FIGS. **11** to **12B**.

[0169] A plurality of gate lines **121** having gate electrodes **124** and end portions **129** and a plurality of storage electrode lines **131** having a plurality of enlarged portions **137** are disposed on substrate **110**. A gate insulating layer **140**, a plurality of semiconductor stripes **151** having projections **154**, a plurality of line-shaped ohmic contacts **161** having projections **163**, and a plurality of island-shaped ohmic contacts **165** are sequentially disposed thereon, in this order. Source electrodes **173**, a plurality of data lines **171** having end portions **179**, and a plurality of drain electrodes **175** are disposed on the ohmic contacts **161** and **165**. A passivation layer **180** is disposed thereon. A plurality of contact holes **181**, **182**, and **185** are formed in passivation layer **180** and

the gate insulating layer 140. A plurality of pixel electrodes 191 and a plurality of contact assistants 81 and 82 are disposed thereon.

[0170] Unlike the thin film transistor array panel shown in FIGS. 11 to 12B, in the thin film transistor array panel according to the example, the semiconductor stripes 151 have substantially the same planar shape as those of data line 171, drain electrode 175, and the underlying ohmic contacts 161 and 165 except for the projections 154 where the thin film transistors are disposed. Namely, the semiconductor stripes 151 have unexposed portions under data lines 171, drain electrodes 175, and underlying ohmic contacts 161 and 165 and exposed portions that are not covered between the source electrodes 173 and drain electrode 175.

[0171] According to the present invention, after the common voltage is fixed to be a predetermined voltage, the levels of the storage signals are changed in a predetermined period and are applied to the storage electrode lines. At this time, storage signals having different voltages are applied to the adjacent storage electrode lines. As a result, the range of the pixel electrode voltage is widened and the range of the pixel voltage is also widened. Since the range of voltage for representing grayscales is widened, image quality can be improved.

[0172] In a case where the data voltages having the same range are applied, a wider range of the pixel voltage can be generated to the application of a constant storage signal. Therefore, power consumption is reduced. In addition, the common voltage is fixed at a constant value, so that the power consumption can be further reduced.

[0173] In addition, since the range of the pixel electrode voltage before the completion of the charging operation of the liquid crystal is wider than the range of the pixel electrode voltage after the completion of the charging operation of the liquid crystal, a voltage that is higher or lower than the target voltage is applied at the initial time of driving the liquid crystal, the response speed of the liquid crystal can be improved.

[0174] While this invention has been described in connection with what is presently considered to be practical exemplary embodiments, it is to be understood by those ordinarily skilled in the art that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

What is claimed is:

1. A display device comprising:

- a plurality of gate lines transmitting gate signals, each gate signal having a gate-on voltage and a gate-off voltage;
- a plurality of data lines intersecting the gate lines and transmitting data voltages;
- a plurality of storage electrode lines extending in parallel to the gate lines and transmitting storage signals;
- a plurality of pixels arranged in a matrix, each pixel comprising a switching element connected to a gate line and a data line, a liquid crystal capacitor connected to the switching element and a common voltage, and a storage capacitor connected to the switching element and a storage electrode line; and
- a plurality of storage signal generators generating the storage signals based on the gate signals,

wherein the storage signal applied to each pixel has a changed voltage level, immediately after the charging a data voltage into the liquid crystal capacitor and the storage capacitor is finished.

2. The display device of claim 1, wherein when the charged data voltage has a positive polarity, the storage signal is changed from a low level to a high level, and when the charged data voltage has a negative polarity, the storage signal is changed from the high level to the low level.

3. The display device of claim 2, wherein the gate-on voltage is maintained for about 1 H.

4. The display device of claim 2, wherein the storage signals applied to adjacent storage electrode lines have different levels from each other, and the storage signal applied to the same storage electrode line is inverted every frame.

5. The display device of claim 1, wherein the display device performs row inversion.

6. The display device of claim 1, wherein the common voltage has a constant value.

7. The display device of claim 1, wherein the storage signal generator is formed along with the gate lines, the data lines, and the storage electrode lines.

8. The display device of claim 1, wherein the storage signal generator comprises a plurality of signal generating circuits outputting the storage signals to the storage electrode lines, respectively.

9. The display device of claim 8, wherein the respective signal generating circuits comprise:

a driving voltage;

a first switching element having a control terminal connected to a first gate line, an input terminal connected to the driving voltage, and an output terminal connected to a corresponding storage electrode line; and

a second switching element having a control terminal connected to a second gate line adjacent to the first gate line, an input terminal connected to the driving voltage, and an output terminal connected to the storage electrode line.

10. The display device of claim 9, wherein the driving voltage comprises a first level and a second level that is less than the first level, and the level of the driving voltage is inverted every about 1 H.

11. The display device of claim 8, wherein the respective signal generating circuit comprises:

a first driving voltage;

a second driving voltage;

a first switching element having a control terminal connected to a first gate line and an output terminal connected to a corresponding storage electrode line; and

a second switching element having a control terminal connected to a second gate line adjacent to the first gate line and an output terminal connected to the storage electrode line,

wherein the first switching element has an input terminal connected to one of the first and second driving voltages, and the second switching element has an input terminal connected to another of the first and second driving voltages.

12. The display device of claim 11, wherein the first and second driving voltages comprise a first level and a second level that is less than the first level, respectively,

the first driving voltage has a waveform that is inverted with respect to a waveform of the second driving voltage, and

the first and second driving voltages are inverted every frame.

13. The display device of claim **11**, further comprising a first conductor transmitting the first driving voltage and a second conductor transmitting the second driving voltage and that is adjacent to the first conductor in a longitudinal direction, the positions of the first conductor and the second conductor are changed every pixel row, and

the input terminals of the first and second switching elements are connected to the adjacent conductor, respectively.

14. The display device of claim **11**, further comprising a first conductor transmitting the first driving voltage and a second conductor transmitting the second driving voltage and that is parallel to the first conductor in a longitudinal direction, and the connection between the input terminals of the first and second switching elements and the first and second conductor are changed every pixel row.

15. The display device of claim **8**, wherein the respective signal generating circuits comprise:

- a first driving voltage having a first level;
- a second driving voltage having a second level different from the first level;
- a first selection voltage;
- a second selection voltage having a waveform that is inverted with respect to a waveform of the first selection voltage;
- a first switching element having an input terminal connected to the first selection voltage and a control terminal connected to a gate line;
- a second switching element having an input terminal connected to the second selection voltage and a control terminal connected to the gate line;
- a third switching element having a control terminal connected to an output terminal of the first switching element and an output terminal connected to a corresponding storage electrode line; and
- a fourth switching element having a control terminal connected to an output terminal of the second switching element and an output terminal connected to the storage electrode line,

wherein the third switching element has an input terminal connected to one of the first and second driving volt-

ages, and the fourth switching element has an input terminal connected to another of the first and second driving voltages.

16. The display device of claim **15**, wherein the first and second selection voltages comprise a third level and a fourth level that is less than the third level, respectively, the first selection voltage has a waveform that is inverted with respect to a waveform of the second selection voltage, and the first and second selection voltages are inverted every frame.

17. The display device of claim **15**, further comprising a first conductor transmitting the first driving voltage and a second conductor transmitting the second driving voltage and that is adjacent to the first conductor in a longitudinal direction, the positions of the first conductor and the second conductor are changed every pixel row, and the input terminals of the third and fourth switching elements are connected to the adjacent conductor, respectively.

18. The display device of claim **1**, wherein the storage signal generator comprises a shift register having a plurality of stages that are connected to the storage electrode lines, respectively.

19. The display device of claim **18**, wherein the storage signal generator further comprises a plurality of inverters connected to odd-numbered stages or even-numbered stages.

20. The display device of claim **18**, wherein the shift register is an integrated circuit.

21. A display device having a plurality of intersecting gate lines and data lines defining a matrix of pixels each of which includes a liquid crystal capacitor, the data lines carrying data signals for charging the liquid crystal capacitor with a data voltage, comprising;

- a plurality of storage electrode lines extending in parallel to the gate lines;
- a storage capacitor for each pixel connected to the storage electrode lines; and
- a plurality of storage signal generators connected to the storage electrode lines and generating storage signals for changing the voltage level of the liquid crystal capacitor and the storage capacitor so that when the charged data voltage has a positive polarity, the storage signal is changed from a low level to a high level, and when the charged data voltage has a negative polarity, the storage signal is changed from the high level to a low level.

* * * * *

专利名称(译)	显示设备		
公开(公告)号	US20080062104A1	公开(公告)日	2008-03-13
申请号	US11/636197	申请日	2006-12-07
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	LEE BAEK WOON		
发明人	LEE, BAEK-WOON		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3614 G09G3/3648 G09G3/3655 G09G2320/0252 G09G2300/0408 G09G2300/0876 G09G3/3688		
优先权	1020050120740 2006-09-12 KR		
外部链接	Espacenet USPTO		

摘要(译)

一种显示装置，包括传输栅极信号的多条栅极线，其中每个栅极信号具有栅极导通电压和栅极截止电压，多条数据线与栅极线交叉并传输数据电压，多条存储电极线延伸与栅极线平行并传输存储信号，以矩阵排列的多个像素，其中每个像素包括连接到栅极线和数据线的开关元件，连接到开关元件的液晶电容器和公共电压，连接到开关元件和存储电极线的存储电容器，以及基于栅极信号产生存储信号的多个存储信号发生器。在将数据电压充电到液晶电容器中并且存储电容器完成之后，施加到每个像素的存储信号立即具有改变的电压电平。

