



US 20090190074A1

(19) **United States**
(12) **Patent Application Publication**
Woo et al.

(10) **Pub. No.: US 2009/0190074 A1**
(43) **Pub. Date: Jul. 30, 2009**

(54) **LIQUID CRYSTAL DISPLAY**

Publication Classification

(75) Inventors: **Jonghoon Woo**, Gyeonggi-do (KR);
Youngbok Lee, Gyeonggi-do (KR)

(51) **Int. Cl.**
G02F 1/1335 (2006.01)
G02F 1/1333 (2006.01)

Correspondence Address:
HOLLAND & KNIGHT LLP
2099 PENNSYLVANIA AVE, SUITE 100
WASHINGTON, DC 20006 (US)

(52) **U.S. Cl.** **349/106; 349/110**

(57) **ABSTRACT**

Disclosed is a liquid crystal display which can switch between a wide viewing angle and a narrow viewing angle in a quad type pixel structure including white subpixels. The liquid crystal display comprises: a plurality of quad type pixels each having an R subpixel, a G subpixel, a B subpixel, and a W subpixel; and a plurality of light blocking patterns disposed on the W subpixels, for guiding light from the W subpixels to a side viewing angle, wherein the W subpixels are fixed at specific positions of the quad type pixels respectively, and the R, G, and B subpixels have a different arrangement for each of the quad type pixels adjacent horizontally or vertically to each other.

(73) Assignee: **LG DISPLAY CO., LTD.**, Seoul (KR)

(21) Appl. No.: **12/314,914**

(22) Filed: **Dec. 18, 2008**

(30) **Foreign Application Priority Data**

Dec. 26, 2007 (KR) 10-2007-0138031

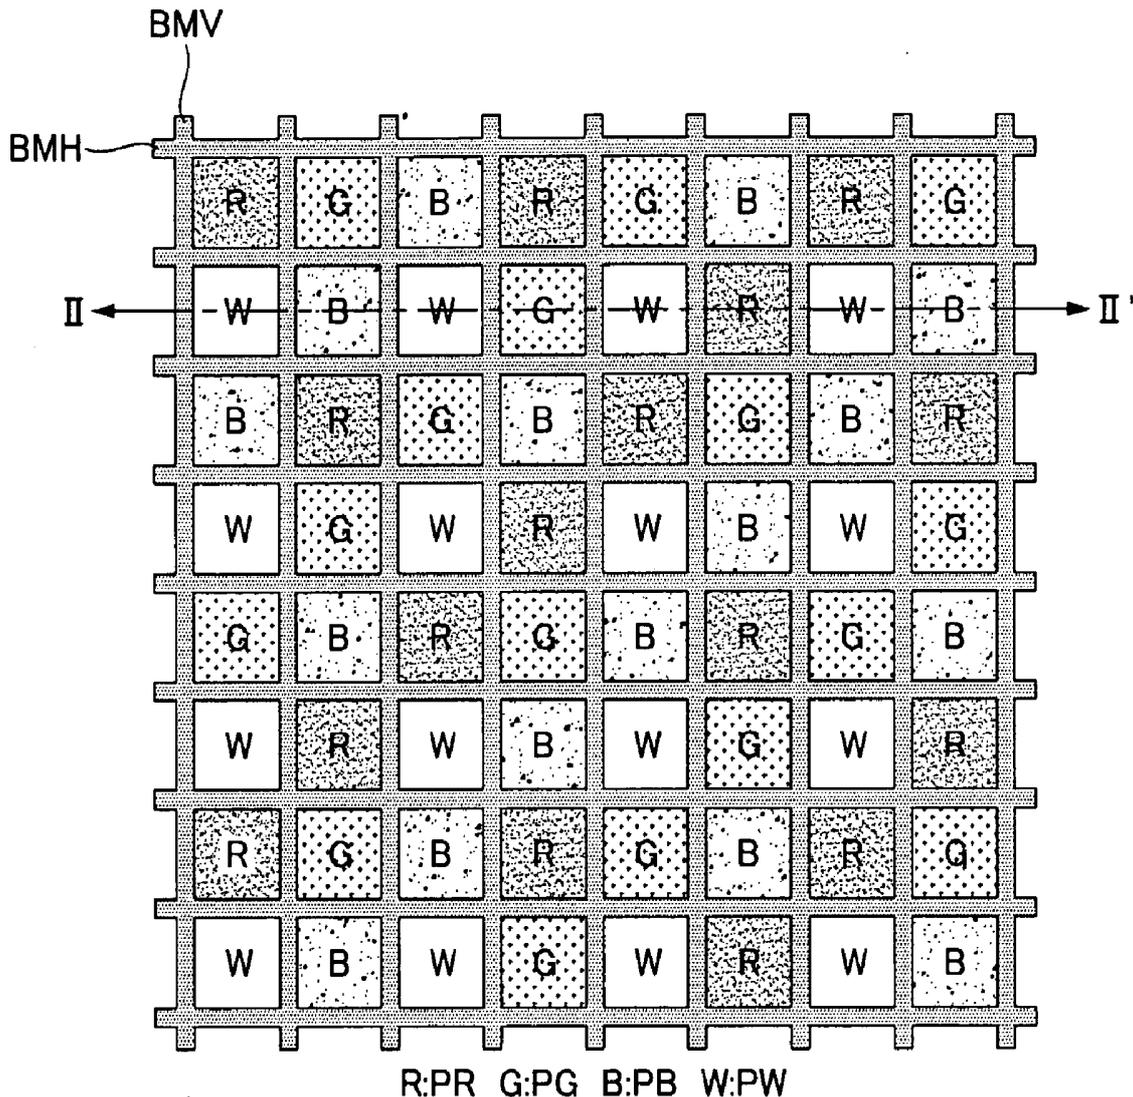


FIG. 1

(Related Art)

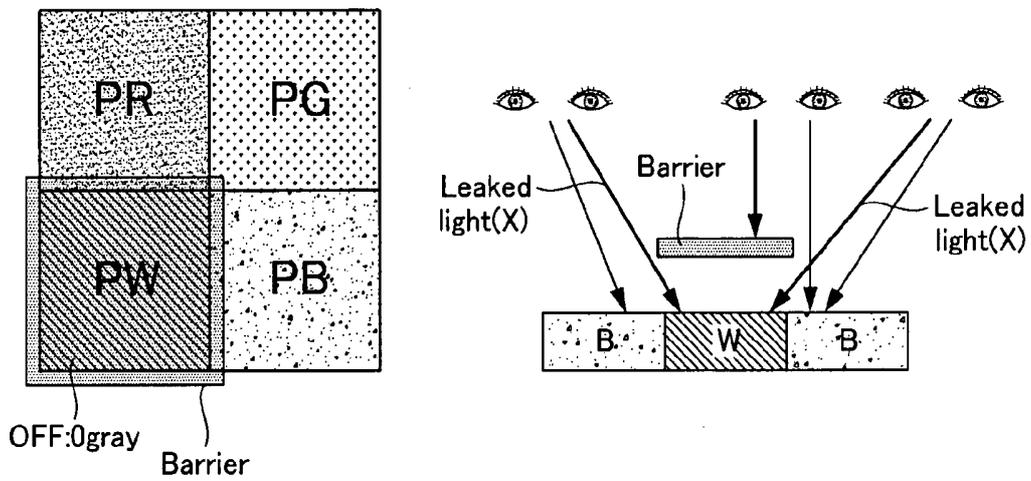


FIG. 2

(Related Art)

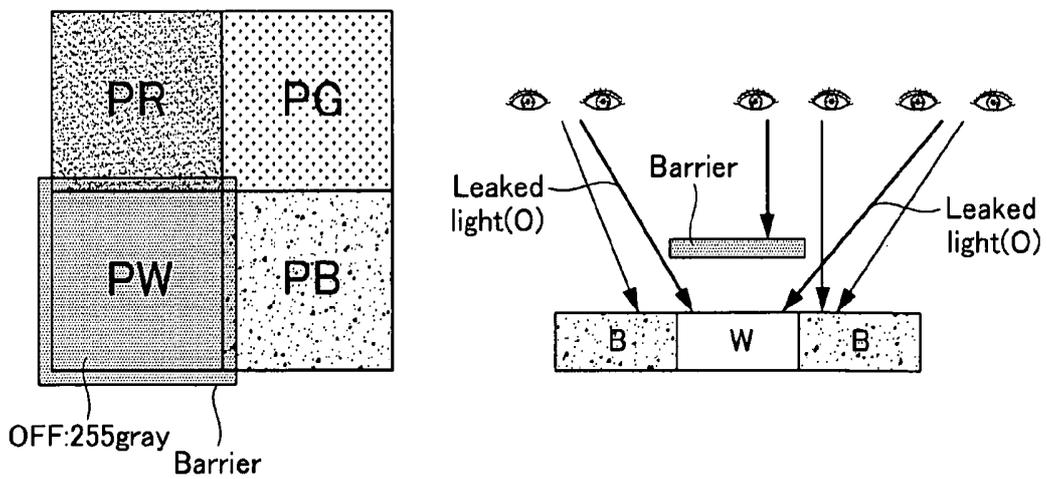


FIG. 3

(Related Art)

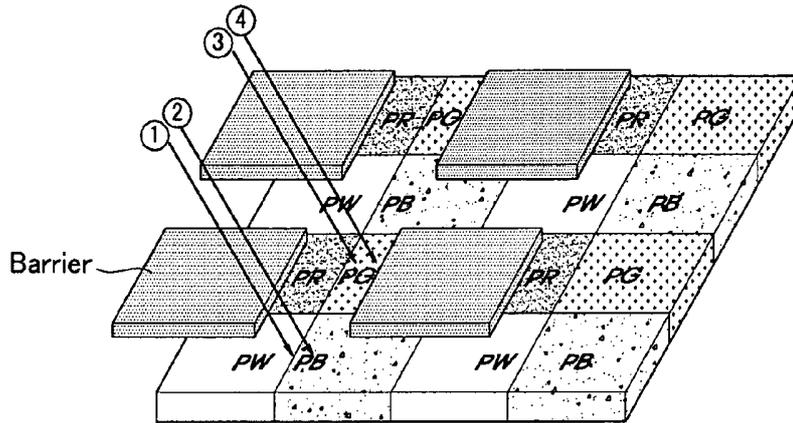


FIG. 4

(Related Art)

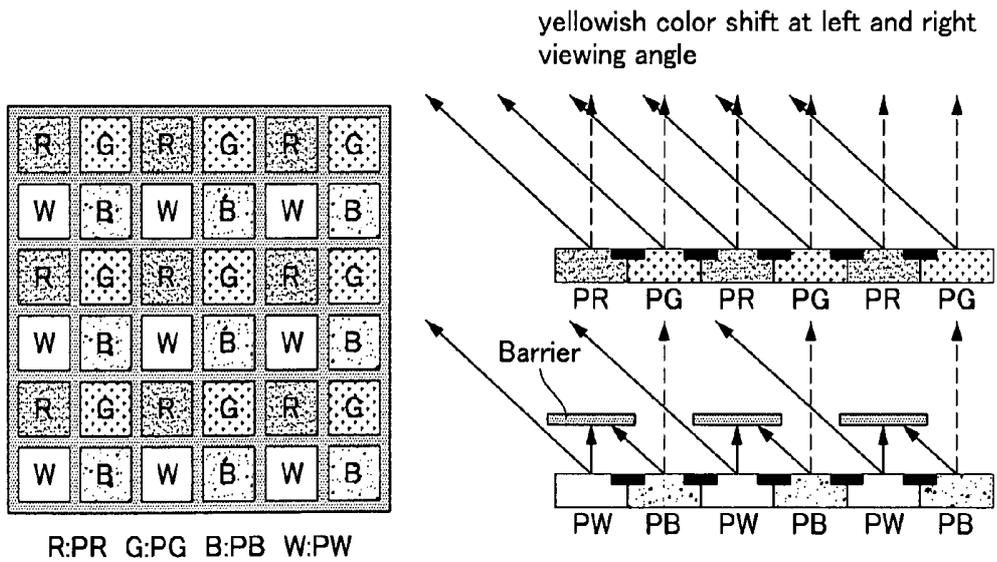


FIG. 5

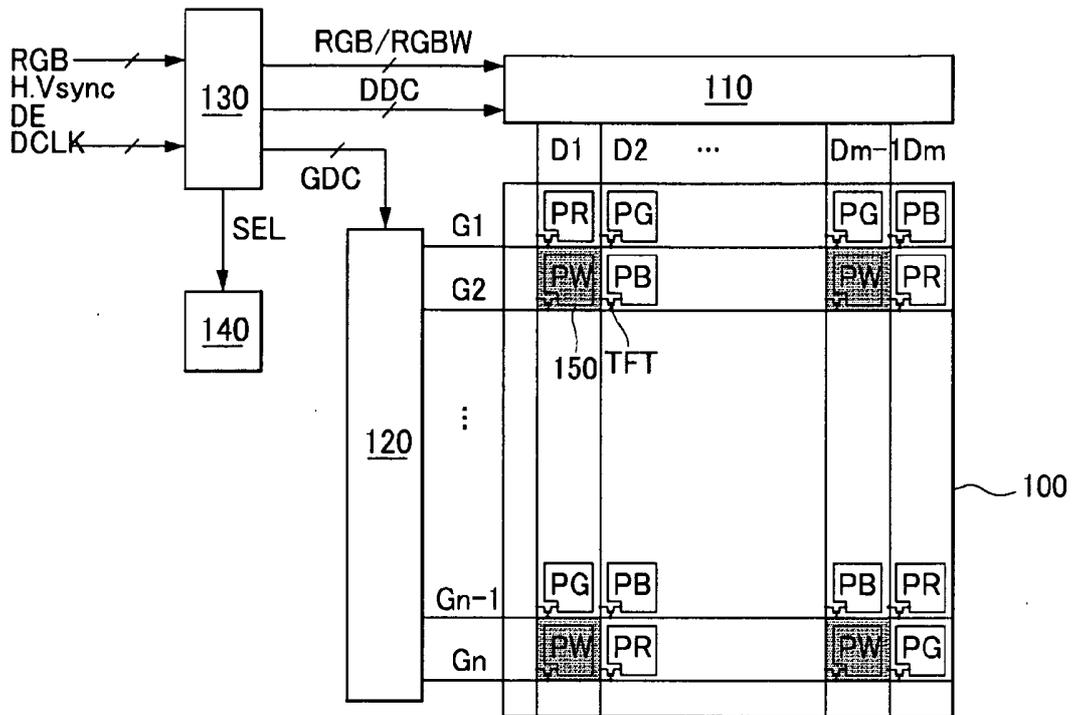


FIG. 6

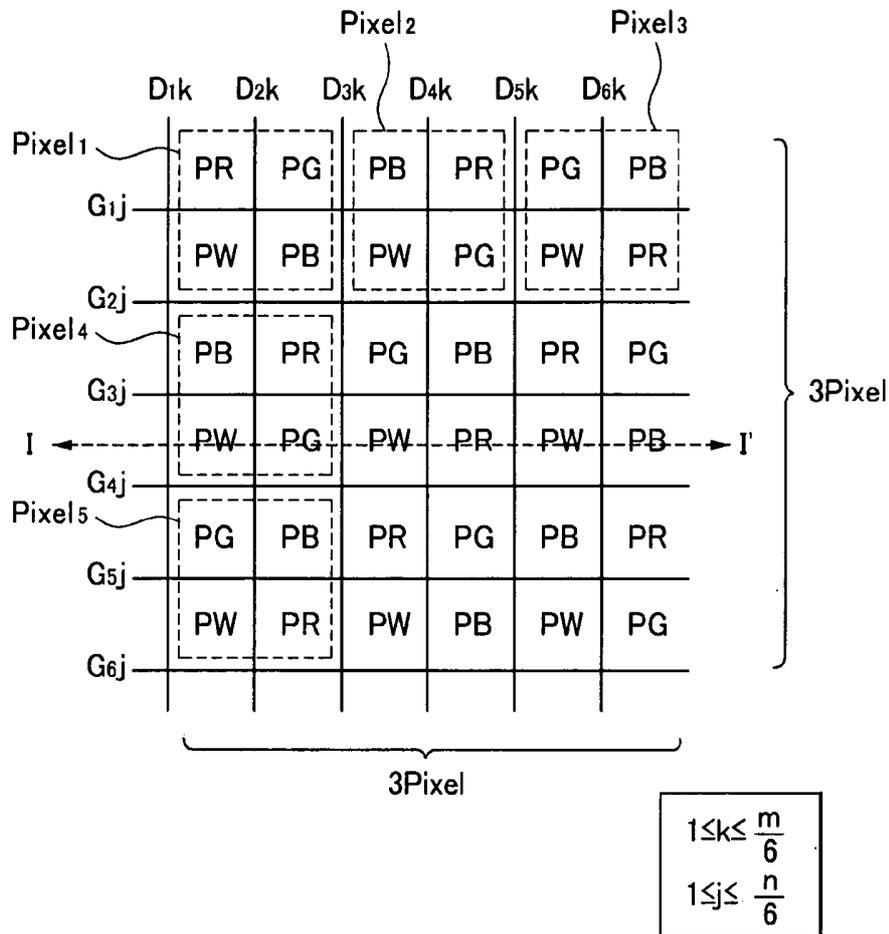


FIG. 7

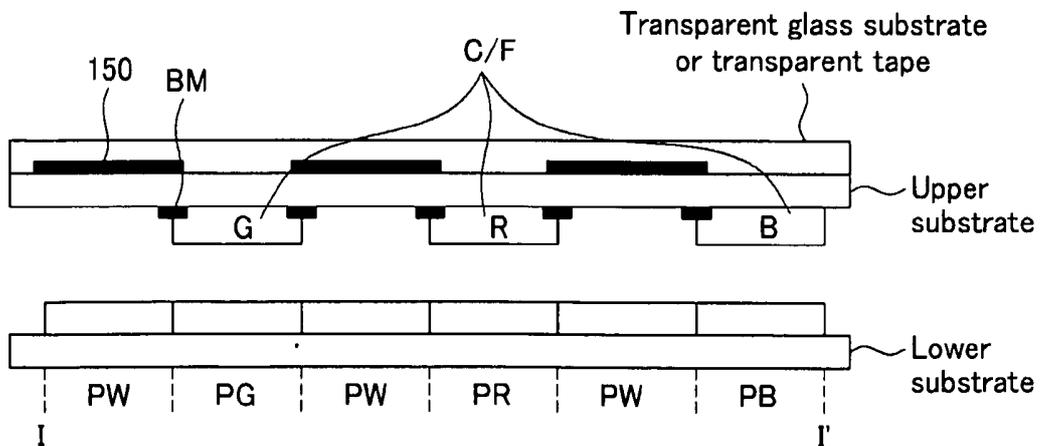


FIG. 8

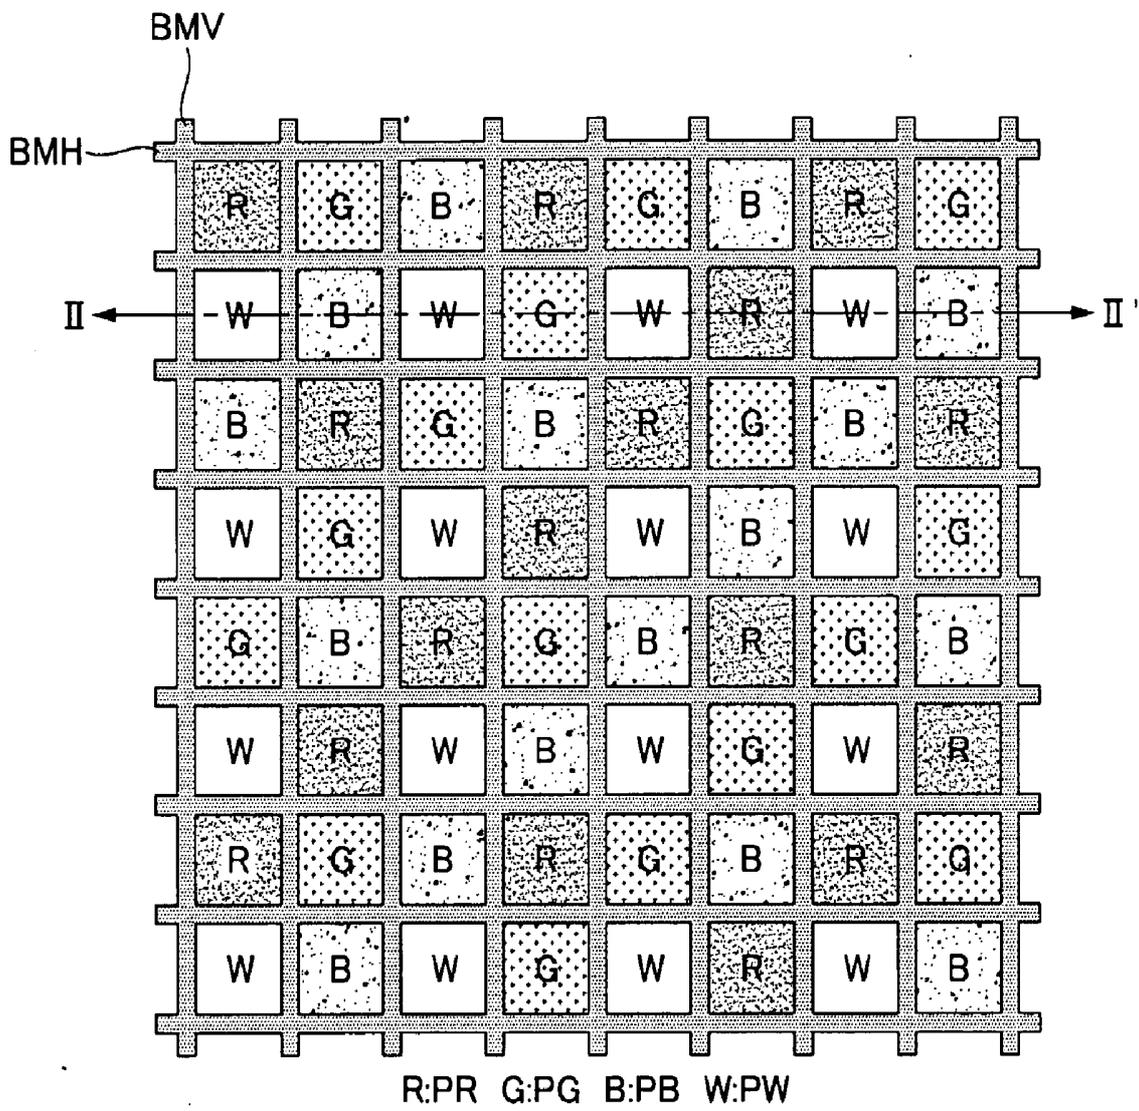


FIG. 9

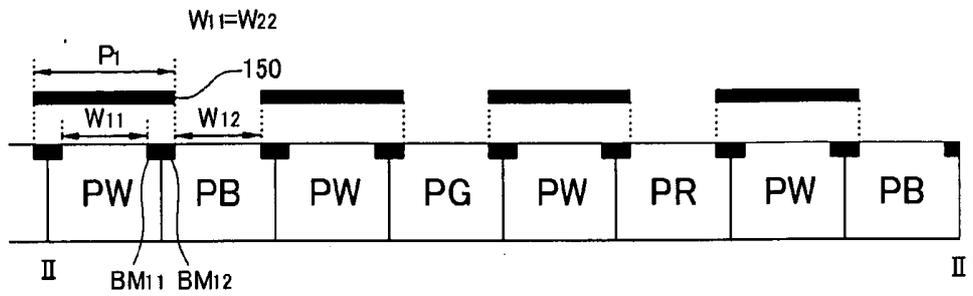


FIG. 10

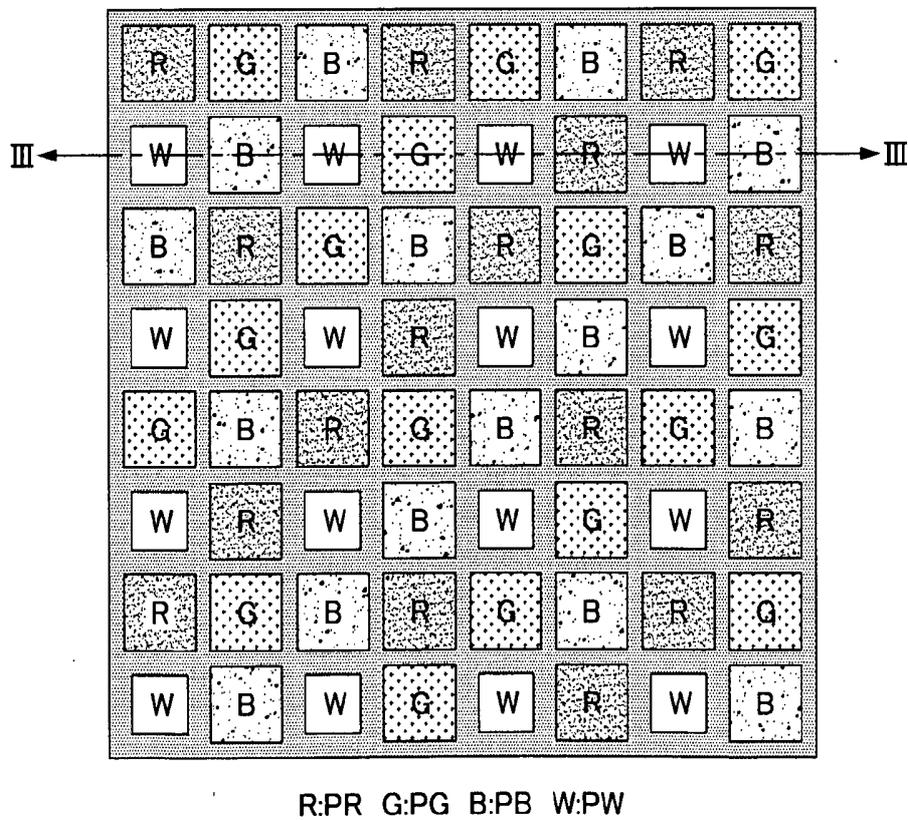


FIG. 11

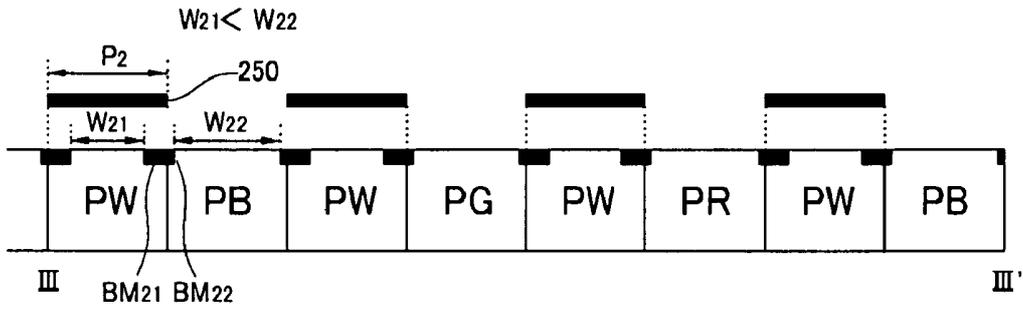


FIG. 12

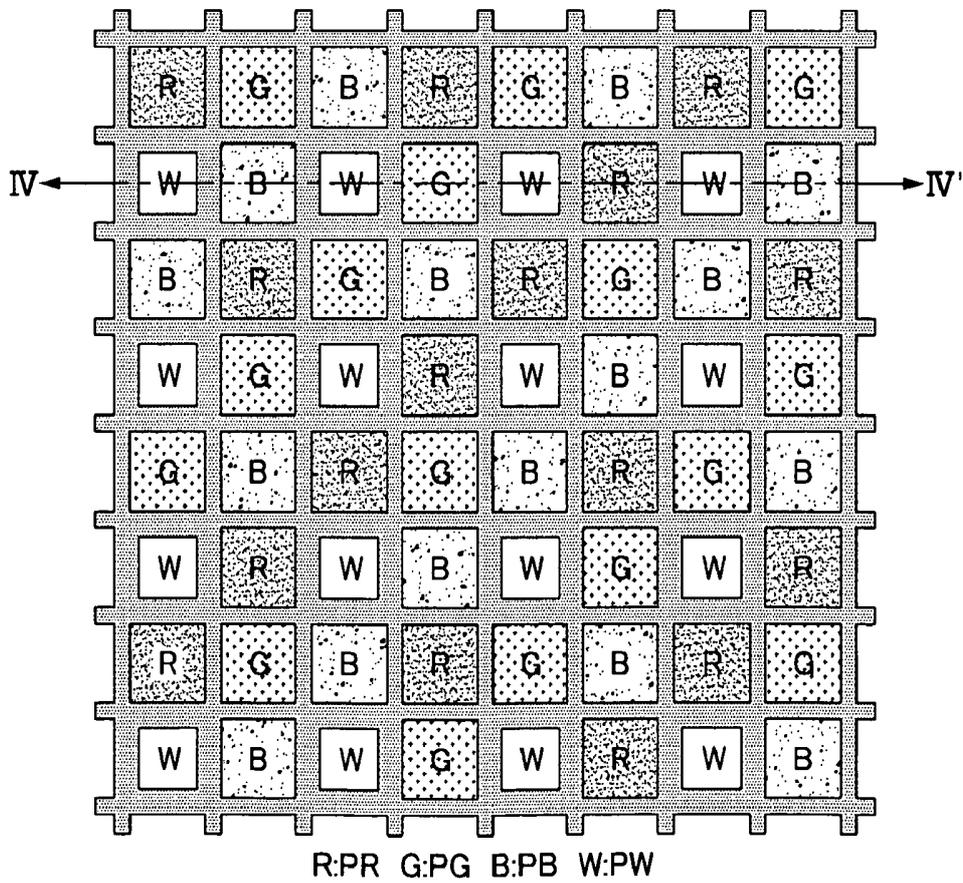


FIG. 13

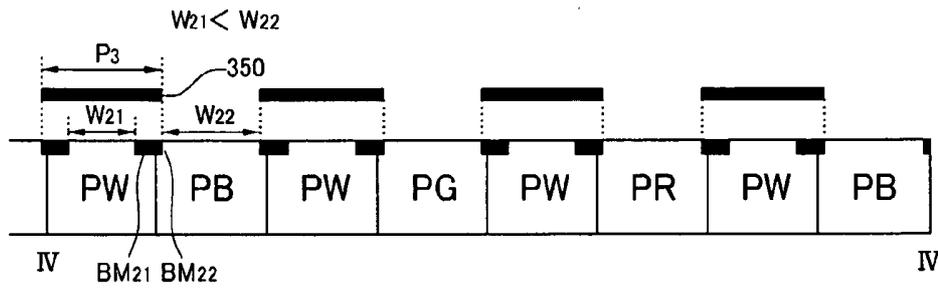


FIG. 14


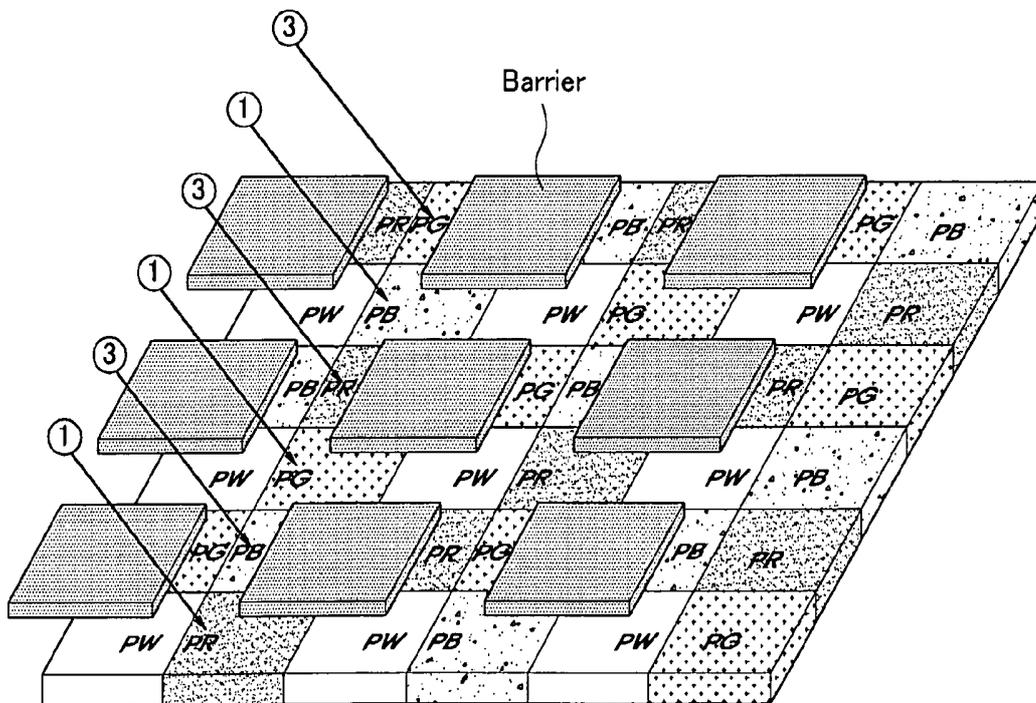


FIG. 15

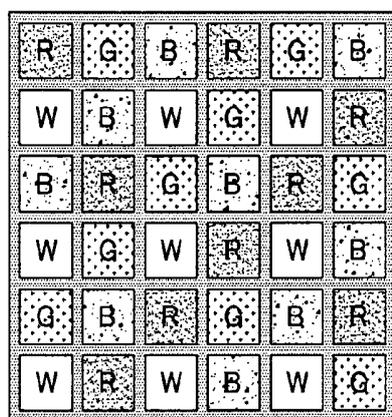

R:PR G:PG B:PB W:PW

Solve the problem of yellowish color shift at left and right viewing angle


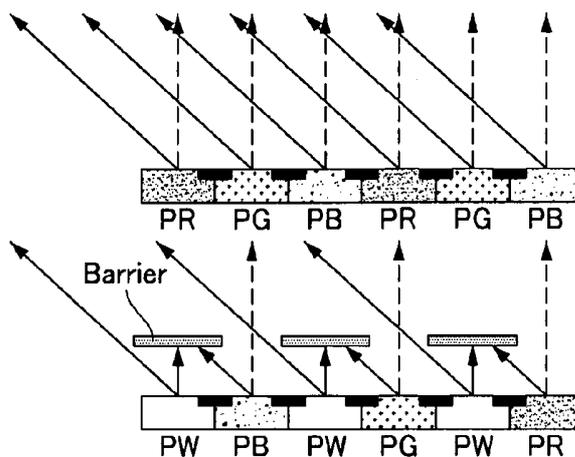


FIG. 16



(a)

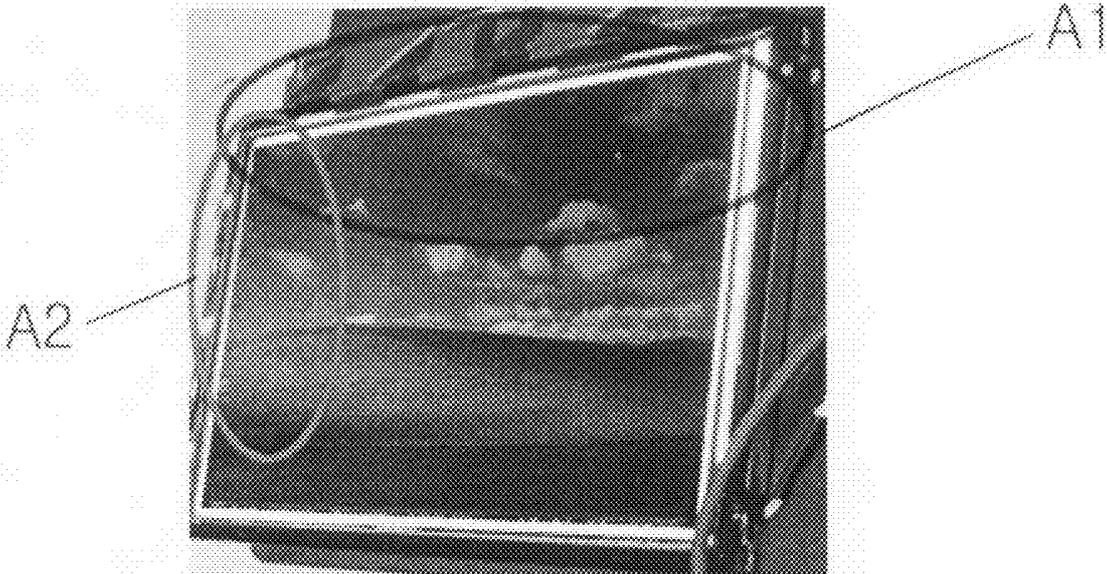

(b)

LIQUID CRYSTAL DISPLAY

[0001] This application claims the benefit of Korean Patent Application No. 10-2007-0138031 filed on Dec. 26, 2007, which is hereby incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] This document relates to a liquid crystal display, more particularly, to a liquid crystal display which can switch between a wide viewing angle and a narrow viewing angle by comprising white subpixels.

[0004] 2. Related Art

[0005] In the recent information society, display devices have been in the spotlight as visual information transfer media. In recent years, a cathode ray tube or a Braun tube becoming the mainstream is problematic in the heavy weight and bulky size. Various kinds of panel displays which can overcome the limitations of the cathode ray tube have been developed.

[0006] Flat panel display devices include liquid crystal display (LCD) devices, field emission display (FED) devices, plasma display panel (PDP) devices and an electroluminescence (EL) displays. Most of these display devices are already available on the market.

[0007] Among them, the liquid crystal display device is on a trend of its application scope being broadened due to characteristics such as light weight, thinness, lower power consumption drive and the like. According to this trend, the liquid crystal display devices are used in portable computers, such as notebook PCs, office automation equipment, audio/video equipment, outdoor and indoor advertisement displays, and so on. The liquid crystal display devices control the transmissivity of a light beam in accordance with a video signal applied to a plurality of control switches, which are arranged in a matrix, thereby displaying a desired picture on a screen. Due to the result of research and development and the use of mass production technology, the liquid crystal display device has rapidly been developed to be of large size and high resolution.

[0008] Recently, there has been suggested a liquid crystal display device in which pixels formed on a liquid crystal display panel for security and privacy protection comprises a plurality of quad type pixels each having one white subpixel (hereinafter, referred to as "W subpixel") for viewing angle adjustment and three RGB subpixels, rather than comprising stripe type RGB subpixels. A light blocking member (hereinafter, referred to as "barrier") is disposed on the W subpixel of the quad type pixels, spaced apart a predetermined gap, and guides light from the W subpixel toward a side viewing angle to reduce visibility from the sides, thereby enabling the implementation of a narrow viewing angle. By such a liquid crystal display device, the switching between a wide viewing angle mode and a narrow viewing angle mode can be arbitrarily controlled by the turn on/off of the W subpixel.

[0009] In the wide viewing angle mode, a quad type pixel is driven only by RGB subpixels PR, PG, and PB, with the W subpixel PW being turned off. As the W subpixel PW is turned off, there is generated no leaked light that deteriorates the visibility from a side viewing angle. Since the visibility is maintained well in both of the front and side viewing angle directions, the wide viewing angle mode is implemented.

[0010] In the narrow viewing angle mode, a quad type pixel is driven by all of the RGBW subpixels PR, PG, PB, and PW including the W subpixel PW. The W subpixel PW is turned on and the W subpixels PW and the barrier are spaced apart a predetermined gap from each other. Thus, from a side viewing angle, as shown in the drawing, the visibility is reduced much due to the affect of a leaked light from the W subpixel PW. On the contrary, from the front viewing angle, a leaked light from the W subpixel PW is blocked by the barrier. In this manner, while the visibility is maintained well in a front viewing angle direction, the visibility is lowered much in a side viewing angle direction, thereby implementing the narrow viewing angle mode.

[0011] By the way, as stated above, the liquid crystal display device having such a quad type pixel structure has the barrier spaced apart a predetermined gap from W subpixels PW. Hence, the degree of light shielding of the barrier on the RGB subpixels PR, PG, and PB in the side viewing angle directions is varied according to a viewing angle. For example, as shown in FIG. 3, there is a big difference in the degree of light shielding by the barrier among an image of the B subpixels PB viewed from □, an image of the G subpixels PG viewed from □. The difference in the degree of light shielding of the barrier on the RGB subpixels PR, PG, and PB leads to a difference in the size of RGP aperture regions exposed according to a side viewing angle, and this occurs in both of the wide viewing angle mode and the narrow viewing angle mode.

[0012] When the size of RGP aperture regions exposed in a side viewing angle direction is varied according to a viewing angle, if all of the subpixels of the quad type pixel as shown in FIG. 4 are fixedly disposed at specific positions, the observer senses the image of the B subpixels PB relatively much less than the images of the R and G subpixels PR and PG from a side viewing angle. This causes a greenish or yellowish color shift at a side viewing angle, and hence acts as a primary factor to destroy white balance and deteriorate display quality at a side viewing angle.

SUMMARY

[0013] An aspect of this document is to provide a liquid crystal display having quad type pixels capable of switching between a wide viewing angle and a narrow viewing angle, which can prevent a color shift by compensating for a difference in the degree of light shielding in a side viewing angle direction.

[0014] To accomplish the foregoing object, there is provided a liquid crystal display according to an embodiment of the present invention, comprising: a plurality of quad type pixels each having an R subpixel, a G subpixel, a B subpixel, and a W subpixel; and a plurality of light blocking patterns disposed on the W subpixels, for guiding light from the W subpixels to a side viewing angle, wherein the W subpixels are fixed at specific positions of the quad type pixels respectively, and the R, G, and B subpixels have a different array for each of the quad type pixels adjacent horizontally or vertically to each other.

[0015] Each of the quad type pixels is formed in a quadrangular structure including the R, G, and B subpixels and the W subpixel.

[0016] A quad type pixel having subpixels arranged in the order of B-R-G is adjacently disposed at the right side of a quad type pixel having subpixels arranged in the order of R-G-B; a quad type pixel having subpixels arranged in the

order of B-R-G is adjacently disposed below the quad type pixel having subpixels arranged in the order of R-G-B; a quad type pixel having subpixels arranged in the order of G-B-R is adjacently disposed at the left side of the quad type pixel having subpixels arranged in the order of R-G-B; and a quad type pixel having subpixels arranged in the order of G-B-R is adjacently disposed above the quad type pixel having subpixels arranged in the order of R-G-B.

[0017] In the quad type pixels, the arrangement order of the R, G, and B subpixels is repeated in units of 3 (quad type pixels) \times 3 (quad type pixels).

[0018] The light blocking patterns are patterned on a transparent glass substrate, and the glass substrate having the light blocking patterns is attached to an image display surface of the liquid crystal display panel having the quad type pixels.

[0019] The size of the light blocking patterns is larger than the aperture area of the W subpixels.

[0020] The aperture area of the W subpixels is equal to the aperture area of the respective R, G, and B subpixels.

[0021] The aperture area of the W subpixels is smaller than the aperture area of the respective R, G, and B subpixels.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated on and constitute a part of this specification illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0023] In the drawings:

[0024] FIG. 1 is a view showing the driving of a quad type pixel in a wide viewing angle mode;

[0025] FIG. 2 is a view showing the driving of a quad type pixel in a narrow viewing angle mode;

[0026] FIG. 3 is a view for explaining that there occurs a difference in the degree of light shielding from a side viewing angle in the conventional art;

[0027] FIG. 4 is a view for explaining that there occurs a color shift due to the difference in the degree of light shielding from a side viewing angle in the conventional art;

[0028] FIG. 5 is a block diagram showing a liquid crystal display according to an embodiment of the present invention;

[0029] FIG. 6 is a view showing that R, G, and B subpixels in quad type pixels have a different arrangement for each of the quad type pixels adjacent horizontally or vertically to each other;

[0030] FIG. 7 is a view for explaining the arrangement position of a barrier pattern;

[0031] FIG. 8 is a plan view showing a liquid crystal display according to a first embodiment of the present invention;

[0032] FIG. 9 is a cross sectional view taken along line II-II' of FIG. 8;

[0033] FIG. 10 is a plan view showing a liquid crystal display according to a second embodiment of the present invention;

[0034] FIG. 11 is a cross sectional view taken along line III-III' of FIG. 10;

[0035] FIG. 12 is a plan view showing a liquid crystal display according to a third embodiment of the present invention;

[0036] FIG. 13 is a cross sectional view taken along line IV-IV' of FIG. 12;

[0037] FIGS. 14 and 15 are views for explaining the compensation of a difference in the degree of light shielding of a

barrier on RGB subpixels in a side viewing angle direction according to the embodiments of the present invention; and [0038] FIG. 16 is a result screen of an experiment carried out by the compensation of a difference in the degree of light shielding in a side viewing angle direction.

DETAILED DESCRIPTION

[0039] Hereinafter, an implementation of this document will be described in detail with reference FIGS. 5 to 15.

[0040] FIG. 5 is a block diagram showing a liquid crystal display according to an embodiment of the present invention.

[0041] Referring to FIG. 5, the liquid crystal display of the present invention comprises a liquid crystal display panel 100 in which data lines D1 to Dm cross gate lines G1 to Gn, and a thin film transistor TFT for driving subpixels PR, PG, PB, and PW is formed at each of the crossing parts, a barrier pattern 150 patterned to correspond to the W subpixels PW of the liquid crystal display panel 100, and disposed on an image display surface of the liquid crystal display panel 100 in order to block light from the W subpixels PW in a front viewing angle direction and leak the light in a side viewing angle direction, a data driver 110 for supplying data to the data lines D1 to Dm of the liquid crystal display panel 100, a gate driver 120 for supplying scan pulses to the gate lines G1 to Gn of the liquid crystal display panel 100, a timing controller 130 for selectively outputting RGB data and RGBW data in accordance with an input viewing angle selection signal SEL and controlling the driving timing of the drivers 110 and 120, and a user interface 140 for inputting a viewing angle selection signal SEL so as to selectively drive in a wide viewing angle mode or in a narrow viewing angle mode.

[0042] The data lines D1 to Dm and the gate lines G1 to Gn are formed to cross each other at a predetermined gap in a lower substrate of the liquid crystal display panel 100. R, G, and B subpixels PR, PG, and PB for original image representation and a W subpixel PW for viewing angle adjustment are formed at the crossing regions of the data lines D1 to Dm and the gate lines G1 to Gn. The thin film transistor TFT is electrically connected to each of the subpixels PR, PG, PB and PW included in one unit pixel. In response to scan pulses from the gate lines G1 to Gn, the thin film transistor TFT is turned on and applies R, G, and B data voltages supplied from the data lines D1 to D, to pixel electrodes of the R, G, and B subpixels PR, PG, and PB. In addition, in response to scan pulses from the gate lines G1 to Gn, the thin film transistor TFT is turned on and applies a white data voltage (hereinafter, referred to as "W data voltage") supplied from the data lines D1 to Dm to a pixel electrode of the W subpixel PW. To this end, a gate electrode of the thin film transistor TFT is connected to the gate lines G1 to Gn. A source electrode of the thin film transistor TFT is connected to the data lines D1 to DL. A drain electrode of the thin film transistor TFT is connected to the pixel electrodes of the subpixels PR, PG, PB, and PW. A common electrode for forming an electrical field while facing the pixel electrodes is formed on the upper substrate in devices employing a vertical electric field driving method, such as a TN (Twisted Nematic) mode or a VA (Vertical Alignment) mode. Alternatively, the common electrode is formed along with the pixel electrode Ep on the lower glass substrate in devices employing a horizontal electric field driving method, such as an IPS (In-Plane Switching) mode or an FFS (Fringe Field Switching) mode. Polarizers with the optical axes perpendicularly crossing each other are respectively applied to the upper substrate and the lower substrate of

the liquid crystal display panel **100**. Alignment films for setting the pre-tilt angle of liquid crystal molecules are then formed in the interfaces of the respective polarizers which face the liquid crystal.

[0043] In such a liquid crystal display panel **100**, RGBW subpixels PR, PG, PB, and PW adjacent in horizontal and vertical directions constitute one quad type pixel. W subpixels PW in quad type pixels are fixedly disposed at specific positions of the quad type pixels, respectively. In contrast, the R, G, and B subpixels in the quad type pixels have a different arrangement for each of the quad type pixels adjacent horizontally or vertically to each other in order to prevent a color shift in a side viewing angle direction. More specifically, as shown in FIG. 6, the W subpixels PW are allocated to the crossing regions of odd-numbered data lines D1*k*, D3*k* and D5*k* and even-numbered gate lines G2*j*, G4*j*, and G6*j*, and hence they are fixed at specific positions of all of the quad type pixels. However, the arrangement position of the R, G, and B subpixels PR, PG, and PB rolls clockwise or counterclockwise among the quad type pixels adjacent horizontally or vertically to each other as seen in the first to fifth quad type pixels Pixels **1** to **5**. For example, a quad type pixel Pixel **2** having subpixels PB, PR, and PG arranged in the order of B-R-G is adjacently disposed at the right side of a quad type pixel Pixel **1** having subpixels PR, PG, and PB arranged in the order of R-G-B, and a quad type pixel Pixel **4** having subpixels PB, PR, and PG arranged in the order of B-R-G is adjacently disposed below the quad type pixel Pixel **1** having subpixels PR, PG, and PB arranged in the order of R-G-B. In addition, a quad type pixel Pixel **3** having subpixels PG, PB, and PR arranged in the order of G-B-R is adjacently disposed at the left side of the quad type pixel Pixel **1** having subpixels PR, PG, and PB arranged in the order of R-G-B, and a quad type pixel Pixel **5** having subpixels PG, PB, and PR arranged in the order of G-B-R is adjacently disposed above the quad type pixel Pixel **1** having subpixels PR, PG, and PB arranged in the order of R-G-B. The quad type pixels thusly rendered are repetitively disposed within the liquid crystal display panel **100** in units of 3 (pixels)×3 (pixels). Accordingly, the degree of light shielding among the R, G, and B subpixels PR, PG, and PB in each of the unit pixels comprising 9 quad type pixels is made equal by rendering.

[0044] As shown in FIG. 2, a barrier pattern **150** is disposed on an image display surface of the liquid crystal display panel **100**, and patterned to correspond to the W subpixels PW of the liquid crystal panel **100**, thereby blocking light from the W subpixels W in a front viewing angle direction and leaking the light in a side viewing angle direction. The barrier pattern **150** may be formed by patterning a black resin or the like through which light cannot permeate. A target material on which the barrier pattern **150** is patterned may be a transparent glass substrate, or a transparent tape. On the upper substrate of the liquid crystal panel **100**, a black matrix BM, color filters CF and an overcoat layer (not shown) are formed. The black matrix BM is formed of a metal, such as a chrome oxide (CrOx) having an optical density higher than 3.5, or chrome, or formed of a carbon group organic material. The black matrix BM serves to prevent occurrence of light leakage in a region where the thin film transistor TFT of the lower substrate is formed, in a region where the gate lines and the data lines are formed, and in the surrounding regions. The color filters C/F include a red layer R to be formed on the R subpixels PR, a green layer G to be formed on the G subpixels

PG, and a blue layer B to be formed on the B subpixels PB. No color filter is formed on the W subpixels PW.

[0045] The data driver **110** samples and latches digital RGB data supplied from the timing controller **130** in both the wide viewing angle mode and the narrow viewing angle mode in response to a data control signal DDC. The data driver **110** converts the latched digital RGB data into analog data voltages suitable for realizing a gray scale level on the basis of a gamma reference voltage supplied from the outside and supplies the analog data voltages to the data lines D1 to Dm. Furthermore, the data driver **110** samples and latches W disable data supplied from the timing controller **130** in the wide viewing angle mode in response to the data control signal DDC. The data driver **110** converts the latched W disable data into disable data voltages identical to a common voltage on the basis of the gamma reference voltage supplied from the outside and supplies the disable data voltages to the data lines D1, D3, . . . , Dm-1 to which the W subpixels PW are connected. Furthermore, the data driver **110** samples and latches W data supplied from the timing controller **130** in the narrow viewing angle mode in response to the data control signal DDC. The data driver **110** converts the latched W data into W data voltages suitable for realizing a gray scale level on the basis of the gamma reference voltage supplied from the outside and supplies the W data voltages to the data lines D1, D3, . . . , Dm-1 to which the W subpixels PW are connected.

[0046] The gate driver **120** sequentially generates a scan pulse in response to a gate control signal GDC supplied from the timing controller **130** to supply it to the gate lines G1 to Gn. The scan pulse is swung between a gate high voltage for turning on the thin film transistor TFT and a gate low voltage for turning off the thin film transistor TFT.

[0047] The timing controller **130** generates a data control signal DDC controlling the supply of the RGB data and/or the W data to supply the data to the data driver **110** by using a vertical synchronization signal Vsync, a horizontal synchronization signal Hsync, and an input clock DCLK. The timing controller **130** generates a gate control signal GDC for controlling the supply of the scan pulse to supply the data to the gate driver **120** by using a vertical synchronization signal Vsync, a horizontal synchronization signal Hsync, and an input clock DCLK. The data control signal DDC includes a source shift clock SSP, a polarity control signal POL, and a source output enable signal SOE. The gate control signal GDC includes a gate start pulse GSP, a gate shift clock GSc, and a gate output enable signal GOE.

[0048] In the narrow viewing angle mode, the timing controller **130** calculates the average brightness of the RGB data and maps the calculated average brightness with the W data stored by an experiment, to thus determine W data for reducing visibility by decreasing the contrast ratio at a side viewing angle. This W data is mixed with input RGB data, re-aligned in accordance with the pixel structure of quad type to be rendered, and supplied to the data driver **110**. In the wide viewing angle mode, the timing controller **130** mixes the W disable data with input RGB data so as to prevent the driving of the W subpixels PR formed on the liquid crystal display panel **110**, and re-aligns the mixed W disable data and RGB data in accordance with the pixel structure of quad type to output the aligned data to the data driver **110**.

[0049] The user interface **140** is used to input a viewing angle selection signal SEL for selecting the wide viewing angle mode or the narrow viewing angle mode. The use inter-

face **140** can be implemented by a keyboard, a mouse, a touch panel, and an OSD (On Screen Display). When the viewing angle selection signal SEL is inputted by the user, the user interface **140** analyzes this signal and supplies it to the timing controller **130**.

[0050] Such a liquid crystal display according to the present invention can improve a color shift in a side viewing angle direction, and can variously adjust the size of the barrier pattern **150** and/or the aperture area of the W subpixels PW in order to increase the visibility in a front viewing angle direction and decrease the visibility in a side viewing angle direction when the wide viewing angle mode is selected.

[0051] FIG. **8** is a plan view showing a liquid crystal display according to a first embodiment of the present invention. FIG. **9** is a cross sectional view taken along line II-II' of FIG. **8**.

[0052] Referring to FIGS. **8** and **9**, in the liquid crystal display according to the first embodiment of the present invention, R, G, and B subpixels PR, PG, and PB in quad type pixels are disposed to have a different arrangement for each of the quad type pixels adjacent horizontally or vertically to each other in order to improve a color shift in a side viewing angle direction. In the wide viewing angle mode, the size of a barrier pattern **150** is larger than the aperture area of W subpixels PW in order to increase visibility in a front viewing angle direction by completely blocking light leaked from the W subpixels PW. To this end, in the liquid crystal display according to the first embodiment of the present invention, the width of a black matrix BMV in the longitudinal direction is larger than the width of a black matrix BMH in the transverse direction in the entire regions of the liquid crystal display panel, and the horizontal width P1 of the barrier pattern **150** is extended to a black matrix BM12 of the R, G, and B subpixels PR, PG, and PB beyond a black matrix BM11 of the W subpixels. Accordingly, the horizontal width P1 of the barrier pattern **150** is relatively larger than the horizontal width W11 of the opened surface of the W subpixels PW, thereby much improving visibility in the front viewing angle direction upon driving in the wide viewing angle mode. In the liquid crystal display according to the first embodiment, the horizontal width W11 of the opened surface of the W subpixels PW and the horizontal width W12 of the opened surface of the R, G, and B subpixels PR, PG, and PB are equal to each other.

[0053] FIG. **10** is a plan view showing a liquid crystal display according to a second embodiment of the present invention. FIG. **11** is a cross sectional view taken along line III-III' of FIG. **10**.

[0054] Referring to FIGS. **10** and **11**, in the liquid crystal display according to the first embodiment of the present invention, R, G, and B subpixels PR, PG, and PB in quad type pixels are disposed to have a different arrangement for each of the quad type pixels adjacent horizontally or vertically to each other in order to improve a color shift in a side viewing angle direction. In the wide viewing angle mode, the size of a barrier pattern **250** is larger than the aperture area of W subpixels PW in order to increase visibility in a front viewing angle direction by completely blocking light leaked from the W subpixels PW. To this end, in the liquid crystal display according to the second embodiment of the present invention, the width of a black matrix BM21 is larger than the width of a black matrix BM22 of the R, G, and B subpixels in up, down, left and right directions. Thus, the aperture area of the W subpixels PW is decreased, and the horizontal width P2 of the barrier pattern **250** is extended only to a black matrix BM11 of the W subpixels PW. Accordingly, the horizontal width P2 of the

barrier pattern **250** is relatively larger than the horizontal width W11 of the opened surface of the W subpixels PW, thereby improving visibility in the front viewing angle direction upon driving in the wide viewing angle mode. Further, because the aperture area of the R, G, and B subpixels PR, PG, and PB is increased compared to the first embodiment, the luminance of the liquid crystal display is not lowered. In the liquid crystal display according to the second embodiment, the horizontal width W11 of the opened surface of the W subpixels PW is smaller than the horizontal width W21 of the opened surface of the R, G, and B subpixels PR, PG, and PB.

[0055] FIG. **12** is a plan view showing a liquid crystal display according to a third embodiment of the present invention. FIG. **13** is a cross sectional view taken along line IV-IV' of FIG. **12**.

[0056] Referring to FIGS. **12** and **13**, in the liquid crystal display according to the first embodiment of the present invention, R, G, and B subpixels PR, PG, and PB in quad type pixels are disposed to have a different arrangement for each of the quad type pixels adjacent horizontally or vertically to each other in order to improve a color shift in a side viewing angle direction. In the wide viewing angle mode, the size of a barrier pattern **350** is larger than the aperture area of W subpixels PW in order to increase visibility in a front viewing angle direction by completely blocking light leaked from the W subpixels PW. To this end, in the liquid crystal display according to the third embodiment of the present invention, the width of a black matrix BM21 is larger than the width of a black matrix BM22 of the R, G, and B subpixels in up, down, left and right directions. Thus, the aperture area of the W subpixels PW is decreased, and the horizontal width P2 of the barrier pattern **350** is extended to a black matrix BM12 of the R, G, and B subpixels PR, PG, and PB beyond a black matrix BM11 of the W subpixels PW. Accordingly, the horizontal width P3 of the barrier pattern **350** is relatively larger than the horizontal width W11 of the opened surface of the W subpixels PW, thereby much more improving visibility in the front viewing angle direction upon driving in the wide viewing angle mode. Further, because the aperture area of the R, G, and B subpixels PR, PG, and PB is increased compared to the first embodiment, the luminance of the liquid crystal display is not lowered. The liquid crystal display according to the third embodiment is substantially identical to the liquid crystal display according to the second embodiment except for the size of the barrier pattern **350**. In the liquid crystal display according to the third embodiment, the horizontal width W21 of the opened surface of the W subpixels PW is smaller than the horizontal width W22 of the opened surface of the R, G, and B subpixels PR, PG, and PB.

[0057] FIGS. **14** and **15** are views for explaining the compensation of a difference in the degree of light shielding of a barrier on RGB subpixels PR, PG, and PB in a side viewing angle direction by varying the arrangement of the R, G, and B subpixels PR, PG, and PB for each of the quad type pixels adjacent horizontally or vertically to each other according to the embodiments of the present invention.

[0058] Referring to FIGS. **14** and **15**, in the liquid crystal display according to the embodiments of the present invention, the arrangement of R, G, and B subpixels PR, PG, and PB rolls clockwise or counterclockwise for each of the quad type pixels adjacent horizontally or vertically to each other unlike the conventional art in which the subpixels of all of the quad type pixels are fixedly disposed at specific positions. Due to this rolling, an image in the side viewing angle direc-

tion ① whose degree of light shielding by barriers is relatively high is not fixed as an image of the B subpixels PB but represented as a mixed image of the RGB subpixels PR, PG, and PB. Further, an image in the side viewing angle direction ① whose degree of light shielding by barriers is relatively low is not fixed as an image of the G subpixels PG or R subpixels PR but represented as a mixed image of the RGB subpixels PR, PG, and PB. In other words, even if the size of the RGP aperture regions exposed in a side viewing angle direction is varied according to a viewing angle, if the arrangement of the R, G, and B subpixels PR, PG, and PB is rolled clockwise or counterclockwise for each of the quad type pixels adjacent horizontally or vertically to each other, the average amount of images sensed by the observer from a side viewing angle is all the same in the R, G, and B subpixels PR, PG, and PB. Accordingly, it is possible to prevent a greenish or yellowish color shift caused by a difference in the degree of light shielding among the R, G, and B subpixels at a side viewing angle.

[0059] FIG. 16 is a result screen of an experiment carried out by the compensation of a difference in the degree of light shielding in a side viewing angle direction.

[0060] In the liquid crystal display where the subpixels of all of the quad type pixels are fixedly disposed at specific positions as in the conventional art, a yellowish color shift A1 and a greenish color shift A2 occurred at a-side viewing angle as shown in (a) of FIG. 16.

[0061] In contrast, in the liquid crystal display where the arrangement of the R, G, and B subpixels PR, PG, and PB is rolled clockwise or counterclockwise for each of the quad type pixels adjacent horizontally or vertically to each other as in the conventional art, it can be seen that no color shift occurs at all as shown in (b) of FIG. 16 as a difference in the degree of light shielding among the R, G, and B subpixels at a side viewing angle is compensated for.

[0062] As described above, the liquid crystal display according to the embodiments of the present invention, a color shift is prevented by compensating for a difference in the degree of light shielding in a side viewing angle direction, thereby much improving display quality.

[0063] From above-describe details, those skilled in the art will appreciate that various changes and modifications are possible without departing from the technical spirit of the invention. Accordingly, the scope of the invention must not be limited to only details of the above-described embodiment, but defined by the claims.

What is claimed is:

1. A liquid crystal display, comprising:
 - a plurality of quad type pixels each having an R subpixel, a G subpixel, a B subpixel, and a W subpixel; and
 - a plurality of light blocking patterns disposed on the W subpixels, for guiding light from the W subpixels to a side viewing angle,
 wherein the W subpixels are fixed at specific positions of the quad type pixels respectively, and the R, G, and B subpixels have a different arrangement for each of the quad type pixels adjacent horizontally or vertically to each other.
2. The liquid crystal display of claim 1, wherein each of the quad type pixels is formed in a quadrangular structure including the R, G, and B subpixels and the W subpixel.
3. The liquid crystal display of claim 2, wherein a quad type pixel having subpixels arranged in the order of B-R-G is adjacently disposed at the right side of a quad type pixel having subpixels arranged in the order of R-G-B;
 - a quad type pixel having subpixels arranged in the order of B-R-G is adjacently disposed below the quad type pixel having subpixels arranged in the order of R-G-B;
 - a quad type pixel having subpixels arranged in the order of G-B-R is adjacently disposed at the left side of the quad type pixel having subpixels arranged in the order of R-G-B; and
 - a quad type pixel having subpixels arranged in the order of G-B-R is adjacently disposed above the quad type pixel having subpixels arranged in the order of R-G-B.
4. The liquid crystal display of claim 3, wherein, in the quad type pixels, the arrangement order of the R, G, and B subpixels is repeated in units of 3 (quad type pixels) \times 3 (quad type pixels).
5. The liquid crystal display of claim 1, wherein the light blocking patterns are patterned on a transparent glass substrate, and the glass substrate having the light blocking patterns is attached to an image display surface of the liquid crystal display panel having the quad type pixels.
6. The liquid crystal display of claim 5, wherein the size of the light blocking patterns is larger than the aperture area of the W subpixels.
7. The liquid crystal display of claim 6, wherein the aperture area of the W subpixels is equal to the aperture area of the respective R, G, and B subpixels.
8. The liquid crystal display of claim 6, wherein the aperture area of the W subpixels is smaller than the aperture area of the respective R, G, and B subpixels.

* * * * *

专利名称(译)	液晶显示器		
公开(公告)号	US20090190074A1	公开(公告)日	2009-07-30
申请号	US12/314914	申请日	2008-12-18
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	WOO JONGHOON LEE YOUNGBOK		
发明人	WOO, JONGHOON LEE, YOUNGBOK		
IPC分类号	G02F1/1335 G02F1/1333		
CPC分类号	G02B5/201 G02B5/223 G02F2201/52 G02F1/133512 G02F1/133514 G02F1/1323		
优先权	1020070138031 2007-12-26 KR		
其他公开文献	US8130345		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种液晶显示器，其能够在包括白色子像素的四边形像素结构中在宽视角和窄视角之间切换。液晶显示器包括：多个四边形像素，每个像素具有R子像素，G子像素，B子像素和W子像素；多个光阻挡图案设置在W子像素上，用于将来自W子像素的光引导至侧视角，其中W子像素分别固定在四方像素的特定位置，以及R，G和B对于彼此水平或垂直相邻的每个四边形像素，子像素具有不同的排列。

