


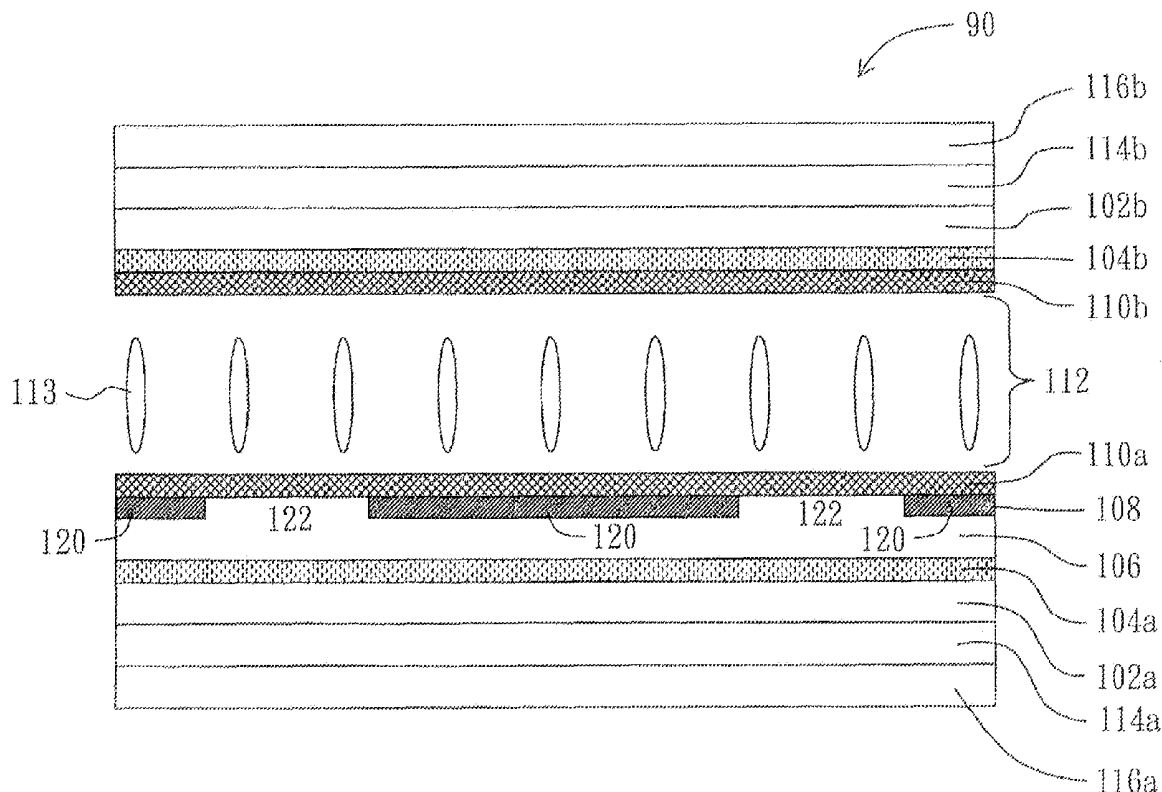

US 20080218645A1

(19) **United States**(12) **Patent Application Publication**
Zhu et al.(10) **Pub. No.: US 2008/0218645 A1**(43) **Pub. Date: Sep. 11, 2008**(54) **LIQUID CRYSTAL DISPLAY**(22) Filed: **Mar. 7, 2007**(75) Inventors: **Xinyu Zhu**, Orlando, FL (US);
Zhibing Ge, Orlando, FL (US);
Shin-Tson Wu, Oviedo, FL (US);
Wang-Yang Li, Tainan County
(TW); **Chung-Kuang Wei**, Taipei
City (TW)**Publication Classification**(51) **Int. Cl.**
G02F 1/133 (2006.01)
(52) **U.S. Cl.** **349/33**Correspondence Address:
FISH & RICHARDSON PC
P.O. BOX 1022
MINNEAPOLIS, MN 55440-1022 (US)(73) Assignees: **CHI MEI OPTOELECTRONICS**
CORPORATION, Tainan (TW);
University of Central Florida
Research Foundation, Inc.,
Orlando, FL (US)(21) Appl. No.: **11/683,206**(57) **ABSTRACT**

A display includes pixel circuits, each pixel circuit including a first electrode, a second electrode, a third electrode, and a liquid crystal layer doped with a chiral material. The first electrode is electrically coupled to a first reference voltage. The second electrode receives a pixel voltage corresponding to a gray scale level, the second electrode including a conducting layer having openings. The third electrode is electrically coupled to a second reference voltage. The second electrode is between the first and third electrodes, and the liquid crystal layer is between the first and second electrodes.

100

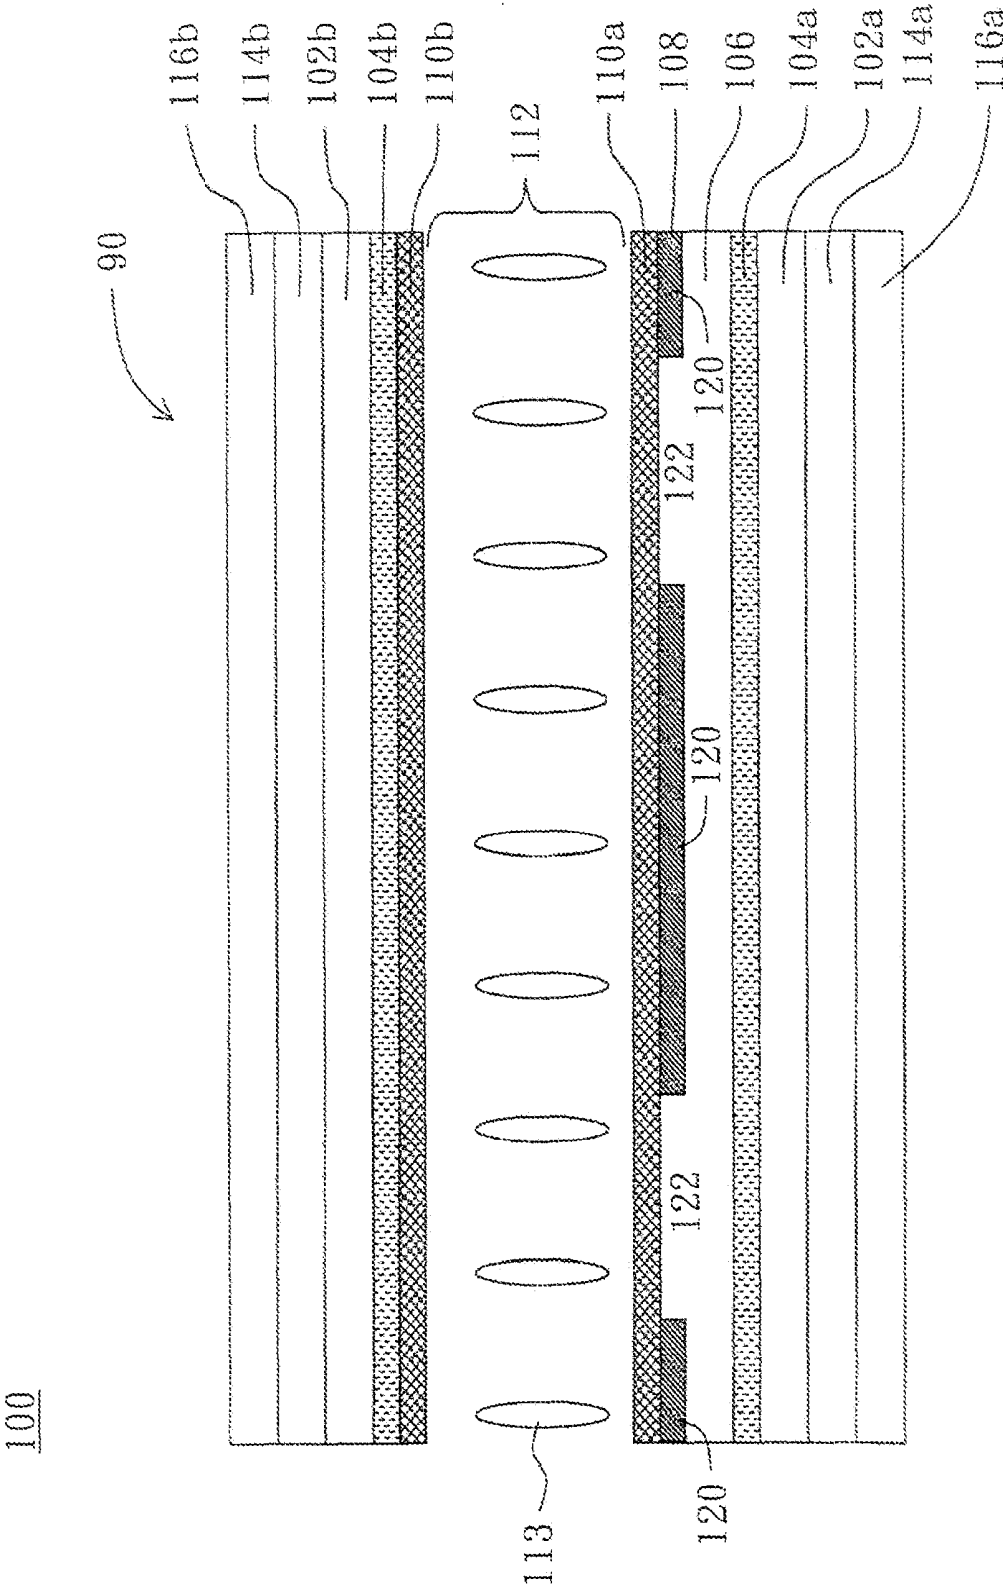


FIG. 1

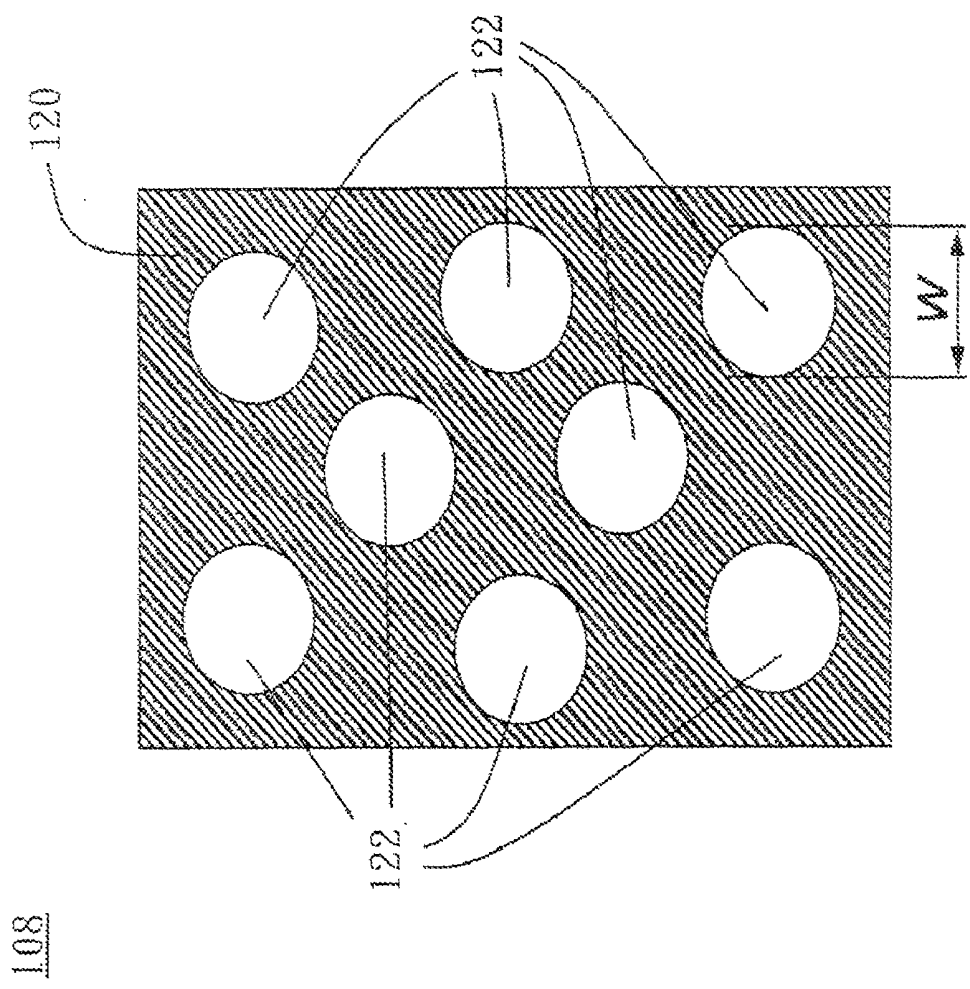


FIG. 2A

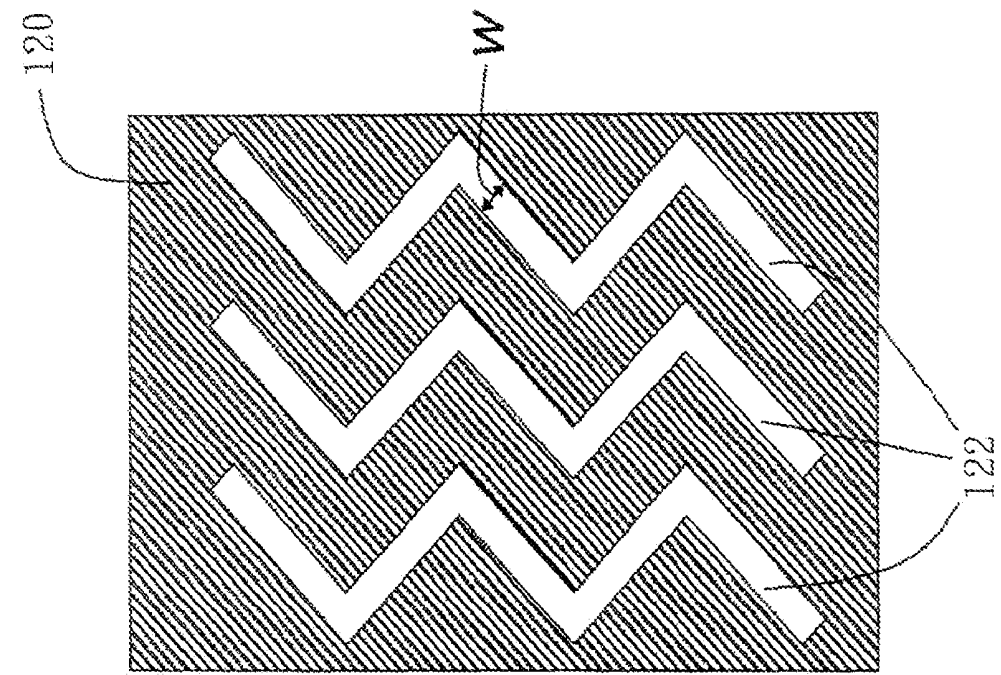


FIG. 2B

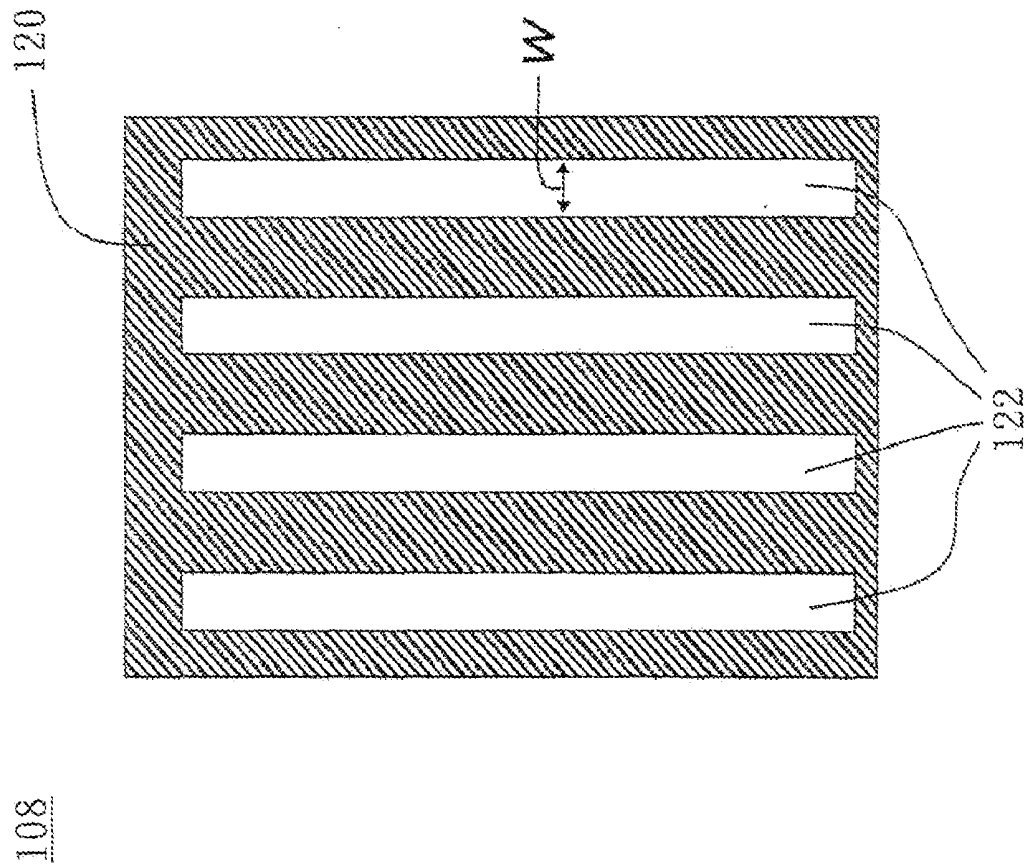
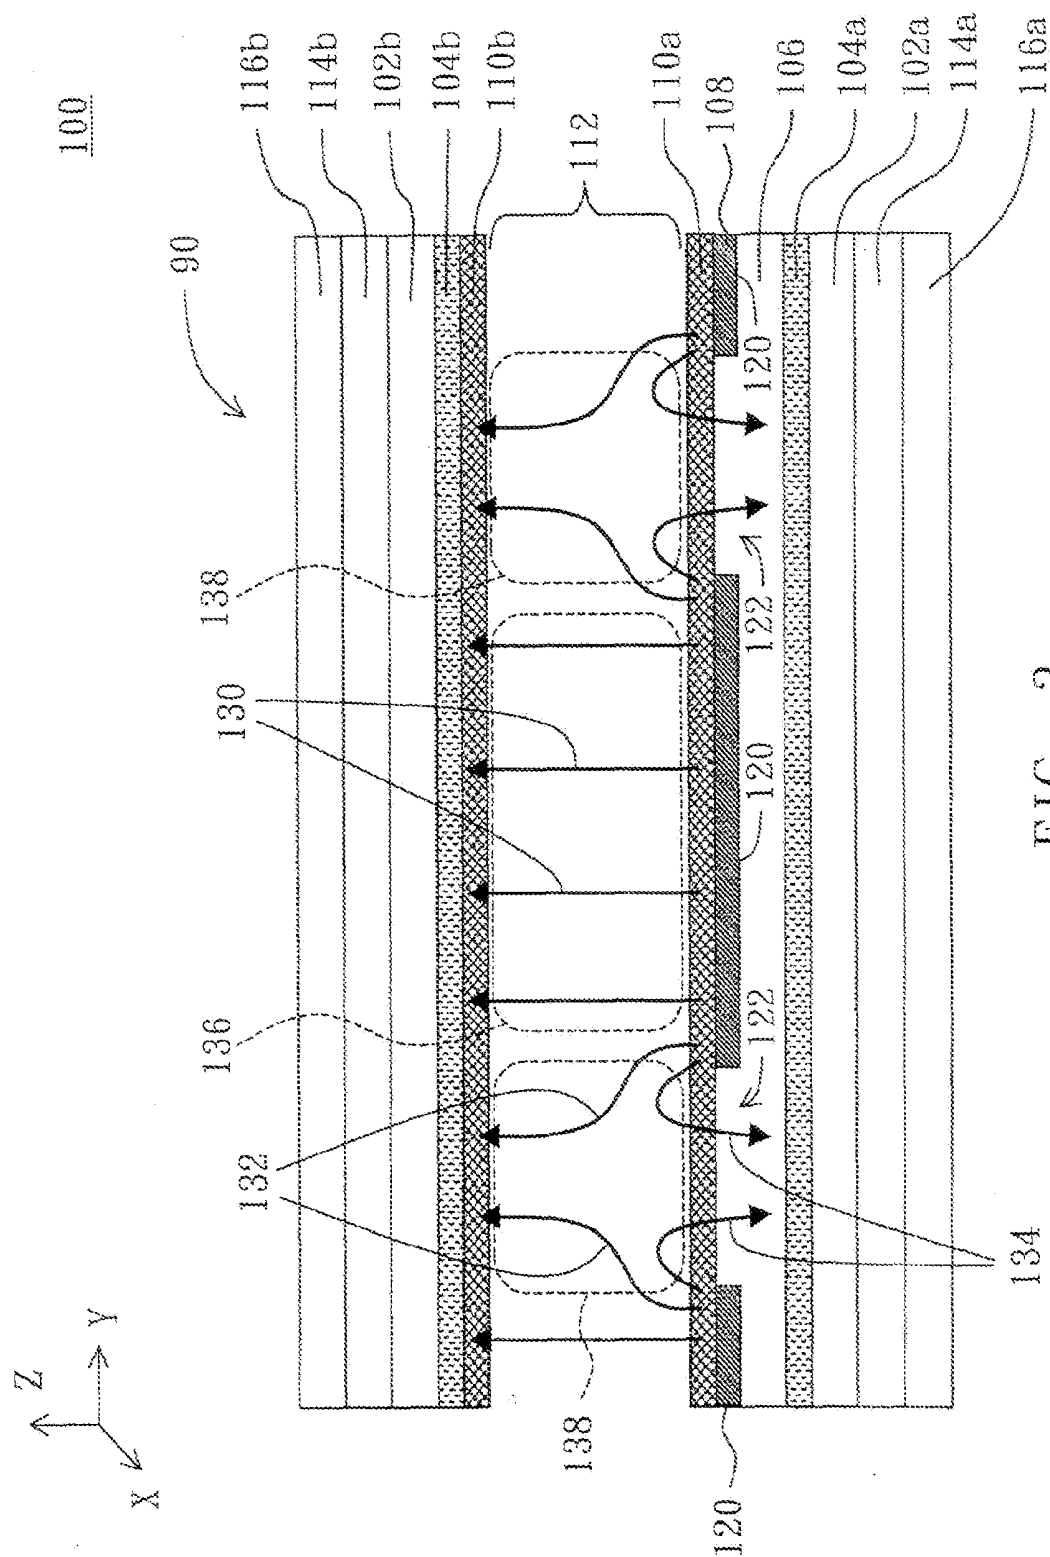


FIG. 2C

3
G
H

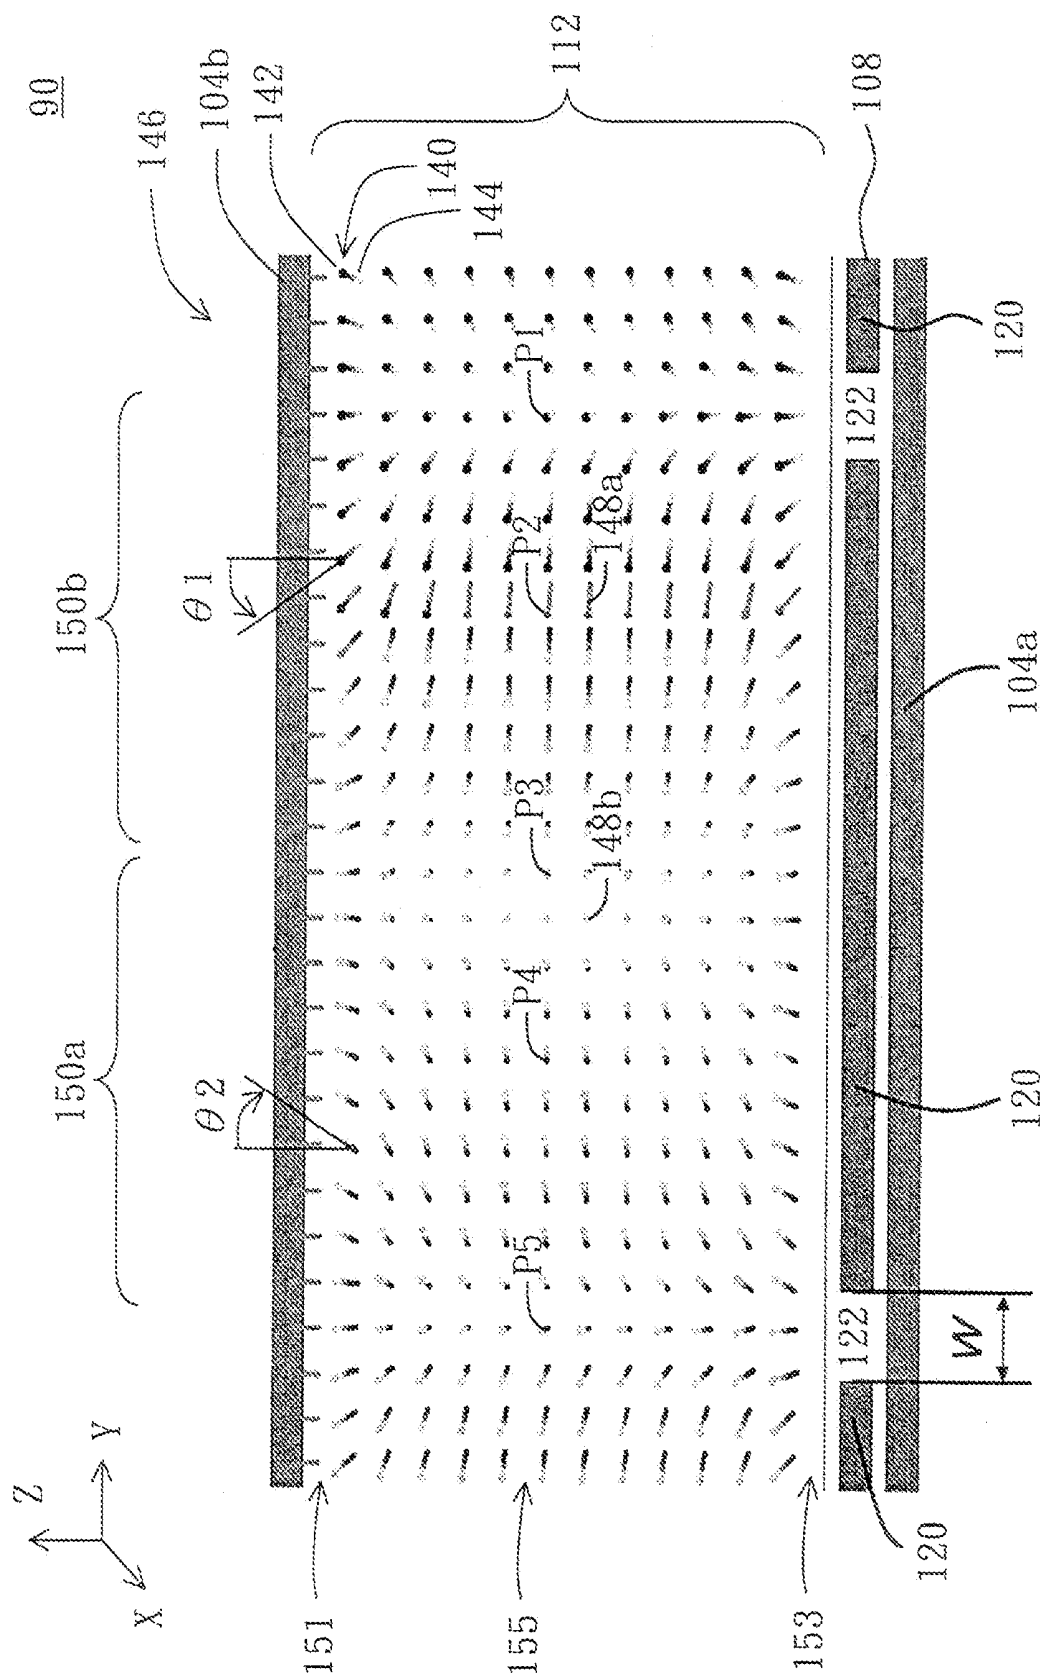


FIG. 4A

160

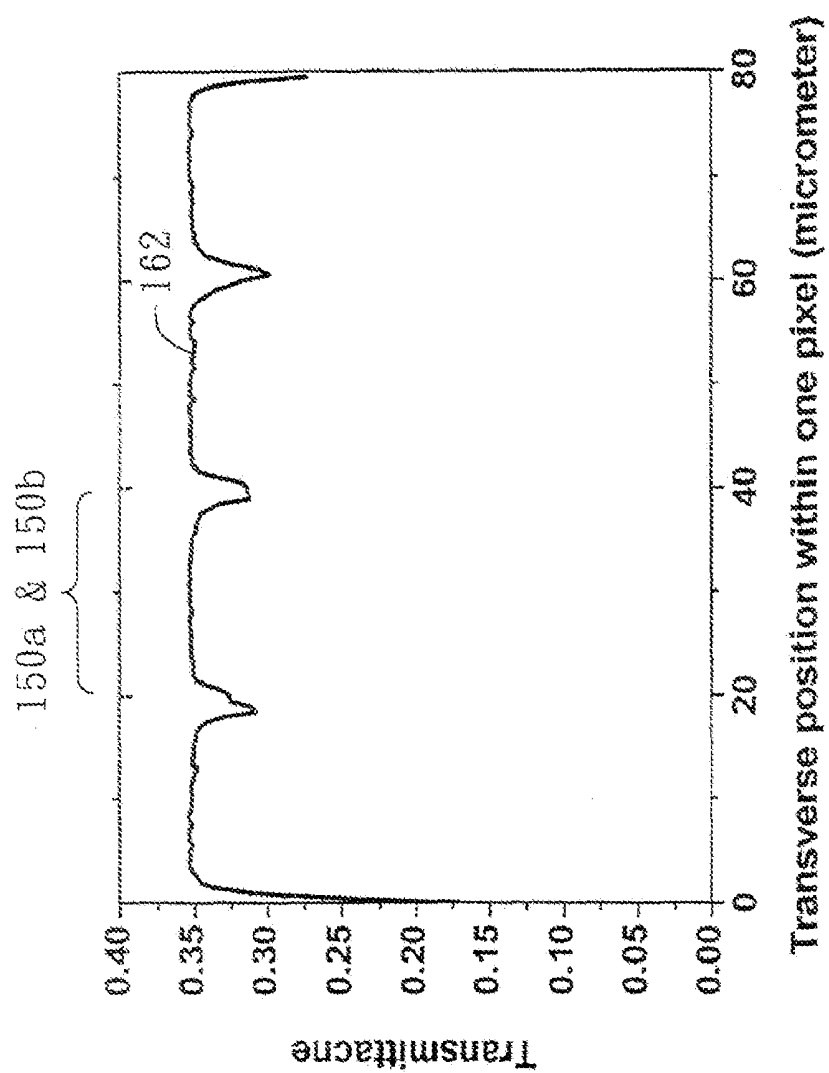


FIG. 4B

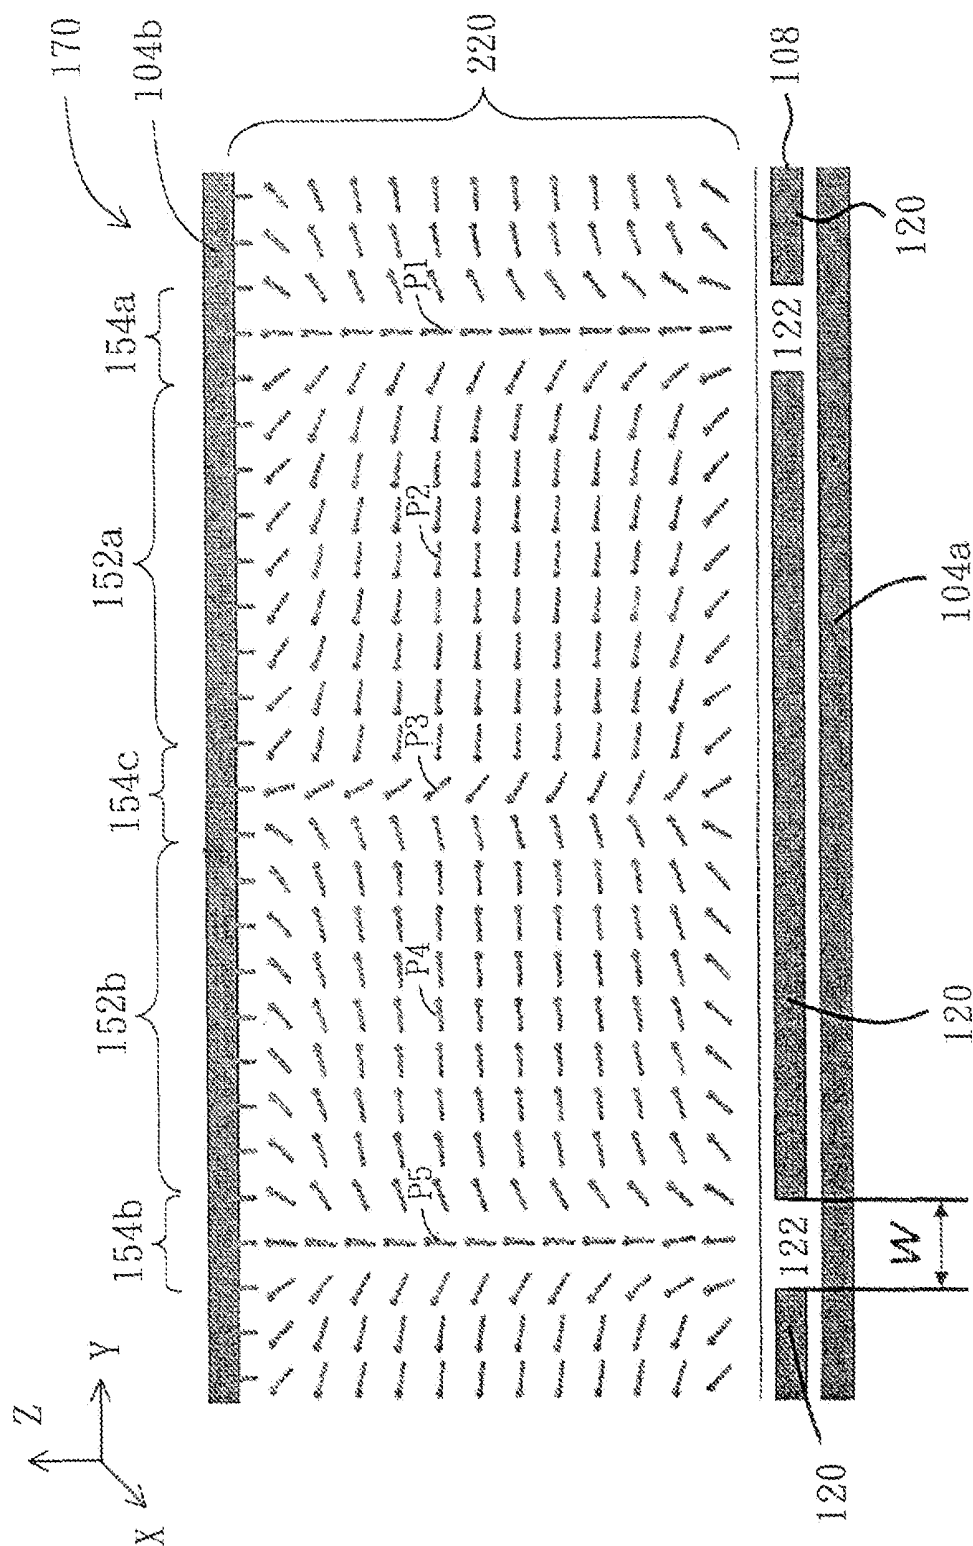


FIG. 5A

180

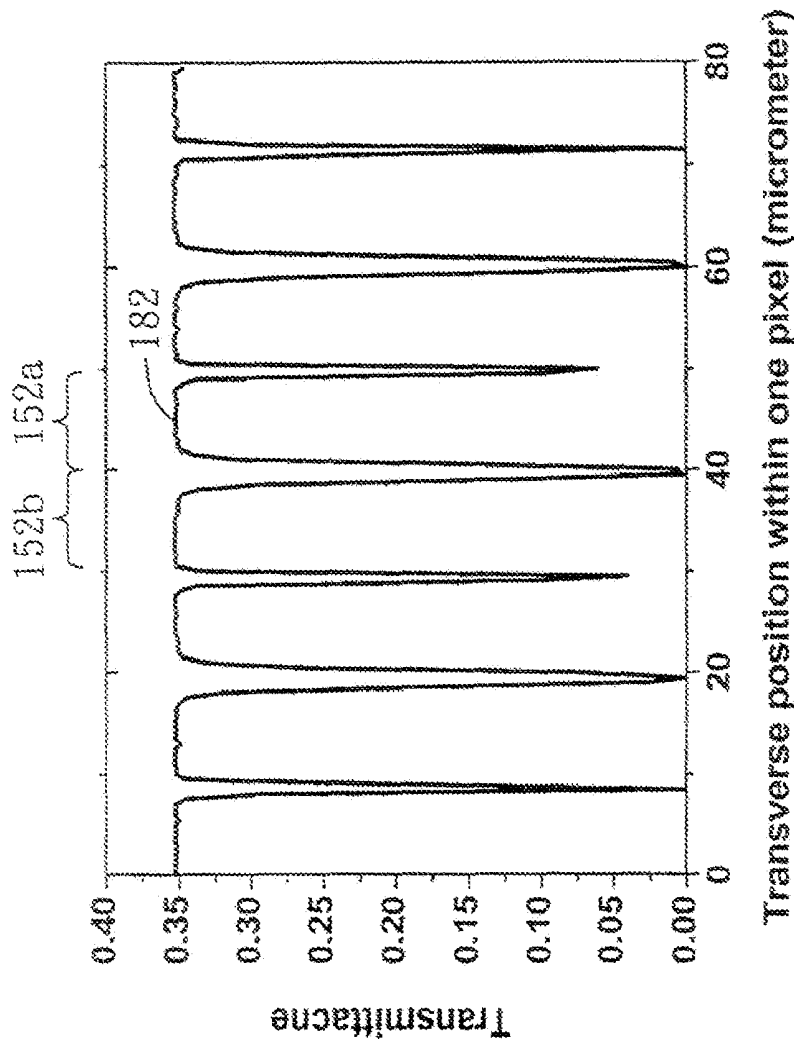


FIG. 5B

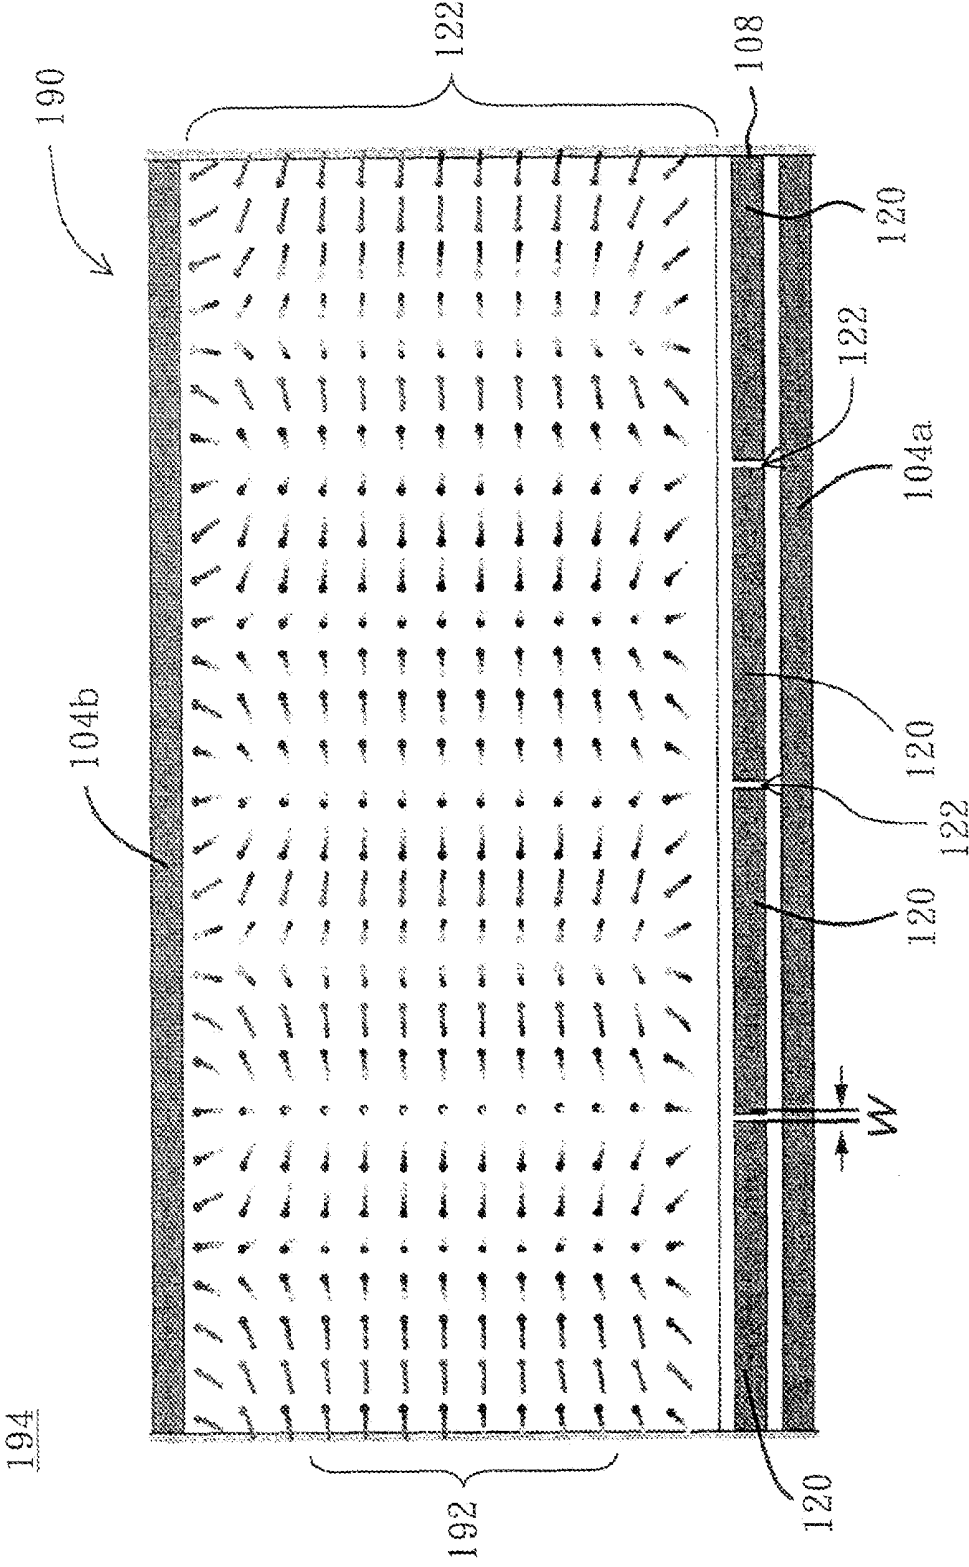


FIG. 6A

200

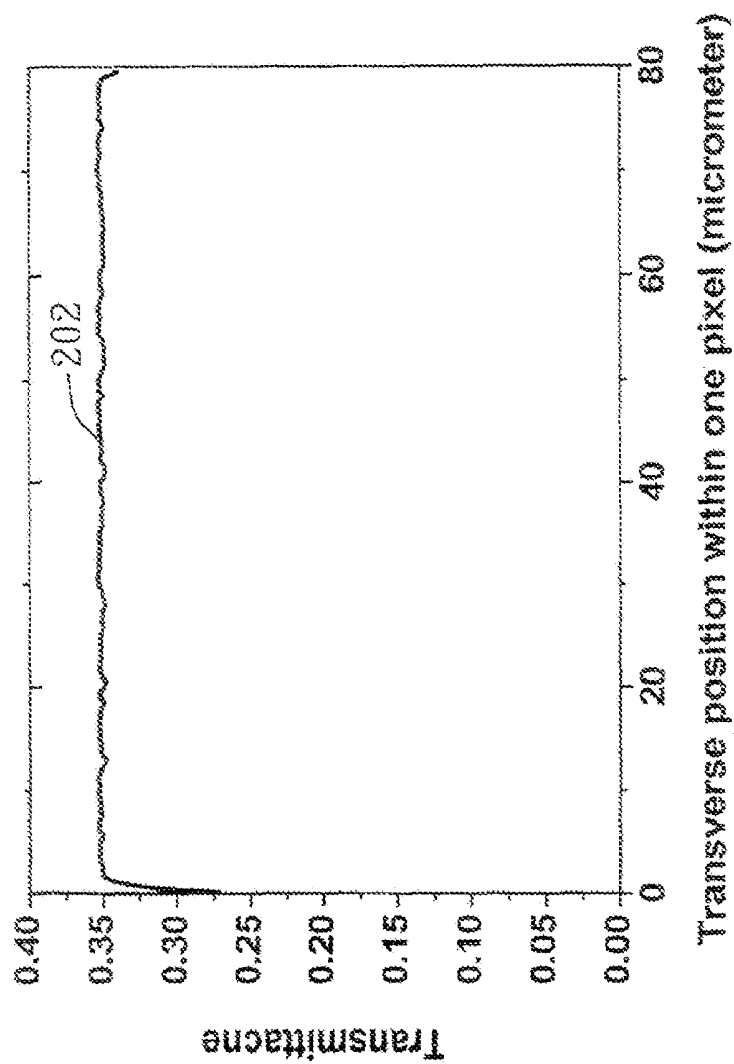


FIG. 6B

210

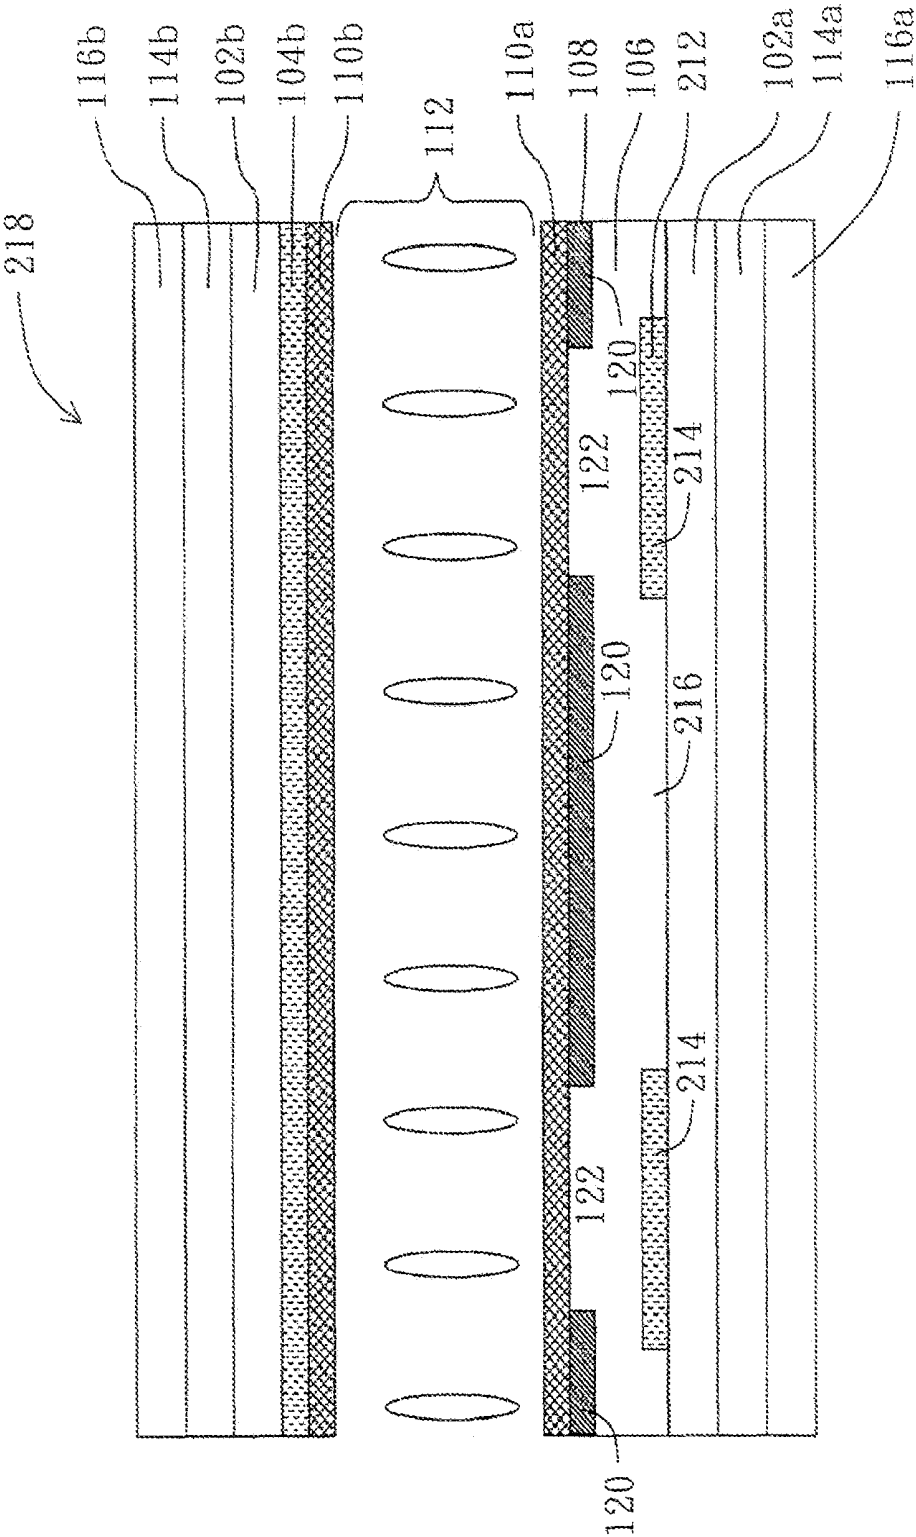
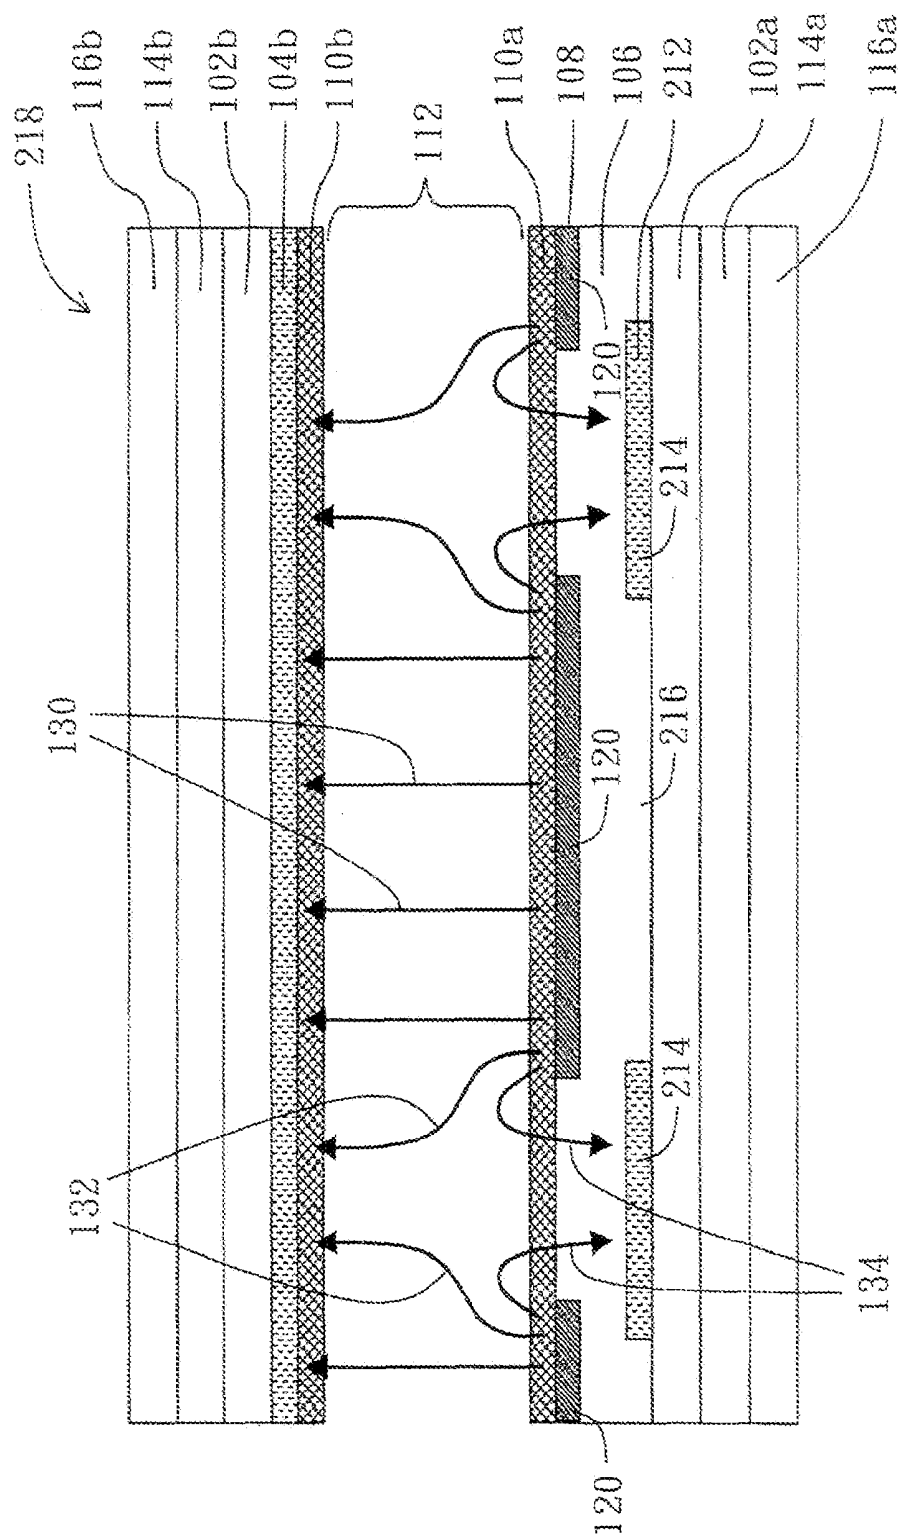


FIG. 7



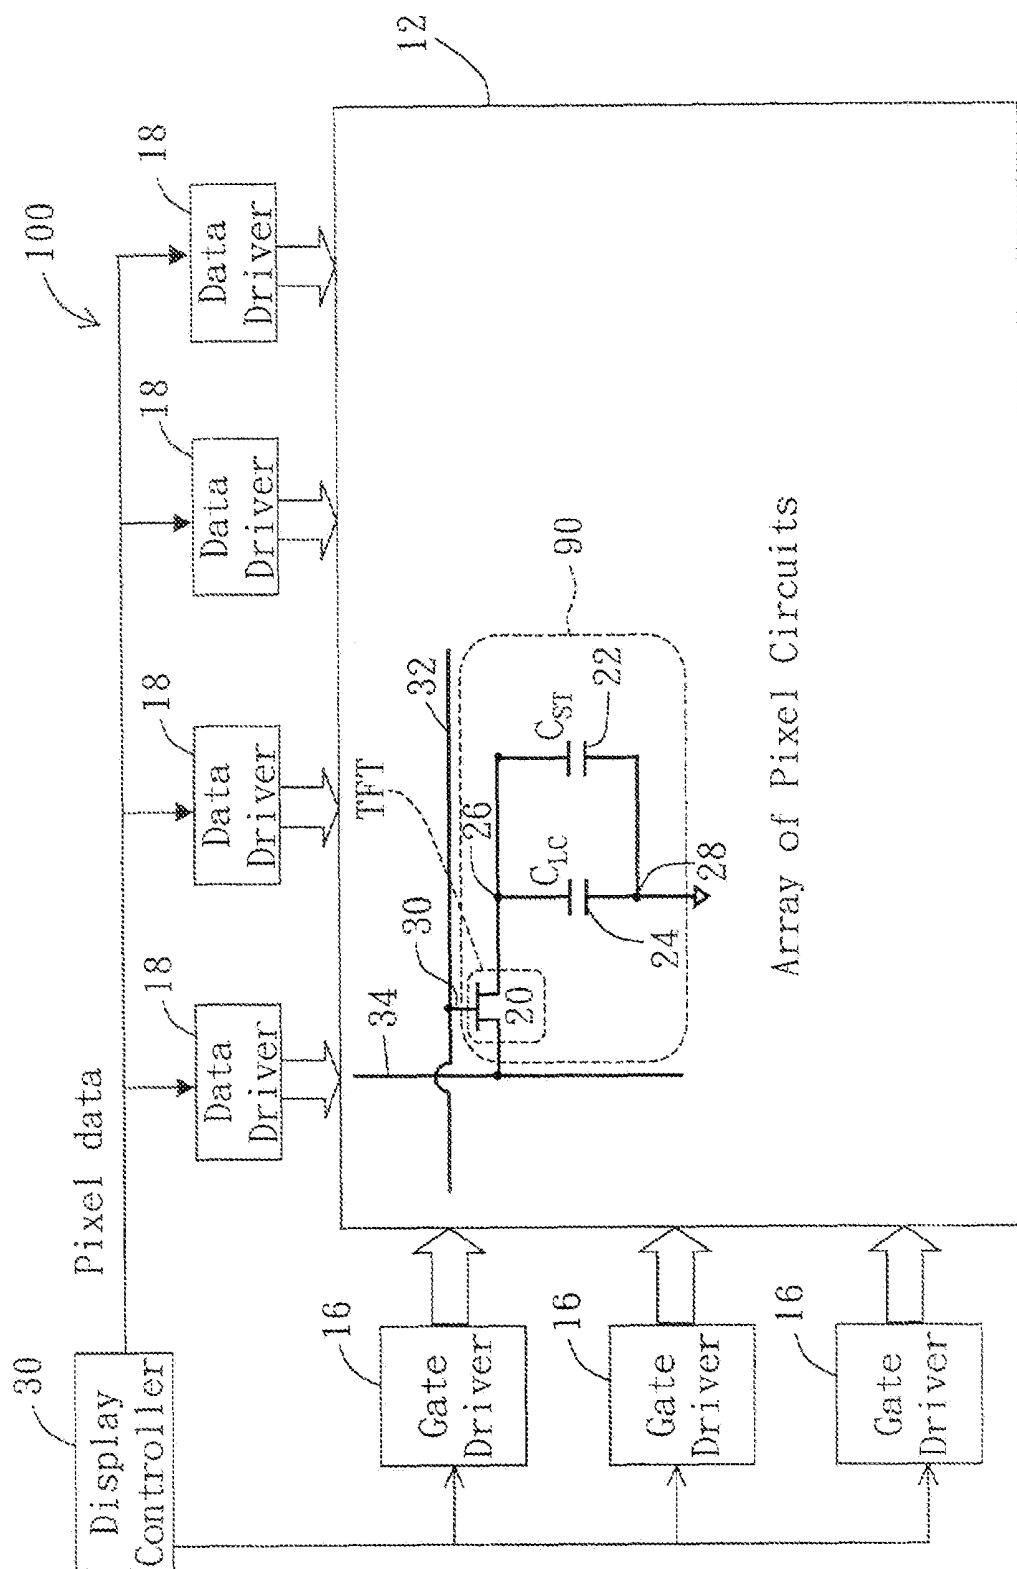


FIG. 9

LIQUID CRYSTAL DISPLAY

BACKGROUND OF THE INVENTION

[0001] This description relates to liquid crystal displays.

[0002] Liquid crystal displays (LCDs) can be used in many electronic devices, such as cell phones, personal digital assistants, laptop computers, desktop monitors, and flat panel televisions. For example, a liquid crystal display has a liquid crystal layer positioned between two crossed linear polarizers for modulating light using an electro-optic effect. A voltage applied to the liquid crystal layer changes the orientations of the liquid crystal molecules and the optical phase retardation of the liquid crystal layer, thereby changing the amount of light that passes the crossed linear polarizers. The liquid crystal display has an array of pixel circuits that can be individually addressed. The pixel circuits modulate light according to pixel data (pixel voltages), thereby generating images. Each pixel of the display can show a range of gray scale levels depending on the voltage applied to the liquid crystal layer. Use of color filters allows the display to show color images.

SUMMARY

[0003] In one aspect, in general, a display includes pixel circuits, each pixel circuit including a first electrode to be electrically coupled to a first reference voltage, a second electrode to receive a pixel voltage corresponding to a gray scale level, the second electrode includes a conducting layer having openings, a third electrode to be electrically coupled to a second reference voltage, the second electrode being between the first and third electrodes, and a liquid crystal layer between the first and second electrodes, the liquid crystal layer being doped with a chiral material.

[0004] Implementations of the display may include one or more of the following features. The first reference voltage is equal to the second reference voltage. The first and second reference voltages are equal to a ground voltage of the pixels. The chiral material is selected to cause the liquid crystal layer to form twisted structures each having a free pitch of at least ten times a thickness of the liquid crystal layer. The first, second, and third electrodes and the chiral dopant are configured such that when the pixel voltage is applied to the second electrode, an electric field generated by the first, second, and third electrodes cause liquid crystal molecules above the openings to tilt by amounts that are more than half of those of the liquid crystal molecules above the conducting layer away from the openings, the amount of tilt being measured from initial positions of the molecules when the pixel voltage is below a threshold.

[0005] In some examples, when the pixel circuit is in a bright state, the transmissivity of portions of the pixel corresponding to the openings is at least half the transmissivity of portions of the pixel corresponding to the conducting layer away from the openings. In some examples, when the pixel circuit is in a bright state, the transmissivity of portions of the pixel corresponding to the openings is at least 90% the transmissivity of portions of the pixel corresponding to the conducting layer away from the openings. The first, second, and third electrodes and the chiral dopant are configured such that azimuth angles of liquid crystal directors vary continuously across the pixel when the pixel voltage is applied to the second electrode. The liquid crystal layer includes liquid crystal molecules that are aligned along a direction substan-

tially normal to the surfaces of the first and second electrodes when the pixel voltage is below a threshold.

[0006] In some examples, the openings include circles having diameters in a range between 0.1 μm to 8 μm . In some examples, the openings include elongated slits each having a width in a range between 0.1 μm to 8 μm . The elongated slits have at least one of straight, curved, and piecewise linear shapes. In some examples, the third electrode includes a continuous conducting layer without openings. In some examples, the third electrode includes a conducting layer having openings. The conducting layer includes portions having shapes that correspond to the shapes of the openings of the second electrode. The second and third electrodes are configured such that liquid crystal molecules adjacent to the openings are subject to electric fields having directions from the liquid crystal layer to the third electrode. The first, second, and third electrodes are configured such that liquid crystal molecules farther away from the openings are subject to electric fields having directions from the second electrode to the first electrode.

[0007] The display includes an alignment film between the liquid crystal layer and the second electrode. The display includes an alignment film between the liquid crystal layer and the first electrode. Each pixel includes a storage capacitor having terminals that include portions of the second electrode and the third electrode. The first electrodes of different pixels are electrically connected. The third electrodes of different pixels are electrically connected. The display includes a first circular polarizer and a second circular polarizer, the liquid crystal layer being between the first and second circular polarizers. The display includes a first linear polarizer and a second linear polarizer, the liquid crystal layer being between the first and second linear polarizers.

[0008] In another aspect, in general, a display includes a first substrate, a second substrate, and pixel circuits between the first and second substrates. Each pixel circuit includes a first electrode to be electrically coupled to a ground reference voltage, a second electrode to receive a pixel voltage corresponding to a gray scale level, the second electrode includes a conducting layer having openings, a third electrode to be electrically coupled to the ground reference voltage, the second electrode being between the first and third electrodes, and a liquid crystal layer between the first and second electrodes. The display includes a first alignment layer between the liquid crystal layer and the first electrode of each pixel circuit, and a second alignment layer between the liquid crystal layer and the second electrode of each pixel circuit.

[0009] Implementations of the display may include one or more of the following features. The liquid crystal layer includes a chiral material.

[0010] In another aspect, in general, a method includes generating an electric field in a liquid crystal layer of a pixel circuit of a display, the electric field causing liquid crystal molecules in the liquid crystal layer to tilt from initial positions, the electric field having a distribution such that the liquid crystal layer forms a continuous domain in which the liquid crystal molecules at different locations tilt in different directions, and the tilt directions of the liquid crystal molecules vary continuously across the pixel circuit. The method includes providing a twisting force to the liquid crystal molecules to cause the liquid crystal molecules to tilt at along different azimuth angles across the pixel.

[0011] Implementations of the method may include one or more of the following features. Providing a twisting force

includes using chiral dopants in the liquid crystal layer to provide the twisting force. Generating the electric field includes providing a first reference voltage to a first electrode, providing a pixel voltage to a second electrode, and providing a second reference voltage to a third electrode, the liquid crystal layer being between the first and second electrodes, the second electrode being between the first and third electrodes, the second electrode includes a conducting layer having openings. The method includes tilting the liquid crystal molecules above the openings by amounts that are more than half of those of the liquid crystal molecules above the conducting layer away from the openings. The method includes providing a substantially uniform transmittance across the pixel upon application of the pixel voltage, the transmittance of portions of the pixel corresponding to the openings being more than half of the transmittance of portions of the pixel corresponding to the conducting layer away from the openings. The method includes aligning liquid crystal molecules of the liquid crystal layer along directions substantially normal to substrates at two sides of the liquid crystal layer prior to generating the electric field.

[0012] In another aspect, in general, a method includes forming a first electrode on a first substrate, forming a third electrode on a second substrate, forming an insulation layer on the third electrode, forming a second electrode on the insulation layer, the second electrode includes a conducting layer having openings, positioning the first substrate parallel to and at a distance to the second substrate, and providing a liquid crystal layer between the first and second electrodes.

[0013] Implementations of the method may include one or more of the following features. The method includes adding a chiral material to the liquid crystal material of the liquid crystal layer. Adding the chiral material includes adding a chiral material having a concentration selected to cause the liquid crystal layer to form a twisted structure having a free pitch of at least ten times a thickness of the liquid crystal layer.

[0014] Advantages of the liquid crystal displays can include one or more of the following. The display can have a high light efficiency. The display can have wide viewing angle in which there is low color shift when viewing from oblique viewing directions.

DESCRIPTION OF DRAWINGS

[0015] FIG. 1 is a cross-sectional diagram of a pixel.

[0016] FIGS. 2A-2C are diagrams of patterned ITO layers.

[0017] FIG. 3 is a cross-sectional diagram of a pixel, showing an electric field distribution at the pixel.

[0018] FIG. 4A is a diagram showing simulated orientations of liquid crystal molecules.

[0019] FIG. 4B is a graph showing the transmittance profile of a pixel.

[0020] FIG. 5A is a diagram showing simulated orientations of liquid crystal molecules.

[0021] FIG. 5B is a graph showing the transmittance profile of a pixel.

[0022] FIG. 6A is a diagram that shows simulated orientations of liquid crystal molecules.

[0023] FIG. 6B is a graph showing the transmittance profile of a pixel.

[0024] FIG. 7 is a cross-sectional diagram of a pixel.

[0025] FIG. 8 is a cross-sectional diagram of a pixel, showing an electric field distribution at the pixel.

[0026] FIG. 9 is a schematic diagram of a liquid crystal display, showing driving circuits of the display.

DETAILED DESCRIPTION

[0027] FIG. 1 is a cross-sectional diagram of an example of a pixel 90 of a vertical alignment mode liquid crystal display 100 that includes a first transparent substrate 102a coated with an indium tin oxide (ITO) layer 104a, a non-conductive planar layer 106, a patterned ITO layer 108, and a first vertical alignment film 110a. The patterned ITO layer 108 has a shape that extends over only a portion of the pixel 90. The display 100 includes a second transparent substrate 102b coated with an ITO layer 104b and a second vertical alignment film 110b. A negative dielectric anisotropic nematic liquid crystal layer 112, doped with a chiral material, is positioned between the first vertical alignment film 110a and the second vertical alignment film 110b. When no voltage is applied across the liquid crystal layer 112, liquid crystal molecules 113 in the layer 112 are aligned substantially normal to the surfaces of the substrates 102a and 102b.

[0028] A first phase retardation film 114a and a first linear polarizer 116a are laminated on an outer surface of the first substrate 102a. The phase retardation film 114a can be, e.g., a chromatic quarter-wave film or a broadband quarter-wave film, so that the combination of the phase retardation film 114a and the linear polarizer 116a forms a circular polarizer. A second phase retardation film 114b and a second linear polarizer 116b are laminated on an outer surface of the second substrate 102b. Similarly, the phase retardation film 114b can be, e.g., a chromatic quarter-wave film or a broadband quarter-wave film so that the combination of the phase retardation film 114b and the linear polarizer 116b forms a circular polarizer. The display 100 can include a color filter layer (not shown) that is placed between the second substrate 102b and the second alignment film 110b, allowing the display 100 to show color images. The color filter can also be placed between the first substrate 102a and the first alignment film 110a.

[0029] The patterned ITO layer 108 functions as a pixel electrode and is connected to a thin-film-transistor (TFT) switch 20 and a storage capacitor C_{ST} 22 (FIG. 9). The ITO layer 104a on the first substrate 102a functions as a first common electrode. The ITO layer 104a of different pixels can be electrically connected. For example, the ITO layer 104a can be a continuous layer on the first substrate 102a that extends across all of the pixels. The ITO layer 104b on the second substrate 102b functions as a second common electrode. For example, the ITO layer 104b can be a continuous layer on the second substrate 102b that extends across all of the pixels. The first common electrode (ITO layer 104a) and the second common electrode (ITO layer 104b) can both be connected to a ground voltage.

[0030] The ITO layer 108, ITO layer 104a, and ITO layer 104b will also be referred to as the pixel electrode 108, the first common electrode 104a, and the second common electrode 104b, respectively. The pixel electrode 108, the common electrodes 104a, 104b, the liquid crystal layer 112, the thin film transistor 20, and the storage capacitor C_{ST} 22 of a pixel are collectively referred to as a pixel circuit.

[0031] As described below, the pixel electrode 108, the first common electrode 104a, and the second common electrode 104b are configured to generate electric fields having a distribution that, in combination with a twisting effect caused by the chiral dopants, facilitates the formation of a continuous

domain in the liquid crystal layer 112 of the pixel 90. The liquid crystal molecules 113 at different locations in the liquid crystal layer 112 tilt in different directions that vary continuously across the pixel 90. This increases the viewing angle of the display 100 because light traveling at different angles through the liquid crystal layer 112 will experience similar phase retardation.

[0032] The substrates 102a and 102b can be made of, e.g., glass. The non-conductive planar layer 106 can be made of, e.g., silicon dioxide (SiO₂) or silicon nitride (SiN_x). The first and second alignment films 110a and 110b can be made of, e.g., polyimide materials. The first and second phase retardation films 114a and 114b can be made of, e.g., polycarbonate or polyvinyl alcohol (PVA). The first and second linear polarizers 116a and 116b can be, e.g., linearly oriented polyvinyl alcohol (PVA) film with iodine solution imbibitions.

[0033] FIG. 2A is a diagram of a first example of the patterned ITO layer 108. The patterned ITO layer 108 has a conductive portion 120 made of indium-tin-oxide, and openings 122. The openings 122 can be formed by etching away a portion of the INDIUM TIN OXIDE in the layer 108. In this example, the openings 122 have circular shapes each having a diameter W in a range between 0.1 μm to 8 μm.

[0034] FIG. 2B is a diagram of a second example of the patterned ITO layer 108, which includes a conductive portion 120 made of indium tin oxide, and openings 122. In this example, the openings 122 have piecewise linear, chevron-like shapes. The gap width W of each opening 122 can be in a range between 0.1 μm to 8 μm.

[0035] FIG. 2C is a diagram of a third example of the patterned ITO layer 108, which includes a conductive portion 120 made of indium tin oxide, and openings 122. In this example, the openings 122 have long rectangular shapes. The gap width W of the opening 122 can be in a range between 0.1 μm to 8 μm.

[0036] FIG. 3 is a cross-sectional diagram of the pixel 90, showing electric field lines at a voltage-on state. The voltage-on state refers to a condition in which a pixel voltage is applied to the pixel electrode 108, such that electric fields are generated in the regions between the pixel electrode 108 and the first common electrode 104a, and in the regions between the pixel electrode 108 and the second common electrode 104b.

[0037] As described below, the pixel electrode 108, the first common electrode 104a, and the second common electrode 104b are configured to generate electric fields having a distribution that facilitates rotation of liquid crystal molecules 113 so that the amount of tilt of the liquid crystal molecules 113 above the openings 122 are comparable to the amount of tilt of the liquid crystal molecules 113 above the conductive portion 120. The transmissivities of the portion of the liquid crystal layer 112 above the openings 122 are comparable to those above the conductive portion 120. This increases the overall light efficiency of the pixel 90, resulting in a brighter pixel for a given amount of backlight.

[0038] The electric field in the liquid crystal layer is a function of position within the liquid crystal layer 112. A Cartesian coordinate system having x, y, and z axes is used as a reference for describing the orientations of the components of the display 100. In this example, the z-axis is selected to be perpendicular to the surfaces of the substrates 102a and 102b. The x-axis and the y-axis are parallel to the surfaces of the substrates 102a and 102b.

[0039] The electric field in the liquid crystal layer 112 includes a “longitudinal electric field” 130 at a region 136 above the conductive portion 120 of the pixel electrode 108, and “fringe electric fields” 132 and 134 at a region 138 above the opening 122 of the pixel electrode 108. In the longitudinal electric field 130, the electric field lines are substantially parallel to the z-axis. In the fringe electric field 132, the electric field lines generally extend from the pixel electrode 108 toward the second common electrode 104b along directions that are not parallel to the z-axis (except near the electrodes 108 and 104b). In the fringe electric field 134, the electric field lines generally extend from the pixel electrode 108 partially into the liquid crystal layer 112, then turn toward the opening 122, pass the opening 122, and end at the first common electrode 104a.

[0040] FIG. 4A is a diagram 146 showing an example of simulated orientations of liquid crystal molecules 113 in the liquid crystal layer 112 of a portion of the pixel 90 when the pixel 90 is operating in a bright state. The average orientations of liquid crystal molecules 113 in small localized regions are represented by unit vectors called liquid crystal directors 140. In FIG. 4A, each liquid crystal director 140 is represented by a head 142 and a tail 144.

[0041] In this example, a negative dielectric anisotropy liquid crystal material (MLC-6882 with $n_e=1.582$ and $n_o=1.484$, available from Merck, Germany) doped with a chiral material (CB15, available from Merck, Germany) is used in the liquid crystal layer 112. The first common electrode 104a and the second common electrode 104b are connected to ground voltage (0 V), and the patterned pixel electrode 108 is connected to a pixel voltage $V_{DATA}=6V$. The thickness of the liquid crystal layer 112 is 3.4 μm.

[0042] FIG. 4A shows a cross section of the pixel 90 along the Y-Z plane, with the positive x direction extending outwards out of the paper of FIG. 4A. The substrates 102a and 102b are parallel to the X-Y plane. The pixel electrode 108 has openings 122 each having a long rectangular shape, similar to those shown in FIG. 2C. The long sides of the rectangular openings 122 are parallel to the x-axis. The gap width W of the openings 122 is 2 μm.

[0043] The electric field causes the liquid crystal molecules 113 to form a continuous domain that has multiple regions, e.g., 150a and 150b, within the pixel 90. The liquid crystal directors 140 tilt in different directions in which the tilt angle (e.g., θ_1 or θ_2) vary continuously from one location to another. For example, the liquid crystal directors 140 closer to the top and bottom boundaries 151 and 153 of the liquid crystal layer 112 are tilted down less (e.g., angle θ_1 or θ_2 is smaller) relative to initial vertical alignment positions (parallel to the z-axis). The liquid crystal directors 140 closer to the middle portion 155 of the liquid crystal layer 112 are tilted down more (e.g., angle θ_1 or θ_2 is larger) relative to the initial vertical alignment positions.

[0044] The azimuthal angles of the liquid crystal directors 140 also vary continuously along a direction parallel to the X-Y plane, gradually rotating either clockwise or counter clockwise. Here, a director 140 having a head 142 that is darker than a tail 144 indicates that the head 142 is closer to the -x direction, and vice versa. To illustrate the rotation of the liquid crystal molecules 113 within each pixel 90, a director (e.g., 148a) more parallel to the Y-Z plane is shown to be longer than a director (e.g., 148b) that is more perpendicular to the Y-Z plane.

[0045] For example, moving from a location P1 to locations P2, P3, P4, and P5 (which are all located on the same X-Y plane) in sequence, the liquid crystal directors 140 rotate continuously from pointing approximately in the $-x$ direction to the $-y$, $+x$, $+y$, and $+x$ directions, respectively. The azimuth angles of the liquid crystal molecules vary continuously from one location to another within the pixel 90. The transition from one region (e.g., 150a) to another region (e.g., 150b) in the liquid crystal layer 112 is continuous.

[0046] The twist forces imparted by the chiral dopant assist in tilting down the liquid crystal molecules 113 from their initial vertical alignment positions (parallel to the z-axis) when a pixel voltage is applied to the pixel electrode 108. The liquid crystal molecules 113 at locations (e.g., P1 and P5) directly above the openings 122 are tilted relative to initial positions by amounts comparable to (or greater than half of) those at locations (e.g., P2, P3, and P4) above the conducting portions 120.

[0047] The type of material and concentration of the chiral dopant are selected such that the liquid crystal mixture (including the liquid crystal material and the chiral dopant) has a free pitch greater than 10 times the cell gap (thickness of the liquid crystal layer 112). For example, if the cell gap is 4.5 μm , the chiral dopant is selected such that the liquid crystal mixture has a free pitch of more than $4.5 \mu\text{m} \times 10 = 45 \mu\text{m}$. In the example of FIG. 4A, the cell gap is 3.4 μm and the free pitch of the liquid crystal mixture is 1000 μm . The term "free pitch" refers to the pitch length of the twisted structures in the liquid crystal layer doped with the chiral material when no external force (or voltage) is applied to the liquid crystal layer, and only one substrate surface is coated with a rubbed homogeneous alignment layer while the other substrate surface is coated with an unrubbed homogeneous alignment layer. The free pitch decreases as the concentration of the chiral dopant increases.

[0048] FIG. 4B is a graph 160 showing the transmittance profile 162 of the pixel 90 based on the liquid crystal director profile of FIG. 4A. The transmittance is between about 30% to 35% across the pixel 90. The transmittance above the conducting area 120 is about 35%, and the transmittance above the openings 122 is about 30%. The transmittance values shown in FIG. 4B take into account the reduction in light caused by the phase retardation films 114a, 114b and linear polarizers 116a, 116b. When the transmittance values shown in FIG. 4B are normalized to the transmittance of two parallel linear polarizers, the overall light efficiency of the pixel 90 is about 97.5% (assuming that the substrates 102a, 102b, electrodes 104a, 104b, 108, alignment films 110a, 110b, and the planar layer 106 are completely transparent).

[0049] The graph 160 shows that the transmittance drops slightly in the regions above the openings 122. This is because the liquid crystal molecules 113 in regions above the openings 122 have tilt angles (the angle between the liquid crystal director direction and the z-axis) slightly smaller than those in regions above the conducting portions 120. The overall accumulated phase retardation by the liquid crystal layer 112 in the region above the opening 122 is slightly smaller than that in the region above the conducting portion 120. Thus, when circular polarizers are laminated on both sides of the display 100, the transmittances in the regions above the openings 122 are slightly lower than those in the regions above the conducting portion 120.

[0050] For comparison, FIG. 5A is a diagram 170 showing an example of simulated orientations of liquid crystal mol-

ecules in a liquid crystal layer 220 of a portion of a pixel in which the liquid crystal layer 220 does not include chiral dopants. The electric field causes multiple domains (e.g., 152a and 152b) to be formed in the liquid crystal layer 220. Because there is no chiral dopant, the liquid crystal molecules do not rotate significantly about the z-axis when moving from, e.g., location P1 to locations P2, P3, P4, and P5. Some of the liquid crystal molecules at the domain boundaries (e.g., 154a, 154b, and 154c) are not tilted and remain at their initial positions (aligned parallel to the z-axis). One possible reason for the liquid crystal molecules not tilting at the domain boundaries is that the electric field is symmetrically distributed at the domain boundaries, so the forces inducing the liquid crystal molecules to tilt in one direction (e.g., clockwise) is as strong as the forces inducing the molecules to tilt in an opposite direction (e.g., counter clockwise). The different forces acting on the liquid crystal molecules cancel each other, so the molecules do not tilt and remain at their initial positions.

[0051] FIG. 5B is a graph 180 showing the transmittance profile 182 of the pixel based on the liquid crystal director profile of FIG. 5A (in which the liquid crystal layer 220 does not include chiral dopants). The graph 180 shows the transmittance profile of the entire pixel in which the pixel width is 80 μm . At the domain boundaries above the openings 122, the liquid crystal molecules are not tilted, so the accumulated phase retardation is small. Therefore, the transmittances at the domain boundaries (e.g., 154a, 154b, 154c) are low, and the domain boundaries appear as dark lines. The transmittance profile 182 is obtained using circular polarizers on both sides of the liquid crystal panel. The overall light efficiency of the pixel in the example of FIG. 5B is around 88.7% when normalized to the transmittance of two parallel linear polarizers. This is lower than the light efficiency (97.5%) of the pixel 90 the example of FIG. 4B in which the liquid crystal layer 122 includes chiral dopants.

[0052] FIG. 6A is a diagram 190 that shows an example of simulated orientations of liquid crystal molecules 113 in the liquid crystal layer 112 of a pixel 194 operating in a bright state. The pixel 194 used in the simulation of FIG. 6A is similar to the pixel 90 used in the simulation of FIG. 4A, except that the widths W of the openings 122 in the pixel 194 is smaller than the widths W of the openings 122 in the pixel 90. In the example of FIG. 6A, the width W is 0.5 μm (as compared to $W=2 \mu\text{m}$ in FIG. 4A), the cell gap is 3.4 μm , and the free pitch of the liquid crystal mixture is 1000 μm .

[0053] When the widths of the openings 122 is reduced, the fringe fields (132 and 134 in FIG. 3) are stronger, causing the liquid crystal molecules 113 to tilt more at regions above the openings 122, increasing overall light efficiency of the pixel 194. In the diagram 190, in the bulk region 192 of the liquid crystal layer 122, almost all of liquid crystal molecules 113 are tilted and aligned along directions substantially parallel to the substrates 102a and 102b.

[0054] FIG. 6B is a graph 200 showing the transmittance profile 202 of the pixel 194 based on the liquid crystal director profile of FIG. 6A. A substantially flat transmittance profile is achieved across the whole pixel 194. In this example, the light efficiency of the pixel 194 is more than 99.2% when normalized to the transmittance of two parallel linear polarizers.

[0055] FIG. 7 is a cross-sectional diagram of an example of a pixel 218 of a vertical alignment mode liquid crystal display 210 that includes a pixel electrode 108 having openings 122 and a liquid crystal layer 112 doped with a chiral material.

The display **210** is similar to the display **100** of FIG. **1**, except that the display **210** includes a patterned first common electrode **212** that has conductive portions **214** and openings **216**. The conductive portions **214** have shapes that correspond to the shapes of the openings **122** of the pixel electrode **108**. The widths of the conductive portions **214** are slightly larger than the widths of the openings **122**.

[0056] FIG. **8** is a cross-sectional diagram of the pixel **218**, showing electric field lines at a voltage-on state. The electric field generated by the pixel electrode **108**, the first common electrode **212**, and the second common electrode **104b** in FIG. **8** is similar to those shown in FIG. **3**. This indicates that the openings **216** in the first common electrode **212** do not affect the tilting of the liquid crystal molecules **113** in the liquid crystal layer **112**. The optical performance of the display **210** in FIG. **8** is similar to that of the display **100** in FIG. **1**.

[0057] FIG. **9** is a schematic diagram of an example of the liquid crystal display **100**, which includes an array **12** of pixels **90** that are controlled by one or more gate drivers **16** and one or more data drivers **18**. Each pixel **90** includes one or more thin film transistors (TFT) **20**, a storage capacitor C_{ST} **22**, and a liquid crystal cell **112** that has an effective capacitance represented by a capacitor C_{LC} **24**. The storage capacitor C_{ST} **22** can be formed by the pixel electrode **108** and the first common electrode **104a**. The capacitors C_{ST} **22** and C_{LC} **24** can be, e.g., connected in parallel to a first node **26** and a second node **28**. The TFT **20** includes a gate **30** that is connected to a gate line **32**, which is connected to the gate driver **16**. When the gate driver **16** drives the gate line **32** to turn on the TFT **20**, the data driver **18** drives a data line **34** with a voltage signal (e.g., V_{DATA}) that is passed to the capacitors C_{ST} **22** and C_{LC} **24**.

[0058] In some examples, the first node **26** is connected to the pixel electrode **108** (FIG. **1**), and the second node **28** is connected to the first and second common electrodes **104a**, **104b**. The voltage (e.g., V_{DATA}) across the capacitor C_{ST} **22** determines the voltage applied to the liquid crystal cell **112**. The voltage on the data line **34** is sometimes referred to as a “pixel voltage” or “gray scale voltage” because it determines the gray scale level shown by the pixel **90**.

[0059] A number of embodiments of the invention have been described. Other implementations are also within the scope of the following claims. For example, the first common electrode **104a** can be connected to a first reference voltage, and the second common electrode **104b** can be connected to a second reference voltage. The first and second reference voltages do not necessarily have to be equal to the ground voltage. The first and second reference voltages can be the same or different. Additional passivation layers, alignment layers, and compensation films can be used in the displays described above. The components of the displays, such as the liquid crystal layer and the polarization films can use materials and have parameters different from those described above. The retardation values of the films can be different from those described above.

[0060] The orientations of the liquid crystal molecules described above refer to the directions of directors of the liquid crystal molecules. The molecules may tend to point more in one direction (represented by the director) over time than other directions. For example, the phrase “the liquid crystal molecules are substantially aligned along a direction normal to the substrates” means that the average direction of the directors of the liquid crystal molecules are generally

aligned along the normal direction, but the individual molecules may point to different directions.

What is claimed is:

1. A display comprising:
 - pixel circuits each comprising:
 - a first electrode to be electrically coupled to a first reference voltage;
 - a second electrode to receive a pixel voltage corresponding to a gray scale level, the second electrode comprising a conducting layer having openings;
 - a third electrode to be electrically coupled to a second reference voltage, the second electrode being between the first and third electrodes; and
 - a liquid crystal layer between the first and second electrodes, the liquid crystal layer comprising a chiral material.
2. The display of claim **1** wherein the first reference voltage is equal to the second reference voltage.
3. The display of claim **2** wherein the first and second reference voltages are equal to a ground voltage of the pixels.
4. The display of claim **1** wherein the chiral material is selected to cause the liquid crystal layer to form twisted structures each having a free pitch of at least ten times a thickness of the liquid crystal layer.
5. The display of claim **1** wherein the first, second, and third electrodes and the chiral dopant are configured such that when the pixel voltage is applied to the second electrode, an electric field generated by the first, second, and third electrodes cause liquid crystal molecules above the openings to tilt by amounts that are more than half of those of the liquid crystal molecules above the conducting layer away from the openings, the amount of tilt being measured from initial positions of the molecules when the pixel voltage is below a threshold.
6. The display of claim **1** wherein when the pixel circuit is in a bright state, the transmissivity of portions of the pixel corresponding to the openings is at least half the transmissivity of portions of the pixel corresponding to the conducting layer away from the openings.
7. The display of claim **1** wherein when the pixel circuit is in a bright state, the transmissivity of portions of the pixel corresponding to the openings is at least 90% the transmissivity of portions of the pixel corresponding to the conducting layer away from the openings.
8. The display of claim **1** wherein the first, second, and third electrodes and the chiral dopant are configured such that azimuth angles of liquid crystal directors vary continuously across the pixel when the pixel voltage is applied to the second electrode.
9. The display of claim **1** wherein the liquid crystal layer comprises liquid crystal molecules that are aligned along a direction substantially normal to the surfaces of the first and second electrodes when the pixel voltage is below a threshold.
10. The display of claim **1** wherein the openings comprise circles having diameters in a range between $0.1\ \mu\text{m}$ to $8\ \mu\text{m}$.
11. The display of claim **1** wherein the openings comprise elongated slits each having a width in a range between $0.1\ \mu\text{m}$ to $8\ \mu\text{m}$.
12. The display of claim **11** wherein the elongated slits have at least one of straight, curved, and piecewise linear shapes.
13. The display of claim **1** wherein the third electrode comprises a continuous conducting layer without openings.

14. The display of claim 1 wherein the third electrode comprises a conducting layer having openings.

15. The display of claim 1 wherein the second and third electrodes are configured such that liquid crystal molecules adjacent to the openings are subject to electric fields having directions from the liquid crystal layer to the third electrode.

16. The display of claim 15 wherein the first, second, and third electrodes are configured such that liquid crystal molecules farther away from the openings are subject to electric fields having directions from the second electrode to the first electrode.

17. The display of claim 1 wherein each pixel comprises a storage capacitor having terminals comprising the second electrode and the third electrode.

18. The display of claim 1 wherein the first electrodes of different pixels are electrically connected.

19. The display of claim 1 wherein the third electrodes of different pixels are electrically connected.

20. The display of claim 1, further comprising a first circular polarizer and a second circular polarizer, the liquid crystal layer being between the first and second circular polarizers.

21. The display of claim 1, further comprising a first linear polarizer and a second linear polarizer, the liquid crystal layer being between the first and second linear polarizers.

22. A display comprising:

a first substrate;

a second substrate;

pixel circuits between the first and second substrates, each pixel circuit comprising:

a first electrode to be electrically coupled to a ground reference voltage;

a second electrode to receive a pixel voltage corresponding to a gray scale level, the second electrode comprising a conducting layer having openings;

a third electrode to be electrically coupled to the ground reference voltage, the second electrode being between the first and third electrodes; and

a liquid crystal layer between the first and second electrodes;

a first alignment layer between the liquid crystal layer and the first electrode of each pixel circuit; and

a second alignment layer between the liquid crystal layer and the second electrode of each pixel circuit.

23. The display of claim 22 wherein the liquid crystal layer comprises a chiral material.

24. A method comprising:

generating an electric field in a liquid crystal layer of a pixel circuit of a display, the electric field causing liquid crystal molecules in the liquid crystal layer to tilt from initial positions, the electric field having a distribution such that the liquid crystal layer forms a continuous

domain in which the liquid crystal molecules at different locations tilt in different directions, and the tilt directions of the liquid crystal molecules vary continuously across the pixel circuit; and

providing a twisting force to the liquid crystal molecules to cause the liquid crystal molecules to tilt at along different azimuth angles across the pixel.

25. The method of claim 24 wherein providing a twisting force comprises using chiral dopants in the liquid crystal layer to provide the twisting force.

26. The method of claim 24 wherein generating the electric field comprises providing a first reference voltage to a first electrode, providing a pixel voltage to a second electrode, and providing a second reference voltage to a third electrode, the liquid crystal layer being between the first and second electrodes, the second electrode being between the first and third electrodes, the second electrode comprising a conducting layer having openings.

27. The method of claim 26, further comprising tilting the liquid crystal molecules above the openings by amounts that are more than half of those of the liquid crystal molecules above the conducting layer away from the openings.

28. The method of claim 24, further comprising providing a substantially uniform transmittance across the pixel upon application of the pixel voltage, the transmittance of portions of the pixel corresponding to the openings being more than half of the transmittance of portions of the pixel corresponding to the conducting layer away from the openings.

29. The method of claim 24 further comprises aligning liquid crystal molecules of the liquid crystal layer along directions substantially normal to substrates at two sides of the liquid crystal layer prior to generating the electric field.

30. A method comprising:

forming a first electrode on a first substrate;

forming a third electrode on a second substrate;

forming an insulation layer on the third electrode;

forming a second electrode on the insulation layer, the second electrode comprising a conducting layer having openings;

positioning the first substrate parallel to and at a distance to the second substrate; and

providing a liquid crystal layer between the first and second electrodes.

31. The method of claim 30 further comprising adding a chiral material to the liquid crystal material of the liquid crystal layer.

32. The method of claim 31 wherein adding the chiral material comprises adding a chiral material having a concentration selected to cause the liquid crystal layer to form a twisted structure having a free pitch of at least ten times a thickness of the liquid crystal layer.

* * * * *

专利名称(译)	液晶显示器		
公开(公告)号	US20080218645A1	公开(公告)日	2008-09-11
申请号	US11/683206	申请日	2007-03-07
[标]申请(专利权)人(译)	群创光电股份有限公司 中佛罗里达大学		
申请(专利权)人(译)	奇美电子股份有限公司 佛罗里达中部研究基金会，Inc.的大学.		
当前申请(专利权)人(译)	FISH & RICHARDSON P.C. 佛罗里达中部研究基金会，Inc.的大学.		
[标]发明人	ZHU XINYU GE ZHIBING WU SHIN TSON LI WANG YANG WEI CHUNG KUANG		
发明人	ZHU, XINYU GE, ZHIBING WU, SHIN-TSON LI, WANG-YANG WEI, CHUNG-KUANG		
IPC分类号	G02F1/133		
CPC分类号	G02F1/134363 G02F1/1393 G02F2001/134381 G02F2001/134372 G02F2001/133638		
其他公开文献	US8208080		
外部链接	Espacenet USPTO		

摘要(译)

显示器包括像素电路，每个像素电路包括第一电极，第二电极，第三电极和掺杂有手性材料的液晶层。第一电气电耦合到第一参考电压。第二电极接收对应于灰度级的像素电压，第二电极包括具有开口的导电层。第三电极电耦合到第二参考电压。第二电极位于第一和第三电极之间，液晶层位于第一和第二电极之间。

