



US 20100033662A1

(19) **United States**(12) **Patent Application Publication**
LEE et al.(10) **Pub. No.: US 2010/0033662 A1**(43) **Pub. Date: Feb. 11, 2010**(54) **LIQUID CRYSTAL DISPLAY**(30) **Foreign Application Priority Data**(75) Inventors: **Jun-Hyup LEE**, Seoul (KR);
Jae-Jin LYU, Yongin-si (KR)

Aug. 7, 2008 (KR) 10-2008-0077644

Publication ClassificationCorrespondence Address:
CANTOR COLBURN, LLP
20 Church Street, 22nd Floor
Hartford, CT 06103 (US)(51) **Int. Cl.**
G02F 1/1337 (2006.01)(52) **U.S. Cl.** **349/123; 428/1.2; 349/191**(57) **ABSTRACT**

A liquid crystal display including a first substrate; a second substrate facing the first substrate; a first field generating electrode disposed on the first substrate; a second field generating electrode disposed on the second substrate; and a liquid crystal layer disposed between the first substrate and the second substrate, the liquid crystal layer including a liquid crystal and an alignment assistant, wherein the alignment assistant includes a mesogen and two or more photo-polymerizable groups.

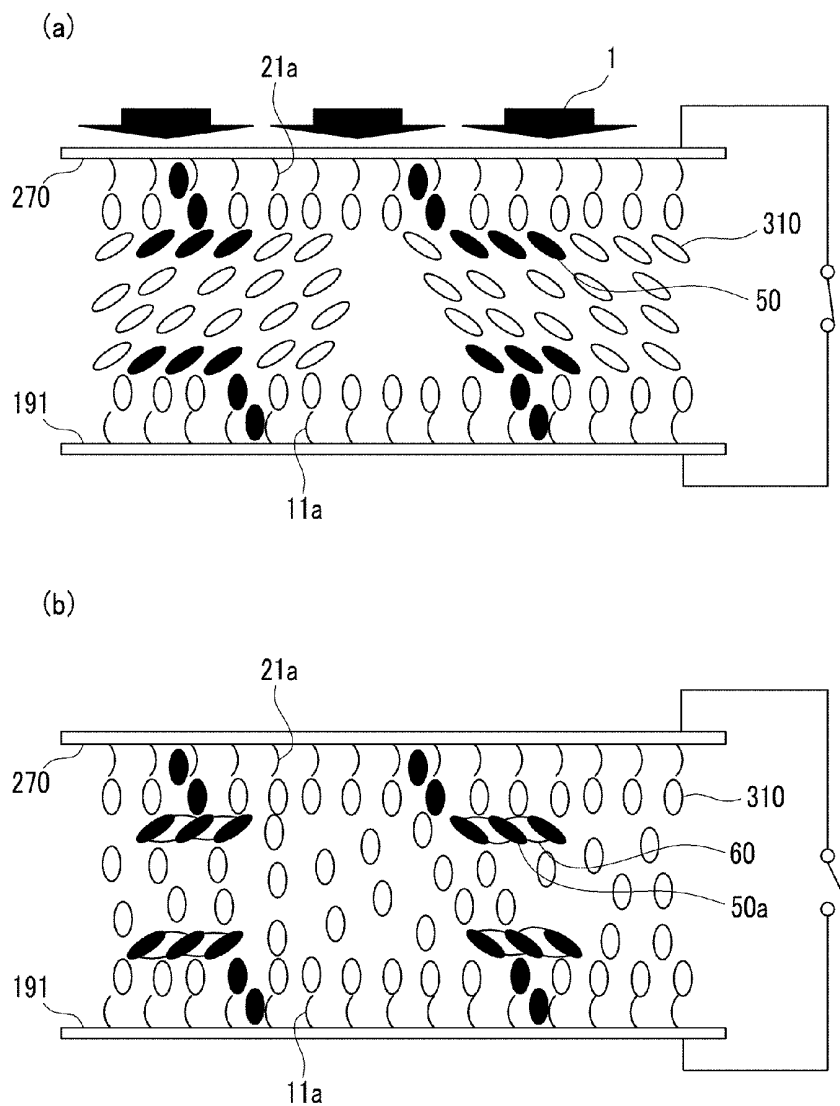
(73) Assignee: **Samsung Electronics Co., Ltd.**,
Suwon-si (KR)(21) Appl. No.: **12/416,548**(22) Filed: **Apr. 1, 2009**

FIG. 1

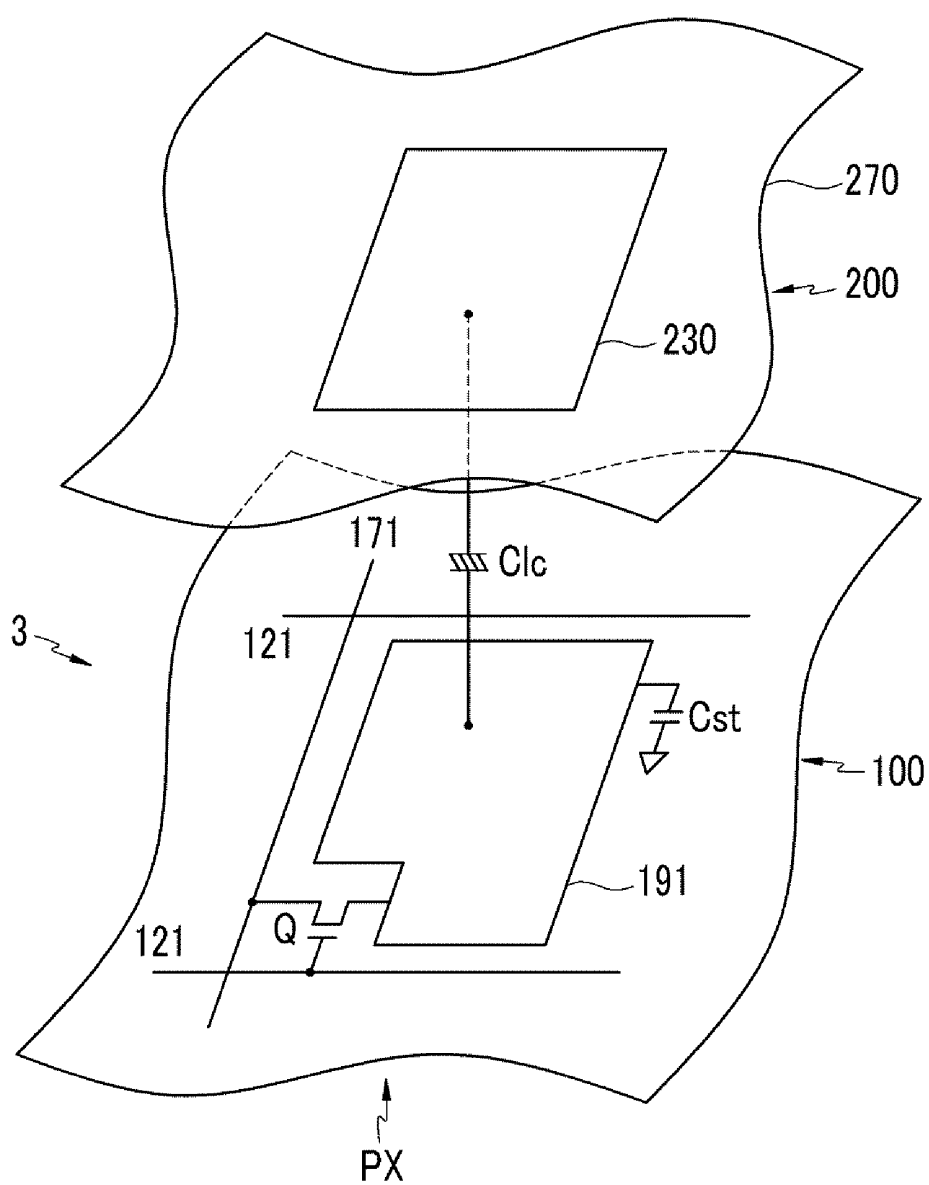


FIG.2

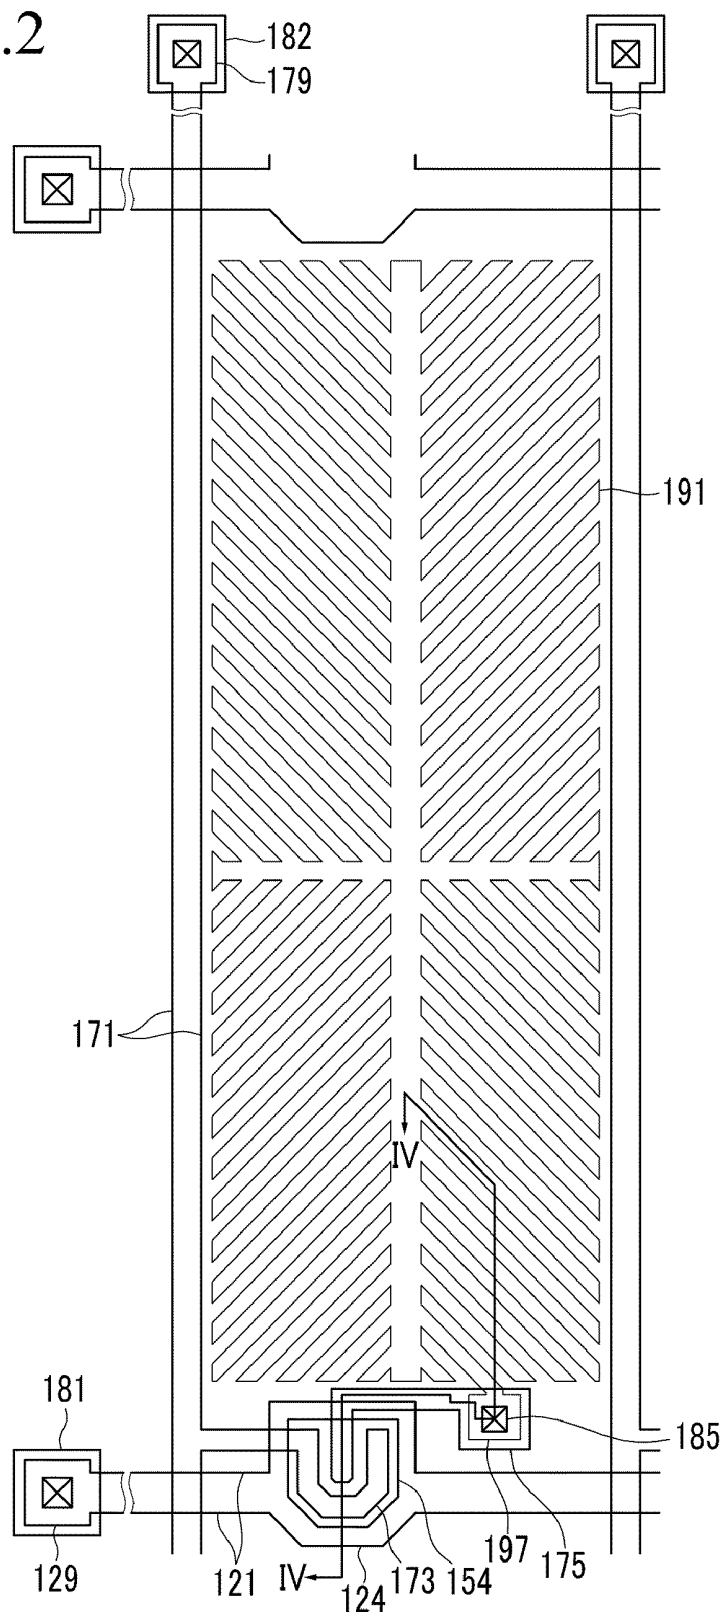


FIG.3

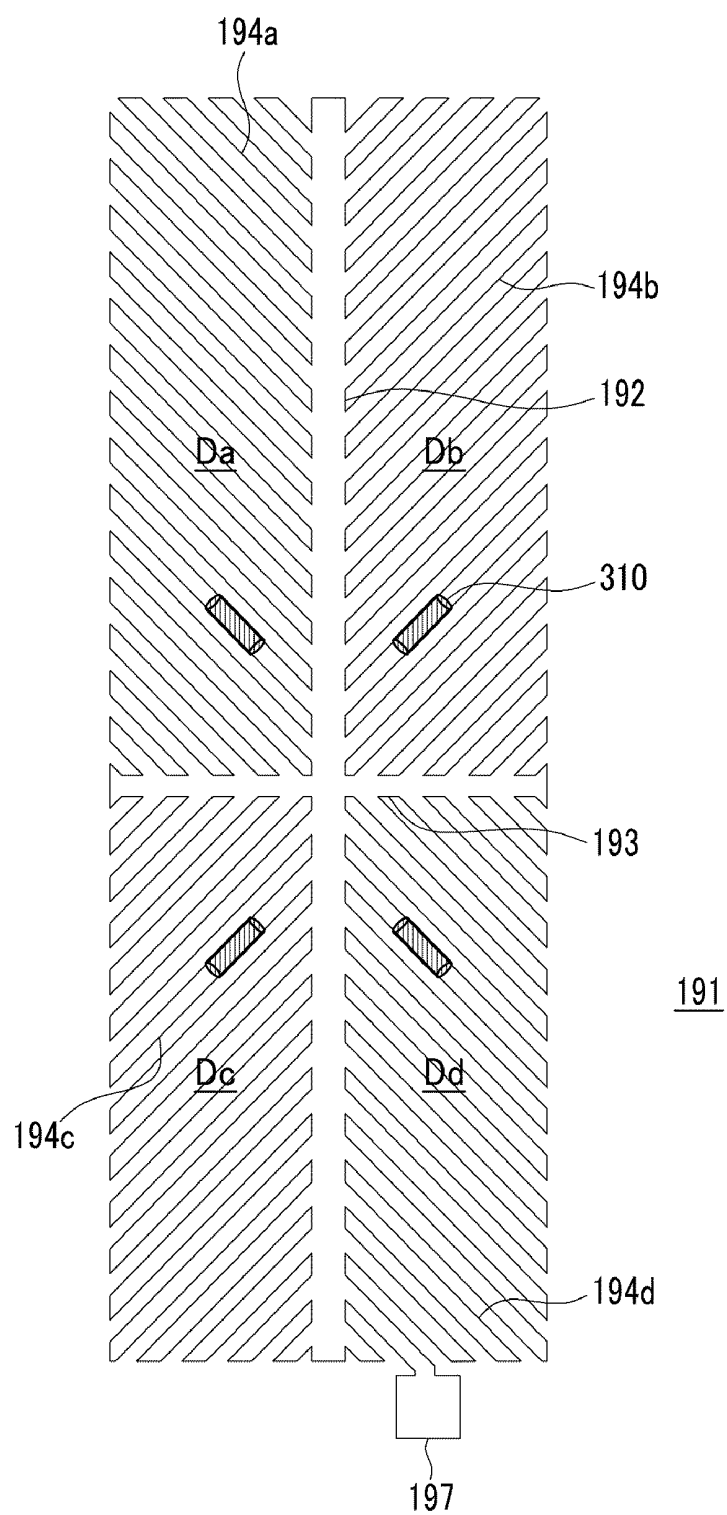


FIG.4

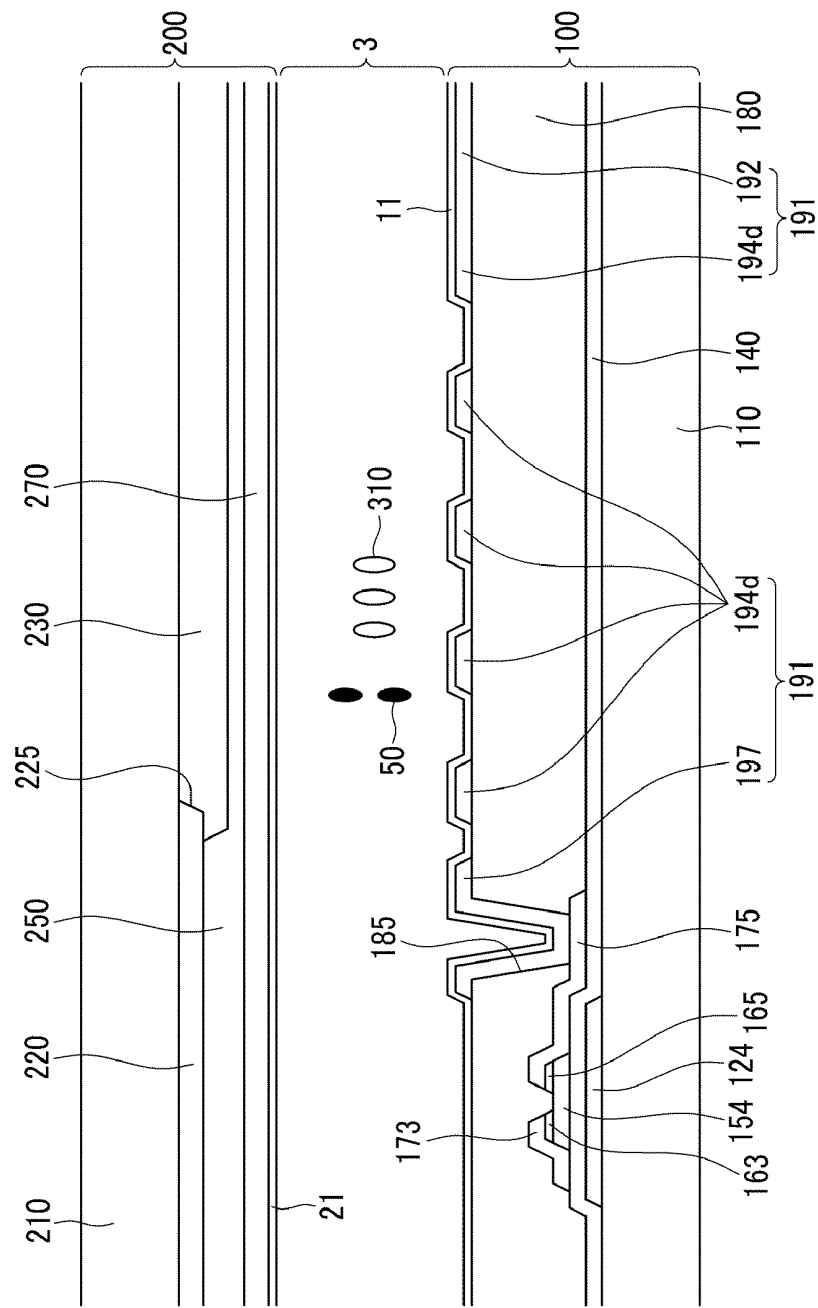


FIG.5

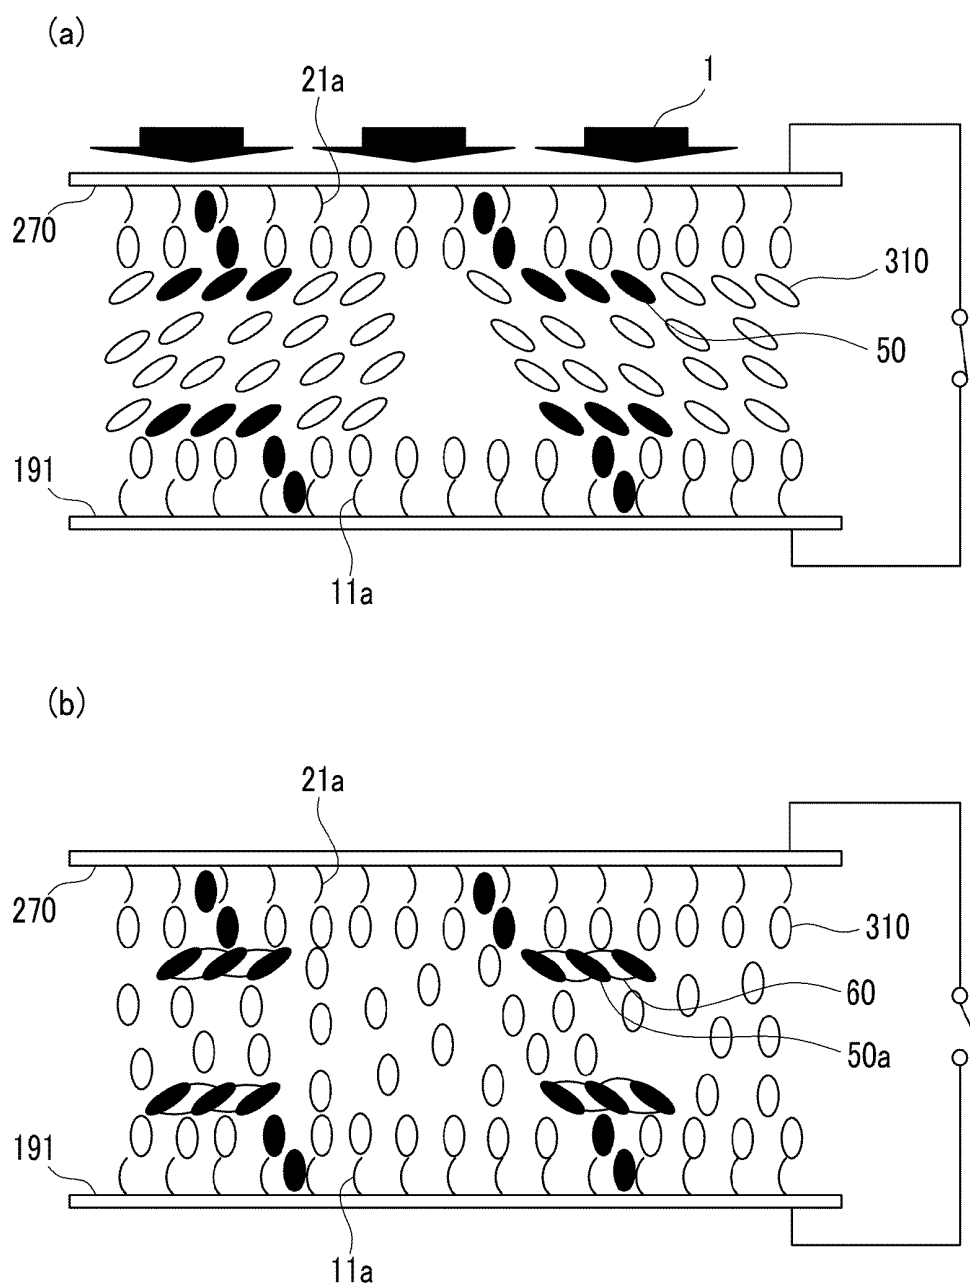


FIG.6A

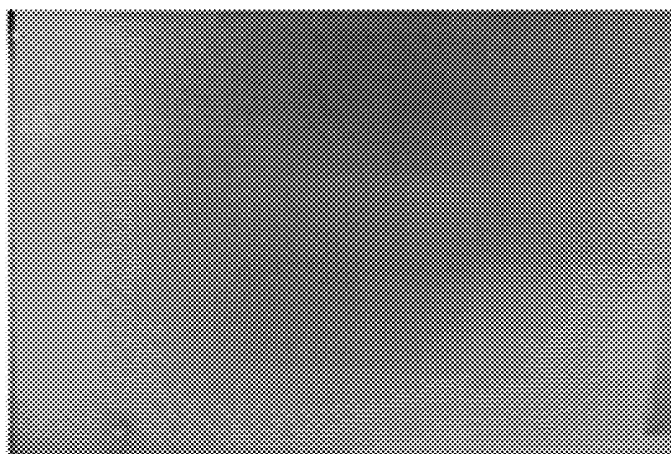


FIG.6B

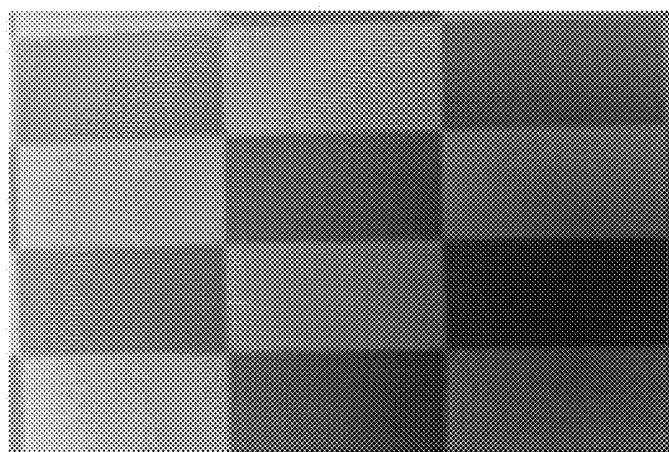


FIG. 7A

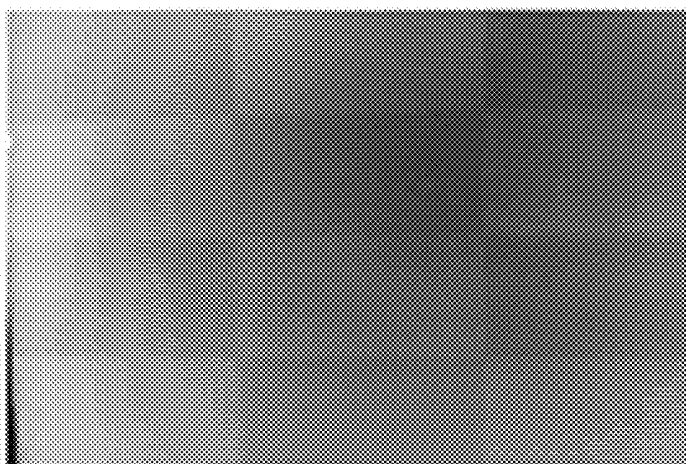


FIG. 7B


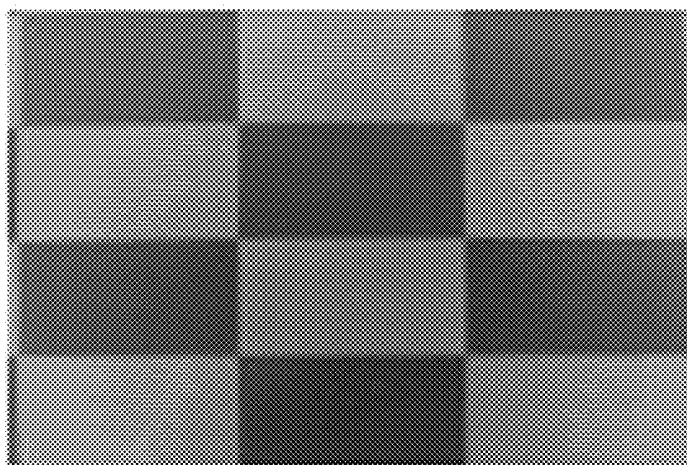


FIG.8

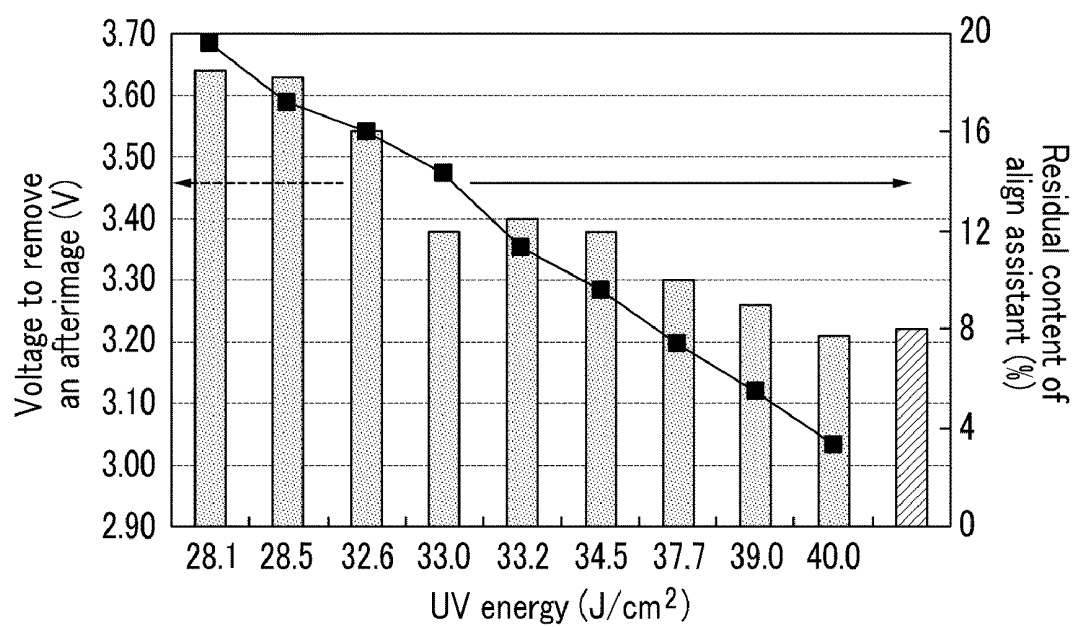

LIQUID CRYSTAL DISPLAY

[0001] This application claims priority to Korean Patent Application No. 10-2008-0077644, filed on Aug. 7, 2008, and all the benefits accruing therefrom under 35 U.S.C. §119, the contents of which in its entirety are herein incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] (a) Field of the Invention

[0003] This disclosure relates to a liquid crystal display.

[0004] (b) Description of the Related Art

[0005] Liquid crystal displays ("LCD"s) are a widely used type of flat panel display. An LCD includes two display panels on which field-generating electrodes are disposed, and a liquid crystal layer interposed between the panels. In the LCD, a voltage is applied between the field generating electrodes to generate an electric field. The electric field controls the alignment of liquid crystal molecules in a liquid crystal layer. Accordingly, a transmittance of light passing through the liquid crystal layer can be controlled.

[0006] In an LCD, control of the liquid crystals is important to obtain a desired image, which is generated by control of transmitted of light. In particular, because LCD applications have become more diverse, it would be desirable to ensure various characteristics, including a low driving voltage, a high voltage holding ratio ("VHR"), a wide viewing angle, a wide operation temperature range, and a high-speed response.

[0007] A liquid crystal layer includes a liquid crystal composition including various types of liquid crystal components so as to satisfy the above-mentioned characteristics.

[0008] In addition, it is important for the liquid crystals to be initially aligned.

[0009] To obtain a satisfactory initial alignment of the liquid crystals, a pretilt of the liquid crystals must be uniform. When the pretilt of the liquid crystals is not uniform, the

initial alignment of the liquid crystals can be such that it is difficult to control light passing through the liquid crystal layer, resulting in reduced the contrast ratio. In addition, pretilt differences can be observed as an afterimage, thereby deteriorating display quality.

BRIEF SUMMARY OF THE INVENTION

[0010] Accordingly, an exemplary embodiment reduces an afterimage in a liquid crystal display, which may be caused by a difference of a pretilt of a liquid crystal, and thus improves a display characteristic.

[0011] The above described and other drawbacks are alleviated by a liquid crystal display including a first substrate; a second substrate facing the first substrate; a first field generating electrode formed on the first substrate; and a second field generating electrode disposed on the second substrate; and a liquid crystal layer disposed between the first substrate and the second substrate, the liquid crystal layer including a liquid crystal and an alignment assistant, wherein the alignment assistant includes a mesogen and two or more photo-polymerizable groups.


[0012] The mesogen may include at least one group selected from the group consisting of a naphthalene group, a biphenyl group, a bisphenol-A group, a fluorine substituted naphthalene group, a fluorine substituted biphenyl group, a fluorine substituted bisphenol-A group, and a combination including at least one of the foregoing groups.

[0013] The photo-polymerizable group may include at least one group selected from the group consisting of an acrylate group, a methacrylate group, and a combination including at least one of the foregoing groups.

[0014] The liquid crystal display may further include a C₃-C₁₂alkyl group disposed between the mesogen and the photo-polymerizable group.


[0015] The alignment assistant may include at least one compound selected from the group of compounds represented by Chemical Formulas 1 to 4:

[Chemical Formula 1]

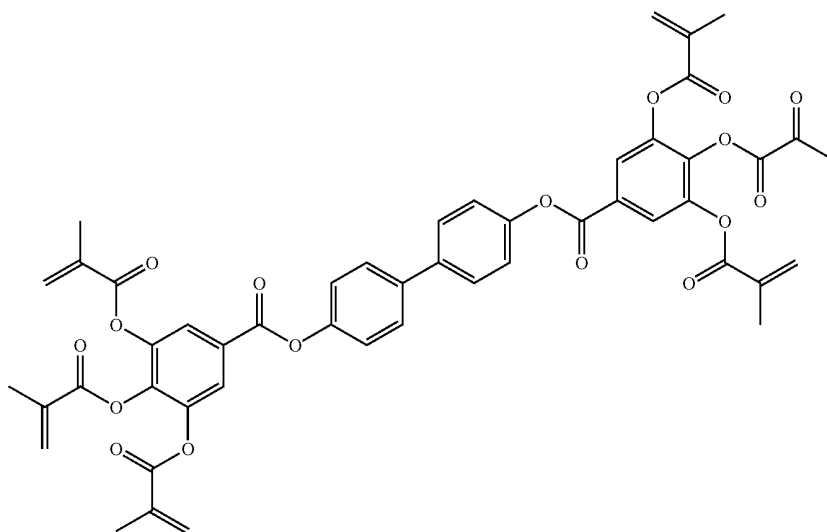


-continued

[Chemical Formula 2]

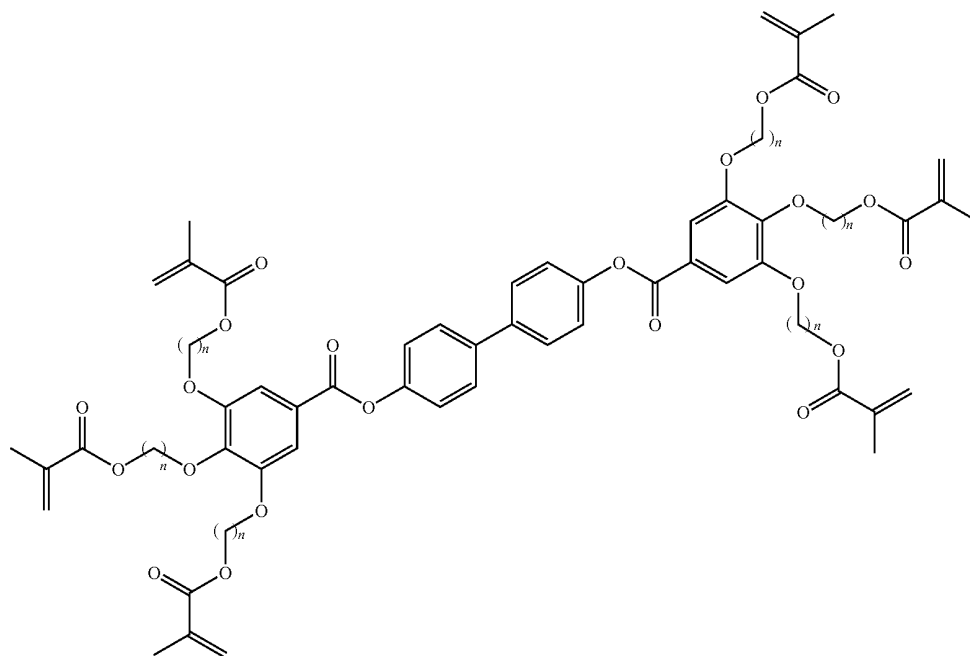


[Chemical Formula 3]

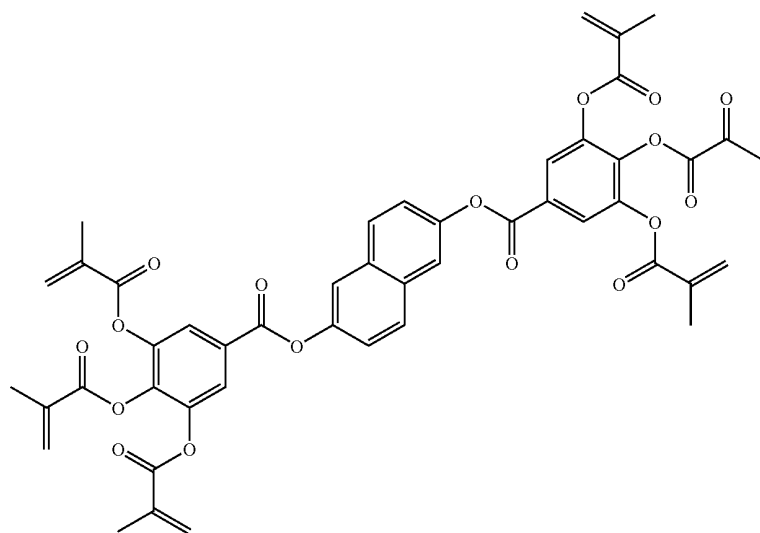

-continued

[Chemical Formula 4]

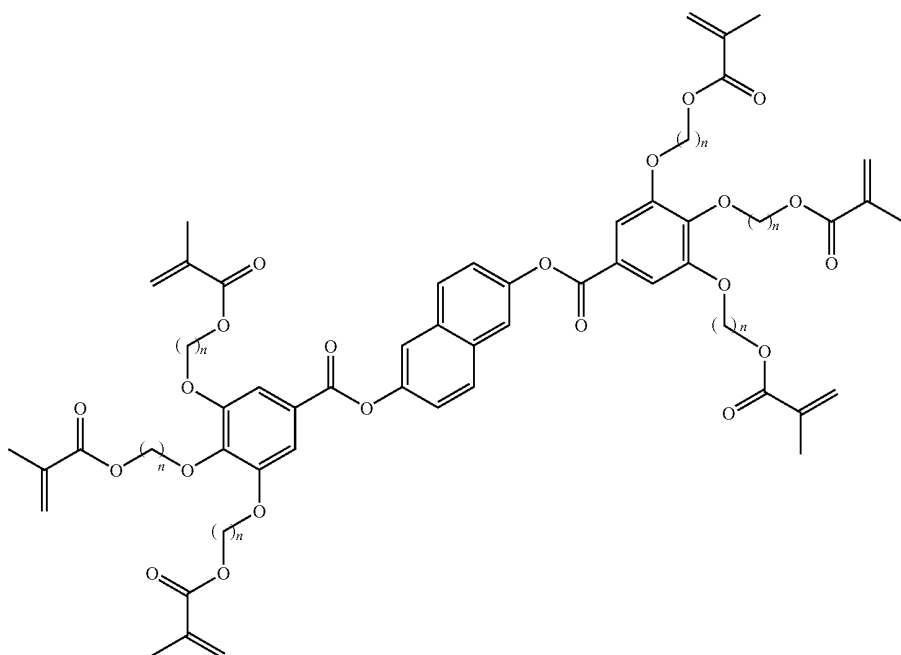

[0016] The alignment assistant may be contained in an amount between about 0.1 weight percent (wt. %) to about 10 wt % with respect to the content of the liquid crystals.

[0017] In an embodiment, at least one of the first and the second field generating electrodes may include a branch shape.

[0018] In an embodiment, the alignment assistant may comprise a non-polymerized alignment assistant; and the non-polymerized alignment assistant may be contained in an amount equal to or less than about 5 wt. % with respect to a total content of the alignment assistant.


[0019] Also disclosed is a liquid crystal display including a first substrate; a second substrate facing the first substrate; a first field generating electrode disposed on the first substrate; a second field generating electrode disposed on the second

substrate; and a liquid crystal layer disposed between the first substrate and the second substrate, the liquid crystal layer including a liquid crystal, a first alignment assistant and a second alignment assistant, wherein the first alignment assistant includes a non-mesogen and three or more photo-polymerizable groups, and a second alignment assistant includes a mesogen and two or more photo-polymerizable groups.


[0020] The photo-polymerizable group may include at least one group selected from the group consisting of an acrylate group, a methacrylate group, and a combination including at least one of the foregoing photo-polymerizable groups.

[0021] The first alignment assistant may include at least one compound selected from the group of compounds represented by Chemical Formulas 5 to 10:

[Chemical Formula 5]




[Chemical Formula 6]

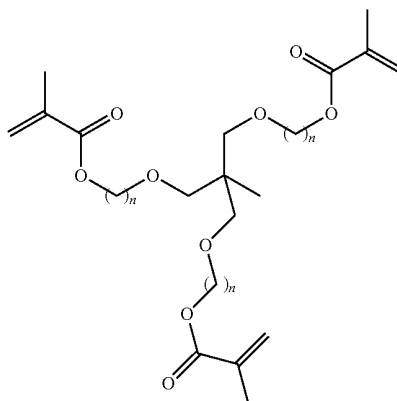


-continued


[Chemical Formula 7]




[Chemical Formula 8]

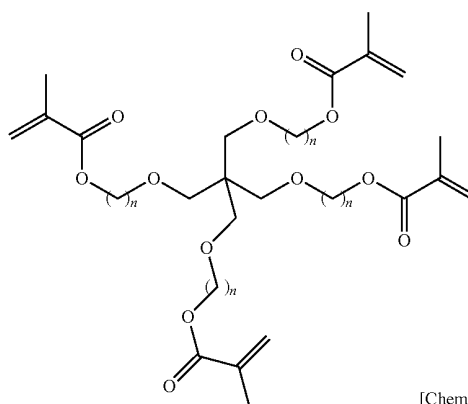


[Chemical Formula 9]

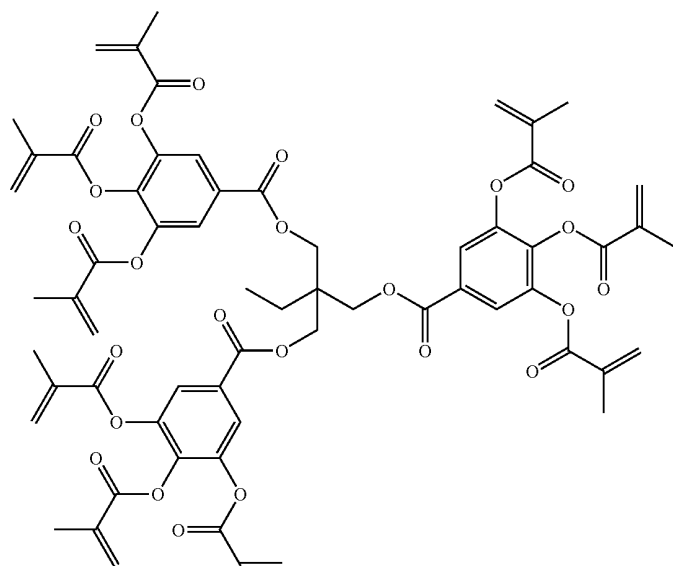

[Chemical Formula 10]

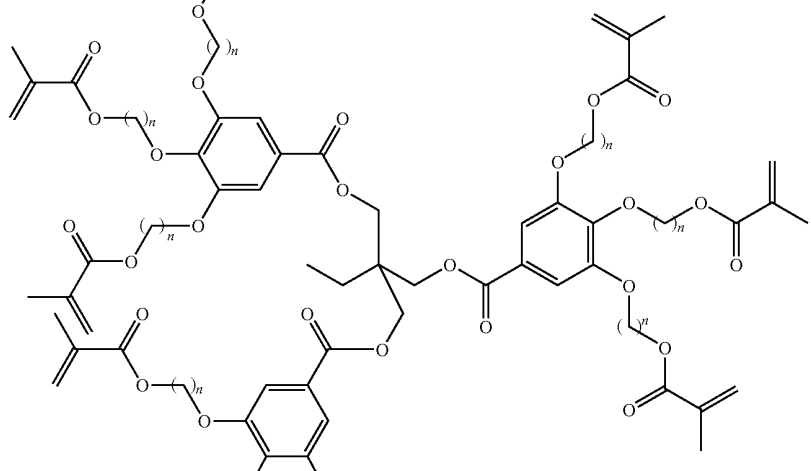


-continued




[0022] The second alignment assistants may include at least one compound selected from the group of compounds represented by Chemical Formulas 1 to 4 and Chemical Formulas 11 to 21:


[Chemical Formula 11]




[Chemical Formula 12]

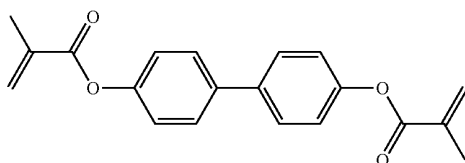


[Chemical Formula 13]

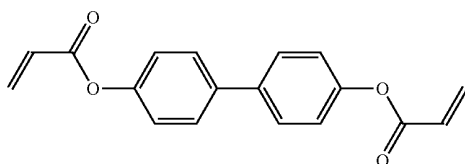

[Chemical Formula 14]

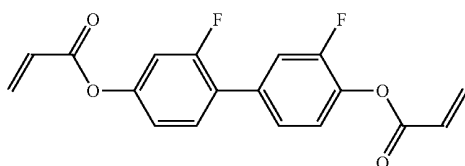


[Chemical Formula 15]

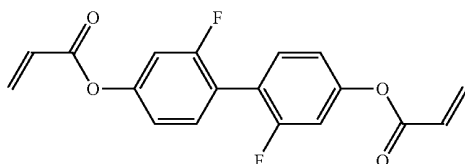


-continued


[Chemical Formula 16]

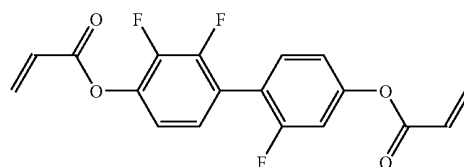


[Chemical Formula 17]

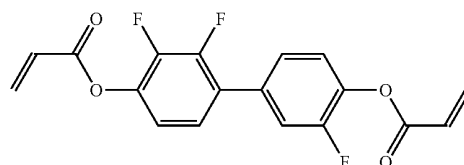


[Chemical Formula 18]

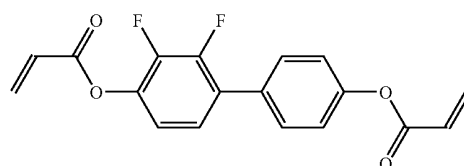


[Chemical Formula 19]

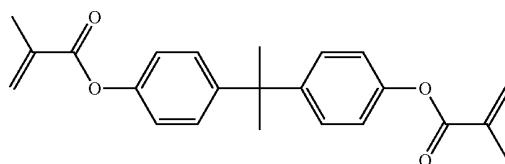

[Chemical Formula 20]

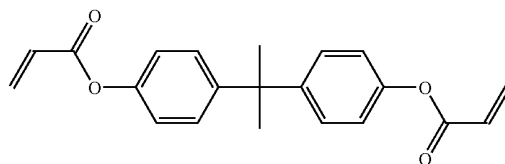

[Chemical Formula 21]

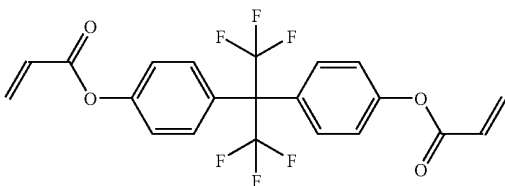

[0023] At least one of the first alignment assistant and the second alignment assistant may be contained in an amount between about 0.1 wt. % to about 10 wt. % with respect to the content of the liquid crystal.

[0024] The second alignment assistant may be contained in an amount between about 40 wt. % to about 90 wt. % with respect to the content of the total content of the first and the second alignment assistants.

[0025] At least one of the first and the second field generating electrodes may include a branch shape.

[0026] In an embodiment, at least one of the first and the second alignment assistants may comprise a non-polymerized alignment assistant; and the non-polymerized alignment assistants may be contained in an amount less than or equal to about 5 wt. % with respect to a total content of the first and the second alignment assistants.

[0027] In an embodiment, a manufacturing method of a liquid crystal display includes forming a first display panel with a pixel electrode; forming a second display panel with a common electrode; assembling the first display panel and the second display panel; disposing a liquid crystal layer between the first display panel and the second display panel, the liquid crystal layer including a liquid crystal and at least one of a first alignment assistant and a second alignment assistant; applying a voltage between the pixel electrode and the common electrode; and irradiating light on the liquid crystal layer during the application of a voltage between the pixel electrode and the common electrode.

[0028] The second alignment assistant may include a mesogen and two or more photo-polymerizable groups.

[0029] The mesogen may be selected from the group consisting of a naphthalene group, a biphenyl group, a bisphenol-A group, a fluorine substituted naphthalene group, a fluorine substituted biphenyl group, a fluorine substituted bisphenol-A group, and a combination including at least one of the foregoing groups, and the photo-polymerizable group may be selected from the group consisting of an acrylate group, a methacrylate group, and a combination including at least one of the foregoing groups.

[0030] In an embodiment, the first alignment assistant may include a non-mesogen and three or more photo-polymerizable groups, and the second alignment assistant includes a mesogen and two or more photo-polymerizable groups.

[0031] In an embodiment, the pixel electrode may include a branch shape.

[0032] The method may further include irradiating light on the liquid crystal layer when the voltage between the pixel electrode and the common electrode is not applied.

[0033] In an embodiment, at least one of the first alignment assistant and the second alignment assistant comprises a non-polymerized alignment assistant, and the non-polymerized alignment assistant may be contained in an amount less than or equal to about 5 wt. % with respect to the total content of the first and the second alignment assistants.

[0034] As above described, the liquid crystal display according to an exemplary embodiment includes an alignment assistant such that a pre-tilt of the liquid crystal may be uniformly controlled, and the alignment assistant includes a selected structure such that a residual content of the non-polymerized alignment assistant, which remains in a liquid crystal layer, may be reduced. Accordingly, an afterimage,

which may be caused by the non-polymerized alignment assistant, may be reduced, thereby improving display quality.

BRIEF DESCRIPTION OF THE DRAWINGS

[0035] The above and other aspects, advantages, and features of the invention will become more apparent by describing in further detail exemplary embodiments thereof with reference to the attached drawings, in which:

[0036] FIG. 1 is an equivalent circuit diagram showing an exemplary embodiment of a pixel in a liquid crystal display;

[0037] FIG. 2 is a plan view showing an exemplary embodiment of a liquid crystal display;

[0038] FIG. 3 is a plan view showing an exemplary embodiment of a pixel electrode of the liquid crystal display shown in FIG. 2;

[0039] FIG. 4 is a cross-sectional view showing an exemplary embodiment of the liquid crystal display shown in FIG. 2 taken along line IV-IV;

[0040] FIG. 5 is a schematic diagram showing an exemplary embodiment of a method of pretilting a liquid crystal using an alignment assistant;

[0041] FIG. 6A and FIG. 6B are photographs showing an afterimage evaluation result of an exemplary embodiment of a liquid crystal display and a liquid crystal display according to a comparative example, respectively;

[0042] FIG. 7A and FIG. 7B are photographs showing an afterimage evaluation result of another exemplary embodiment of a liquid crystal display and a liquid crystal display according to a comparative example, respectively; and

[0043] FIG. 8 is a graph showing a residual content of a non-polymerized alignment assistant, and a voltage to remove an afterimage, with respect to an irradiation energy when irradiating light to polymerize an exemplary embodiment of an alignment assistant of a liquid crystal display.

DETAILED DESCRIPTION OF THE INVENTION

[0044] The invention will be described more fully herein-after with reference to the accompanying drawings, in which exemplary embodiments are shown. As those skilled in the art would realize, the disclosed embodiments may be modified in various different ways, all without departing from the spirit or scope of the invention.

[0045] In the drawings, the thickness of layers, films, panels, regions, etc., are exaggerated for clarity. Like reference numerals designate like elements throughout the specification. It will be understood that when an element such as a layer, film, region, or substrate is referred to as being "on" another element, it may be directly on the other element or intervening elements may also be present. In contrast, when an element is referred to as being "directly on" another element, there are no intervening elements present.

[0046] As used herein, the term "(meth)acrylate" encompasses both acrylate and methacrylate groups.

[0047] As used herein, "alkyl" is intended to include both branched and straight-chain saturated aliphatic hydrocarbon groups, having the specified number of carbon atoms. Thus, the term C₃-C₁₂alkyl as used herein includes alkyl groups having from about 3 to about 6 carbon atoms.

[0048] The term "substituted," as used herein, means that any one or more hydrogens on the designated compound or group is replaced with the indicated atom or group, provided that an atom's normal valence is not exceeded.

[0049] The singular forms “a,” “an,” and “the” include plural referents unless the context clearly dictates otherwise.

[0050] As used herein, a mesogen is a group having a valence of two or more and comprising two or more aromatic or aliphatic rings.

[0051] As used herein, a non-mesogen is an acyclic group having a valence of two or more, thus a non-mesogen does not include an aromatic or aliphatic ring.

[0052] A liquid crystal display according to an exemplary embodiment is described with reference to FIG. 1 to FIG. 4.

[0053] FIG. 1 is an equivalent circuit diagram showing an exemplary embodiment of a pixel of a liquid crystal display, FIG. 2 is a plan view showing an exemplary embodiment of a liquid crystal display, FIG. 3 is a plan view showing an exemplary embodiment of a pixel electrode of the liquid crystal display shown in FIG. 2, and FIG. 4 is a cross-sectional view showing an exemplary embodiment of the liquid crystal display shown in FIG. 2 taken along line IV-IV.

[0054] Referring to FIG. 1, a liquid crystal display includes a thin film transistor array panel 100 and a common electrode panel 200 facing each other, and a liquid crystal layer 3 interposed between the thin film transistor array panel 100 and the common electrode panel 200.

[0055] The thin film transistor array panel 100 includes a gate line 121 for transmitting a gate signal and a data line 171 for transmitting a data voltage. The gate lines 121 are substantially parallel to each other and may extend in a row direction, and the data lines 171 are substantially parallel to each other and may extend in a column direction.

[0056] Each pixel PX includes a switching element Q electrically connected to a gate line 121 and a data line 171, and a liquid crystal capacitor Clc and a storage capacitor Cst electrically connected thereto.

[0057] The liquid crystal capacitor Clc is disposed between a pixel electrode 191 of the thin film transistor array panel 100 and a common electrode 270 of the common electrode panel 200, and the liquid crystal layer 3, which is disposed between the pixel electrode 191 and the common electrode 270, functions as a dielectric material.

[0058] The storage capacitor Cst, serving as an assistant to the liquid crystal capacitor Clc, is disposed as a separate signal line (not shown) on the thin film transistor array panel 100. The pixel electrode 191 and the storage capacitor Cst may overlap, an insulator may be interposed therebetween, and a selected voltage, such as a common voltage Vcom, may be applied thereto. The storage capacitor Cst may be omitted if desirable.

[0059] In an embodiment, the pixel may include a color filter 230 for display of a color. The color filter 230 may be disposed on the common electrode panel 200, but it is not limited thereto, and the color filter 230 may be disposed on the thin film transistor array panel 100.

[0060] The liquid crystal display according to an exemplary embodiment is described in further detail with reference to FIG. 2 to FIG. 4.

[0061] First, the thin film transistor array panel 100 is described.

[0062] A gate line 121, including a gate electrode 124, which may extend in an upward and a downward direction, and an end portion 129 for connection with an external circuit, is disposed on an insulating substrate 110.

[0063] A gate insulating layer 140 is disposed on the gate line 121, and a semiconductor 154 comprising hydrogenated amorphous silicon, polysilicon, or the like, or a combination

comprising at least one of the foregoing materials, is disposed on the gate insulating layer 140.

[0064] A first and a second of ohmic contacts 163 and 165 are disposed on the semiconductor 154. The first and the second ohmic contacts 163 and 165 may comprise a material such as n+ hydrogenated amorphous silicon, in which an n-type impurity such as phosphorus, or the like, is doped at a high concentration, a silicide, or the like, or a combination comprising at least one of the foregoing materials.

[0065] A data line 171 and a drain electrode 175 are disposed on the first and the second ohmic contacts 163 and 165, and on the gate insulating layer 140.

[0066] The data line 171 may be perpendicular to the gate line 121 and include a source electrode 173, which may be disposed in a “U” shape oriented towards the gate electrode 124, and a second end portion 179, for electrical connection to an external circuit.

[0067] The drain electrode 175 includes a first portion within the source electrode 173 having a first width, and a second portion extending therefrom having a second width, wherein the first width is less than the second width.

[0068] A thin film transistor (“TFT”) Q comprises a gate electrode 124, a source electrode 173, a drain electrode 175, and a semiconductor 154, and a channel of the TFT Q is disposed on the semiconductor 154 between the source electrode 173 and the drain electrode 175.

[0069] A passivation layer 180 is disposed on the data line 171, the drain electrode 175, and the exposed semiconductor 154. The passivation layer 180 comprises a first and a second contact holes 185 and 182 exposing the drain electrode 175 and the second end portion 179, respectively, of the data line 171, and the passivation layer 180 and the gate insulating layer 140 comprise a third contact hole 181 exposing the first end portion 129 of the gate line 121.

[0070] A pixel electrode 191, comprising a transparent conductive material, such as indium tin oxide (“ITO”), indium zinc oxide (“IZO”), or the like, or a reflective metal such as aluminum, silver, chromium, alloys thereof, or the like, or a combination comprising at least one of the foregoing materials, is disposed on the passivation layer 180.

[0071] The pixel electrode 191 may comprise a rectangular shape, and the pixel electrode 191 may include a transverse stem 193, a longitudinal stem 192 intersecting the transverse stem 193, a first, a second, a third, and a fourth branches 194a, 194b, 194c, and 194d obliquely extending from the transverse stem 193 and the longitudinal stem 192, and a lower protrusion 197.

[0072] Also, the pixel electrode 191 may be divided into a first sub-region Da, a second sub-region Db, a third sub-region Dc, and a fourth sub-region Dd by the transverse stem 193 and the longitudinal stem 192. The sub-regions Da, Db, Dc, and Dd respectively include the first, the second, the third, and the fourth branches 194a, 194b, 194c, and 194d, and the four sub-regions Da, Db, Dc, and -Dd may form a display unit for transmitting light.

[0073] The first branch 194a may obliquely extend from the transverse stem 193 or the longitudinal stem 192 in an upper-left direction, and the second branch 194b may obliquely extend from the transverse stem 193 or the longitudinal stem 192 in an upper-right direction. Also, the third branch 194c may obliquely extend from the transverse stem 193 or the longitudinal stem 192 in a lower-left direction, and

the fourth branch **194d** may obliquely extend from the transverse stem **193** or the longitudinal stem **192** in a lower-right direction.

[0074] The first, the second, the third, and the fourth branches **194a**, **194b**, **194c**, and **194d** may form an angle of about 45 degrees or about 135 degrees with the gate line **121** or the transverse stem **193**. Also, the branches **194a**, **194b**, **194c**, and **194d** of two neighboring sub-regions Da, Db, Dc, and Dd may be perpendicular to each other.

[0075] The lower protrusion **197** of the pixel electrode **191** is physically and electrically connected to the drain electrode **175** through the first contact hole **185**, and receives a data voltage from the drain electrode **175**.

[0076] Next, the common electrode panel **200** is described.

[0077] A light blocking member **220** is formed on an insulation substrate **210**. The light blocking member **220** prevents light leakage between the pixel electrodes **191** and includes an opening **225**, which defines a region facing the pixel electrodes **191**.

[0078] A color filter **230** may be disposed on the substrate **210** and the light blocking member **220**. The color filter **230** may be disposed in a region enclosed by the light blocking member **220**, and may extend to correspond to a column comprising a plurality of pixel electrodes **191**. A color filter **230** may display one of the primary colors, such as the colors red, green, or blue.

[0079] An overcoat **250** may be disposed on the color filter **230** and the light blocking member **220**, and a common electrode **270** comprising a transparent conductor, such as ITO, IZO, or the like, or a combination comprising at least one of the foregoing transparent conductors, is disposed on substantially an entire surface of the overcoat **250**.

[0080] A first and a second alignment layers **11** and **21** are disposed on an inner surface of the thin film transistor array panel **100** and the common electrode panel **200**, and may be a vertical alignment layer.

[0081] A polarizer (not shown) may be disposed on at least one of an outer surface of the thin film transistor array **100** and an outer surface of a common electrode panel **200**.

[0082] A liquid crystal layer **3** is disposed between the thin film transistor array panel **100** and the common electrode panel **200**. The liquid crystal layer **3** includes a liquid crystal **310** and an alignment assistant **50**.

[0083] The liquid crystal **310** may have a negative dielectric anisotropy, and may be oriented such that a major axis of the liquid crystal **310** is substantially perpendicular to a surface of the thin film transistor array panel **100** and the common electrode panel **200** when no electric field is applied.

[0084] If a voltage is applied between the pixel electrode **191** and the common electrode **270**, the liquid crystal **310** rearranges in response to the electric field such that a direction of the major axis thereof changes to be substantially perpendicular to a direction of the electric field. The liquid crystal may change an angle of polarization of light incident on the liquid crystal layer **3** depending on a degree of inclination of the liquid crystal **310**. Also, a change in the angle of polarization of light may be observed by a change in a transmittance of light when a polarizer is used. Accordingly, a liquid crystal display may display an image.

[0085] The orientation of the liquid crystal **310** may be controlled by the branches **194a**, **194b**, **194c**, and **194d** of the pixel electrode **191**, and the liquid crystal **310** may be inclined parallel to a length direction of the branches **194a**, **194b**,


194c, and **194d**. A pixel electrode **191** may include the four sub-regions Da, Db, Dc, and Dd, each comprising the a branch **194a**, **194b**, **194c**, and **194d**, respectively, of the different length directions such that an inclined direction of the liquid crystal **310** comprises all four directions, and the four sub-regions, include the different alignment directions of the liquid crystal **310**, are disposed in the liquid crystal layer **3**. Therefore, a viewing angle of the liquid crystal display is widened by varying the inclined direction of the liquid crystal.

[0086] The alignment assistant **50** may function to control a pre-tilt during an initial alignment of the liquid crystal **310**.


[0087] The alignment assistant **50** may comprise a structure which is similar to a liquid crystal structure, and thus may include a core group, comprising a core axis, and a terminal group connected thereto.

[0088] The alignment assistant **50**, according to an exemplary embodiment, includes a mesogen, as a core group, substituted by two or more photo-polymerizable groups, which are a terminal group.


[0089] The mesogen is a substituted or unsubstituted group comprising two or more aromatic or aliphatic rings. Exemplary mesogens include at least one group selected from the group consisting of a substituted or unsubstituted naphthalene, such as the group represented by Chemical Formula A, a substituted or unsubstituted biphenyl group, such as the group represented by Chemical Formula B, a substituted or unsubstituted bisphenol-A group, such as the group represented by Chemical Formula C, a fluorine substituted biphenyl group, such as the group represented by Chemical Formula D, a fluorine substituted bisphenol-A group, such as the group represented by Chemical Formula E, and the like, and a combination comprising at least one of the foregoing mesogens. In an embodiment, the mesogen is symmetric across one, two, or three mirror planes.




[Chemical Formula A]




[Chemical Formula B]



[Chemical Formula C]




[Chemical Formula D]




[Chemical Formula E]

[0090] The photo-polymerizable group is a functional group which may be polymerized by light, but is not limited thereto. Exemplary photo-polymerizable groups include an acrylate group, such as the group represented by Chemical Formula F, and a methacrylate group, such as the group represented by Chemical Formula G, or the like, or a combination comprising at least one of the foregoing photo-polymerizable groups.




[Chemical Formula F]



[Chemical Formula G]

[0091] Also, the alignment assistant **50** may further include a substituted or unsubstituted alkyl group disposed between the mesogen and the photo-polymerizable group. In an embodiment, the alkyl group is unsubstituted. In an embodiment, the alkyl group is a C₁-C₆alkyl group, a C₃-C₁₂alkyl group, or a C₇-C₁₂alkyl group. The alkyl group may be disposed between the mesogen and the photo-polymerizable group, and the length of the alkyl group may be selected such that a degree of polymerization is increased when light is disposed on the alignment assistant.


[0092] The alignment assistant **50** may include at least one compound selected from the compounds represented by Chemical Formulas 1 to 4.

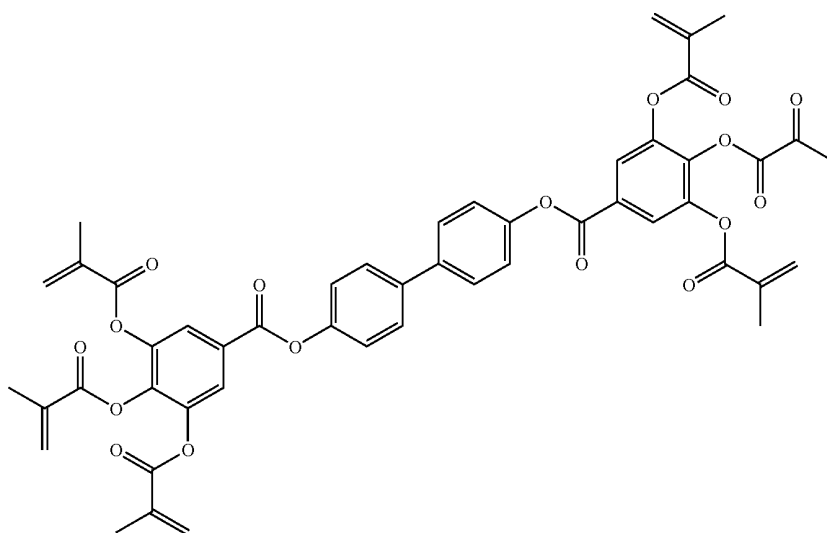


[Chemical Formula 1]

-continued

[Chemical Formula 2]

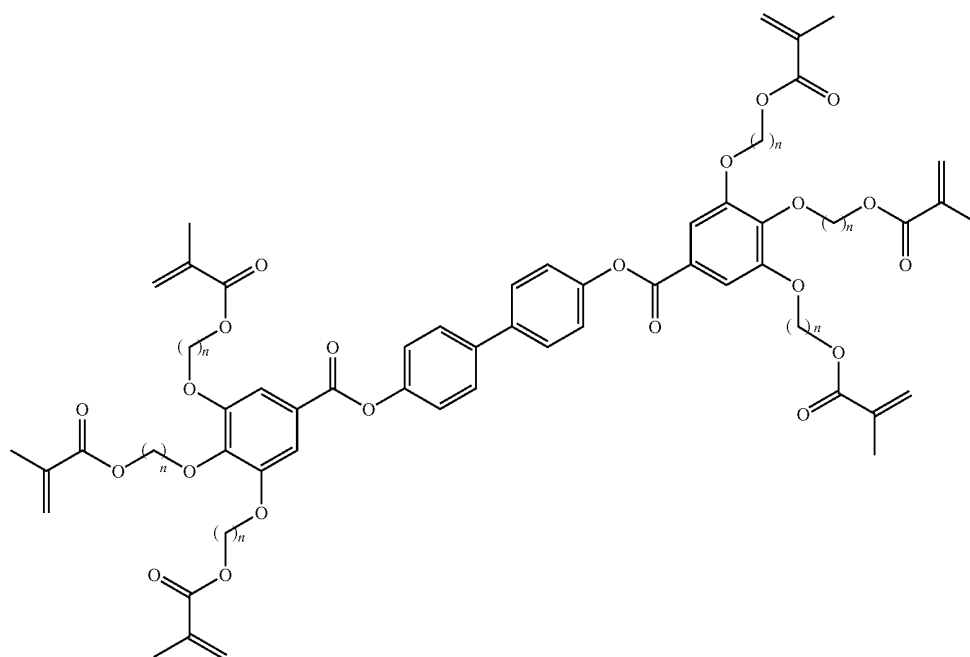


[Chemical Formula 3]

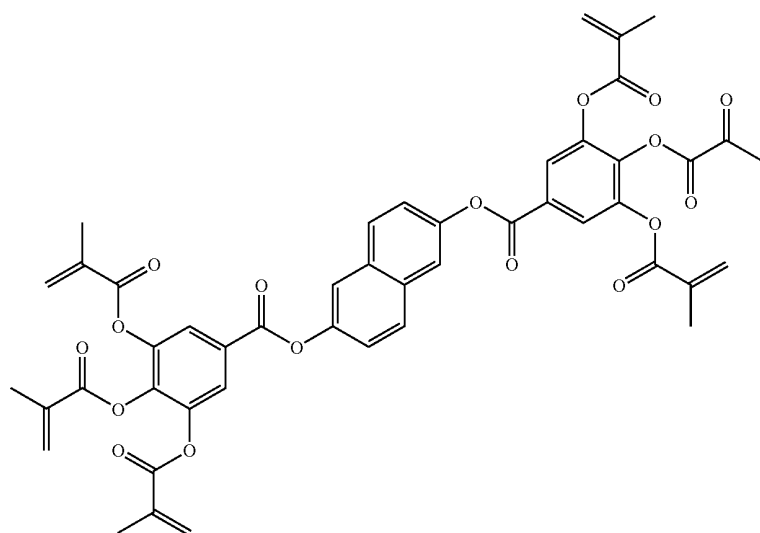

-continued

[Chemical Formula 4]

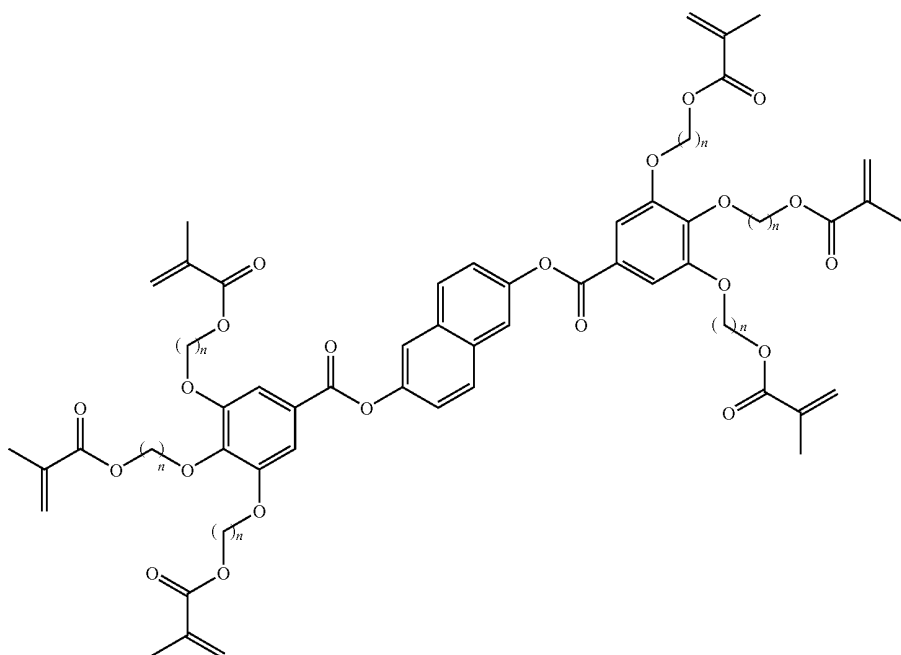

[0093] In Chemical Formula 1, the mesogen includes a biphenyl group, the photo-polymerizable group includes a methacrylate group, and the number of photo-polymerizable groups is 6.


[0094] In Chemical Formula 2, the mesogen includes the biphenyl group, the photo-polymerizable group includes a methacrylate group, and an alkyl group is disposed between the mesogen and the photo-polymerizable group. The alkyl group may be a C_3 - C_{12} alkyl group, thus n in Chemical Formula 2 may be about 3 to about 12. The number of photo-polymerizable groups in Chemical Formula 2 is 6.

[0095] In Chemical Formula 3, the mesogen includes a naphthalene group, the photo-polymerizable group includes a methacrylate group, and the number of photo-polymerizable groups is 6.


[0096] In Chemical Formula 4, the mesogen includes a naphthalene group, the photo-polymerizable group is a methacrylate group, and an alkyl group is disposed between the mesogen and the photo-polymerizable group. The alkyl group may be a C_3 - C_{12} alkyl group, thus n in Chemical Formula 4 may be about 3 to about 12. In Chemical Formula 4 the number of photo-polymerizable groups is 6.

[0097] The compound represented by Chemical Formula 1 may be prepared by the method of Reaction Formula 1.

[Reaction Formula 1]

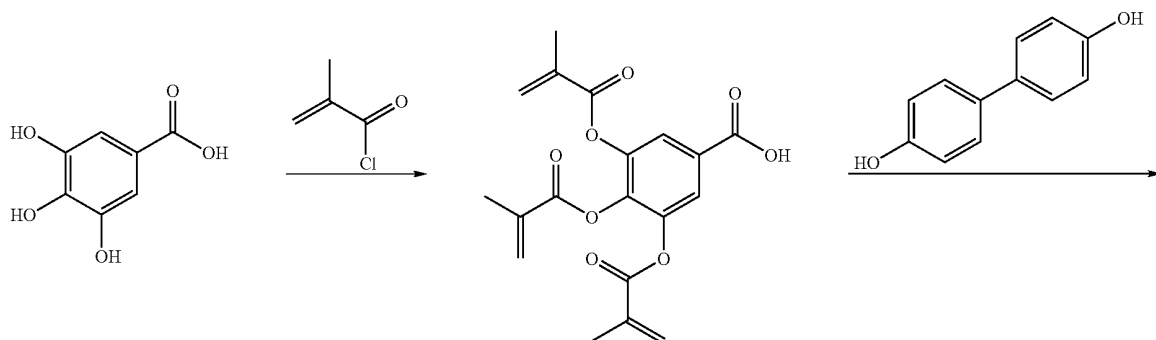


-continued

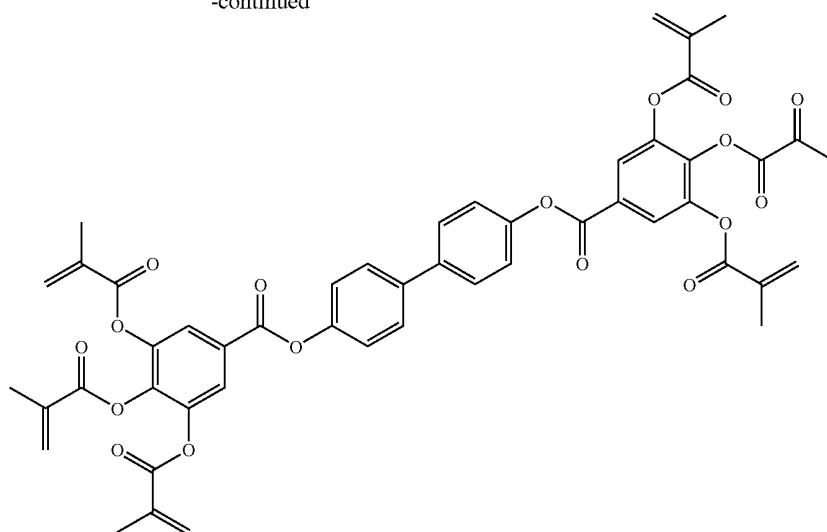


[0098] The compound represented by Chemical Formula 2 may be prepared by the method of Reaction Formula 2.


[Reaction Formula 2]

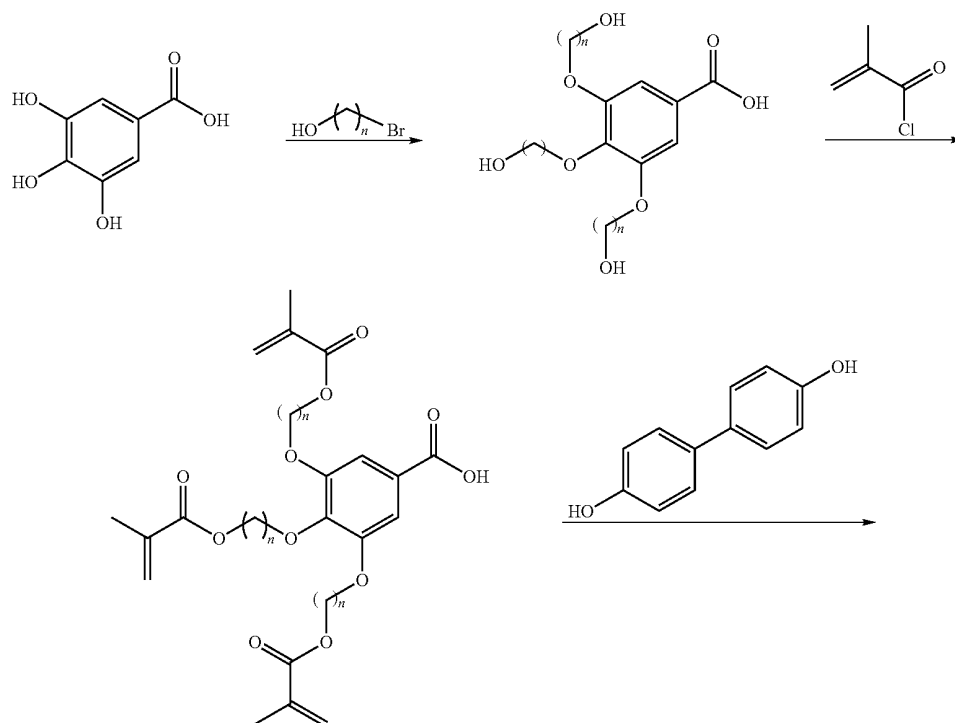


-continued

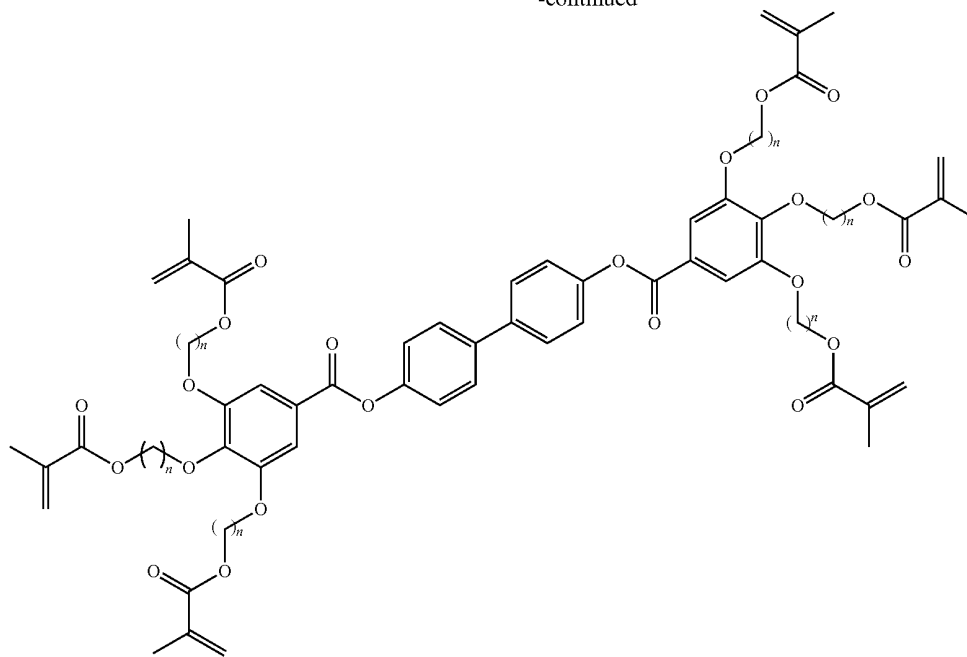

[0099] The compound represented by Chemical Formula 3 may be prepared by the method of Reaction Formula 3.

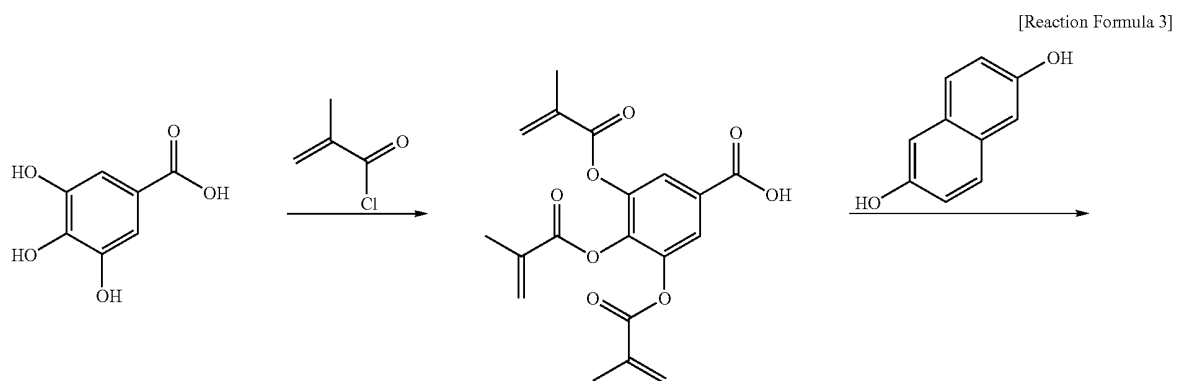


-continued

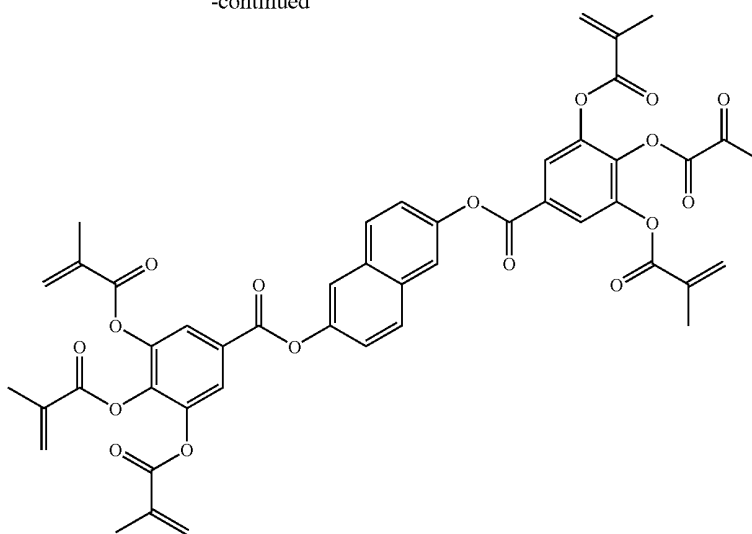


[0100] The compound represented by Chemical Formula 4 may be prepared by the method of Reaction Formula 4.

[Reaction Formula 4]

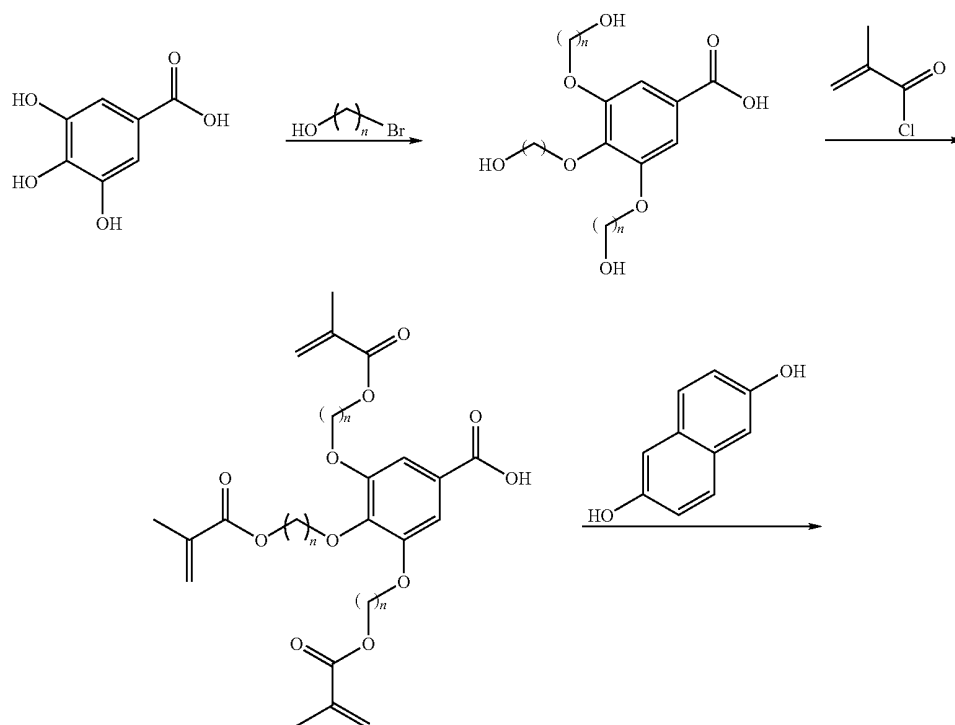

-continued

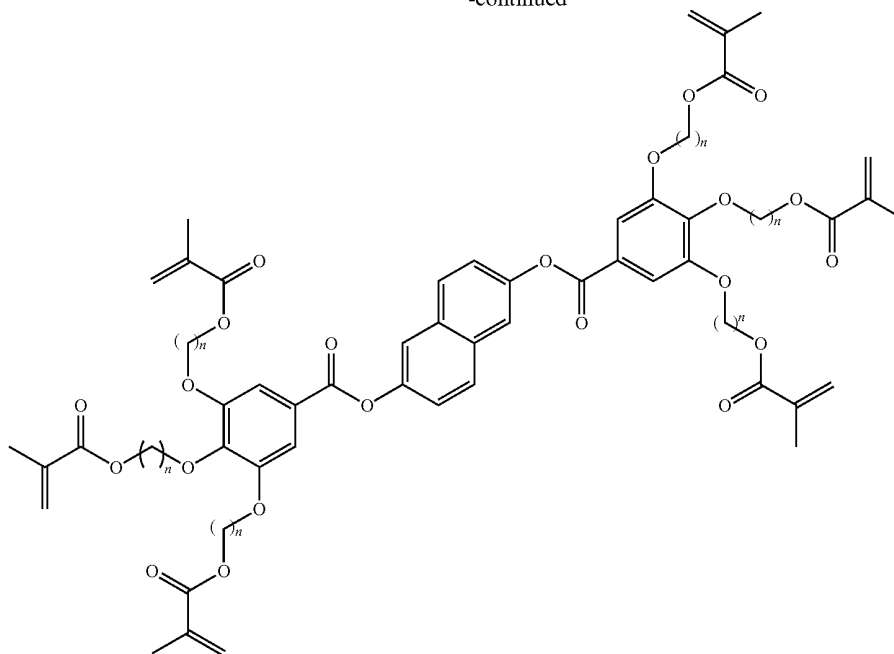

[0101] The alignment assistant may be contained in an amount between about 0.1 weight percent (wt. %) to about 10 wt. % with respect to the content of the liquid crystal. When the alignment assistant is contained in an amount less than about 0.1 wt. %, it may be difficult to control a pre-tilt of the liquid crystal, and when the alignment assistant is contained in an amount greater than about 10 wt. %, the content of the liquid crystal may be reduced, thereby deteriorating the display characteristic.

[0102] The liquid crystal layer, according to another exemplary embodiment may comprise a first alignment assistant and a second alignment assistant, wherein the first alignment

assistant comprises a non-mesogen and the second alignment assistant comprises a mesogen.


[0103] The mesogen may be bonded to two or more photo-polymerizable groups, and the non-mesogen may be bonded to three or more photo-polymerizable groups.

[0104] A non-mesogen is acyclic, thus does not include an aromatic or aliphatic ring. A mesogen is cyclic, and comprises two or more aromatic or aliphatic rings.


[0105] The non-mesogen may function as a cross-linker for improving a reaction probability to facilitate polymerization by light.

[0106] An alignment assistant comprising a non-mesogen may include at least one compound selected from the group represented by Chemical Formulas 5 to 10.

[Chemical Formula 5]




[Chemical Formula 6]

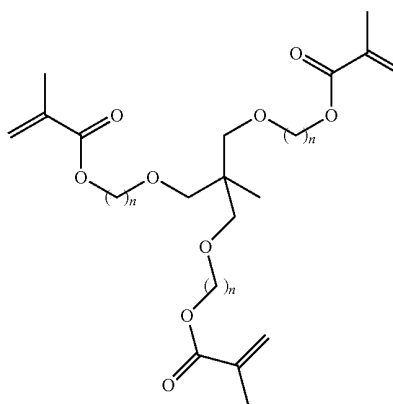


-continued


[Chemical Formula 7]




[Chemical Formula 8]

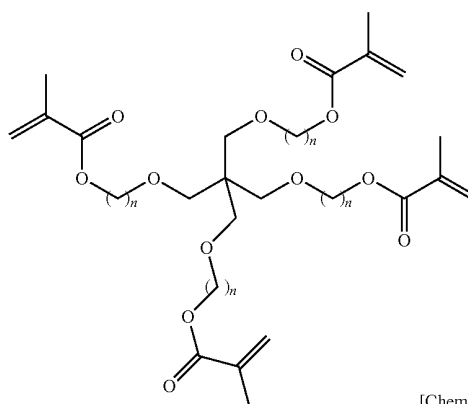


[Chemical Formula 9]

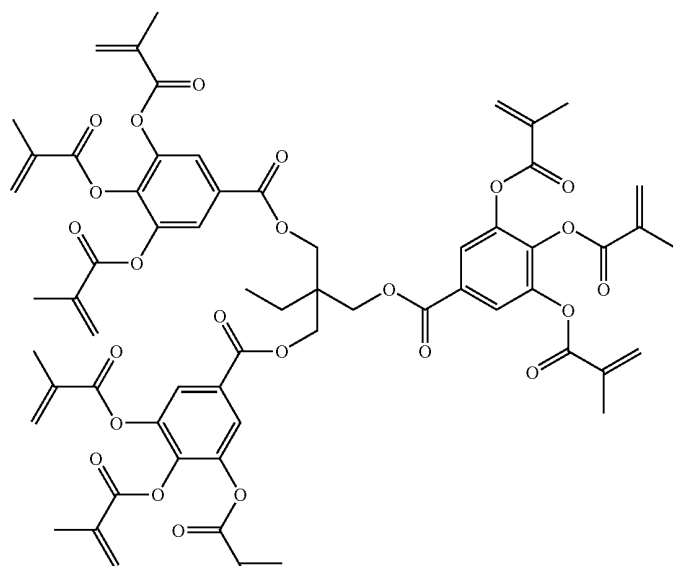


[Chemical Formula 10]

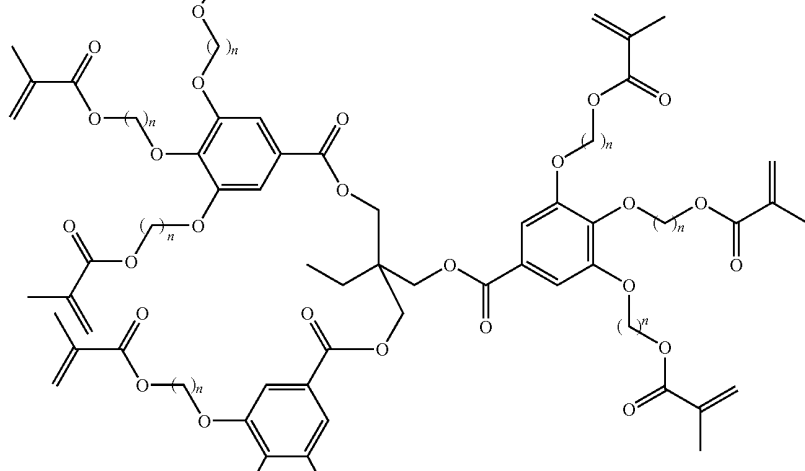


-continued




[0107] The compound represented by Chemical Formula 5 may be manufactured by the method of Reaction Formula 5.

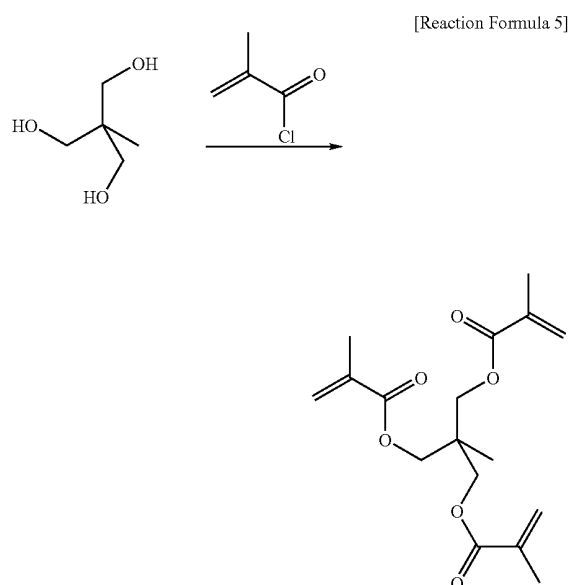


-continued

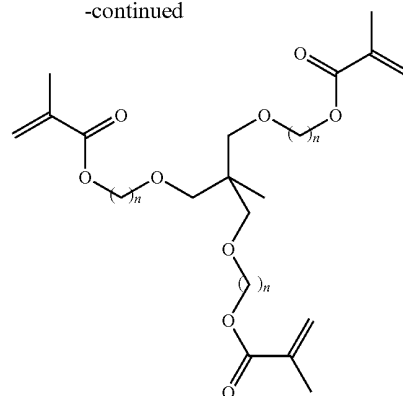


[0109] The compound represented by Chemical Formula 7 may be manufactured by the method of Reaction Formula 7.


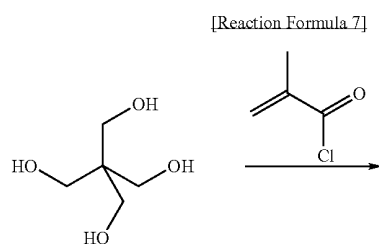


[0108] The compound represented by Chemical Formula 6 may be manufactured by the method of Reaction Formula 6.

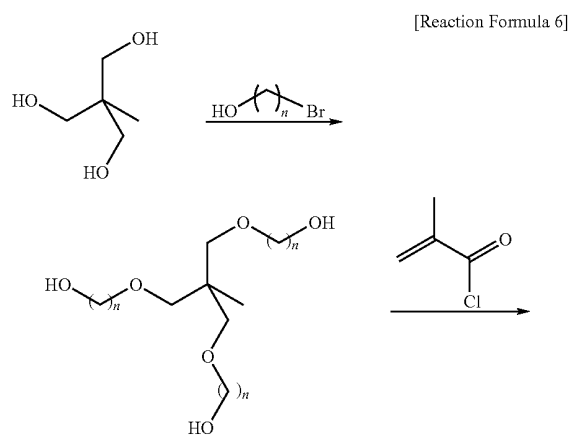


[0110] The compound represented by Chemical Formula 7 may be manufactured by the method of Reaction Formula 7.

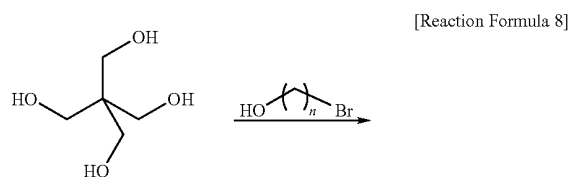

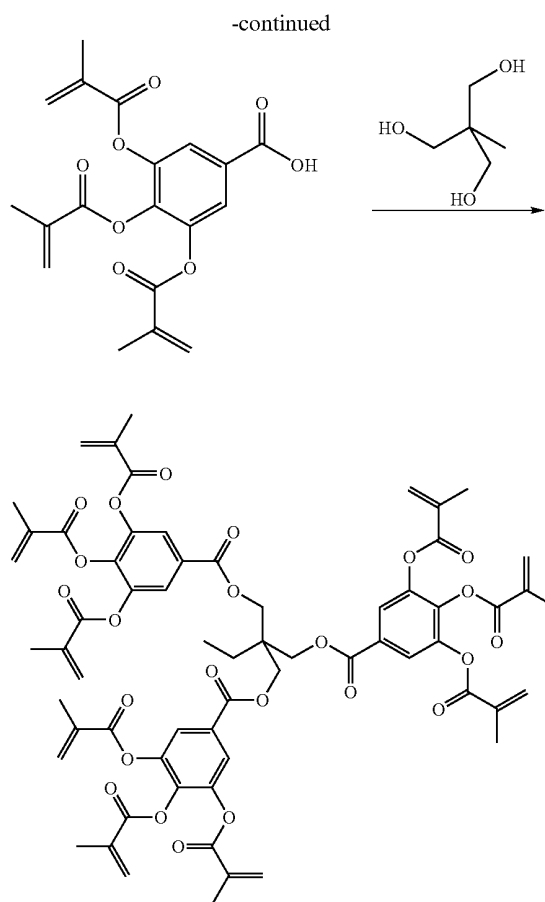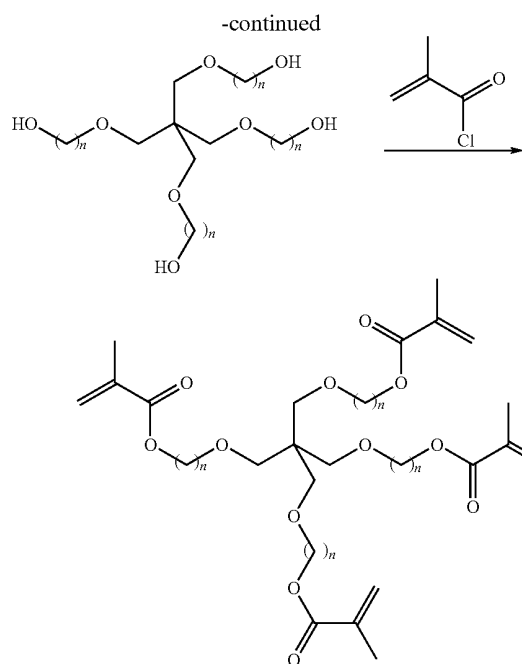


[0111] The compound represented by Chemical Formula 9 may be manufactured by the method of Reaction Formula 9.

[Reaction Formula 9]

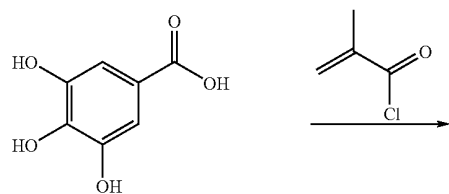


[0112] The compound represented by Chemical Formula 10 may be manufactured by the method of Reaction Formula 10.

[Reaction Formula 10]

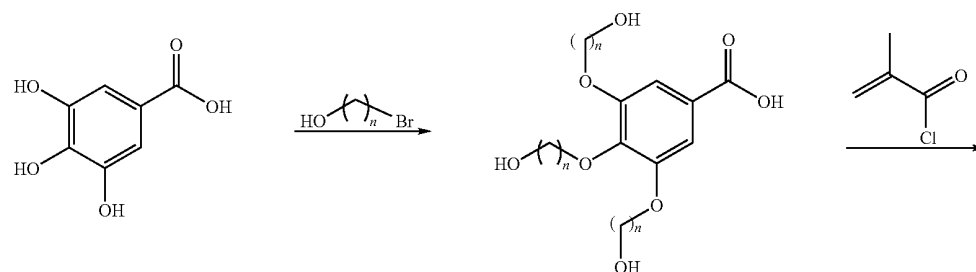


-continued

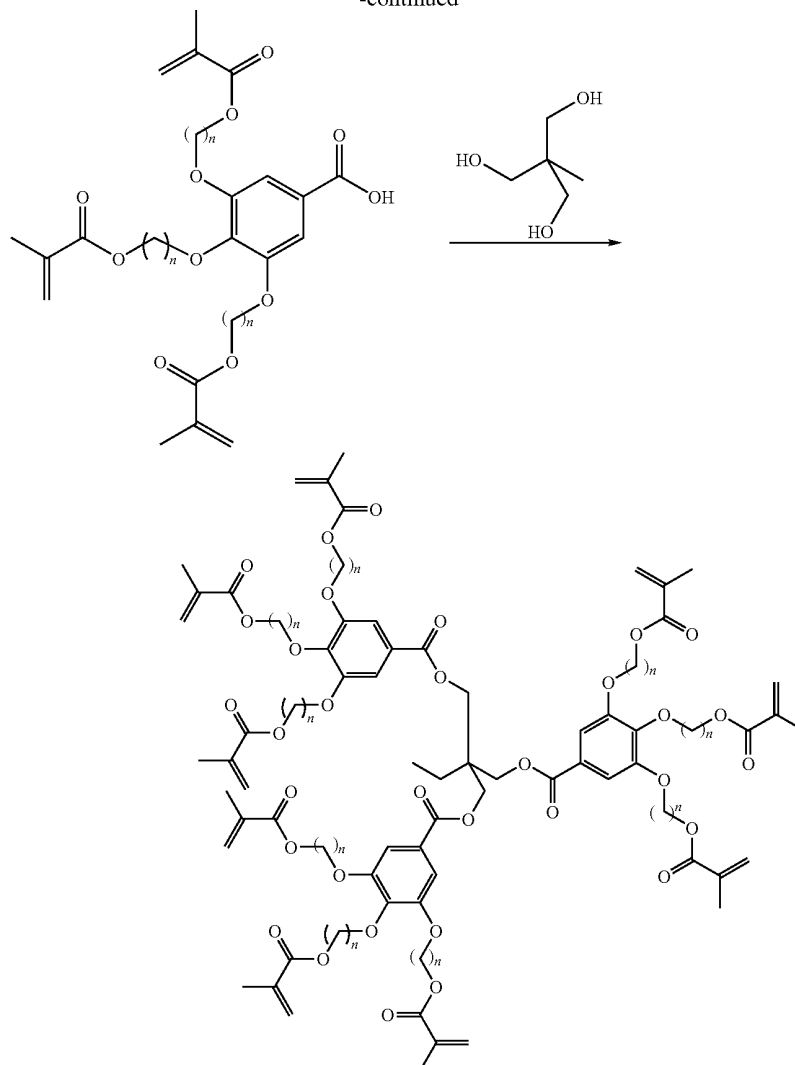


[0113] An alignment assistant comprising a mesogen may include at least one compound selected from the group represented by the above-described Chemical Formulas 1 to 4 and by Chemical Formulas 11 to 21 below.

-continued


[Chemical Formula 12]

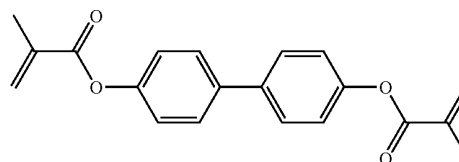

[Chemical Formula 13]

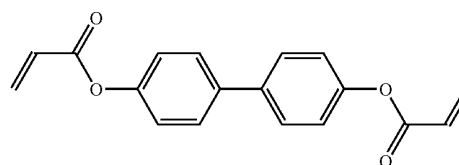


[Chemical Formula 11]




-continued


[Chemical Formula 14]

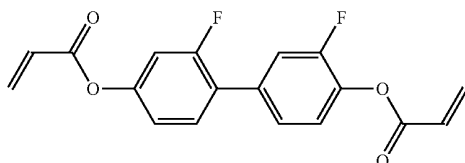


[Chemical Formula 15]

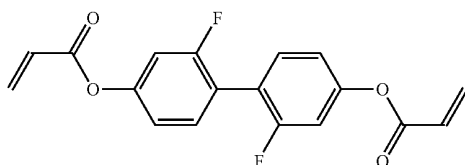


[Chemical Formula 16]

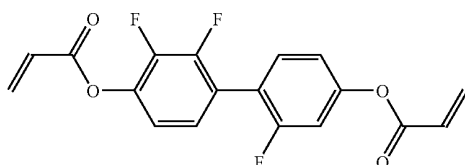


[Chemical Formula 17]

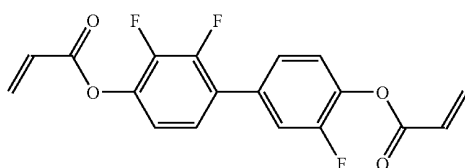


[Chemical Formula 18]

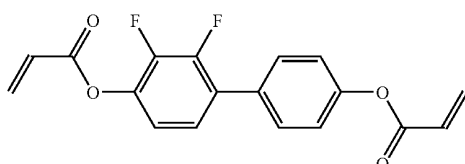

[Chemical Formula 19]

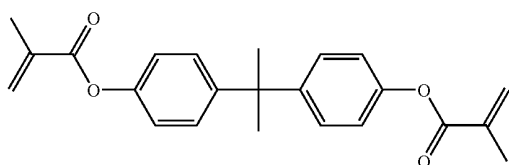


[Chemical Formula 20]

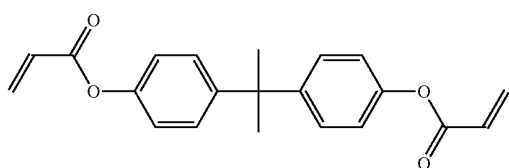

-continued

[Chemical Formula 21]

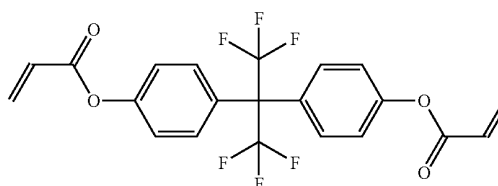

[0114] In Chemical Formula 11, the mesogen is a naphthalene group, the photo-polymerizable group is a methacrylate group, and the number of photo-polymerizable groups is two.

[0115] In Chemical Formula 12, the mesogen is a biphenyl group, the photo-polymerizable group is a methacrylate group, and the number of photo-polymerizable groups is two.

[0116] In Chemical Formula 13, the mesogen is a biphenyl group, the photo-polymerizable group is an acrylate group, and the number of photo-polymerizable groups is two.

[0117] In Chemical Formula 14, the mesogen is a fluorine substituted biphenyl group, the photo-polymerizable group is an acrylate group, and the number of photo-polymerizable groups is two.

[0118] In Chemical Formula 15, the mesogen is a fluorine substituted biphenyl group, the photo-polymerizable group is an acrylate group, and the number of photo-polymerizable groups is two.

[0119] In Chemical Formula 16, the mesogen is a fluorine substituted biphenyl group, the photo-polymerizable group is an acrylate group, and the number of photo-polymerizable groups is two.

[0120] In Chemical Formula 17, the mesogen is a fluorine substituted biphenyl group, the photo-polymerizable group is an acrylate group, and the number of photo-polymerizable groups is two.

[0121] In Chemical Formula 18, the mesogen is a fluorine substituted biphenyl group, the photo-polymerizable group is an acrylate group, and the number of photo-polymerizable groups is two.

[0122] In Chemical Formula 19, the mesogen is a bisphenol-A group, the photo-polymerizable group is a methacrylate group, and the number of photo-polymerizable groups is two.

[0123] In Chemical Formula 20, the mesogen is a bisphenol-A group, the photo-polymerizable group is an acrylate group, and the number of photo-polymerizable groups is two.

[0124] In Chemical Formula 21, the mesogen is a fluorine substituted bisphenol-A group, the photo-polymerizable group is an acrylate group, and the number of photo-polymerizable groups is two.

[0125] A second alignment assistant may be contained in an amount between about 40 wt. % to about 90 wt. %, with respect to a total content of the first and the second alignment assistants.

[0126] The first and the second alignment assistant may be contained in an amount about 0.1 wt. % to about 10 wt. % with respect to the content of the liquid crystal. When the first and the second alignment assistants are contained in an amount less than about 0.1 wt. %, it may be difficult to control a pre-tilt of the liquid crystal, and when the first and the second alignment assistants are contained in an amount greater than

about 10 wt. %, the content of the liquid crystal may be reduced, thereby deteriorating a display characteristic.

[0127] The alignment assistant may be polymerized by light.

[0128] The polymerization of the alignment assistant is described with reference to FIG. 5 as well as FIG. 2 to FIG. 4.

[0129] FIG. 5 is a schematic diagram of an exemplary embodiment of a method of pretilting a liquid crystal using an alignment assistant.

[0130] First, a thin film transistor array panel 100 and a common electrode panel 200 are disposed.

[0131] The thin film transistor array panel 100 may be manufactured by the following method.

[0132] A plurality of thin films are disposed on a substrate 110 to sequentially dispose a gate line 121, including a gate electrode 124 and an end portion 129, a gate insulating layer 140, a semiconductor 154, a data line 171 including a source electrode 173 and an end portion 179, a drain electrode 175, and a passivation layer 180.

[0133] Next, a conductive layer, comprising a conductive material including ITO, IZO, or the like, or a combination comprising at least one of the foregoing conductive materials, is disposed on the passivation layer 180 and patterned to form a pixel electrode 191 including a longitudinal stem 192, a transverse stem 193, and a plurality of branches 194a, 194b, 194c, and 194d, as shown in FIG. 2 and FIG. 3. In an embodiment, the branches 194a, 194b, 194c, and 194d may be minute.

[0134] Next, an alignment layer 11 may be disposed on the pixel electrode 191.

[0135] The common electrode panel 200 may be manufactured by the following method.

[0136] A light blocking member 220 is disposed on a substrate 210, and a color filter 230 is disposed on the substrate 210 and the light blocking member 220. An overcoat 250 is disposed on substantially an entire surface of the substrate, the color filter 230, and the light blocking member 220, and a common electrode 270 is disposed on the overcoat 250. Next, an alignment layer 21 is disposed on the common electrode 270.

[0137] The thin film transistor array panel 100 and the common electrode panel 200 are assembled, and a liquid crystal layer 3 is disposed, for example by injecting a mixture comprising a liquid crystal 310, and an alignment assistant 50. In an embodiment, the liquid crystal layer 3 may comprise a first and a second alignment assistant. In another embodiment, the liquid crystal layer 3 may be disposed by dripping a mixture comprising a liquid crystal 310 and an alignment assistant 50 on at least one of the thin film transistor array panel 100 and the common electrode panel 200.

[0138] Next, referring to FIG. 5(a) and FIG. 3, a voltage is applied between the pixel electrode 191 and the common electrode 270. The liquid crystal 310 and the alignment assistant 50 are inclined parallel to a length direction of the branches 194a, 194b, 194c, and 194d of the pixel electrode 191. The liquid crystal 310 disposed adjacent to the alignment layer 11 may maintain a perpendicular alignment using a chain 11a of the alignment layer 11.

[0139] A light 1 may be irradiated while a voltage is applied between the pixel electrode 191 and the common electrode 270. Accordingly, a portion of the alignment assistant 50 may be photo-polymerized to form a polymer 50a. The polymer 50a may control a pre-tilt of the liquid crystal 310.

[0140] Next, as shown in FIG. 5(b), a voltage between the pixel electrode 191 and the common electrode 270 is off.

[0141] Next, light is irradiated on the liquid crystal layer 3 while the voltage between the pixel electrode 191 and the common electrode 270 is not applied. Accordingly, a degree of polymerization may be increased.

[0142] The liquid crystal layer 3 may include the polymer 50a, which is polymerized by light, and a residual content of non-polymerized alignment assistant 50. Thus a liquid crystal display may comprise a liquid crystal layer, the liquid crystal layer comprising a portion of the alignment assistant, which is polymerized by light, and a non-polymerized portion of the alignment assistant. In another embodiment the alignment assistant 50 may include three or more photo-polymerizable groups, which are described above, such that the polymerization reactivity may be improved, and as a result a residual content of non-polymerized alignment assistant (alignment assistant which is not photo-polymerized) may be reduced. In a liquid crystal display according to an exemplary embodiment, the residual content of non-polymerized alignment assistant may be less than or equal to about 5 wt. % of the total content of the alignment assistant.

[0143] When the content of the non-polymerized alignment assistant is greater than about 5 wt. %, a variability in a pre-tilt may cause a difference in a black/white display unit such that an afterimage may be observable.

[0144] FIG. 8 shows this result. FIG. 8 is a graph showing a residual content of non-polymerized alignment assistant and a voltage to remove an afterimage with respect to an irradiation energy when irradiating light to polymerize an exemplary embodiment of an alignment assistant of the liquid crystal display.

[0145] Referring to FIG. 8, a residual content of non-polymerized alignment assistant is reduced with increasing light irradiation, and when the energy of irradiation is about 40 J/cm², the residual content of non-polymerized alignment assistant is reduced to about 3.3 wt. %, based on the total content of an alignment assistant. Accordingly, an afterimage, which may be caused by non-polymerized alignment assistant may be reduced, thereby improving a display characteristic.

[0146] An afterimage is further described with reference to FIG. 6a to 7b.

[0147] FIG. 6A to FIG. 7B are photographs showing an afterimage evaluation result of an exemplary embodiment of a liquid crystal display and an afterimage evaluation result of a liquid crystal display according to a comparative example.

[0148] The afterimage evaluation may be performed by the following method.

[0149] First, a display panel including two substrates each disposed with a field generating electrode, and a liquid crystal layer interposed therebetween, is provided. On the display panel, a plurality of pixels are disposed. An image is displayed wherein a portion of the pixels that are alternately disposed in the longitudinal and transverse directions among the plurality of pixels represent black, and the remaining pixels represent white such that the pixels represent a black/white pattern comprising a lattice shape. Next, the black/white image is removed after a predetermined time, and when the total screen of the display panel changes from black to white and displays a uniform gray, the display is examined to determine whether a stain of a line shape is observable on a boundary of a pixel.

[0150] FIG. 6A and FIG. 6B are photographs showing the existence and the nonexistence of an afterimage after displaying a black/white image for about 24 hours, and FIG. 7A and FIG. 7B are photographs showing the existence and the nonexistence of an afterimage after displaying a black/white image for about 168 hours.

[0151] FIG. 6A represents about 90 grays, FIG. 6B represents about 220 grays, FIG. 7A represents about 180 grays, and FIG. 7B presents about 245 grays, therefore it has been surprisingly observed that an afterimage remains less in the exemplary liquid crystal displays (FIG. 6A and FIG. 7A) than the liquid crystal displays according to the comparative examples (FIG. 6B and FIG. 7B), and as shown in the photographs of FIG. 6A to FIG. 7B, the afterimage is remarkably improved in the liquid crystal display according to an exemplary embodiment compared with the liquid crystal display according to the comparative example.

[0152] Thus a liquid crystal display according to an exemplary embodiment includes an alignment assistant such that a pre-tilt of a liquid crystal may be uniformly controlled, and the alignment assistant may include a selected group such that a residual content of a non-polymerized alignment assistant, which may remain in a liquid crystal layer, may be reduced. Accordingly, an afterimage, which may be caused by the non-polymerized alignment assistant, may be substantially reduced or prevented, thereby improving a display characteristic.

[0153] While this invention has been described in connection with what is presently considered to be practical exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent

arrangements which are included within the spirit and scope of the appended claims.

What is claimed is:

1. A liquid crystal display comprising:

a first substrate;

a second substrate facing the first substrate;

a first field generating electrode disposed on the first substrate;

a second field generating electrode disposed on the second substrate; and

a liquid crystal layer disposed between the first substrate and the second substrate, the liquid crystal layer including a liquid crystal and an alignment assistant, wherein the alignment assistant includes a mesogen and two or more photo-polymerizable groups.

2. The liquid crystal display of claim 1, wherein

the mesogen includes at least one group selected from the group consisting of a naphthalene group, a biphenyl group, a bisphenol-A group, a fluorine substituted naphthalene group, a fluorine substituted biphenyl group, a fluorine substituted bisphenol-A group, and a combination comprising at least one of the foregoing groups.

3. The liquid crystal display of claim 2, wherein


the photo-polymerizable group includes at least one group selected from the group consisting of an acrylate group, a methacrylate group, and a combination comprising at least one of the foregoing groups.

4. The liquid crystal display of claim 3, further comprising: a C₃-C₁₂alkyl group disposed between the mesogen and the photo-polymerizable group.

5. The liquid crystal display of claim 4, wherein


the alignment assistant includes at least one compound selected from the group of compounds represented by Chemical Formulas 1 to 4:

[Chemical Formula 1]

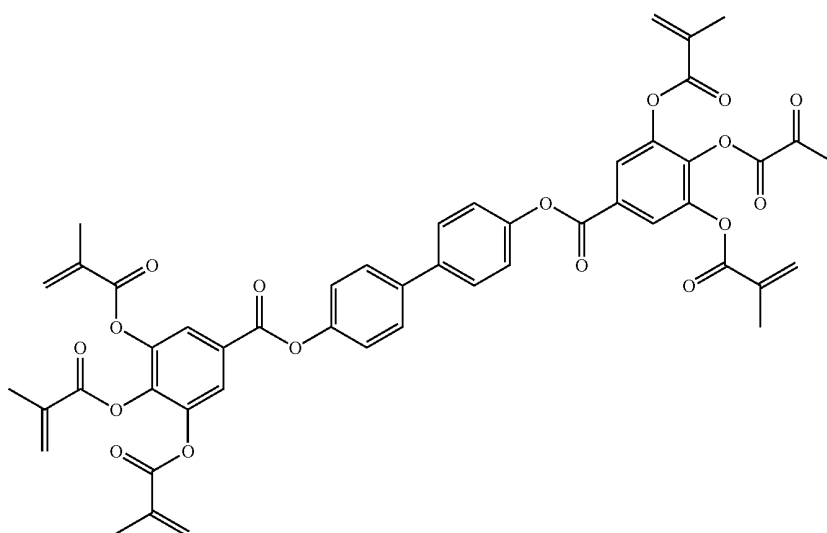


-continued

[Chemical Formula 2]

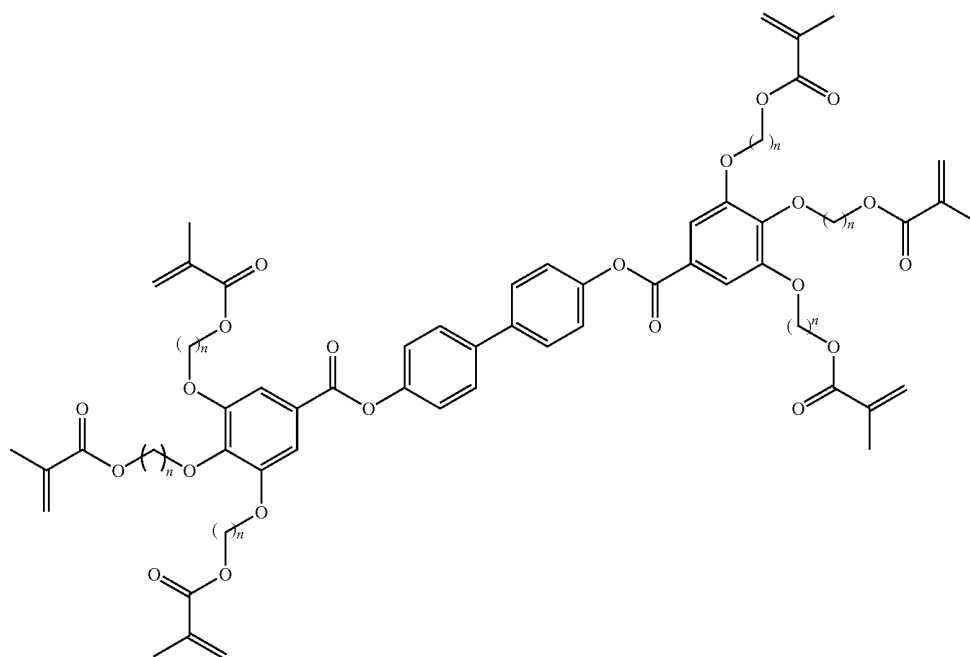


[Chemical Formula 3]

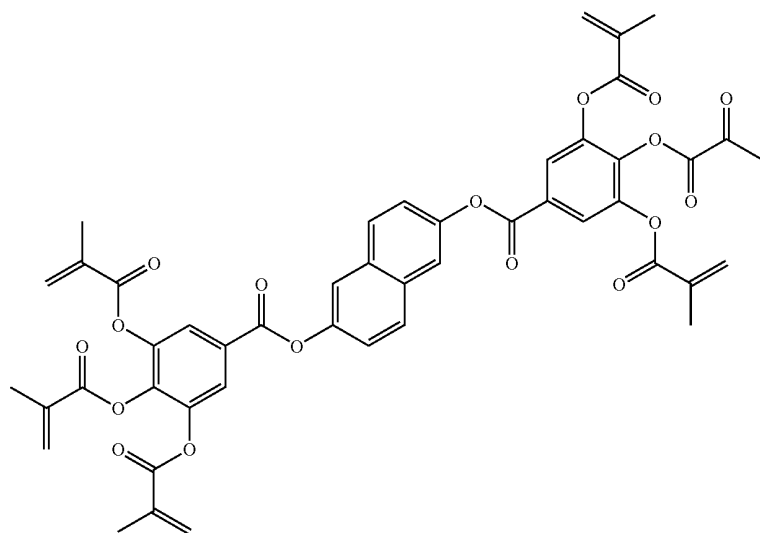

-continued

[Chemical Formula 4]

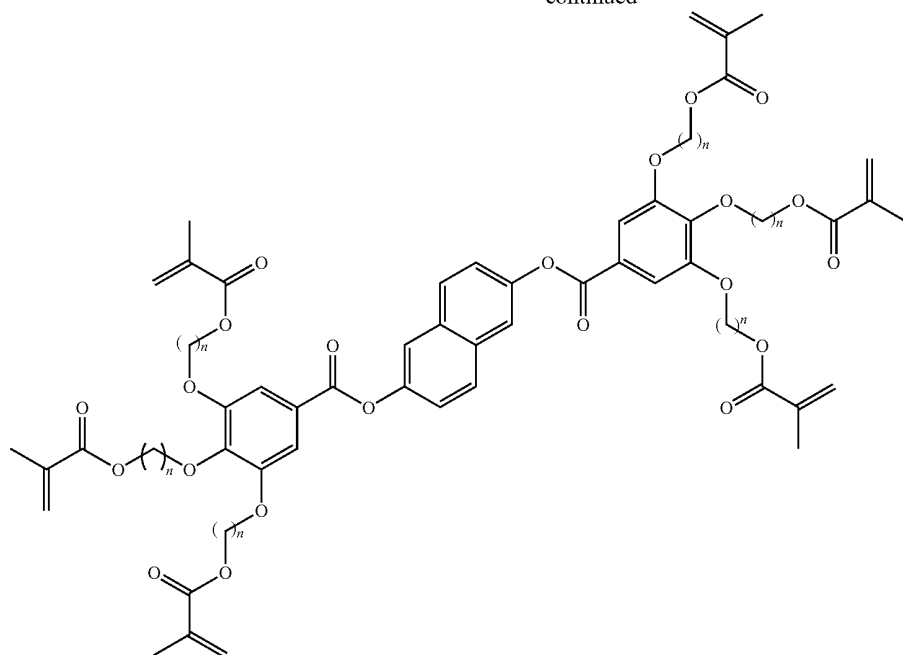

6. The liquid crystal display of claim 1, wherein the alignment assistant is contained in an amount between about 0.1 weight percent to about 10 weight percent with respect to the content of the liquid crystals.

7. The liquid crystal display of claim 1, wherein at least one of the first and the second field generating electrodes comprises a branch shape.

8. The liquid crystal display of claim 1, wherein the alignment assistant comprises a non-polymerized alignment assistant; and

the non-polymerized alignment assistant is contained in an amount equal to or less than about 5 weight percent with respect to a total content of the alignment assistant.

9. A liquid crystal display comprising:

a first substrate;

a second substrate facing the first substrate;

a first field generating electrode disposed on the first substrate;

a second field generating electrode disposed on the second substrate; and

a liquid crystal layer disposed between the first substrate and the second substrate, the liquid crystal layer including a liquid crystal, a first alignment assistant and a second alignment assistant,

wherein the first alignment assistant includes a non-mesogen and three or more photo-polymerizable groups, and

a second alignment assistant includes a mesogen and two or more photo-polymerizable groups.


10. The liquid crystal display of claim 9, wherein

the photo-polymerizable group includes at least one group selected from the group consisting of an acrylate group, a methacrylate group, and a combination comprising at least one of the foregoing photo-polymerizable groups.


11. The liquid crystal display of claim 10, wherein

the first alignment assistant includes at least one compound selected from the group of compounds represented by Chemical Formulas 5 to 10:

[Chemical Formula 5]




[Chemical Formula 6]

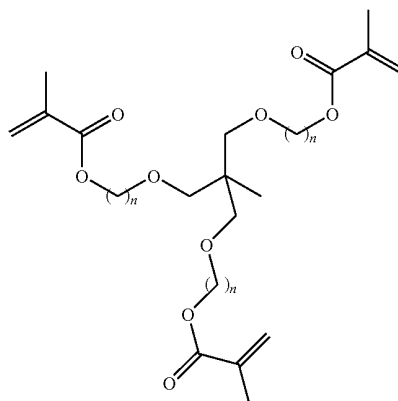


-continued


[Chemical Formula 7]




[Chemical Formula 8]

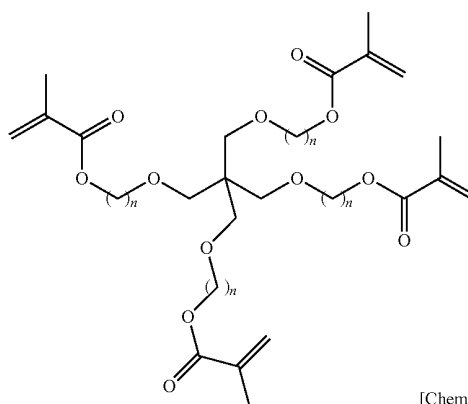


[Chemical Formula 9]

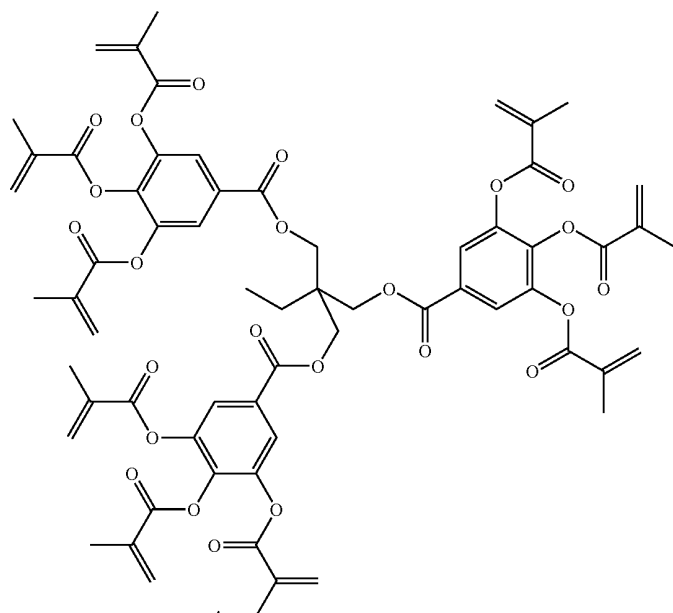

[Chemical Formula 10]

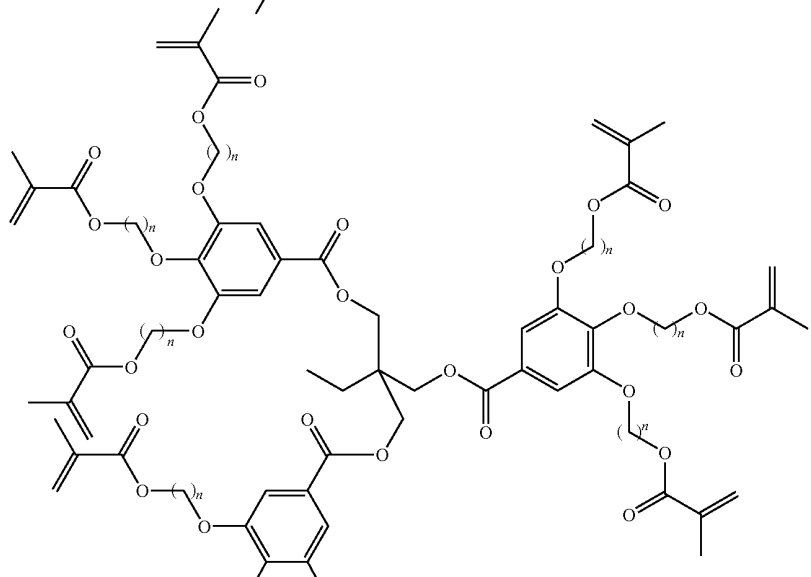


-continued




12. The liquid crystal display of claim 10, wherein the second alignment assistant includes at least one compound selected from the group of compounds represented by Chemical Formulas 1 to 4 and Chemical Formulas 11 to 21:

[Chemical Formula 1]

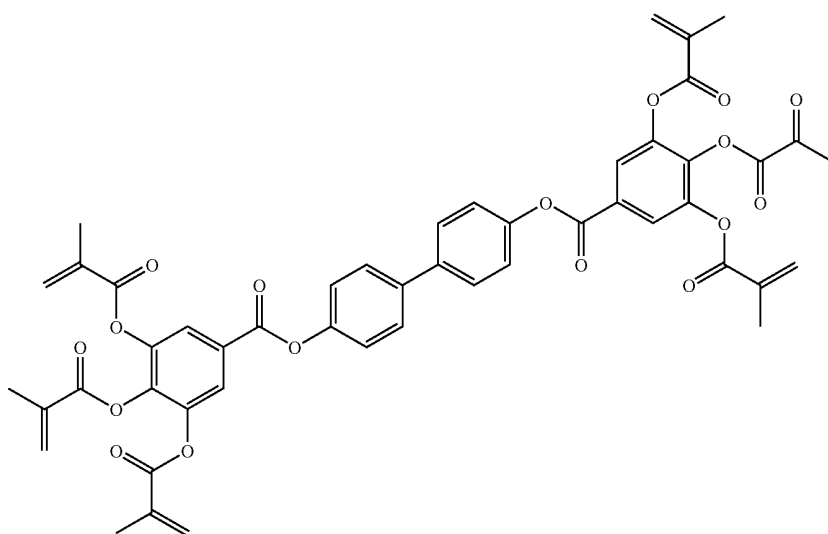


[Chemical Formula 2]

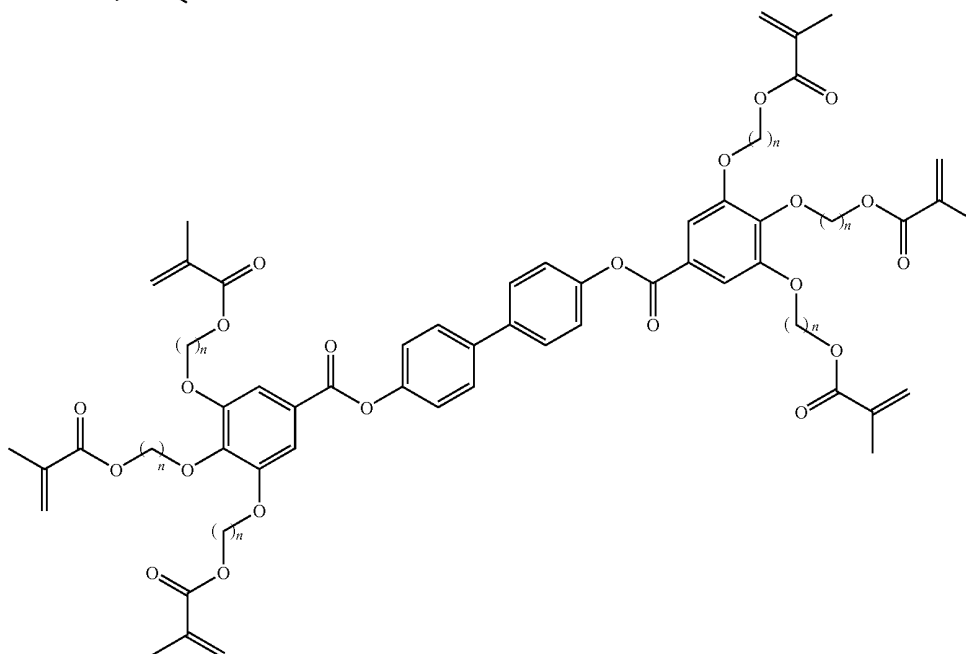


-continued


[Chemical Formula 3]

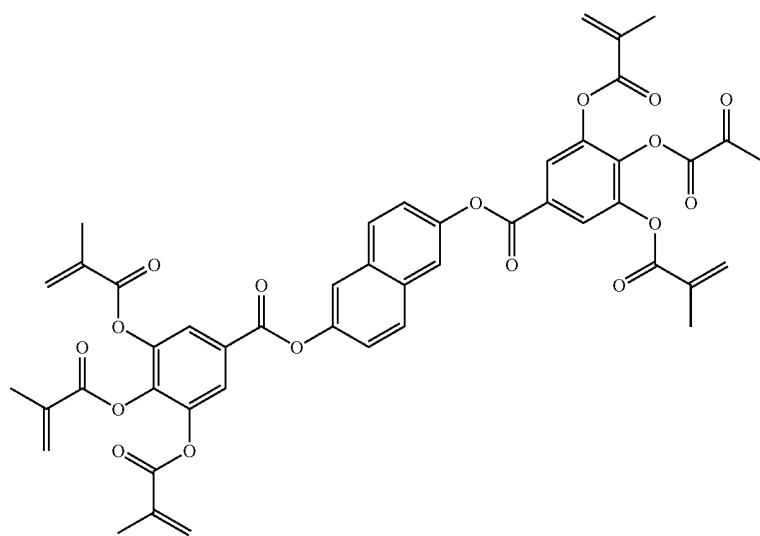


[Chemical Formula 4]

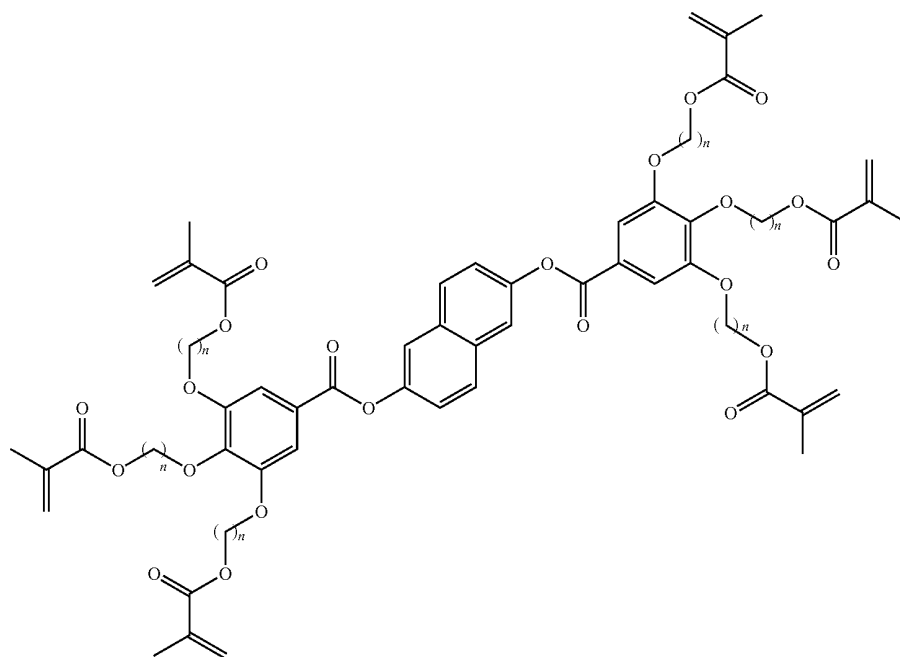

[Chemical Formula 11]




[Chemical Formula 12]

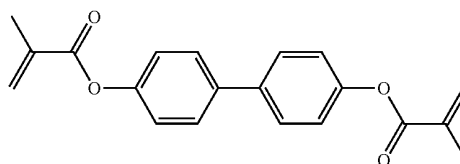


-continued


[Chemical Formula 13]

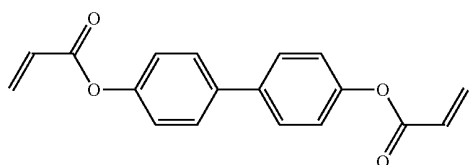



[Chemical Formula 15]

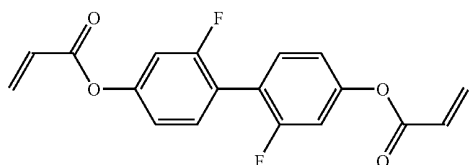


[Chemical Formula 17]

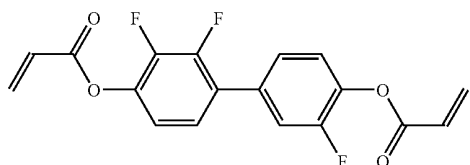


[Chemical Formula 19]

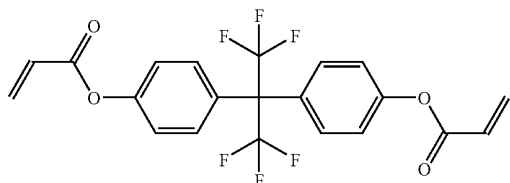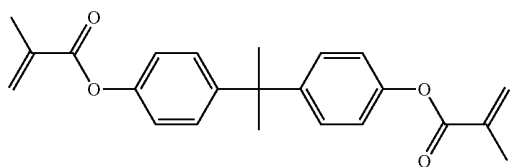


[Chemical Formula 14]

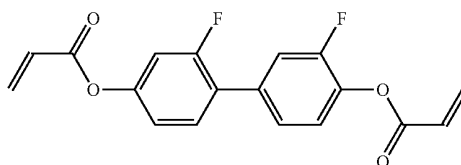


[Chemical Formula 16]

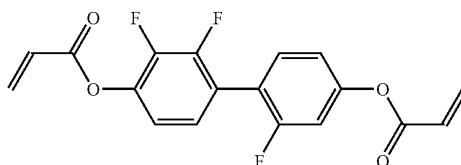

[Chemical Formula 18]

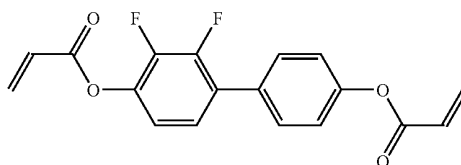

[Chemical Formula 20]

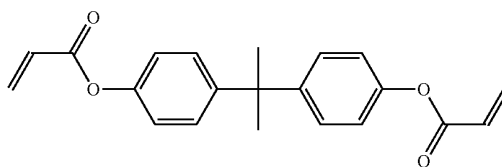

[Chemical Formula 21]

13. The liquid crystal display of claim 9, wherein at least one of the first alignment assistant and the second alignment assistant is contained in an amount between about 0.1 weight percent to about 10 weight percent with respect to the content of the liquid crystal.

14. The liquid crystal display of claim 13, wherein the second alignment assistant is contained in an amount between about 40 weight percent to about 90 weight percent with respect to the total content of the first and the second alignment assistants.

15. The liquid crystal display of claim 9, wherein at least one of the first and the second field generating electrodes comprises a branch shape.

16. The liquid crystal display of claim 9, wherein: at least one of the first and the second alignment assistants comprises a non-polymerized alignment assistant; and the non-polymerized alignment assistant is contained in an amount less than or equal to about 5 weight percent with respect to a total content of the first and the second alignment assistant.

17. A method for manufacturing liquid crystal display, the method comprising:

forming a first display panel with a pixel electrode;
forming a second display panel with a common electrode;
assembling the first display panel and the second display panel;

disposing a liquid crystal layer between the first display panel and the second display panel, the liquid crystal layer including a liquid crystal and at least one of a first alignment assistant and a second alignment assistant;

applying a voltage between the pixel electrode and the common electrode; and

irradiating light on the liquid crystal layer during the application of a voltage between the pixel electrode and the common electrode.

18. The method of claim 17, wherein the second alignment assistant includes a mesogen and two or more photo-polymerizable groups.

19. The method of claim 18, wherein the mesogen is selected from the group consisting of a naphthalene group, a

biphenyl group, a bisphenol-A group, a fluorine substituted naphthalene group, a fluorine substituted biphenyl group, a fluorine substituted bisphenol-A group, and a combination comprising at least one of the foregoing groups, and

the photo-polymerizable group is selected from the group consisting of an acrylate group, a methacrylate group, and a combination comprising at least one of the foregoing groups.

20. The method of claim 17, wherein the first alignment assistant comprises a non-mesogen and three or more photo-polymerizable groups, and the second alignment assistant comprises a mesogen and two or more photo-polymerizable groups.

21. The method of claim 17, wherein
the pixel electrode comprises a branch shape.

22. The method of claim 17, further comprising:
irradiating light on the liquid crystal layer when the voltage between the pixel electrode and the common electrode is not applied.

23. The method of claim 17, wherein
at least one of the first alignment assistant and the second alignment assistant comprises a non-polymerized alignment assistant, and

the non-polymerized alignment assistant is contained in an amount less than or equal to about 5 weight percent with respect to the total content of the first and the second alignment assistants.

24. The method of claim 17, further comprising:
polymerizing at least one of the first alignment assistant and the second alignment assistant.

* * * * *

专利名称(译)	液晶显示器		
公开(公告)号	US20100033662A1	公开(公告)日	2010-02-11
申请号	US12/416548	申请日	2009-04-01
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	LEE JUN HYUP LYU JAE JIN		
发明人	LEE, JUN-HYUP LYU, JAE-JIN		
IPC分类号	G02F1/1337		
CPC分类号	G02F1/137 G02F1/133365 G02F2001/133726 G02F1/133711 Y10T428/10 G02F1/133707 G02F1/133788 G02F2001/13775 G02F2001/133397 G02F2001/13712 Y10T428/1005		
优先权	1020080077644 2008-08-07 KR		
其他公开文献	US8685502		
外部链接	Espacenet USPTO		

摘要(译)

一种液晶显示器，包括第一基板;面向第一基板的第二基板;第一场发生电极，设置在第一基板上;第二场发生电极，设置在第二基板上;液晶层设置在第一基板和第二基板之间，液晶层包括液晶和取向助剂，其中取向助剂包括液晶元和两个或多个可光聚合基团。

