



US 20040257328A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2004/0257328 A1**

**Lim** (43) **Pub. Date: Dec. 23, 2004**

(54) **DATA DRIVE IC OF LIQUID CRYSTAL DISPLAY AND DRIVING METHOD THEREOF**

(52) **U.S. Cl. .... 345/100**

(76) **Inventor: Kyoung Moon Lim, Gwangmyeong-si (KR)**

(57) **ABSTRACT**

Correspondence Address:  
**MCKENNA LONG & ALDRIDGE LLP  
1900 K STREET, NW  
WASHINGTON, DC 20006 (US)**

A data driver IC of a liquid crystal display is provided. The data driver IC includes: a shift register; a latch part in which input digital data are sampled by the shift register and stored, the latch part including a plurality of latches; a digital to analog converter and an amplifier for converting the sampled digital data into an analog signal and amplifying the analog signal; an analog signal supplying part for generating first and second analog voltages corresponding to a black signal level and a white signal level, respectively; a color conversion control signal supplying part for controlling whether to display the input digital data in full colors or 8-bit color; a selector for selecting and outputting one of the first analog voltage corresponding to the black signal level and the second analog voltage corresponding to the white signal level; and a multiplexer for receiving the output analog signal and transferring the output analog signal to a corresponding data line.

(21) **Appl. No.: 10/865,764**

(22) **Filed: Jun. 14, 2004**

(30) **Foreign Application Priority Data**

Jun. 23, 2003 (KR) ..... 2003-40546

**Publication Classification**

(51) **Int. Cl.<sup>7</sup> ..... G09G 3/36**

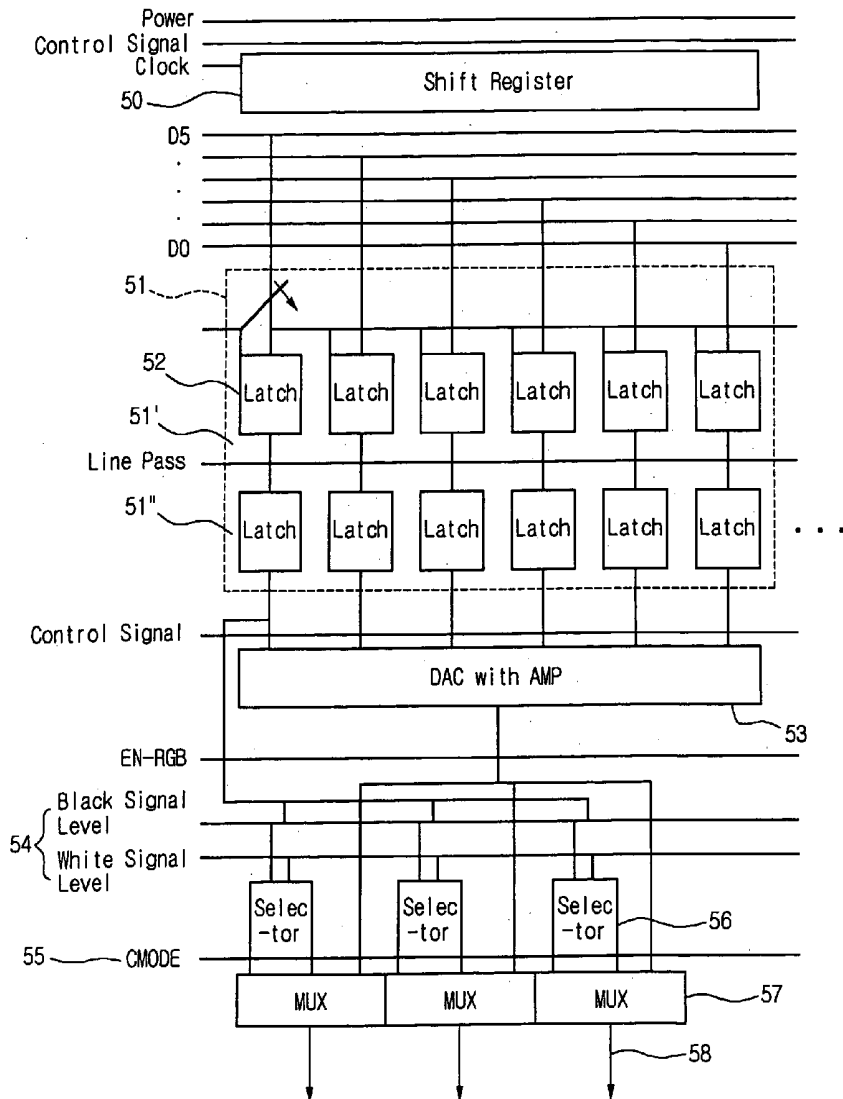


Fig.1  
Related Art

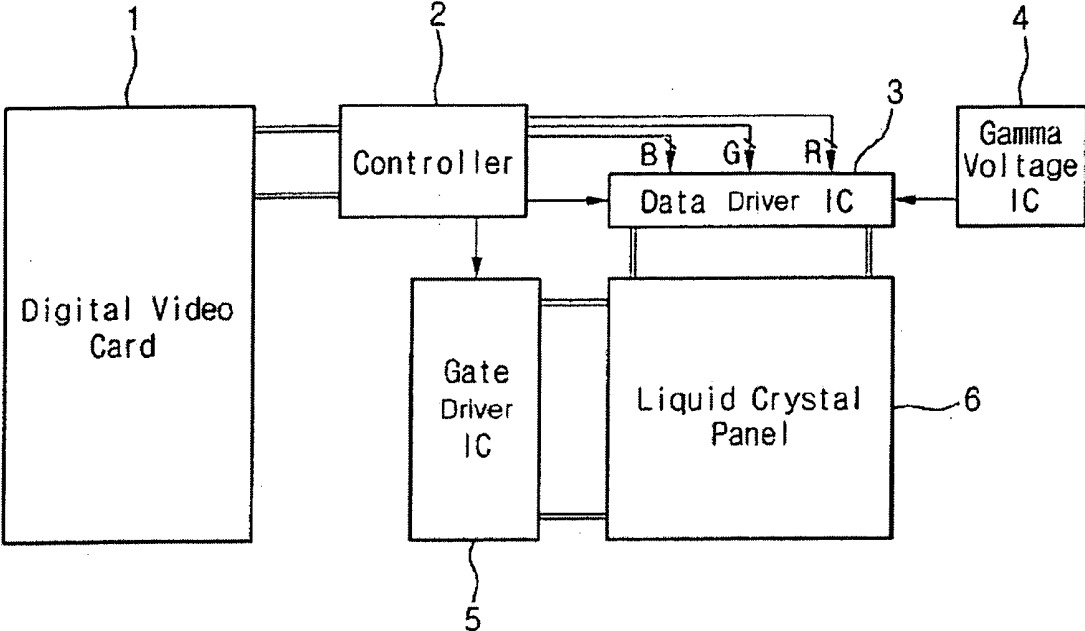


Fig.2  
Related Art

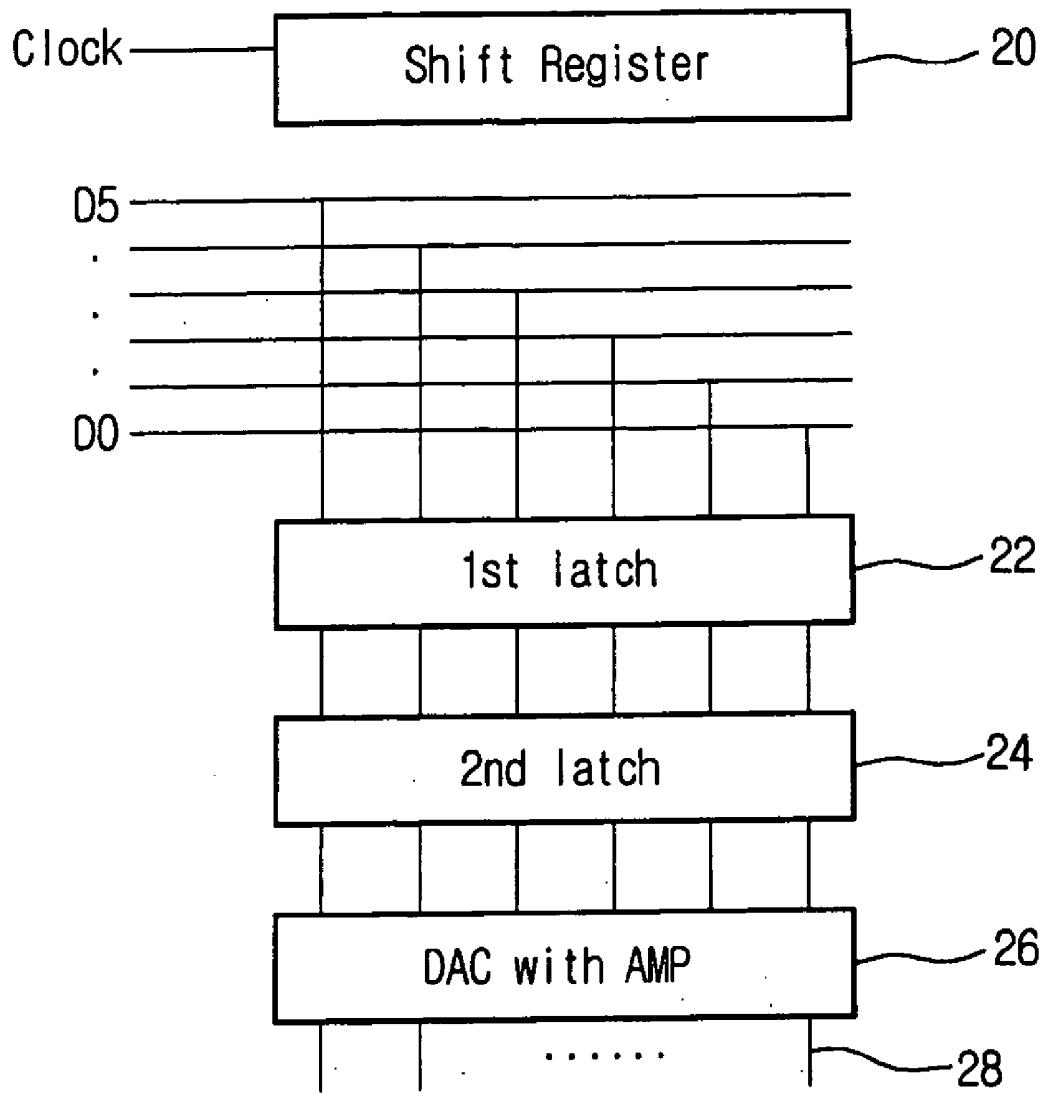


Fig.3  
Related Art

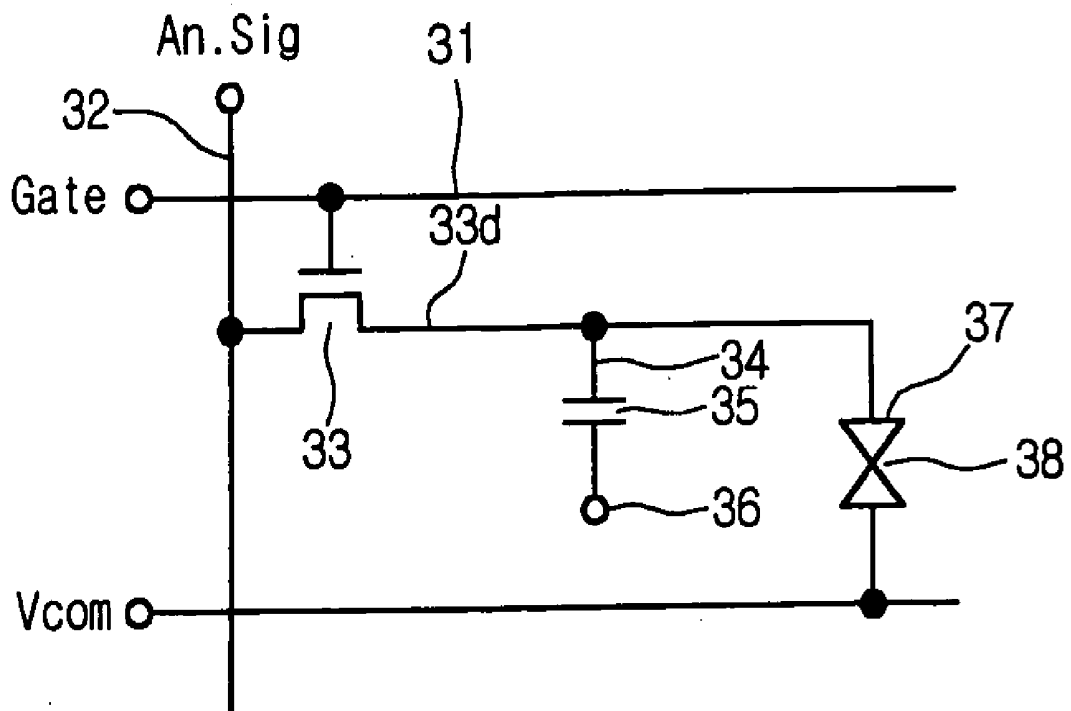


Fig.4  
Related Art

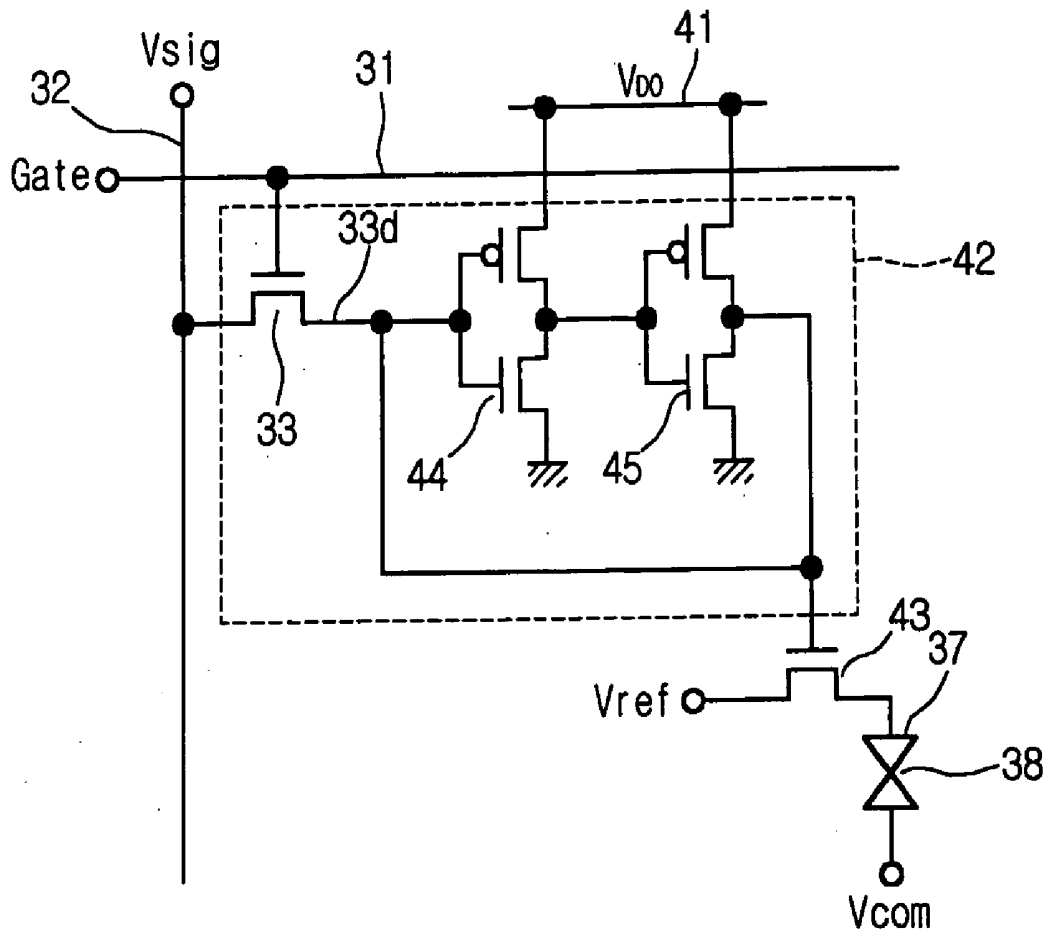


Fig.5

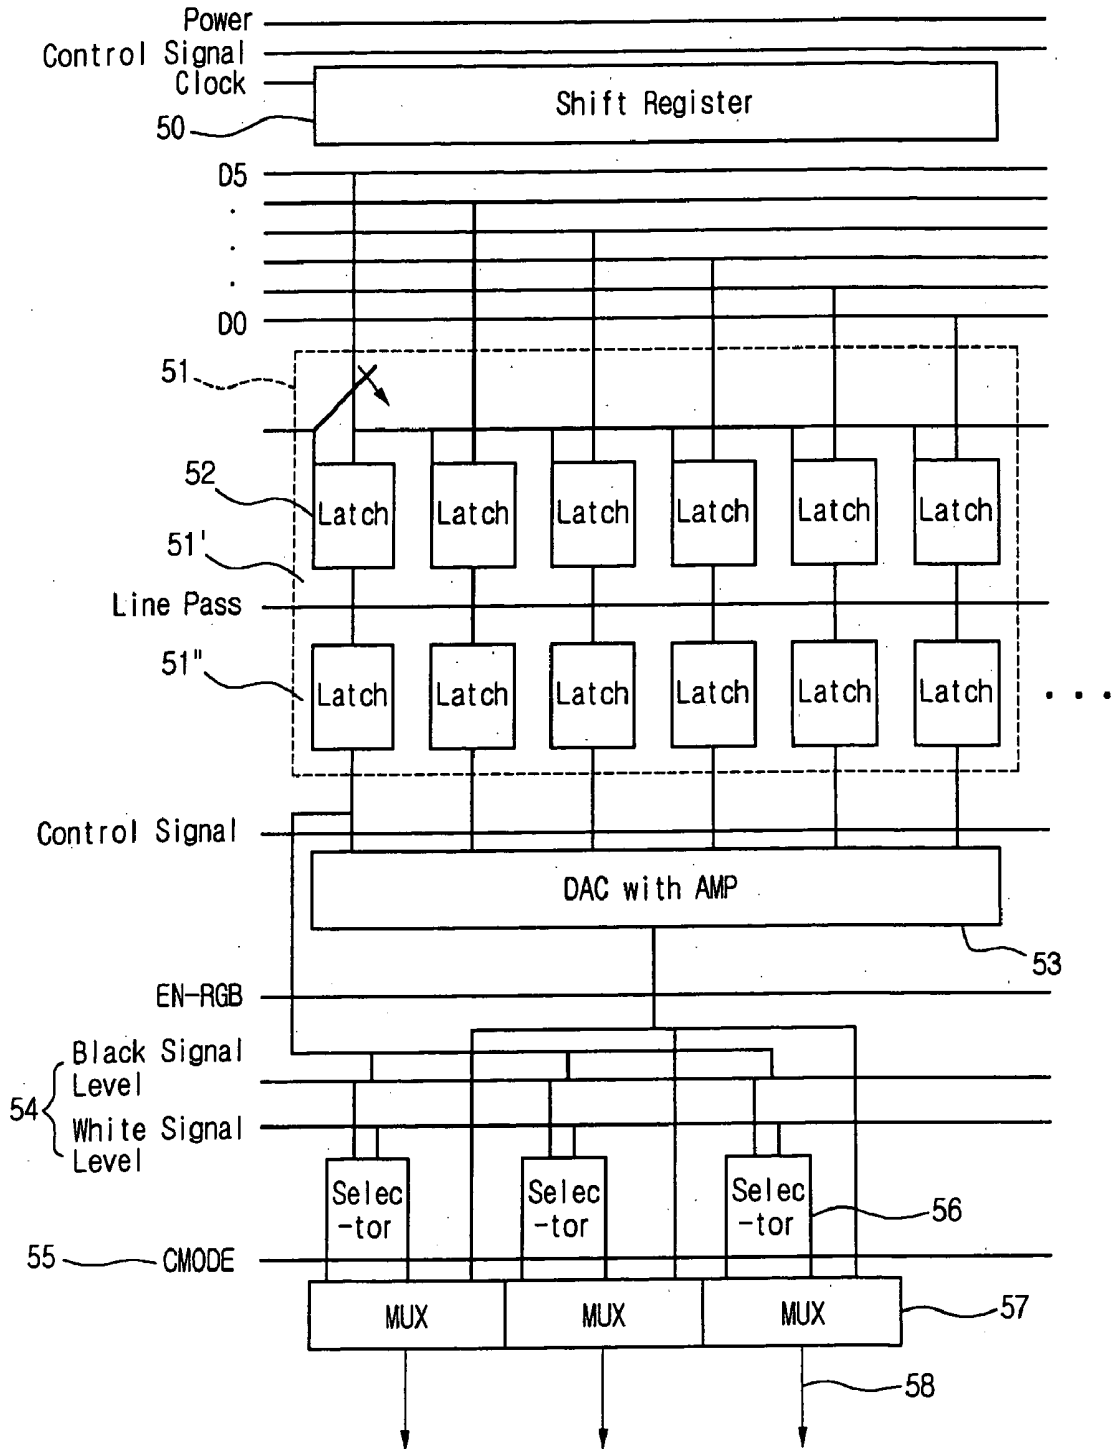


Fig.6A


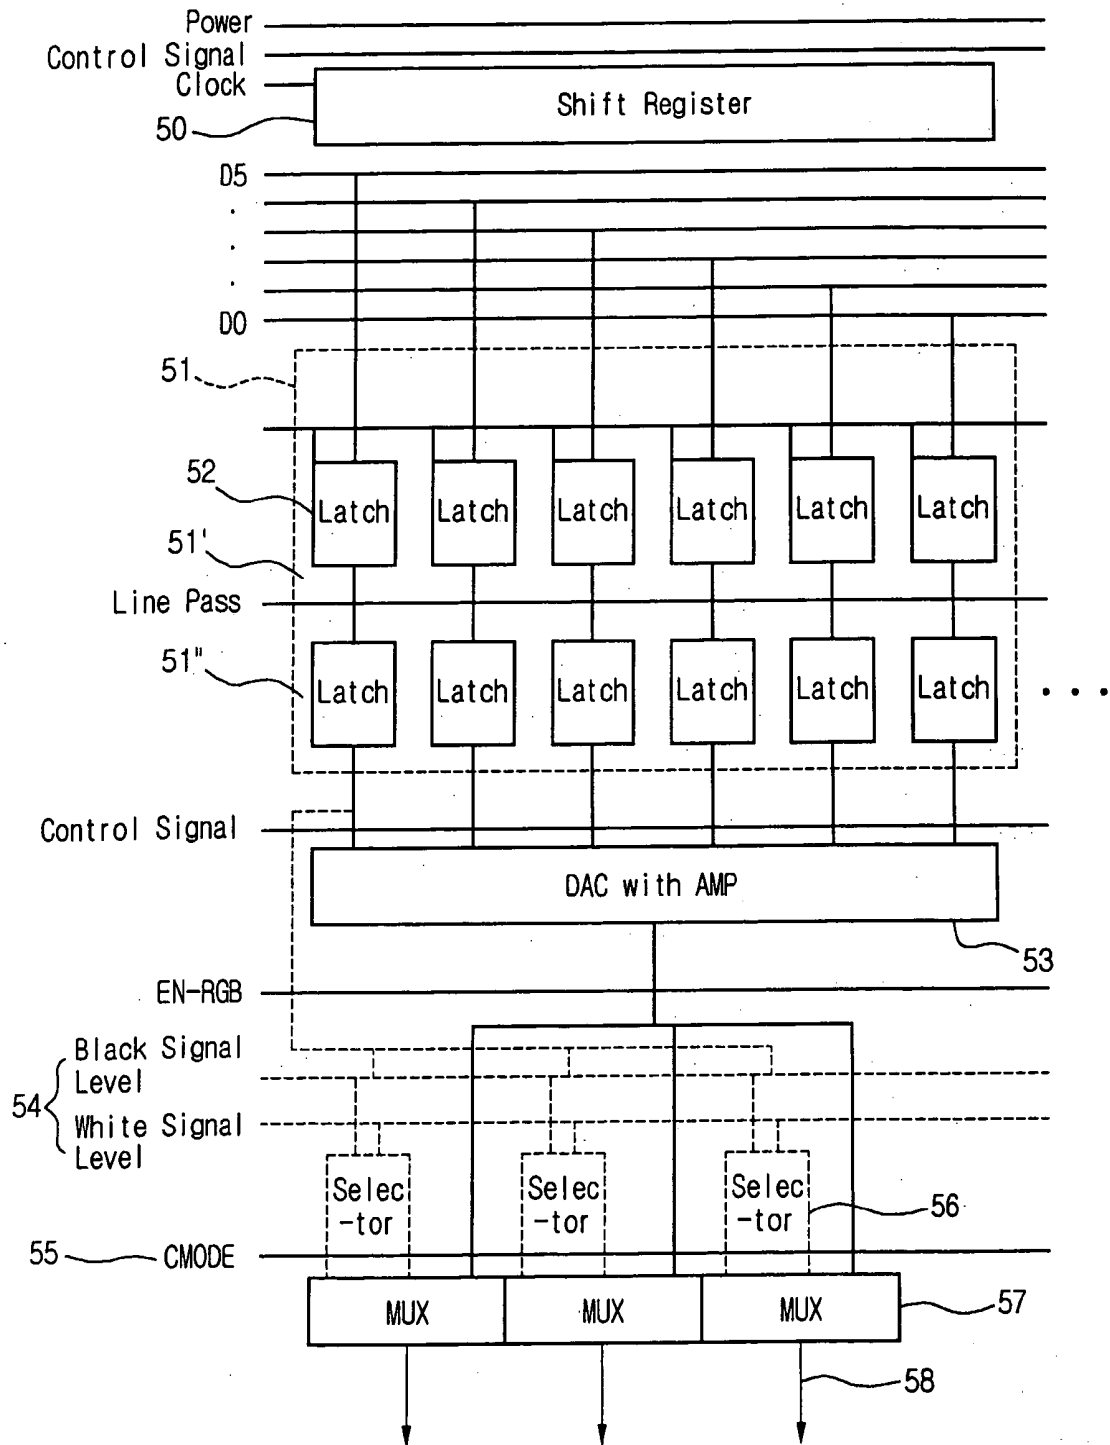


Fig.6B

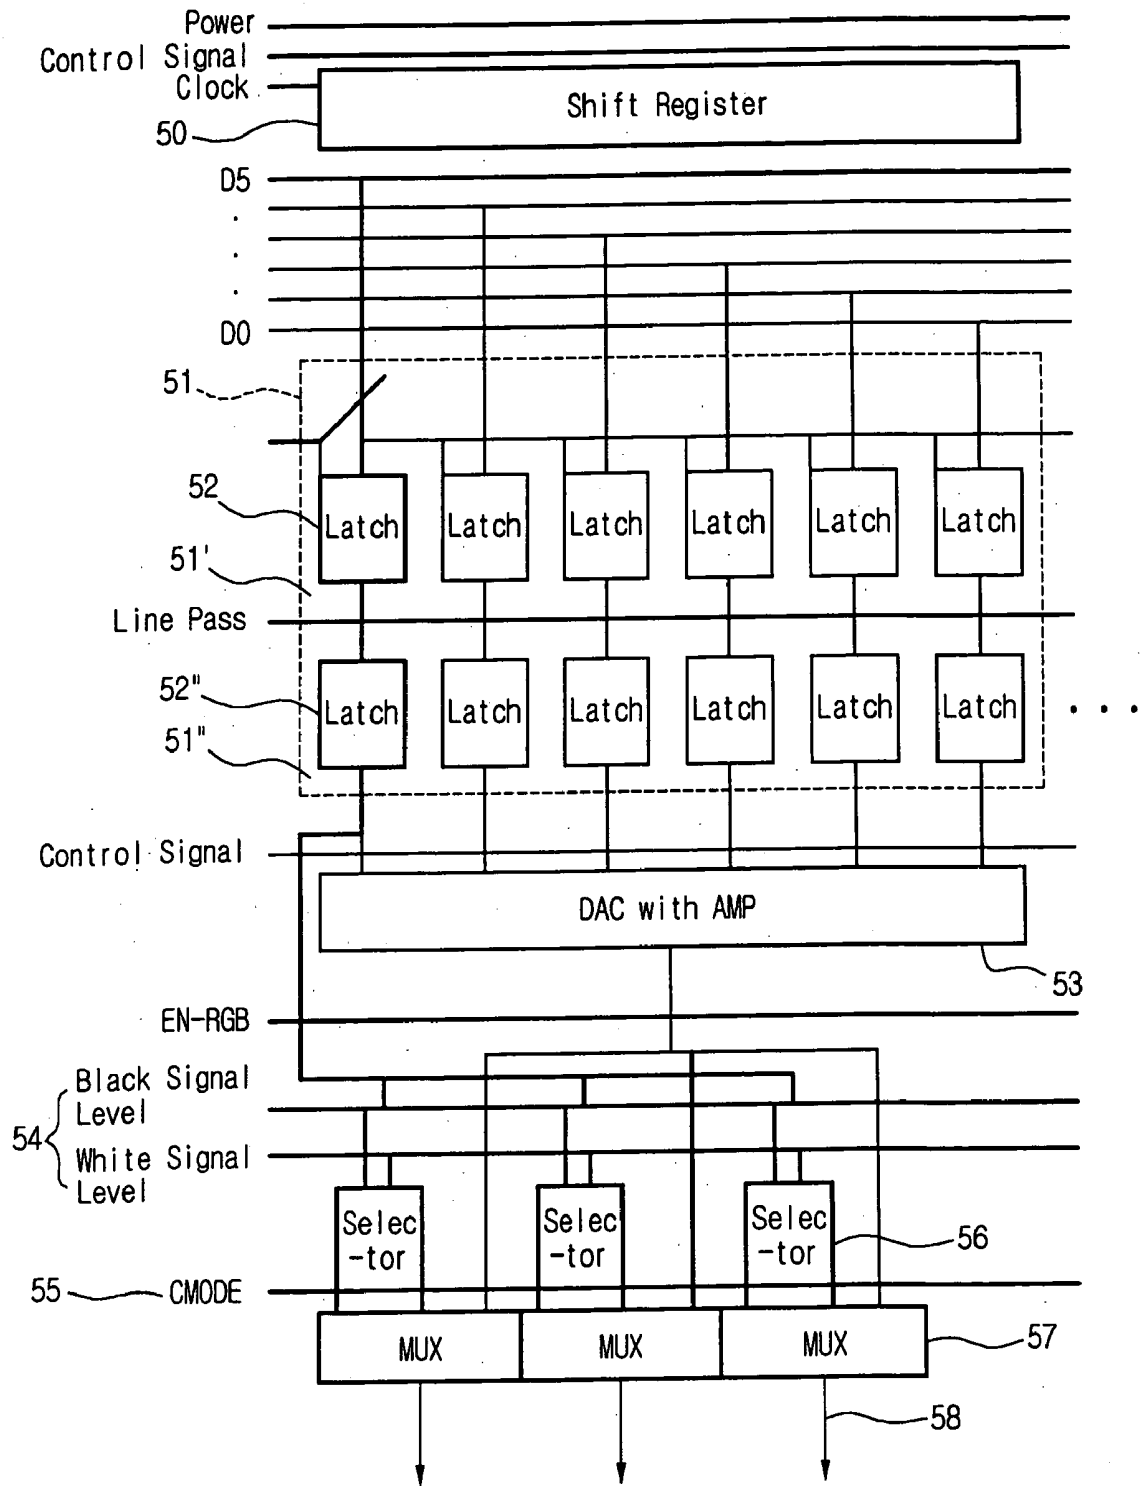

## DATA DRIVE IC OF LIQUID CRYSTAL DISPLAY AND DRIVING METHOD THEREOF

[0001] This application claims the benefit of Korean Patent Application No. 2003-40546 filed on Jun. 23, 2003, which is hereby incorporated by reference for all purposes as if fully set forth herein.

### BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display, and more particularly, to a data driver IC of a liquid crystal display and a driving method of the data driver IC.

[0004] 2. Description of the Related Art

[0005] Recently, liquid crystal displays (LCDs) are becoming widely used as an apparatus for displaying various images including a still picture or a moving picture, and their applications are expanding due to improvements in picture quality achieved by using an improved liquid crystal material and the development of better pixel processing techniques. LCD displays also have the advantages of light weight, thin profile, and low power consumption.

[0006] An active matrix LCD (AM-LCD) generally includes an array substrate including a lower substrate of a liquid crystal panel for image display. On the array substrate, a plurality of pixels are arranged in a matrix configuration, a plurality of thin film transistors (TFTs) functioning as a switching element are also formed, and a plurality of gate lines and a plurality of data lines crossing the plurality of gate lines are arranged.

[0007] FIG. 1 is a block diagram of a related art AM-LCD.

[0008] Referring to FIG. 1, the related art AM-LCD includes a data driver IC 3 for providing a liquid crystal panel 6 with image data from an external video card 1, a gamma voltage IC 4 for supplying a signal voltage to the data driver IC 3, a gate driver IC 5, which provides the liquid crystal panel 6 with a scanning signal for controlling the switching of thin film transistors of the liquid crystal panel 6, and a controller 2 for controlling the data driver IC 3 and the gate driver IC 5.

[0009] The liquid crystal panel 5 with an XGA resolution (1024\*768 pixels) level has 1024\*3. (one for each of red, green, and blue) data lines. For instance, in an LCD with XGA resolution, 8 data driver ICs each having output terminals of 384 channels, and 4 gate driver ICs each having output terminals of 200 channels are used.

[0010] Video data provided by a video card built in a computer or another source is supplied to the data driver IC 3 via the controller 2. In another example, an analog image signal input by a computer is converted to digital video data through an interface module built in an LCD monitor, and the converted digital video data is input into the LCD.

[0011] The gate driver IC 5 applies a scanning pulse once per frame period to each scanning line, and timing of the scanning pulse is interlaced from an upper side of the liquid crystal panel toward a lower side. The data driver IC 3 applies a liquid crystal driving voltage, which corresponds to pixels of one row to which the scanning pulse is applied, i.e., a signal voltage to each data line.

[0012] In selected pixels to which the scanning pulse is applied, corresponding thin film transistors are turned on as voltages of corresponding gate electrodes connected to the data line increase.

[0013] The liquid crystal driving voltage is applied to the liquid crystal from the data line via the drain electrode and the source electrode of each of the thin film transistors, so that each of the corresponding pixels charges a pixel capacitance corresponding to a sum of the liquid crystal capacitance and the storage capacitance. By repeating the operation, a voltage corresponding to an image signal period is applied to a pixel capacitance of the liquid crystal panel repeatedly per frame.

[0014] FIG. 2 is a block diagram of the data driver IC of FIG. 1. In FIG. 2, it is assumed that external digital data has 6 bits for the convenience of this description.

[0015] Referring to FIG. 2, all bits of external digital data D5, . . . , D0 are sequentially sampled by a shift pulse in a first latch 22, and when the sampling ends, the data are transferred to a second latch 24 by a line pass signal at a time.

[0016] Next, the sampled digital data are converted into an analog image signal by a digital-to-analog converter (DAC) 26. The converted analog image signal is amplified by an amp 126, and transferred to data lines 28 of the liquid crystal panel.

[0017] In the related art LCD, a driving IC board, i.e., a board provided with a data driver IC and a gate driver IC, is installed separately from the liquid crystal panel.

[0018] However, as low temperature polysilicon is developed, allowing use of large-sized glass substrates, and the integration technology of driver ICs advances, it becomes possible to integrate circuits for processing the display signals on the glass substrate. In addition, the variety of circuits that can be integrated on the glass substrate increases.

[0019] In other words, the above system-on-LCD includes polysilicon TFTs formed on a glass substrate for use in both the pixel array and the driver IC of the liquid crystal panel. By doing so, the cost of fabricating a module in the fabrication of an LCD can be saved and the power consumption of the LCD is reduced.

[0020] FIG. 3 is a circuit diagram of a unit pixel region in a related art liquid crystal panel.

[0021] Referring to FIG. 3, a gate line 31 and a data line 32 crossing the gate line 31, are formed on a glass substrate. A thin film transistor (TFT) 33 connected to the gate line 31, and the data line 32 is formed near a crossing point of the gate line 31, and the data line 32. A drain electrode 33d of the TFT 33 is electrically connected with a pixel electrode of a liquid crystal cell 38.

[0022] An auxiliary capacitance 35 for maintaining a voltage of the pixel electrode 37 during one field period is also formed between the TFT 33 and the pixel electrode 37. One terminal 34 of the auxiliary capacitance 35 is connected to the drain electrode 33d of the TFT 33, and the other terminal 36 is connected to a common voltage Vcom commonly applied to the pixel electrode 37.

[0023] When a gate signal is applied to the gate line 31, the TFT 33 is turned on as aforementioned, and the analog

image signal is transferred to the pixel electrode 37 via the data line 32 and maintained by the auxiliary capacitance 35. The image signal voltage transferred to the pixel electrode 37 is applied to the liquid crystal cell 38, thereby aligning the liquid crystal.

[0024] In the related art LCD, an image can be obtained regardless of whether the image is from a moving picture or a still picture. As an example of the still picture, a battery indicator image for displaying the power remaining in a battery of a handheld terminal is displayed on an LCD of the handheld terminal.

[0025] However, in the related art LCD, displaying the still picture, like displaying the moving picture, requires turning the TFT on using a gate signal and again inputting an image signal to each pixel electrode. To this end, the gate driver IC, the data driver IC, and a controller for controlling an operation timing of the driver ICs is always working, which increases the power consumption.

[0026] Accordingly, an LCD having a static memory device provided at each pixel has been used.

[0027] FIG. 4 is a circuit diagram of a unit pixel region of a liquid crystal panel having a related art maintenance circuit.

[0028] Referring to FIG. 4, pixel electrodes 37 are arranged in a matrix configuration on a substrate. For the convenience of description, only one pixel electrode is shown in the drawing. Data lines 32 are arranged in left and right sides of the pixel electrode, and gate lines 31 are arranged in upper and lower sides of the pixel electrode 37.

[0029] The maintenance circuit 42 utilizes a memory in which two-stage inverters are in a positive feedback arrangement. In other words, a static random access memory (SRAM) may be used as a maintenance circuit for the digital video signals. Particularly, unlike DRAM, SRAM is appropriate because it does not require a refresh operation for maintaining data.

[0030] To reproduce a still picture in 8 colors with the LCD of FIG. 4, only the SRAM added to the unit pixel operates. Accordingly, the driver ICs and an external module are inactivate, providing the liquid crystal panel with a low power consumption characteristic.

[0031] However, in the LCD having the unit pixel of FIG. 4, because the number of devices constituting the memory is high, apparatuses and processes capable of using a simplified design are needed. Also, although such an LCD can be achieved, it cannot be used in the transmission type LCD because it needs a layout throughout the whole area of the pixel regions.

#### SUMMARY OF THE INVENTION

[0032] Accordingly, the present invention is directed to a data driver IC of a liquid crystal display and a driving method of the data driving IC that substantially obviates one or more problems due to limitations and disadvantages of the related art.

[0033] An advantage of the present invention is to provide a data driver IC of a liquid crystal display and a driving method of the data driving IC in which a color conversion function is provided to the data driver IC, and when the LCD

operates in an 8-bit color mode, 2-bit output signal is generated using only the most significant bit (MSB) among the supplied digital data, thereby greatly reducing power consumption without using most of drive ICs.

[0034] Additional advantages and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. These and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0035] To achieve these and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, there is provided a data driver IC of a liquid crystal display. The data driver IC includes: a shift register; a latch part in which input digital data are sampled by the shift register and stored, the latch part including a plurality of latches; a digital to analog converter and an amplifier for converting the sampled digital data into an analog signal and amplifying the analog signal; an analog signal supplying part for generating first and second analog voltages corresponding to a black signal level and a white signal level, respectively; a color conversion control signal supplying part for controlling whether to display the input digital data in full colors or 8-bit color; a selector for selecting and outputting one of the first analog voltage corresponding to the black signal level and the second analog voltage corresponding to the white signal level; and a multiplexer for receiving the output analog signal and transferring the output analog signal to a corresponding data line.

[0036] In the above data driver IC, a moving picture is displayed in the full colors and a still picture is displayed in the 8-bit color.

[0037] According to another aspect of the present invention, there is provided a method of driving a data driver IC of a liquid crystal display, the method including: sampling and storing input digital data; determining a color mode of an image for the input digital data; when the color mode is an 8-bit color mode, selecting only a MSB of the input digital data; and selecting and outputting an analog signal corresponding to a black signal level or an analog signal corresponding to a white signal level depending on whether the MSB is high or low.

[0038] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0039] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention.

[0040] In the drawings:

[0041] FIG. 1 is a block diagram of a related art AM-LCD;

[0042] FIG. 2 is a block diagram of the data driver IC of FIG. 1;

[0043] FIG. 3 is a circuit diagram of a unit pixel region in a related art liquid crystal panel.

[0044] FIG. 4 is a circuit diagram of a unit pixel region of a liquid crystal panel having a related art maintenance circuit;

[0045] FIG. 5 is a block diagram of a data driver IC according to an embodiment of the present invention; and

[0046] FIGS. 6A and 6B are views illustrating operation of a data driver IC according to the present invention.

#### DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0047] Reference will now be made in detail to embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

[0048] FIG. 5 is a block diagram of a data driver IC according to an embodiment of the present invention.

[0049] It is assumed that the data driver IC is formed on the same substrate as a pixel array of a liquid crystal panel. However, other embodiments are contemplated in which the driver IC is formed on a different layer than the pixel array. For this purpose, an active layer of a thin film transistor (TFT) formed on the substrate is formed of polysilicon. For the convenience of this description, it is assumed that the digital data input has 6 bits.

[0050] Referring to FIG. 5, the data driver IC according to the present invention includes a shift register 50, a latch part 51, a digital-to-analog converter (DAC) and an amplifier 53, an analog signal supplying part for generating analog voltages corresponding to a black signal level and a white signal level, respectively, a color conversion control signal supplying part (CMODE) 55 for controlling whether to display the input digital data in full colors or 8-bit color, a selector 56 for selecting and outputting one of an analog voltage corresponding to the black signal level and an analog voltage corresponding to the white signal level, a multiplexer (MUX) 57 for receiving the output analog signal and transferring the output analog signal to a corresponding data line 58.

[0051] A moving picture may be displayed in full color and a still picture may be displayed in 8-bit color.

[0052] The latch part 51 is configured with a plurality of latches 52. The latch part 51 includes: a first latch part 51', allowing the input digital data D5, . . . ,D0 to be sequentially sampled by a shift pulse of the shift register 50; and a second latch part 51" in which when all the samplings are ended, the sampled digital data are transferred by line pass signal at once and stored.

[0053] In FIG. 5, "Power" represents a supply voltage, such as Vdd and Vss, and "Control Signal" represents control signals that are used for respective circuit operations. Also, "EN-RGB" represents selection control signals when the digital to analog converter is commonly used for R, G and B.

[0054] The most distinctive characteristic of the data driver IC according to the present invention is that a multi-

color function is embedded. The multi-color function means a function of converting colors depending on the kinds of displaying images. For example, a moving picture is displayed in a full color mode and a still picture is displayed in an 8-bit color mode.

[0055] In the related art, SRAMs that are embedded in respective pixels. However, as described above, because a number of devices are required to form the memory, apparatuses and processes capable of achieving a simplified design should be substantially provided. Also, although such an LCD can be realized, it cannot be used in the transmission type LCD. because, it needs a layout throughout an overall area of the pixel regions.

[0056] As noted earlier, the present invention is able to realize the multi-color function, that is, the color conversion function, without using SRAMs. If a still image is displayed, only the most significant bit (MSB) of the inputted digital data is used to achieve the 8-bit color mode, which generates 2 bits with respect to each red color (R), green color (G) and blue color (B). Thus, most of the driver IC. is not used, so that power consumption is reduced greatly.

[0057] Operation of the data driver IC of the LCD according to one embodiment of the present invention will now be described.

[0058] FIGS. 6A and 6B illustrate the operation of the data driver IC according to an embodiment of the present invention.

[0059] If the data driver IC is assumed to receive 6-bit digital data, FIG. 6A illustrates a normal mode operation that reproduces 260K colors and FIG. 6B illustrates a mode operation that reproduces 8-bit colors.

[0060] Referring to FIG. 6A, the data driver IC according to the present invention operates in the same manner as the related art data driver IC, for example, when a moving picture is displayed.

[0061] In other words, it corresponds to the situation in which a moving picture is displayed in full color (260K colors) by a control signal (color change mode control signal) provided from the color conversion control signal supplying part 55. First, the first latch part 51' allows the digital data inputted from the digital data D5, . . . ,D0 input to be sequentially sampled. Once the sampling has ended, the sampled digital data are transferred to the second latch part 51" at once by the line pass signal.

[0062] The sampled digital data are converted into analog video signals by the digital-to-analog converter 53. and the analog video signals are amplified by the analog amplifier 53. The amplified analog video signals pass through the multiplexers 57 by the signal of the color conversion control signal supplying part 55 and are supplied to the data lines 58 connected to the respective pixels.

[0063] In this circumstance, the analog signal supplying part 54 and the selector 56 are not used.

[0064] FIG. 6B illustrates the 8-bit color mode operation, for example, when a still picture is displayed.

[0065] In other words, FIG. 6B illustrates the case of a still picture displayed in 8-bit colors by a control signal (color change mode control signal) provided from the color

conversion control signal supplying part **55**. In the data driver IC, only the blocks indicated by the thick solid lines in **FIG. 6B**. are operated.

[**0066**] In other words, only the shift register **50**, the predetermined latches **52'** and **52''**, the analog signal supplying part **54**, the selector **56**, and the multiplexer **57** are operated. Here, the predetermined latches **52'** and **52''** sample only the most significant bit (MSB) of the input digital data and transfer the sampled MSB to the analog signal supplying part **54** and the selector **56**.

[**0067**] When the still picture is displayed in the 8-bit color by the color conversion control supplying part **55**, power is supplied to only the predetermined latches **52'** and **52''** of the latch part **51** and not to the remaining latches. Thus, even when a still image is displayed, large power consumption can be avoided.

[**0068**] The analog signal corresponding to the black signal level or the analog signal corresponding to the white signal level is selected by the selector depending on whether the sampled MSB digital data is high or low, and then transferred to the multiplexer. As a result, the analog signal is supplied to the data lines **58** that are connected to the respective pixels.

[**0069**] In this case, the digital data are not converted into the analog signals using the digital-to-analog converter and amplifier **53**, but the sampled MSB digital data are directly input to the analog signal supplying part **54** and the selector **56**. The selector **57** selects and transmits the analog signals corresponding to the black signal level and the white signal level depending on whether the sampled MSB. digital data is high or low. Then, the analog signals are transferred to the multiplexer **57** by the signal of the color conversion control signal supplying part **55** and then supplied to the data lines **58**. that are connected to the respective pixels.

[**0070**] The analog signals outputted in the two cases (black signal level or white signal level) are displayed in the 8-bit color ( $2 \times 2 \times 2 = 8$ ), corresponding to red, green, or blue.

[**0071**] According to the data driver IC of the present invention, when the still picture is displayed, the power consumption can be reduced greatly without embedding SRAMs as pixel memories into the respective pixels. Further, since SRAM is not used, the data driver IC can be applied without any limitation on the type of LCD display or the product models, such as the transmission type LCD or the like.

[**0072**] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A data driver IC of a liquid crystal display comprising:
  - a shift register;
  - a latch part in which input digital data are sampled by the shift register and stored, the latch part including a plurality of latches;

- a digital-to-analog converter and an amplifier for converting the sampled digital data into an analog signal and amplifying the analog signal;

- an analog signal supplying part generating first and second analog voltages corresponding to a black signal level and a white signal level, respectively;

- a color conversion control signal supplying part controlling whether to display the input. digital data in full color or 8-bit color;

- a selector selecting and outputting one of the first analog voltage corresponding to the black signal level and the second analog voltage corresponding to the white signal level; and

- a multiplexer receiving the output analog signal and transferring the output analog signal to a corresponding data line.

2. The data driver IC according to claim 1, wherein a moving picture is displayed in the full color and a still picture is displayed in the 8-bit color.

3. The data driver IC according to claim 1, wherein the latch part comprises:

- a first latch part allowing the input digital data to be sequentially sampled by a shift pulse of the shift register; and

- a second latch part, wherein, the sampled digital data are transferred at once by line pass signal and stored.

4. The data driver IC according to claim 1, wherein when the digital data input by the color conversion control signal supplying part is displayed in 8-bit color, a predetermined latch of the latch part, the analog signal supplying part, the selector, and the multiplexer are operated.

5. The data driver IC according to claim 4, wherein the predetermined latch of the latch part samples only the most significant bit (MSB) of the input digital data and transfers the sampled MSB to the analog signal supplying part and the selector.

6. The data driver IC according to claim 5, wherein a first analog signal corresponding to the black signal level or a second analog signal corresponding to the white signal level is selected by the selector depending on whether the sampled MSB digital data is high or low, and transferred to the multiplexer.

7. The data driver IC. according to claim 1, wherein when the digital data input by the color conversion control signal supplying part is displayed in the full colors, the shift register, the latch part, the digital to analog converter and amplifier, and the multiplexer are operated.

8. A method of driving a data driver IC. of a liquid crystal display, comprising:

- sampling and storing input digital data;

- determining a color mode of an image for the input digital data;

- selecting only a MSB of the input digital. data when the color mode is an 8-bit color mode; and

selecting and outputting an analog signal corresponding to a black signal level or an analog signal corresponding to a white signal level depending on whether the most significant bit (MSB) is high or low.

9. The method according to claim 8, wherein the analog signal corresponding to the black signal level or the analog

signal corresponding to the white signal level is displayed in 8 colors.

10. The method according to claim 9, wherein the 8 colors which generates 2 bits with respect to each red color (R), green color (G) and blue color (B).

\* \* \* \* \*

专利名称(译)	液晶显示器的数据驱动IC及其驱动方法		
公开(公告)号	<a href="#">US20040257328A1</a>	公开(公告)日	2004-12-23
申请号	US10/865764	申请日	2004-06-14
[标]申请(专利权)人(译)	LIM KYOUNG MOON		
申请(专利权)人(译)	LIM KYOUNG MOON		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	LIM KYOUNG MOON		
发明人	LIM, KYOUNG MOON		
IPC分类号	G09G3/20 G09G3/36		
CPC分类号	G09G3/2011 G09G3/3688 G09G2300/0408 G09G2310/027 G09G2310/0297 G09G2320/10 G09G2330/021 G09G2340/0428		
优先权	1020030040546 2003-06-23 KR		
其他公开文献	US8633887		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

提供一种液晶显示器的数据驱动器IC。数据驱动器IC包括：移位寄存器；锁存部分，其中输入数字数据由移位寄存器采样并存储，锁存部分包括多个锁存器；数模转换器和放大器，用于将采样的数字数据转换成模拟信号并放大模拟信号；模拟信号提供部分，用于分别产生对应于黑信号电平和白信号电平的第一和第二模拟电压；颜色转换控制信号提供部分，用于控制是以全色还是8位颜色显示输入数字数据；选择器，用于选择和输出对应于黑信号电平的第一模拟电压和对应于白信号电平的第二模拟电压中的一个；多路复用器，用于接收输出模拟信号并将输出模拟信号传送到相应的数据线。

