



US 20080252813A1

(19) **United States**(12) **Patent Application Publication**
Doe(10) **Pub. No.: US 2008/0252813 A1**(43) **Pub. Date: Oct. 16, 2008**(54) **DISPLAY DEVICE HAVING LIQUID
CRYSTAL LAYER AND SWITCHABLE
OPTICAL LAYER**(30) **Foreign Application Priority Data**

Jul. 6, 2002 (GB) 0215701

(75) Inventor: **Steve Doe, Surrey (GB)****Publication Classification**


Correspondence Address:

FOLEY & LARDNER LLP**150 EAST GILMAN STREET, P.O. BOX 1497
MADISON, WI 53701-1497 (US)**(51) **Int. Cl.**
G02F 1/13357 (2006.01)(52) **U.S. Cl.** **349/61**(73) Assignee: **Spyder Navigations, LLC**(57) **ABSTRACT**(21) Appl. No.: **12/143,393**(22) Filed: **Jun. 20, 2008****Related U.S. Application Data**

(62) Division of application No. 10/606,131, filed on Jun. 24, 2003.

(60) Provisional application No. 60/402,837, filed on Aug. 12, 2002.

A display device including a first electrode, a liquid crystal layer positioned under and connected to the first electrode, a second electrode and a switchable optical layer. The switchable optical layer includes either a transparent state or a non-transparent state and is electrically switchable between the transparent state and the non-transparent state. The non-transparent state is selectively emissive state. The switchable optical layer is positioned above and connected to the second electrode. A third electrode is positioned between the liquid crystal layer and the switchable optical layer.

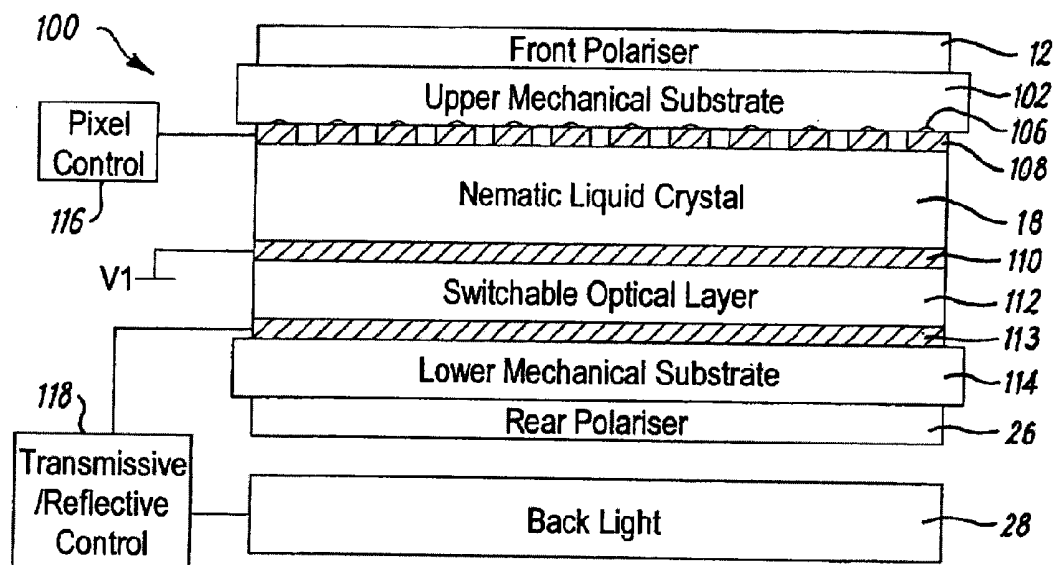

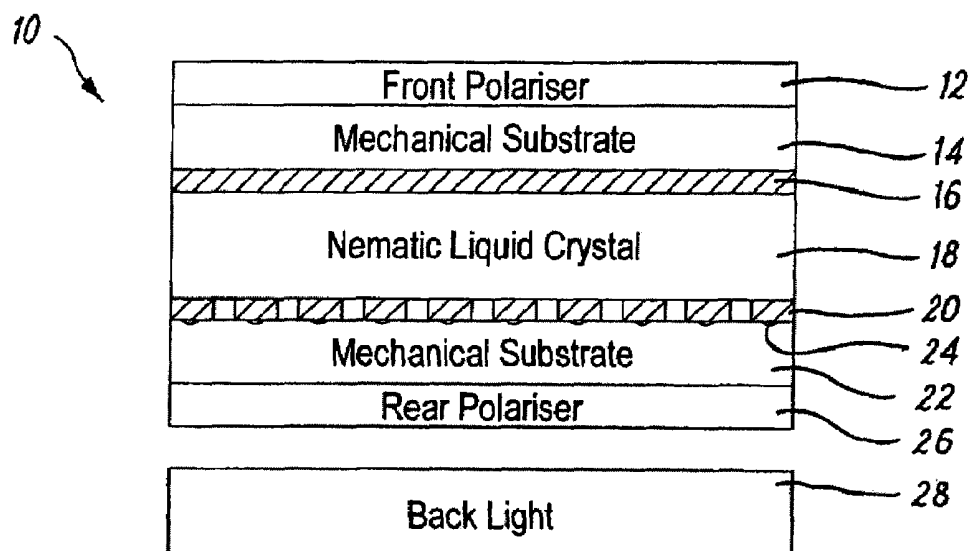


FIG. 1

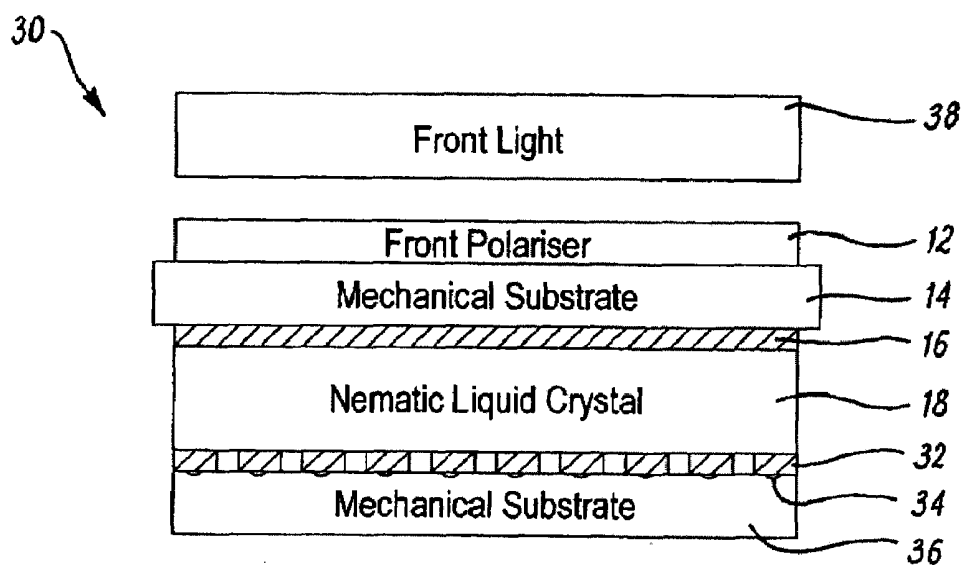


FIG. 2

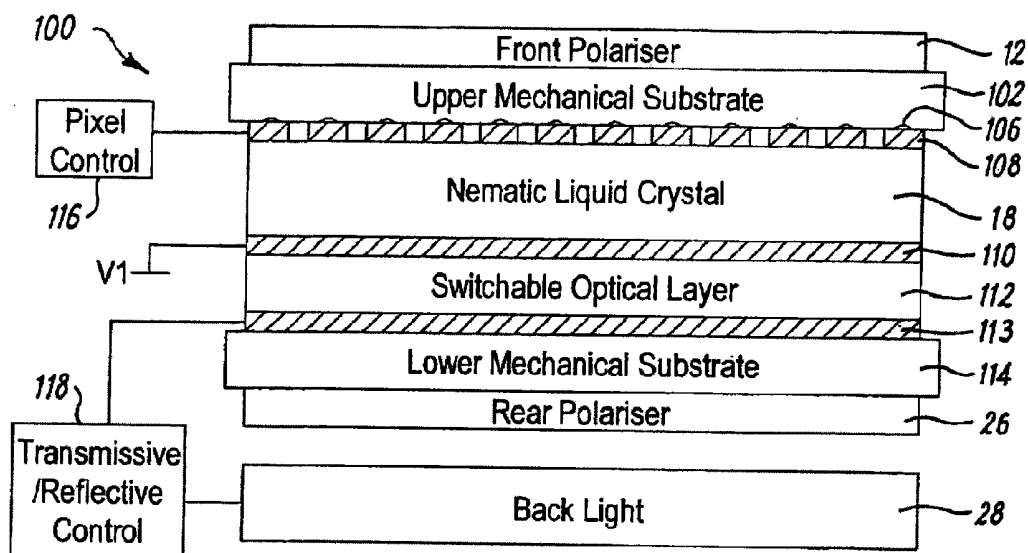


FIG. 3


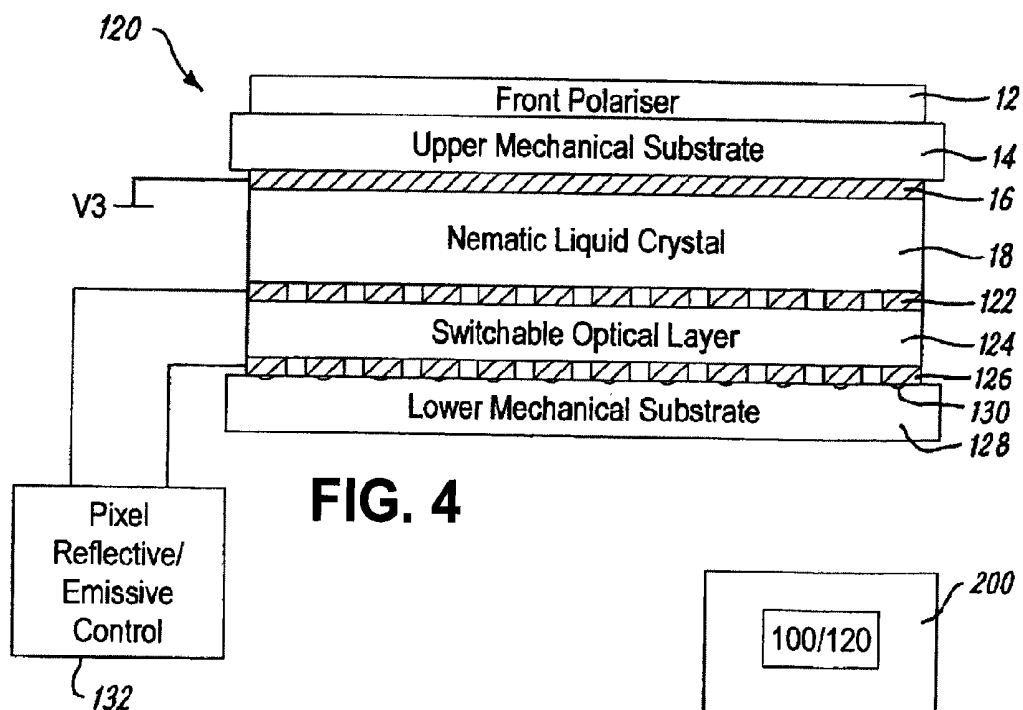


FIG. 4

FIG. 5



DISPLAY DEVICE HAVING LIQUID CRYSTAL LAYER AND SWITCHABLE OPTICAL LAYER

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a divisional of U.S. patent application Ser. No. 10/606,131 that was filed Jun. 24, 2003, the disclosure of which is incorporated by reference in its entirety. U.S. patent application Ser. No. 10/606,131 claims the benefit of U.S. Provisional Patent Application Ser. No. 60/402,837, that was filed Aug. 12, 2002, the disclosure of which is incorporated by reference in its entirety. U.S. patent application Ser. No. 10/606,131 also claims priority under the Paris Convention to Great Britain application 0215701, filed Jul. 6, 2002, the disclosure of which is incorporated by reference in its entirety.

FIELD

[0002] The present invention relates to carrying out transmit antenna diversity from a base station to mobile stations and, more particularly, to doing so in a system with both mobile stations equipped to handle antenna diversity and mobile stations not so equipped.

BACKGROUND

[0003] FIG. 1 illustrates an existing transmissive liquid crystal display (LCD) device 10. The transmissive LCD device 10 comprises a front polariser 12, a transparent mechanical substrate 14, a transparent unitary electrode 16, a nematic liquid crystal layer 18, a transparent pixellated electrode 20 comprising a plurality of distinct electrodes each of which has an associated pixel switch 24, a transparent mechanical substrate 22, a rear polariser 26 and a back light 28.

[0004] The front polariser 12 and the rear polariser 26 are arranged as cross-polarisers. The mechanical substrate 14 supports the transparent unitary electrode 16 and provides mechanical rigidity to the device. It is typically made of glass and supports the front polariser 12 on its upper surface and the transparent unitary electrode 16 on its lower surface. The mechanical substrate 22 has the plurality of pixel switches 24 defined on its upper surface. Each of the pixel switches is electrically connected to one of the plurality of electrodes of the transparent pixellated electrode 20. The lower surface of the mechanical substrate 22 supports the rear polariser 26. The nematic liquid crystal layer 18 is positioned between the transparent unitary electrode 16 and the transparent pixellated electrode 20. When a pixel switch is on, a voltage is applied across the overlying portion of the liquid crystal layer 18. The back light is positioned beneath the rear polariser 26. Light from the back light 28 is initially polarised to a particular orientation by the rear polariser 26. As this light travels through the nematic liquid crystal layer 18 its polarisation will be changed again to either a first orientation or a second orientation depending upon whether the portion of the liquid crystal through which it is travelling has a voltage across it. The front polariser 12 will only let light pass through having polarisation of the first orientation. Therefore, the transmissive liquid crystal device 10 is selectively transmissive in dependence upon the state of the pixel switches 24. This type of device has good image quality in low and at normal ambient light conditions but it is very difficult to see in bright

conditions. In addition, the device requires a permanent back light which uses too much power for many modern applications.

[0005] FIG. 2 illustrates an existing reflective liquid crystal display device 30. The reflective LCD device 30 comprises a front light 38, a front polariser 12, a mechanical substrate 14, a transparent unitary electrode 16, a nematic liquid crystal layer 18, a pixellated reflective electrode 32 comprising a plurality of distinct reflective electrodes each of which has an associated pixel switch 34 and a mechanical substrate 36.

[0006] The differences between the reflective LCD device 30 and the transmissive LCD device 10 are that the reflective device 30 has a front light 38 positioned above the front polariser 12 and does not have a back light; the pixellated electrode 32 between the lower mechanical substrate 36 and the liquid crystal layer 18 is reflective and is not transparent; and the absence of a rear polariser in the reflective LCD device 30.

[0007] Light from the front light 38 passes through the front polariser 12 so that it is polarised in a first orientation, when the light is reflected by a pixellated electrode its polarisation is changed. The polarisation of the light is further changed by passing through the liquid crystal layer 18 and the extent of this change is dependent upon the voltage applied across the portion of the liquid crystal layer through which the light travels, which is in turn dependent upon whether the pixel switch associated with that portion of the liquid crystal layer 18 is on or off. Depending upon the extent to which the liquid crystal layer changes the polarisation of the reflected light, the front polariser 12 either will or will not pass the light. Thus the pixel switches 34 can be used to make portions of the display either reflective or absorptive. A problem with this type of device is that the image quality of the display is reduced by the presence of a front light 38.

[0008] Transflective liquid crystal display devices address this problem by removing the front light 38 and introducing a back light. Each of the distinct electrodes making up the pixellated reflective electrode layer 32 is adapted to have a small hole in it which lets light through from the back light. However, transflective liquid crystal display devices are a poor compromise between transmissive and reflective liquid crystal displays. If the display is optimised towards being bright in daylight by making the holes in the reflector smaller, then it will be darker with the back light on or will need more power in the back light to get the same brightness.

[0009] It would be desirable to provide a display device which has good image quality irrespective of the ambient light conditions and does not have excessive power requirements.

SUMMARY

[0010] According to one aspect of the present invention there is provided a display device comprising: a first electrode; a liquid crystal layer positioned under and connected to the first electrode; a second electrode; a switchable optical layer, having a transparent state and a non-transparent state and being electrically switchable between the transparent state and the non-transparent state, positioned above and connected to the second electrode; and a third electrode positioned between the liquid crystal layer and the switchable optical layer.

[0011] In one embodiment the non-transparent state of the switchable optical layer is a reflective state. In another

embodiment the non-transparent state of the switchable optical layer is a light emissive state.

[0012] According to another aspect of the present invention there is provided a method of controlling a display device comprising a liquid crystal layer and an underlying transparent/reflective layer which is either uniformly transparent or uniformly reflective, to operate in a first mode by: selectively controlling portions of the liquid crystal layer and uniformly maintaining the transparent/reflective layer in a transparent state, and to operate in a second mode by: selectively controlling portions of the liquid crystal layer and uniformly maintaining the transparent/reflective layer in a reflective state.

[0013] According to a further aspect of the present invention there is provided a method of controlling a display device comprising a liquid crystal layer and an underlying transparent/emissive layer which is selectively either transparent or emissive, to operate in a transmissive mode by: selectively controlling portions of the liquid crystal layer and uniformly maintaining the transparent/emissive layer in a transparent state, and to operate in an emissive mode by: uniformly controlling the liquid crystal layer and selectively enabling portions of the transparent/emissive layer so that the selected portions emit light.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] For a better understanding of the present invention and to understand how the same may be brought into effect reference will now be made by way example only to the following drawings, in which:

[0015] FIG. 1 illustrates a prior art transmissive liquid crystal display device;

[0016] FIG. 2 illustrates a prior art reflective liquid crystal display device;

[0017] FIG. 3 illustrates a first embodiment of the present invention;

[0018] FIG. 4 illustrates a second embodiment of the present invention; and

[0019] FIG. 5 illustrates a mobile device having a display according to the present invention.

DETAILED DESCRIPTION

[0020] FIG. 3 illustrates a display device 100 which can operate as either a transmissive liquid crystal display device or as a reflective liquid crystal display device. The display device 100 comprises a front polariser 12 supported on an upper surface of an upper mechanical substrate 102, a plurality of pixel switches 106 defined on a lower surface of the upper mechanical substrate 102, a pixellated electrode 108 comprising a plurality of distinct electrodes each of which is associated with a pixel switch 106, lies between the upper mechanical substrate 106 and a nematic liquid crystal layer 18, a first unitary transparent electrode 110 underlies the liquid crystal layer 18, a switchable optical layer 112 underlies the first unitary transparent electrode 110, a second unitary transparent electrode 113 underlies the switchable optical layer 112 and is supported on an upper surface of a transparent lower mechanical substrate 114, and a rear polariser 26 is supported on the lower surface of the lower mechanical substrate 114. A back light 28 is positioned underneath the rear polariser 26. The front polariser 12 and the rear polariser 26 are arranged as cross-polarisers. The upper mechanical substrate is transparent and is preferably made of glass. Each of the pixel switches 106 is either a

transistor, for example formed from an amorphous silicon or a diode. The pixellated transparent electrode 108 is formed from a layer of indium tin oxide (ITO) and each of the plurality of separate electrodes which forms the pixellated transparent electrode 108 is typically a square of about 0.2 mm in length.

[0021] The nematic liquid crystal layer 18 is a standard nematic liquid crystal layer and its polarisation properties are dependent upon the voltage applied across it. The first unitary transparent electrode 110 is formed from a single layer of indium tin oxide. The switchable optical layer 112 is typically tens of micrometers thick. It is preferably formed from a polymer dispersed liquid crystal (PDLC) but it can also be formed from cholesteric liquid crystals. The important property of the switchable optical layer 112 is that it can be switched from being in a substantially transparent state to being in a substantially reflective state. The second unitary transparent electrode 113 is formed from a single layer of indium tin oxide. The lower mechanical substrate is transparent and is preferably formed from glass.

[0022] The display device 100 also comprises a pixel controller 116 which is connected to selectively enable the pixel switches 106 and a transmissive/reflective controller 118 which is connected to the second unitary transparent electrode 112 and the back light 28. The first unitary transparent electrode is connected to a constant first voltage V1. When the display device 100 is operating as a transmissive display, the transmissive/reflective controller 118 supplies a voltage V1 to the second unitary transparent electrode 113 and switches on the back light 28. The first unitary transparent electrode 110 and the second unitary transparent electrode 113 are at the same voltage and no voltage is developed across the switchable optical layer 112. Consequently, the switchable optical layer 112 is in its transparent state. (In alternative embodiments, the optical layer may be reflective with no voltage across it and transparent with a voltage across it). The pixel controller 116 selectively switches on a first plurality of pixel switches 106 and switches off a second plurality of pixel switches thereby defines on the upper surface of the display device an image. In this mode of operation, the display device 100 operates in a similar manner to the transmissive device 10 described in relation to FIG. 1. There are however significant structural differences. In particular, the pixellated electrode 108 and pixel switches 106 are positioned above the liquid crystal layer 18 and the unitary electrode is positioned beneath the liquid crystal layer 18. In addition the unitary electrode is replaced by a sandwich structure comprising a first unitary transparent electrode 110, a switchable optical layer 112 and a second unitary transparent electrode 113.

[0023] When the display device 100 is operating as a reflective display device, the transmissive/reflective controller 118 provides a voltage V2 to the second unitary transparent electrode 113 and does not switch on the back light 28. The first unitary electrode 110 and the second unitary electrode 113 are at different voltages and a potential is developed across the switchable optical layer 112. Consequently, the switchable optical layer 112 becomes reflective. (In alternative embodiments, the optical layer may be reflective with no voltage across it and transparent with a voltage across it). The pixel controller 116 is used to define the image produced by the display device 100. In this reflective mode of operation, the display device 100 operates in a similar manner to the reflective LCD device 30 described in relation to FIG. 2. There are, however, some major structural differences. In this

embodiment, the pixellated electrode **108** and the pixel switches **106** replace the unitary transparent electrode above the liquid crystal layer **18** and must therefore be transparent. In addition, a sandwich structure comprising the first unitary transparent electrode **110**, the switchable optical layer **112** and the second unitary transparent electrode **113**, now lies beneath the liquid crystal layer **18**.

[0024] In the reflective mode, the display device **100** acts like a reflective LCD and has the image quality of a normal reflective LCD. In the transparent mode, the display device **100** acts like a transmissive LCD and has the same image quality as a normal transmissive LCD. This embodiment therefore represents an optimum combination of reflective and transmissive liquid crystal displays.

[0025] FIG. 4 illustrates a display device **120** according to a second embodiment of the present invention. The display device **120** can operate as a reflective liquid crystal display device or as a light emissive device. The display device **120** comprises a front polariser **12** supported by the upper surface of a upper mechanical substrate **14**, a unitary transparent electrode **16** supported by the lower surface of the upper mechanical substrate **14**, a nematic liquid crystal layer **18** underlying the unitary transparent electrode **16**, a first pixellated transparent electrode **122** underlying the liquid crystal layer **18**, a switchable optical layer **124** underlying the first pixellated transparent electrode **122**, a second pixellated transparent electrode **126** underlying the switchable optical layer **124** and overlying an upper surface of a lower mechanical substrate **128** on which has been defined a plurality of pixel switches **130**.

[0026] The first pixellated transparent electrode **122** comprises a plurality of distinct electrodes. The second pixellated transparent electrode **126** also comprises a plurality of distinct electrodes. Each one of the distinct electrodes of the first pixellated transparent electrode **122** overlies and opposes, with the switchable optical layer **124** intervening, an associated one of the distinct electrodes of the second pixellated transparent electrode **126**. Each one of the distinct electrodes of the second pixellated transparent electrode **126** is associated with a pixel switch **130**.

[0027] The upper mechanical substrate **14** is transparent and preferably made of glass. The unitary transparent electrode **16** is preferably made from indium tin oxide (ITO) deposited on the lower surface of the upper mechanical substrate **14**. The first pixellated transparent electrode **122** is formed from a layer of indium tin oxide. The switchable optical layer **124** has the physical property that it can be switched from being substantially transparent to being light emissive. The switchable optical layer **124** is preferably formed from organic light emitting diodes (OLED)—light emitting dendrimers and inorganic electroluminescent layers could also be used. The second pixellated reflective electrode **126** is formed from a layer of metal deposited on the lower mechanical substrate **128**.

[0028] The unitary transparent electrode **16** is connected to a constant voltage supply V3. A pixel reflective/emissive controller **132** controls whether or not the display device **120** is operating as a reflective liquid crystal display device or as a light emissive device. When the display device **120** is operating as a reflective liquid crystal display device, each distinct electrode of the first pixellated transparent electrode **122** is electrically connected in parallel with its associated distinct electrode of the second pixellated reflective electrode **126**. Thus, if a pixel switch **130** is switched on at a particular pixel,

the distinct electrode of the second pixellated reflective electrode **126** overlying the pixel switch **130** will be brought to a first voltage and the overlying associated distinct electrode of the first pixellated transparent electrode **122** will be brought to the same first voltage. Consequently, no voltage will be developed across any part of the switchable optical layer **124**. The whole of the switchable optical layer **124** would therefore be transparent. However, a voltage will be selectively developed across portions of the liquid crystal layer **18** as the pixel switches **130** are switched on or off.

[0029] The display device **120** therefore operates in a manner similar to the reflective LCD device described in relation to FIG. 2. However, there are a number of significant differences. The display device **120** does not have a front light, and a pixellated transparent electrode **122** and switchable optical layer **124** lie in between the liquid crystal layer **18** and the pixellated reflective electrode **126**.

[0030] When the display device **120** is operating as a light emissive device, all of the distinct electrodes making up the first pixellated transparent electrode **122** are electrically connected together and connected to the constant voltage V3. The first pixellated transparent electrode **122** in this electrical configuration operates as a unitary electrode and no voltage is developed across the liquid crystal layer **18**. The pixel switches **130** supply the voltage or current necessary to enable the overlying portions of the switchable optical layer to emit light. Consequently, by the selective enablement of the pixel switches **130**, selective portions of the switchable optical layer **124** will emit light to produce an image on the display device **120**.

[0031] FIG. 5 illustrates a mobile device **200** comprising a display device **100** or **120**. The mobile device **200** may be a hand-portable communications device such as a mobile phone or a personal digital assistant.

[0032] Although the present invention has been described in the preceding paragraphs with reference to various examples, it should be appreciated that modifications and variations to the examples given can be made without departing from the scope of the invention as claimed.

[0033] Whilst endeavoring in the foregoing specification to draw attention to those features of the invention believed to be of particular importance it should be understood that the Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or shown in the drawings whether or not particular emphasis has been placed thereon.

What is claimed is:

1. A display device comprising:

- a first electrode;
- a liquid crystal layer positioned under and connected to the first electrode;
- a second electrode;
- a switchable optical layer, having in use either a transparent state or a non transparent state and being electrically switchable between the transparent state and the non transparent state, wherein the non transparent state is a selectively emissive state and the switchable optical layer is positioned above and connected to the second electrode; and
- a third electrode positioned between the liquid crystal layer and the switchable optical layer.

2. The display device of claim 1, wherein the third electrode is shared by the liquid crystal layer and the switchable optical layer.

3. The display device of claim 2, wherein the second and third electrodes are both pixellated.

4. A display device as claimed in claim 1 wherein at least one of the first, second or third electrodes is pixellated and has associated pixel switches.

5. A display device as claimed in claim 1 wherein the first electrode is a unitary transparent electrode.

6. A display device as claimed in claim 1 wherein the second electrode is a first pixellated electrode connected to the switchable optical layer comprising a first plurality of first distinct electrodes and the third electrode is a second pixellated electrode connected to the switchable optical layer comprising a first plurality of second distinct electrodes, wherein each one of the first distinct electrodes opposes an associated second distinct electrode across the switchable optical layer.

7. A display device as claimed in claim 6 further comprising pixel switches positioned below the second electrode, such that each pixel switch is connected to one of the plurality of first distinct electrodes.

8. A display device as claimed in claim 1 wherein the third electrode is transparent.

9. A display device as claimed in claim 1 wherein the second electrode is reflective.

10. A display device as claimed in claim 6 further comprising control means arranged, in a first mode, to maintain the second distinct electrodes of the third electrode at the same voltage and, in a second mode, to maintain each second distinct electrode of the third electrode at the same voltage as its associated first electrode of the second electrode.

11. A mobile device comprising a power supply and a display device, as claimed in claim 1.

12. A method of controlling a display device comprising a liquid crystal layer and an underlying transparent/emissive layer which is selectively either transparent or emissive, to operate in a transmissive mode by:

selectively controlling portions of the liquid crystal layer and

uniformly maintaining the transparent/emissive layer in a transparent state, and

to operate in an emissive mode by:

uniformly controlling the liquid crystal layer and

selectively enabling portions of the transparent/emissive layer so that the selected portions emit light.

* * * * *

专利名称(译)	具有液晶层和可切换光学层的显示装置		
公开(公告)号	US20080252813A1	公开(公告)日	2008-10-16
申请号	US12/143393	申请日	2008-06-20
[标]申请(专利权)人(译)	SPYDER导航L LC		
申请(专利权)人(译)	SPYDER导航, LLC		
当前申请(专利权)人(译)	高智I LLC		
[标]发明人	DOE STEVE		
发明人	DOE, STEVE		
IPC分类号	G02F1/13357 G02F1/1335 G02F1/1347		
CPC分类号	G02F1/133555 G02F1/13476		
优先权	60/402837 2002-08-12 US 2002015701 2002-07-06 GB		
其他公开文献	US7821597		
外部链接	Espacenet USPTO		

摘要(译)

一种显示装置，包括第一电极，位于第一电极下方并连接到第一电极的液晶层，第二电极和可切换光学层。可切换光学层包括透明状态或非透明状态，并且可在透明状态和非透明状态之间电切换。非透明状态是选择性发光状态。可切换光学层位于第二电极上方并连接到第二电极。第三电极位于液晶层和可切换光学层之间。

