



US007180499B2

(12) **United States Patent**  
**Lee et al.**

(10) **Patent No.:** **US 7,180,499 B2**  
(45) **Date of Patent:** **Feb. 20, 2007**

(54) **DATA DRIVING APPARATUS AND METHOD FOR LIQUID CRYSTAL DISPLAY**

(75) Inventors: **Seok Woo Lee**, Kyoungsangbuk-do (KR); **Su Kyung Choi**, Kyoungsangbuk-do (KR)

(73) Assignee: **LG. Philips LCD Co., Ltd.**, Seoul (KR)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 445 days.

(21) Appl. No.: **10/125,542**

(22) Filed: **Apr. 19, 2002**

(65) **Prior Publication Data**

US 2003/0071778 A1 Apr. 17, 2003

(30) **Foreign Application Priority Data**

Oct. 13, 2001 (KR) ..... P2001-63207

(51) **Int. Cl.**  
**G09G 3/36** (2006.01)

(52) **U.S. Cl.** ..... 345/100; 345/211

(58) **Field of Classification Search** ..... 345/98, 345/99, 55-100, 204-213; *G09G 3/30, 3/32, G09G 3/36*

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,170,158 A 12/1992 Shinya  
6,078,318 A 6/2000 Mori et al.  
6,097,362 A \* 8/2000 Kim ..... 345/87  
6,157,358 A \* 12/2000 Nakajima et al. .... 345/96  
6,256,005 B1 7/2001 Kim ..... 345/88

6,333,729 B1 12/2001 Ha  
6,335,721 B1 1/2002 Jeong  
6,795,051 B2 \* 9/2004 Ikeda ..... 345/100  
2001/0017607 A1 \* 8/2001 Kwon et al. .... 345/87

FOREIGN PATENT DOCUMENTS

DE 198 21 914 11/1998  
DE 198 25 276 1/1999  
DE 198 54 730 9/1999  
DE 100 25 252 1/2001  
EP 0 368 572 5/1990  
EP 1058232 A2 12/2000  
EP 1 191 513 A2 3/2002  
JP 03125582 A \* 5/1991  
JP 11-249624 9/1999  
WO WO 98/28731 7/1998

\* cited by examiner

Primary Examiner—Alexander Eisen

(74) Attorney, Agent, or Firm—Morgan, Lewis & Bockius, LLP

(57) **ABSTRACT**

A data driving apparatus for a liquid crystal display includes a plurality of output buffer integrated circuits for buffering a plurality of pixel signals and outputting the plurality of pixel signals to a plurality of data lines; a plurality of digital to analog converter integrated circuits, each of which are commonly connected to input terminals of at least two of the plurality of output buffer integrated circuits, for converting input pixel data to the plurality of pixel signals and selectively outputting the plurality of pixel signals to the at least two output buffer integrated circuits; and timing control means for controlling the plurality of digital to analog converter integrated circuits and making a time division of the pixel data into at least two regions to sequentially supply the pixel data to the plurality of data lines.

**12 Claims, 5 Drawing Sheets**

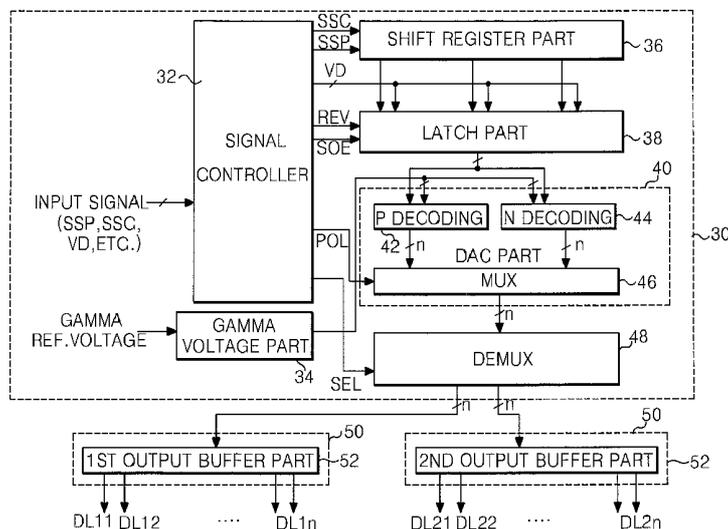


FIG. 1  
CONVENTIONAL ART

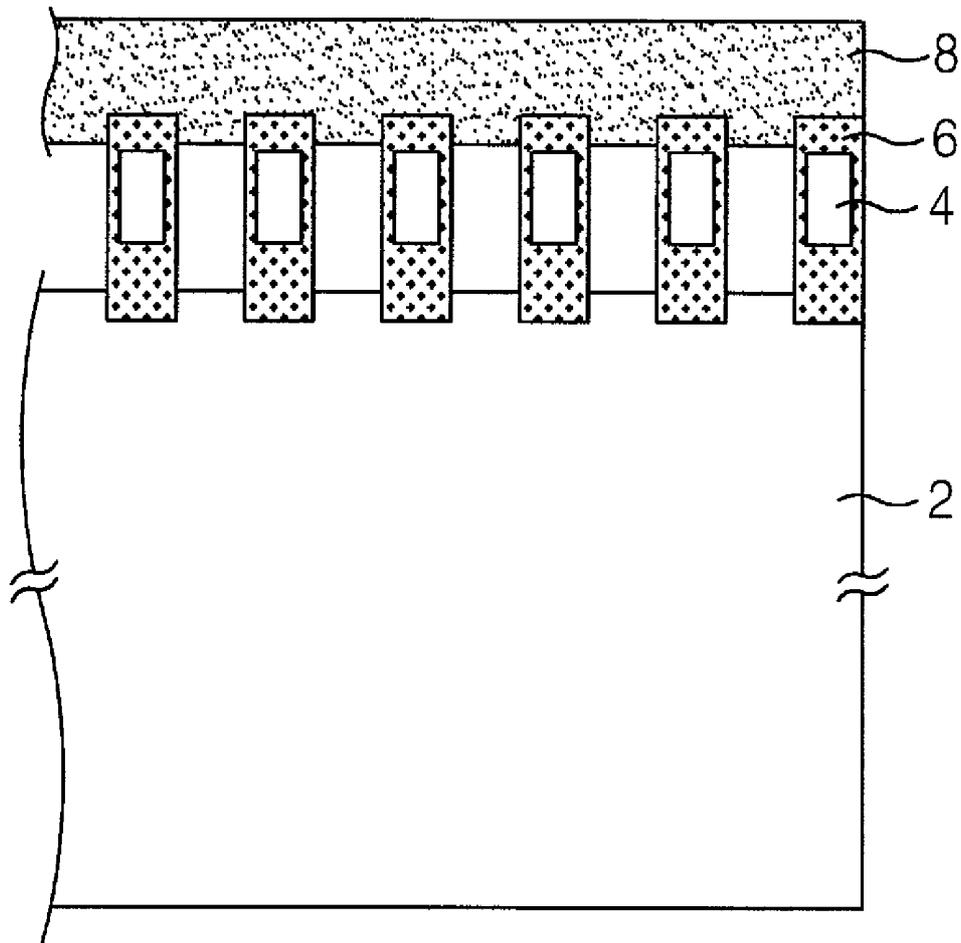


FIG. 2  
CONVENTIONAL ART

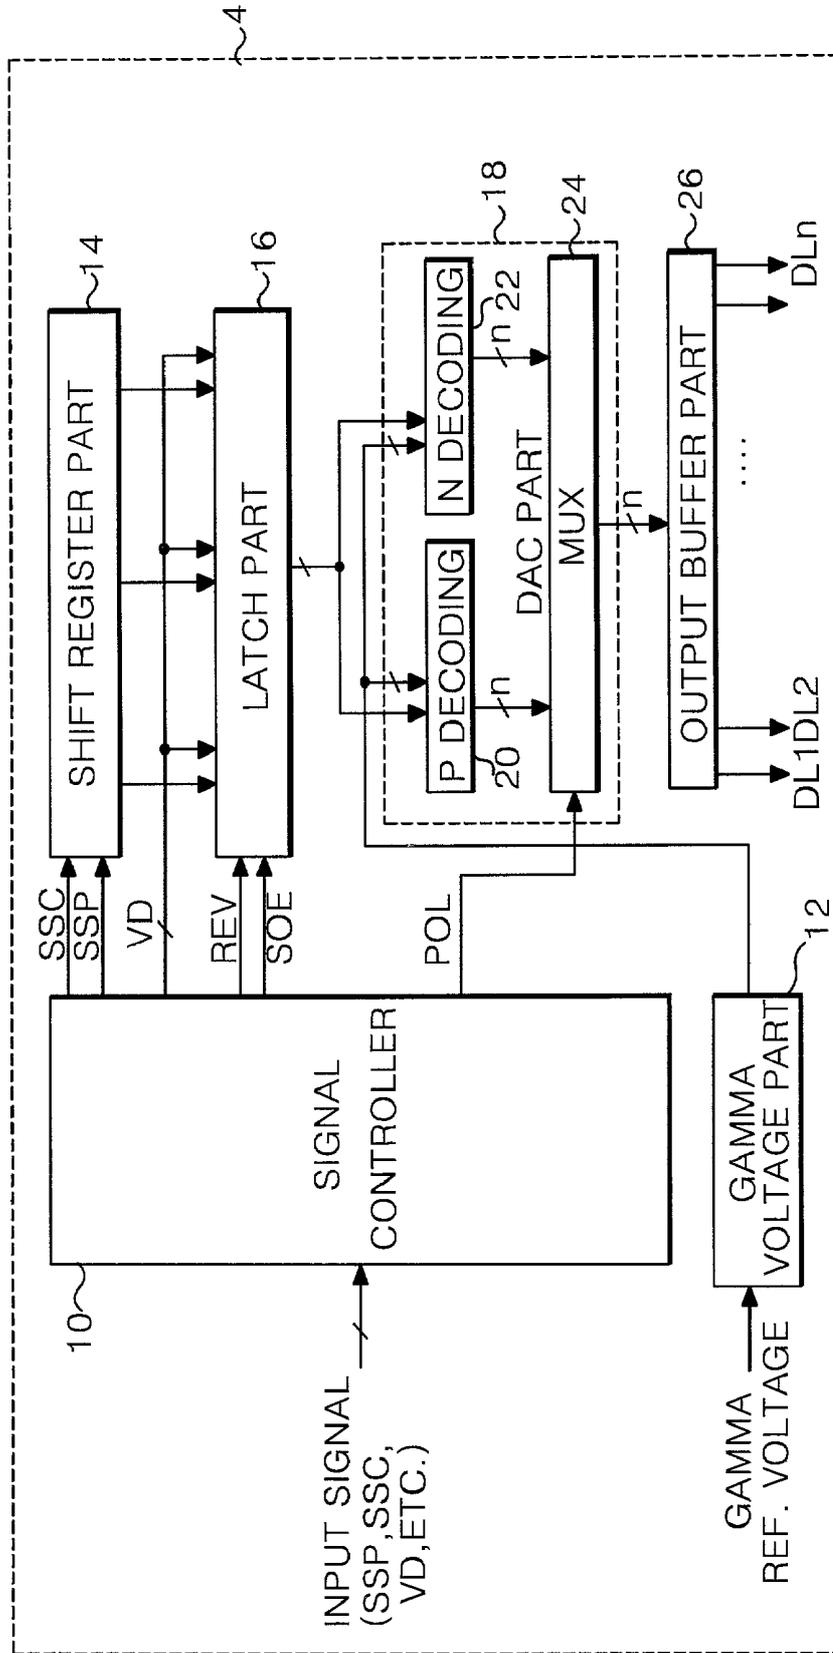


FIG. 3

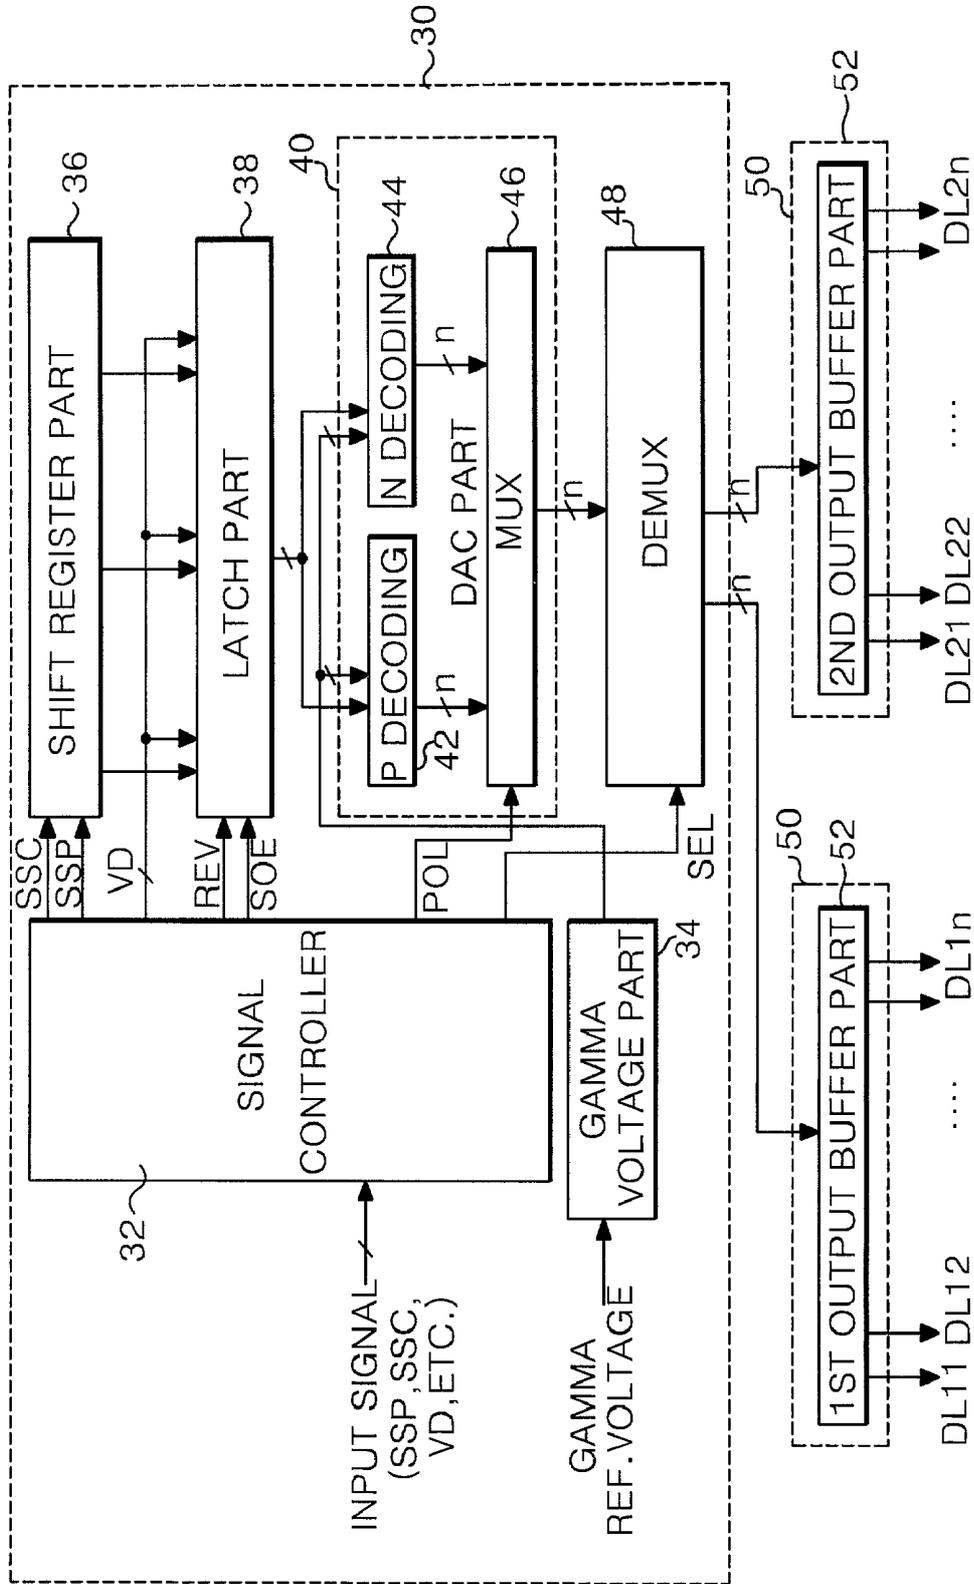


FIG. 4A

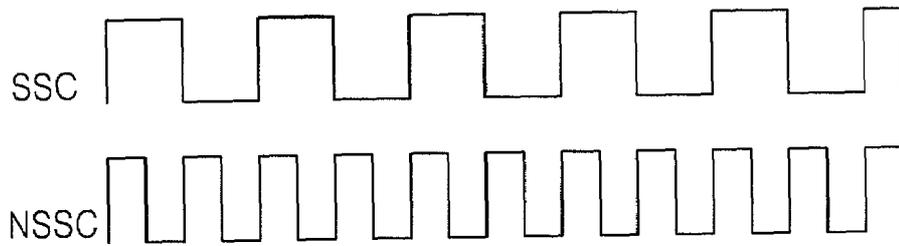


FIG. 4B

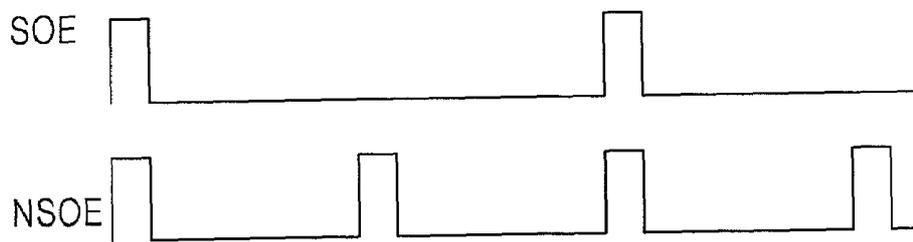


FIG. 4C


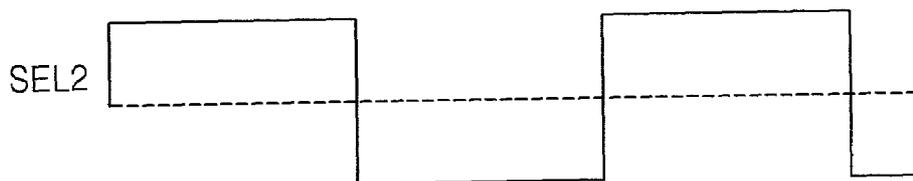


FIG. 5

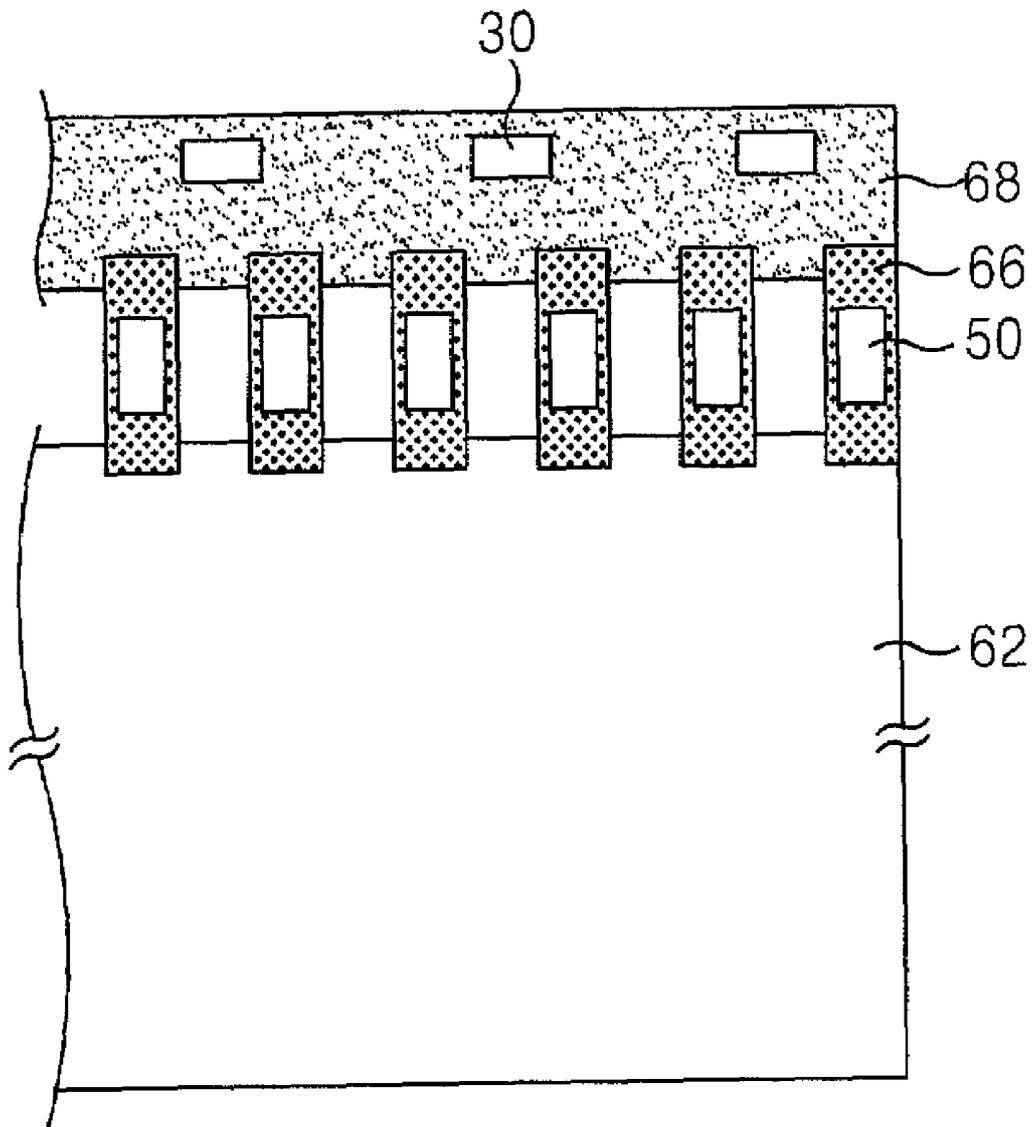

## DATA DRIVING APPARATUS AND METHOD FOR LIQUID CRYSTAL DISPLAY

This application claims the benefit of Korean Patent Application No. P2001-63207, filed in Korea on Oct. 13, 2001, which is hereby incorporated by reference.

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

This invention relates to a liquid crystal display, and more particularly to a data driving apparatus and method for a liquid crystal display wherein a digital to analog converter and an output buffer are separately integrated to dramatically reduce a loss caused by a poor tape carrier package. Also, the present invention is directed to a data driving apparatus and method for a liquid crystal display wherein a digital to analog converter is driven on a time division basis to reduce the number of integrated circuits for providing a digital to analog conversion function.

#### 2. Discussion of the Related Art

Generally, a liquid crystal display (LCD) controls a light transmittance of a liquid crystal using an electric field to display a picture. To this end, the LCD includes a liquid crystal display panel having liquid crystal cells arranged in a matrix, and a driving circuit for driving the liquid crystal display panel.

In the liquid crystal display panel, gate lines and data lines are arranged in such a manner as to cross each other. A liquid crystal cell is positioned at each intersection of the gate lines and the data lines. The liquid crystal display panel is provided with a pixel electrode and a common electrode for applying an electric field to each of the liquid crystal cells. Each pixel electrode is connected, via source and drain electrodes of a thin film transistor as a switching device, to any one of data lines. The gate electrode of the thin film transistor is connected to any one of the gate lines allowing a pixel voltage signal to be applied to the pixel electrodes for each one line.

The driving circuit includes a gate driver for driving the gate lines, a data driver for driving the data lines, and a common voltage generator for driving the common electrode. The gate driver sequentially applies a scanning signal to the gate lines to sequentially drive the liquid crystal cells on the liquid crystal display panel one line at a time. The data driver applies a data voltage signal to each of the data lines whenever the gate signal is applied to any one of the gate lines. The common voltage generator applies a common voltage signal to the common electrode. Accordingly, the LCD controls a light transmittance by an electric field applied between the pixel electrode and the common electrode in accordance with the data voltage signal for each liquid crystal cell, to thereby display a picture. Each of the data drivers and gate drivers is formed from an integrated circuit (IC) chip. They are mounted in a tape carrier package (TCP) and connected to the liquid crystal display panel by a tape automated bonding (TAB) system mainly.

FIG. 1 schematically shows a data driving block in a conventional LCD.

Referring to FIG. 1, the data driving block includes data driving ICs 4 connected, via TCPs 6, to a liquid crystal display panel 2, and a data printed circuit board (PCB) 8 connected, via the TCPs 6, to the data driving ICs 4.

The data PCB 8 receives various control signals from a timing controller (not shown), and data signals and driving voltage signals from a power generator (not shown) to interface them to the data driving ICs 4. Each of the TCPs

6 is electrically connected to a data pad provided at the upper portion of the liquid crystal display panel 2 and an output pad provided at each data PCB 8. The data driving ICs 4 convert digital pixel data into analog pixel signals to apply them to data lines.

To this end, as shown in FIG. 2, each of the data driving ICs 4 includes a shift register part 14 for applying a sequential sampling signal. A latch part 16 sequentially latches a pixel data VD in response to the sampling signal and outputs the pixel data VD at the same time. A digital to analog converter (DAC) 18 for converts the pixel data VD from the latch part 16 into a pixel signal. An output buffer part 26 buffers the pixel signal from the DAC 18 to output it. Further, the data driving ICs 4 each include a signal controller 10 for interfacing various control signals from a timing controller (not shown) and the pixel data VD. A gamma voltage part 12 supplies positive and negative gamma voltages required in the DAC 18. Each of the data driving ICs 4 drives n data lines DLI to DLn.

The signal controller 10 controls various control signals such as, for example, SSP, SSC, SOE, REV and POL, and the pixel data VD to output them to the corresponding elements. The gamma voltage part 12 sub-divides several gamma reference voltages from a gamma reference voltage generator (not shown) for each gray level and outputs the sub-divided gamma reference voltages.

Shift registers included in the shift register part 14 sequentially shift a source start pulse SSP from the signal controller 10 in response to source sampling clock signal SSC to output the source start pulse SSP as a sampling signal.

A plurality of n latches included in the latch part 16 sequentially sample the pixel data VD from the signal controller 10 in response to the sampling signal from the shift register part 14 to latch it. Subsequently, the n latches respond to a source output enable signal SOE from the signal controller 10 to output the latched pixel data VD at the same time. In this case, the latch part 16 restores the pixel data VD modulated in such a manner to have a reduced transition bit number in response to a data inversion selecting signal REV and then outputs the pixel data VD. This is because the pixel data VD, having a transition bit number going beyond a reference value, is supplied such that it is modulated to have a reduced transition bit number in order to minimize an electromagnetic interference (EMI) upon data transmission from the timing controller.

The DAC 18 converts the pixel data VD from the latch part 16 into positive and negative pixel signals at the same time and outputs the signals. To this end, the DAC 18 includes a positive (P) decoding part 20 and a negative (N) decoding part 22, each of which are commonly connected to the latch part 16, and a multiplexor (MUX) 24 for selecting output signals of the P and N decoding parts 20 and 22.

A plurality of n P decoders, which are included in the P decoding part 20, convert n pixel data simultaneously inputted from the latch part 16 into positive pixel signals with the aid of positive gamma voltages from the gamma voltage part 12. A plurality of n N decoders, which are included in the N decoding part 22, convert n pixel data simultaneously inputted from the latch part 16 into negative pixel signals with the aid of negative gamma voltages from the gamma voltage part 12. The multiplexor 24 responds to a polarity control signal POL from the signal controller 10 to selectively output the positive pixel signals from the P decoding part 20 or the negative pixel signals from the N decoding part 22.

A plurality of n output buffers included in the output buffer part 26 consist of voltage followers which are con-

nected to the n data lines DLI to DLn in series. These output buffers buffer the pixel signals from the DAC 18 and apply the signals to the data lines DLI to DLn.

As described above, each of the conventional data driving ICs 4 should have n latches and 2n decoders so as to drive n data lines DLI to DLn. As a result, the conventional data driving IC 4 has a disadvantage in that it has a complex configuration and a relatively high manufacturing cost.

Furthermore, each of the conventional data driving ICs 4 is attached to the TCP 6 in a single chip to adhered to the liquid crystal display panel 2 and the data PCB 8 as shown in FIG. 1. Accordingly, the TCP has a high probability of, for example, breaking or short-circuiting. Thus, a large loss in costs results since the data driving ICs 4 mounted in the TCP 6 also cannot be used when the TCP 6 breaks or short-circuits.

### SUMMARY OF THE INVENTION

Accordingly, the present invention is directed to a data driving apparatus and method for liquid crystal display that substantially obviate one or more of the problems due to limitations and disadvantages of the related art.

An object of the present invention is to provide a data driving apparatus and method for a liquid crystal display wherein a digital to analog converter and an output buffer are separately integrated to dramatically reduce loss caused by a poor tape carrier package.

Another object of the present invention is to provide a data driving apparatus and method for a liquid crystal display wherein a digital to analog converter is driven on a time division basis to reduce the number of integrated circuits for providing a digital to analog conversion function.

Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, the data driving apparatus for a liquid crystal display includes: a plurality of output buffer integrated circuits for buffering a plurality of pixel signals and outputting the plurality of pixel signals to a plurality of data lines; a plurality of digital to analog converter integrated circuits, each of which are commonly connected to input terminals of at least two of the plurality of output buffer integrated circuits, for converting input pixel data to the plurality of pixel signals and selectively outputting the plurality of pixel signals to the at least two output buffer integrated circuits; and timing control means for controlling the plurality of digital to analog converter integrated circuits and making a time division of the pixel data into at least two regions to sequentially supply the pixel data to the plurality of data lines.

A data driving apparatus for a liquid crystal display according to another aspect of the present invention includes: a plurality of output buffer integrated circuits for buffering a plurality of pixel signals and outputting the plurality of pixel signals to a plurality of data lines; and a plurality of digital to analog converter integrated circuits, each of which are commonly connected to input terminals of at least two of the plurality of output buffer integrated circuits, for converting input pixel data to the plurality of

pixel signals and outputting the plurality of pixel signals to the at least two output buffer integrated circuits in a time division of the pixel signals.

In another aspect, a method of driving a data driving apparatus for driving a plurality of data lines arranged at a liquid crystal display panel, wherein the driving apparatus includes a plurality of output buffer integrated circuits connected to the plurality of data lines, and a plurality of digital to analog converter integrated circuits commonly connected to input terminals of at least two of the plurality of output buffer integrated circuits, includes: making a time division of pixel data to be supplied to each of the plurality of digital to analog converter integrated circuits into at least two regions; converting the pixel data into analog pixel signals; and selectively applying the converted pixel signals to the at least two output buffer integrated circuits and to the plurality of data lines.

A method of driving a data driving apparatus for a liquid crystal display panel display according to another aspect of the present invention includes: converting at least two pixel data into analog pixel data, and outputting the converted pixel signals to at least two output buffer integrated circuits in a time division of the pixel signals.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

FIG. 1 is a schematic view showing a data driving block in a conventional liquid crystal display.

FIG. 2 is a block diagram showing a configuration of the data driving integrated circuit in FIG. 1.

FIG. 3 is a block diagram showing a configuration of a data driver in a liquid crystal display according to an embodiment of the present invention.

FIG. 4A and FIG. 4B are comparative waveform diagrams of driving signals of the latch part shown in FIG. 2 and the latch part shown in FIG. 3, and FIG. 4C is a waveform diagram of a driving signal of the demultiplexor shown in FIG. 3.

FIG. 5 is a schematic view showing a data driving block in the liquid crystal display including the data driver shown in FIG. 3.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

FIG. 3 is a block diagram showing a configuration of a data driving apparatus for a liquid crystal display according to an embodiment of the present invention.

Referring to FIG. 3, the data driving apparatus is largely divided into DAC means having a digital to analog conversion function and buffer means having an output buffering function, which are integrated into a separated chip. In other words, the data driving apparatus has a DAC IC 30 and at least two output buffer ICs 50 configured separately. Particularly, the DAC IC 30 is divided into at least two regions

on a time basis such that the at least two output buffer ICs **50** are commonly connected to a single DAC IC **30** for driving, to thereby provide a DAC function.

Hereinafter, a case where two output buffer ICs **50** are commonly connected to a single DAC IC **30** will be described as an example.

The DAC IC **30** includes a shift register part **36** for applying a sequential sampling signal. A latch part **38** sequentially latches a pixel data VD in response to the sampling signal and outputs the pixel data VD at the same time. A digital to analog converter (DAC) **40** converts the pixel data VD from the latch part **38** into a pixel signal. A demultiplexer **48** sequentially applies the pixel signal from the DAC **40** to the two output buffer ICs **50**. Furthermore, the DAC IC **30** includes a signal controller **32** for interfacing various control signals from a timing controller (not shown) and the pixel data VD. A gamma voltage part **34** supplies positive and negative gamma voltages required in the DAC **40**. Each DAC IC **30** is driven on a time division basis to sequentially output pixel signals to be applied to 2n data lines DL11 to DL1n and DL21 to DL2n n by n.

In order to permit the DAC IC **30** to drive twice the number of data lines as compared to the number of data lines in the conventional data driving IC, driving signals have frequencies that are twice those of the conventional data driving IC.

The signal controller **32** controls various control signals such as, for example, SSP, SSC, SOE, REV, and POL, from a timing controller and the pixel data VD to output them to the corresponding elements. In this case, the timing controller allows the various control signals and the pixel data VD to have a frequency twice that of the prior art. Particularly, the timing controller makes a time division of 2n pixel data VD corresponding to the 2n data lines DL11 to DL1n and DL21 to DL2n into two regions to sequentially supply them n by n.

The gamma voltage part **34** sub-divides a plurality of gamma reference voltages from a gamma reference voltage generator (not shown) for each gray level and outputs the sub-divided gamma reference voltages.

Shift registers included in the shift register part **36** sequentially shift a source start pulse SSP from the signal controller **32** in response to a source sampling clock signal SSC to output the source start pulse SSP as a sampling signal. In this case, the shift register part **36** responds to the source start pulse SSP and the source sampling clock signal SSC each having a frequency doubled to output a sampling signal at twice the speed in comparison to the prior art.

A plurality of n latches included in the latch part **38** sequentially sample the pixel data VD from the signal controller **32** in response to the sampling signal from the shift register part **36** to latch it. Subsequently, the n latches respond to a source output enable signal SOE from the signal controller **32** to output the latched pixel data VD at the same time. In this case, the latches restore the pixel data VD modulated in such a manner as to have a reduced transition bit number in response to a data inversion selecting signal REV and then output the pixel data VD. This is because the pixel data VD, having a transition bit number going beyond a reference value, is supplied such that it is modulated to have a reduced transition bit number in order to minimize an electromagnetic interference (EMI) upon data transmission from the timing controller.

Herein, the source sampling clock signal SSC and the source output enable signal SOE applied to the shift register part **36** and the latch part **38** have twice frequency of the "SSC" and "SOE" applied to the conventional shift register

part **14** and latch part **16** shown in FIG. 2, as indicated by "NSSC" and "NSOE" in FIG. 4A and FIG. 4B, respectively.

The DAC **40** converts the pixel data VD from the latch part **38** into positive and negative pixel signals at the same time and outputs the signals. To this end, the DAC **40** includes a positive (P) decoding part **42** and a negative (N) decoding part **44**, each of which are commonly connected to the latch part **38**, and a multiplexer (MUX) **46** for selecting output signals of the P and N decoding parts **42** and **44**.

A plurality of n P decoders, which are included in the P decoding part **42**, convert n pixel data simultaneously inputted from the latch part **38** into positive pixel signals with the aid of positive gamma voltages from the gamma voltage part **34**. A plurality of n N decoders, which are included in the N decoding part **44**, convert n pixel data simultaneously inputted from the latch part **38** into negative pixel signals with the aid of negative gamma voltages from the gamma voltage part **34**. The multiplexer **46** responds to a polarity control signal POL from the signal controller **32** to selectively output the positive pixel signals from the P decoding part **42** or the negative pixel signals from the N decoding part **44**. The DAC **40** converts the pixel data into pixel signals n by n at a speed twice that of the conventional DAC **18**, to thereby convert the 2n pixel data into pixel signals.

The demultiplexer **48** outputs n pixel signals from the multiplexer **46** to the first output buffer IC **50** or the second output buffer IC **50** in response to a selection control signal SEL inputted from the signal controller **32** as shown in FIG. 4C. The selection control signal SEL has an inverted logical value every period of the source output enable signal SOE applied to the latch part **38**, thereby allowing each of the n pixel signals to sequentially be output to the first output buffer IC **50** and the second output buffer IC **50**.

Each of the first and second output buffer ICs **50** includes an output buffer part **52** for buffering pixel signals from the DAC IC **30** to output them to the n data lines DL11 to DL1n or DL21 to DL2n. n output buffers included in each output buffer part **52** consist of voltage followers which are connected to the n data lines DL11 to DL1n or DL21 to DL2n in series. These output buffers make a buffering of the pixel signals from the DAC **18** and apply them to the data lines DL11 to DL1n or DL21 to DL2n.

As shown in FIG. 5, the DAC ICs **30** are mounted in a data PCB **68** while the output buffer ICs **50** are mounted in a TCP **66**. The data PCB **68** sends various control signals from a timing controller (not shown) and data signals to the DAC ICs **30**, and sends pixel signals from the DAC ICs **30** to the output buffer ICs **50** via the TCP **66**. The TCP **66** is electrically connected to data pads provided at the upper portion of a liquid crystal display panel **62** and output pads provided at the PCB **68**. As described above, the simply configured output buffer ICs **50**, having only a buffering function, are mounted in the TCP **66**, so that only the output buffer ICs **50** are damaged when the TCP **66** is damaged. As a result, the large loss in costs resulting from an inability to use the expensive data driving ICs caused by a damaged TCP **66** in the prior art can be reduced dramatically. Furthermore, the DAC IC **30** is divided on a time basis to sequentially apply the pixel signals to at least two output buffer ICs **50** n by n. Accordingly, the number of DAC ICs **30** is reduced to 1/2 in comparison to prior art arrangements, so that it becomes possible to reduce the manufacturing cost.

As described above, according to the present invention, the DAC means and the output buffering means are integrated into a separate chip to thereby mount only the simply

configured output buffer ICs in the TCP having a high probability of breaking or short-circuiting. Accordingly, it is possible to dramatically reduce loss resulted from the inability to use the expensive data driver ICs due to a damaged TCP in prior art arrangements.

Moreover, according to the present invention, the DAC IC is driven on a time division basis with the aid of driving signals having higher frequencies to thereby commonly connect a single DAC IC to at least two output buffer ICs, so that it becomes possible to reduce the number of DAC ICs and thus the manufacturing cost.

It will be apparent to those skilled in the art that various modifications and variations can be made in the data driving apparatus and method for liquid crystal display of the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A data driving apparatus for a liquid crystal display, comprising:

a plurality of output buffer integrated circuits, each of the output buffer integrated circuits simultaneously buffering a plurality of pixel signals and outputting the plurality of pixel signals to a plurality of data lines;

a plurality of digital to analog converter integrated circuits, each of which are connected to input terminals of at least two of the plurality of output buffer integrated circuits, converting input pixel data into the plurality of pixel signals and selectively outputting the plurality of pixel signals to one of the at least two output buffer integrated circuits; and

timing control means for controlling the plurality of digital to analog converter integrated circuits and making a time division of the input pixel data into at least two regions to sequentially supply the pixel data to the plurality of data lines.

2. The data driving apparatus according to claim 1, wherein the plurality of digital to analog converter integrated circuits are mounted in a printed circuit board connected to the timing control means, and each of the plurality of output buffer integrated circuits is mounted in a tape carrier package electrically connected between the printed circuit board and a liquid crystal display panel at which the plurality of data lines are arranged.

3. The data driving apparatus according to claim 1, wherein each of the plurality of digital to analog converter integrated circuits includes:

shift register means for sequentially outputting a sampling signal under control of the timing control means;

latch means for responding to the control of the timing control means and the sampling signal to sequentially latch pixel data inputted from the timing control means and to output the latched pixel data at the same time; digital to analog converting means for converting the pixel data into positive and negative pixel signals using input gamma voltages to output the pixel signals responding to a polarity control signal from the timing control means; and

a demultiplexor for responding to a selection control signal from the timing control means to selectively output the pixel signals from the digital to analog converting means to the at least two output buffer integrated circuits.

4. The data driving apparatus according to claim 3, wherein each of the plurality of digital to analog converter integrated circuits further includes:

a signal controller for interfacing various control signals from the timing control means and the pixel data to apply the control signals to the shift register means, the latch means, the digital to analog converting means and the demultiplexor; and

gamma voltage means for sub-dividing an input gamma reference voltage to generate gamma voltages.

5. The data driving apparatus according to claim 3, wherein the timing control means inverts a logical state of the selection control signal every period of an output enable signal controlling an output of the latching means, thereby allowing the pixel signals to be sequentially applied to the at least two output buffer integrated circuits.

6. The data driving apparatus according to claim 1, wherein each of the output buffer integrated circuits outputs the pixel signals to n data lines, n being a positive integer greater than one, and each of the digital to analog converter integrated circuits converts the pixel data into the pixel signals n-by-n and outputs the converted pixel signals to one of the at least two output buffer integrated circuits n-by-n.

7. A data driving apparatus for a liquid crystal display, comprising:

a plurality of output buffer integrated circuits, each output buffer integrated circuit simultaneously buffering a plurality of pixel signals and outputting the plurality of pixel signals to a plurality of data lines; and

a plurality of digital to analog converter integrated circuits, each of which are connected to input terminals of at least two of the plurality of output buffer integrated circuits, converting input pixel data into the plurality of pixel signals and outputting the plurality of pixel signals to one of the at least two output buffer integrated circuits based on a time division of the pixel signals, such that the buffered pixel signals from each of the output buffer integrated circuits are applied sequentially to the plurality of data lines.

8. The data driving apparatus according to claim 7, further comprising timing control means for controlling the plurality of digital to analog converter integrated circuits and making the time division of the input pixel data into at least two regions to sequentially supply the pixel data to the plurality of data lines.

9. The data driving apparatus according to claim 7, wherein each of the output buffer integrated circuits outputs the pixel signals to n data lines, n being a positive integer greater than one, and each of the digital to analog converter integrated circuits converts the pixel data into the pixel signals n-by-n and outputs the converted pixel signals to one of the at least two output buffer integrated circuits n-by-n.

10. A method of driving a data driving apparatus for driving a plurality of data lines arranged at a liquid crystal display panel wherein the driving apparatus includes a plurality of output buffer integrated circuits, each of the output buffer integrated circuits connected to more than one of the plurality of data lines, and a plurality of digital to analog converter integrated circuits commonly connected to input terminals of at least two of the plurality of output buffer integrated circuits, the method comprising:

making a time division of pixel data to be supplied to each of the plurality of digital to analog converter integrated circuits into at least two regions;

converting the pixel data into analog pixel signals;

9

selectively applying the converted pixel signals to one of the at least two output buffer integrated circuits based on the time division of the pixel data; and applying the buffered pixel signals from each of the output buffer integrated circuits sequentially to the plurality of data lines. 5

11. The method according to claim 10, wherein the step of converting the pixel data into the pixel signals includes: generating a sequential sampling signal; responding to the sampling signal to sequentially sample 10 and latch the pixel data; converting the pixel data into a plurality of positive and negative pixel signals using gamma voltages; and

10

selecting any one of the plurality of positive and negative pixel signals to output the pixel signals.

12. The method according to claim 10, wherein each of the output buffer integrated circuits connects to n data lines, n being a positive integer greater than one, the pixel data are converted into the pixel signals n-by-n, the converted pixel signals are outputted to one of the at least two output buffer integrated circuits n-by-n, and the buffered pixel signals are outputted to the data lines sequentially from one of the at least two output buffer integrated circuits n-by-n.

\* \* \* \* \*

专利名称(译)	用于液晶显示器的数据驱动装置和方法		
公开(公告)号	<a href="#">US7180499</a>	公开(公告)日	2007-02-20
申请号	US10/125542	申请日	2002-04-19
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG.飞利浦液晶CO., LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO., LTD.		
[标]发明人	LEE SEOK WOO CHOI SU KYUNG		
发明人	LEE, SEOK WOO CHOI, SU KYUNG		
IPC分类号	G09G3/36 G02F1/1345 G02F1/133 G09G3/20		
CPC分类号	G09G3/2011 G09G3/3688 G09G3/3614 G09G2310/0297 G09G2310/027		
优先权	1020010063207 2001-10-13 KR		
其他公开文献	US20030071778A1		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

一种用于液晶显示器的数据驱动装置，包括多个输出缓冲器集成电路，用于缓冲多个像素信号并将多个像素信号输出到多个数据线；多个数模转换器集成电路，每个集成电路共同连接到多个输出缓冲器集成电路中的至少两个输入端的输入端，用于将输入像素数据转换为多个像素信号并选择性地输出多个像素向至少两个输出缓冲器集成电路发信号；时序控制装置，用于控制多个数模转换器集成电路，并将像素数据时分为至少两个区域，以顺序地将像素数据提供给多条数据线。

