



(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2003/0156404 A1**

Lee

(43) **Pub. Date:**

Aug. 21, 2003

(54) **BACKLIGHT ASSEMBLY AND LIQUID CRYSTAL DISPLAY DEVICE USING THEREOF**

(30) **Foreign Application Priority Data**

Apr. 9, 2001 (KR)..... 2001-18706

Publication Classification

(76) **Inventor: Hea-Chun Lee, Suwon-si (KR)**

(51) **Int. Cl.⁷ G02F 1/13357**

(52) **U.S. Cl. 362/31; 349/65**

Correspondence Address:
McGuireWoods LLP
Suite 1800
1750 Tysons Boulevard
McLean, VA 22102 (US)

(57) **ABSTRACT**

Disclosed are a backlight for providing an enhanced brightness of light with a lower consumption of electricity and a liquid crystal display device using thereof. A light guide plate has brightness enhancing recesses formed on a bottom surface thereof and light collecting grooves formed on an upper surface thereof. The brightness enhancing recesses efficiently reflect the light having different directions and the light collecting grooves collect the light reflected by the brightness enhancing recesses. A loss of the light generated by a lamp may be minimized, resulting in enhancing the brightness of the light. Thus, the consumption of the electricity can be greatly reduced.

(21) **Appl. No.: 10/393,270**

(22) **Filed: Mar. 21, 2003**

Related U.S. Application Data

(63) **Continuation of application No. 09/859,801, filed on May 18, 2001.**

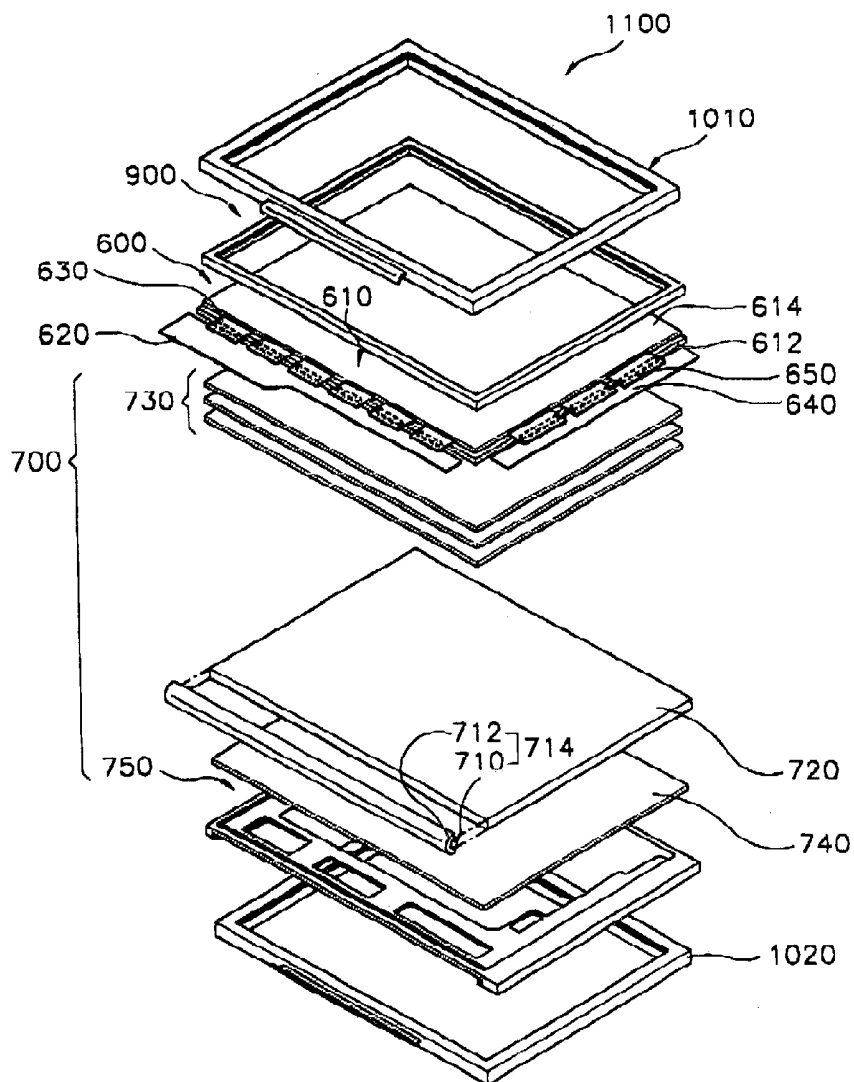


FIG. 1

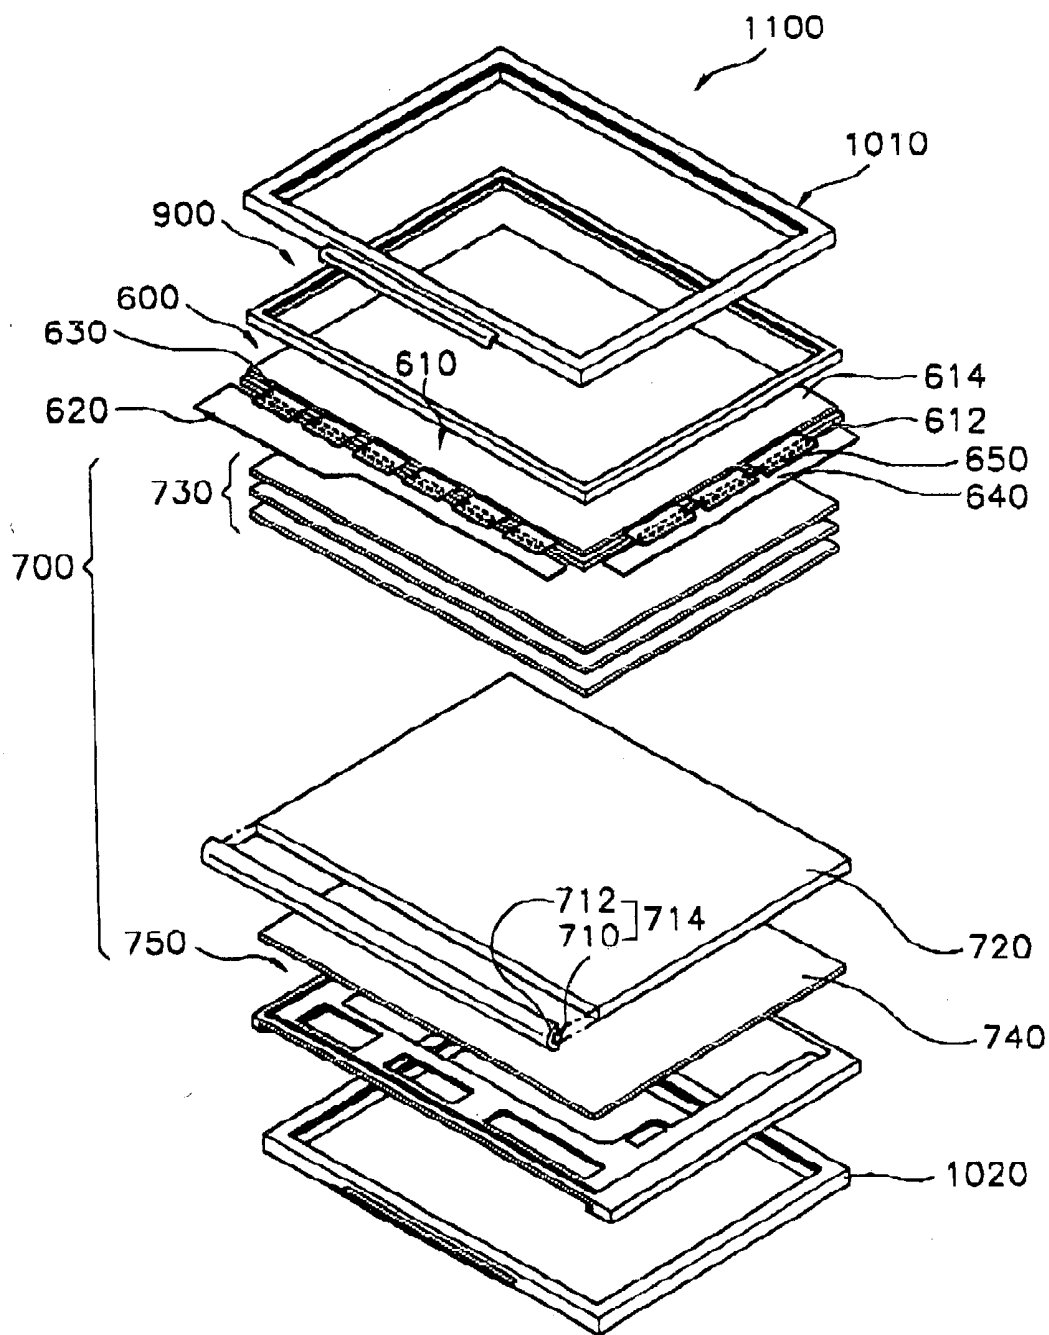


FIG. 2

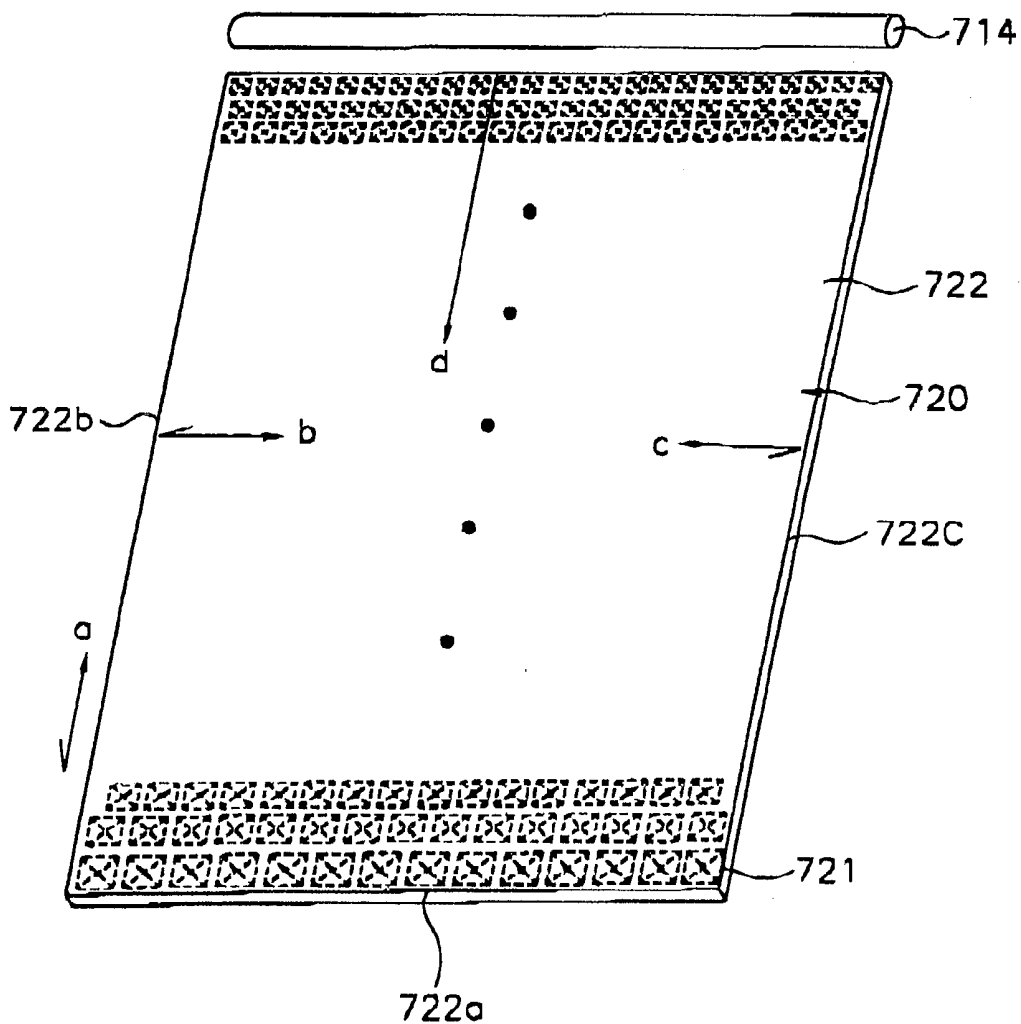


FIG. 3

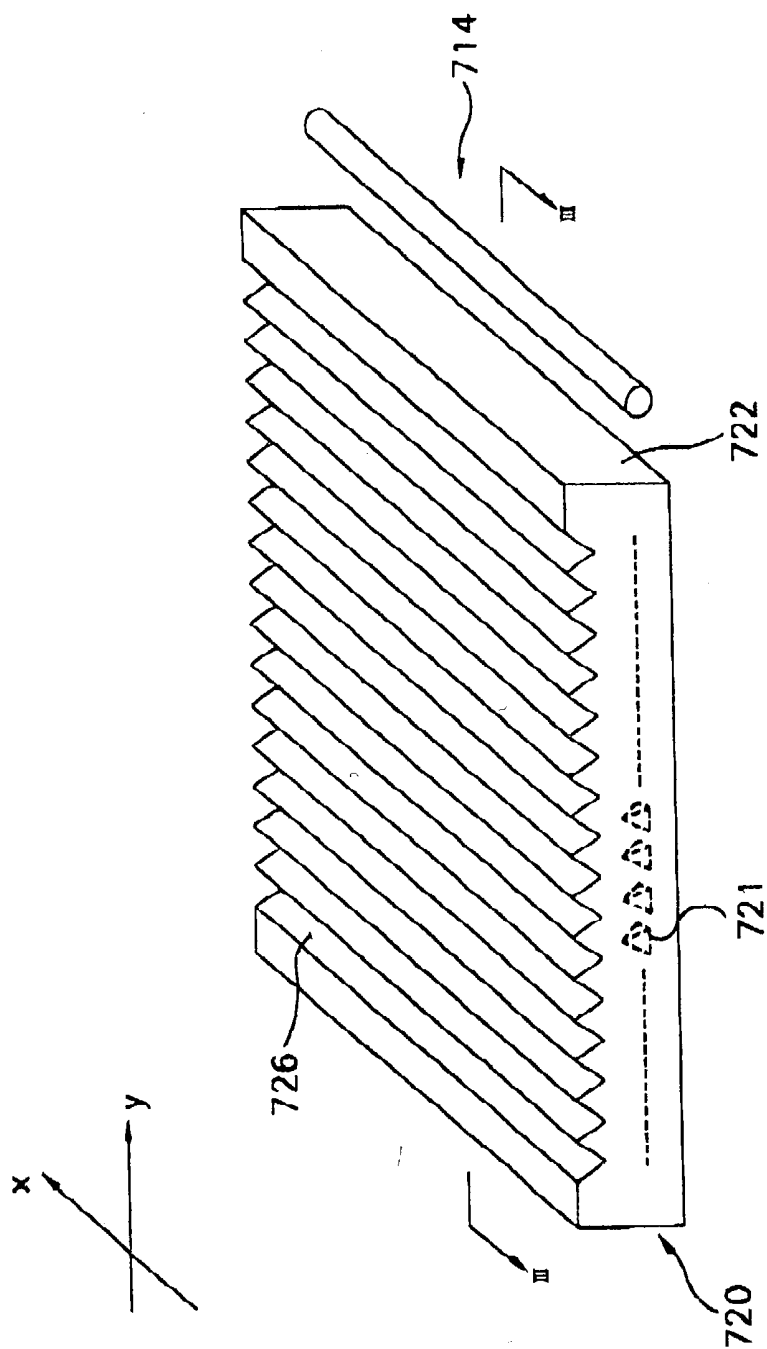


FIG. 4

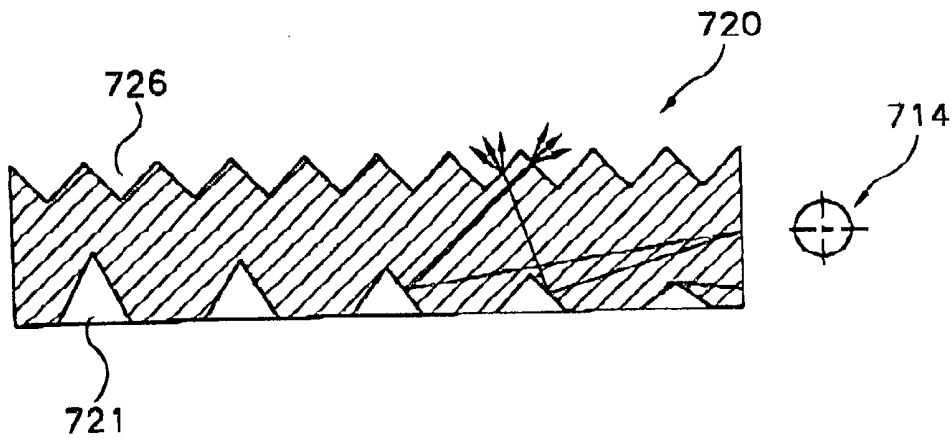


FIG. 5


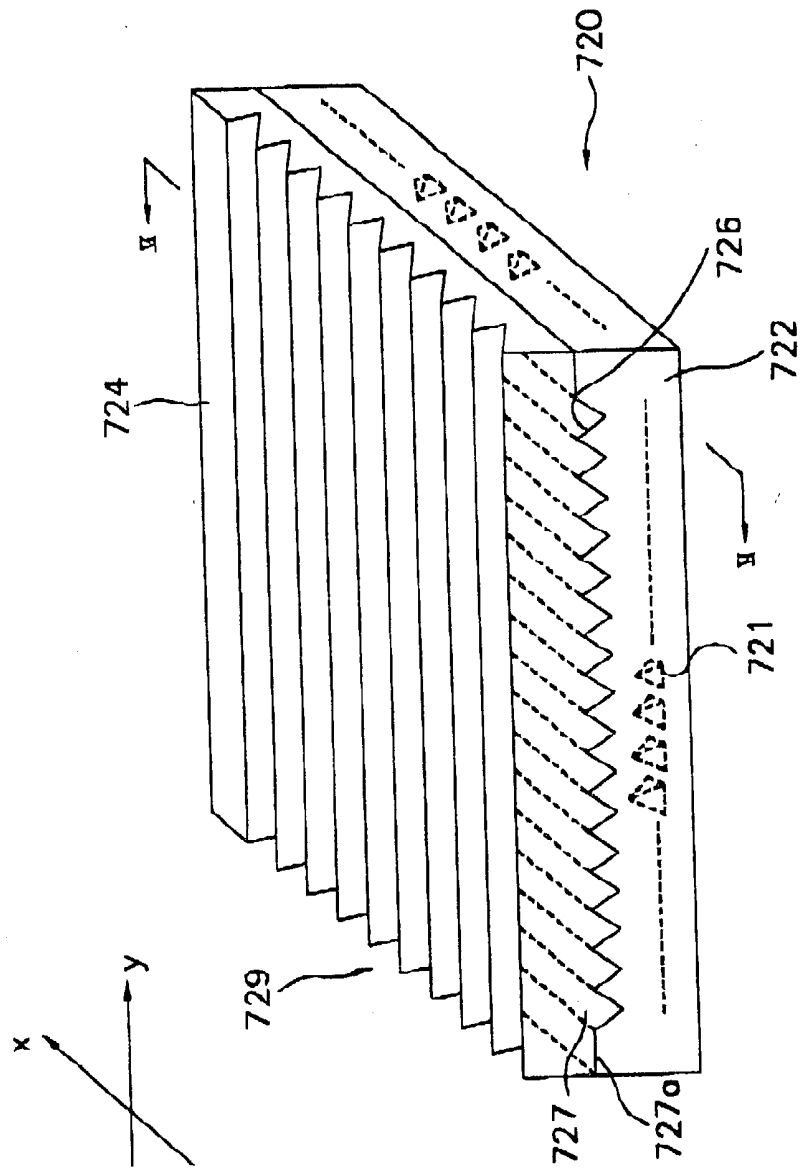


FIG. 6

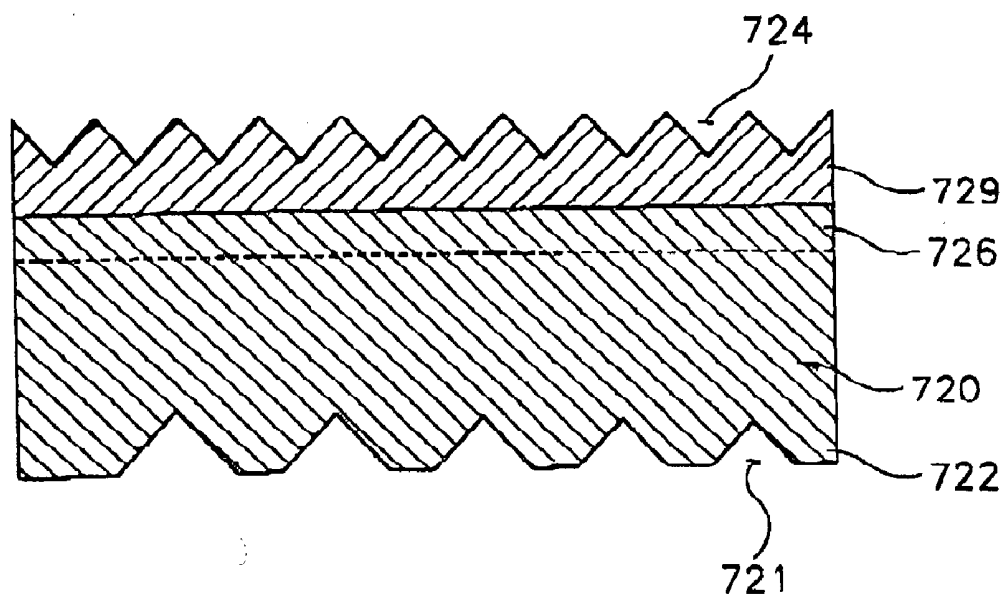

BACKLIGHT ASSEMBLY AND LIQUID CRYSTAL DISPLAY DEVICE USING THEREOF

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a liquid crystal display device, and more particularly to a backlight assembly for increasing a usage efficiency of light generated by a lamp to enhance brightness of light with a lower consumption of electricity and a liquid crystal display device using thereof.

[0003] 2. Description of the Related Art

[0004] In generally, In the liquid crystal display device, a thin film transistor substrate is provided in which a desired voltage is selectively applied to divided regions thereof having a fine area respectively and a color filter substrate is disposed in which a regular voltage is applied to a whole area thereof. Liquid crystal is introduced between the thin film transistor substrate and the color filter substrate of which a permeability of light is changed with depending on a change of an electric filed between the thin film transistor substrate and the color filter substrate. The voltage corresponding to image data is selectively applied to the divided regions of the thin film transistor substrate in order for the liquid crystal display device to display the images.

[0005] The liquid crystal is an element that does not radiate but receive the light, which carries out changing only the permeability of the light according to the change of the electric field between the thin film transistor substrate and the color filter substrate.

[0006] It means that the light is required to display the images with correspondence to the image data provided for the liquid crystal display device

[0007] The light required to display the images in the liquid crystal display device is supplied by a natural light source such as sunlight or an artificial light source using electric energy.

[0008] When displaying the images is performed by using the natural light source, the liquid crystal display device is light in weight and small in size as a separate device using the electric energy is unnecessary for generating the light. In this case, however, there is a disadvantage in that the liquid crystal display device cannot display the images in the dark.

[0009] While it is performed to display the images by using the artificial light source, the liquid crystal display device can display the images anywhere regardless of darkness and brightness. In this case, however, there are disadvantages in that a consumption of electricity increases and the light crystal display device is heavy in weight and large in size.

[0010] Especially, when it is taken in consideration that the liquid crystal display device is made for a portable usage, the consumption of the electricity in the liquid crystal display device using the artificial light source is very important. In recent, accordingly, researches have been performed to reduce the consumption of the electricity in the liquid crystal display device even though the artificial light source is adopted to the liquid crystal display device.

[0011] Recently, it tends to improve a brightness of the light and a uniformity of the brightness of the light by forming V-shaped grooves or printing reflection dots on a bottom surface of the light guide plate that converts a line light source type of light into a surface light source type of light and changes a pathway of the light emitted from the lamp.

[0012] When the brightness of the light is improved and the consumption of the electricity is reduced in the liquid crystal display device in such a manner as described above, the efficiency of the light is deteriorated and it is more difficult to further reduce the electricity consumption. Accordingly, it is required for a backlight assembly capable of increasing a usage efficiency of light generated by a lamp to enhance brightness of light with a lower consumption of electricity.

SUMMARY OF THE INVENTION

[0013] The present invention has been made to solve the aforementioned problem, and accordingly it is the object of the present invention to provide a backlight assembly for increasing a usage efficiency of light generated by a lamp to enhance brightness of light with a lower consumption of electricity.

[0014] It is another object of the present invention to provide a liquid crystal display device having the backlight assembly for increasing a usage efficiency of light generated by a lamp to enhance brightness of light with a lower consumption of electricity.

[0015] In order to achieve the first object of the present invention, a backlight assembly comprising, a lamp assembly for generating and emitting light in a first direction, and a first light guide plate for enhancing a brightness of the light, the light guide plate including a body for guiding the light transmitted from the lamp assembly, which has at least one brightness enhancing groove that is formed on a bottom surface thereof and has a polyhedron horn shape.

[0016] In order to achieve the second object of the present invention, a liquid crystal display device comprising, a liquid crystal display panel assembly for controlling liquid crystal precisely to display an image and a backlight assembly including a lamp assembly for generating and emitting light in a first direction, a light guide plate for guiding the light provided from the lamp assembly, which has a plurality of the recess for enhancing a brightness of the light formed in a polyhedron horn shape on a bottom surface thereof, optical sheets for transmitting the light out of the light guide plate and a receptacle for receiving the lamp assembly, the light guide plate and the optical sheets, the receptacle being combined with the liquid crystal display panel assembly.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The above and other objects and advantages of the present invention will become readily apparent by reference to the following detailed description when considered in conjunction with the accompanying drawings wherein:

[0018] **FIG. 1** is an exploded perspective view showing a liquid crystal display device according to an embodiment of the present invention;

[0019] **FIG. 2** is a plan view showing a light guide plate capable of enhancing a brightness of light according to the embodiment of the present invention;

[0020] FIG. 3 is a perspective view showing the light guide plate and a lamp according to the embodiment of the present invention;

[0021] FIG. 4 is a sectional view showing the light guide plate and the lamp according to the embodiment of the present invention, taken along the line III-III in FIG. 3;

[0022] FIG. 5 is a perspective view showing a light guide plate for enhancing a brightness of light and a light guide plate for collecting the light according to the other embodiment of the present invention; and

[0023] FIG. 8 is a sectional view showing the light guide plate for enhancing a brightness of the light and the light guide plate for collecting the light according to the other embodiment of the present invention, taken along the line VI-VI in FIG. 5.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0024] Hereinafter, a backlight assembly and a liquid crystal display device using thereof according to preferred embodiment of the present invention will be described in detail with reference to the accompanying drawings.

[0025] FIG. 1 is an exploded perspective view showing a liquid crystal display device according to an embodiment of the present invention.

[0026] Referring to FIG. 1, the liquid crystal display device 1100 generally includes a front case 1010 and a rear case 1020, a top chassis 900, a liquid crystal display panel assembly 600 and a backlight assembly 700.

[0027] Firstly, the liquid crystal display panel assembly 600 comprises a thin film transistor substrate 612, a color filter substrate 614, liquid crystals (not shown) and units 620, 630, 640 and 650 for operating the liquid crystal display panel.

[0028] Particularly, the thin film transistor substrate 612 is a transparent glass substrate on which thin film transistors respectively having gate electrodes, source electrodes and drain electrodes are formed in matrix by a process of fabricating semiconductors.

[0029] In the process of fabricating semiconductors, the gate electrodes of the thin film transistors in a column are commonly connected to conductive gate lines and the source electrodes of the thin film transistors in a row are commonly connected to conductive data lines. Pixel electrodes, which are made of a transparent and conductive material such as Indium Tin Oxide, are respectively formed on the drain electrodes of all thin film transistors.

[0030] With the construction of the thin film transistor substrate 612 as described above, a desired voltage can be selectively applied to divided regions in a fine area unit as electric signals are provided for the data lines and the gate lines in time.

[0031] Meanwhile, the color filter substrate 614 is provided so as to face to the thin film transistor substrate 612.

[0032] Particularly, RGB pixels are formed on the transparent glass substrate by the process of fabricating the semiconductors and common Electrodes are formed on transparent glass substrate after formed RGB pixels. The

color filter substrate 614 has RGB pixels arranged regularly thereon to be corresponding to the pixel electrodes that are formed on the thin film transistor substrate 612.

[0033] Since the predetermined voltage is applied to the common electrodes, a difference of electric field is presented between the pixel electrodes and the common electrodes according to the voltage applied to the respective pixel electrode.

[0034] After the thin film transistor substrate 612 is aligned with the color filter substrate 614 so as to change a permeability of the light depending on the difference of the electric field, the liquid crystals are introduced between the thin film transistor substrate 612 and the color filter substrate 614. Then, the thin film transistor substrate 612 and the color filter substrate 614 are sealed.

[0035] In order to selectively apply the desired voltage to the respective pixel electrode arranged in matrix, on the other hand, an output terminal of a flexible printed circuit 650 is mounted through an anisotropic conductive film to the gate lines and an input terminal of the flexible printed circuit 650 is connected to a gate printed circuit board 640.

[0036] An output terminal of a flexible printed circuit 630 also is mounted through the anisotropic conductive film to the data lines and an input terminal of the flexible printed circuit 630 is connected to a data printed circuit board 620.

[0037] Here, the flexible printed circuits 650 and 630, the gate printed circuit board 640 and the data printed circuit board 620 functions as the unit for operating the liquid crystal display panel.

[0038] Even though the liquid crystal display panel assembly 600 constructed as described above operates precisely a desired display characteristic cannot be accomplished when the light is not transmitted from an outside or the light has no sufficient brightness.

[0039] In the present invention, the backlight assembly 700 is utilized to provide the light for the liquid crystal display panel 600.

[0040] The backlight assembly 700 generally includes optical sheets 730, a lamp assembly 714, a light guide plate 720, a light reflection plate 740 and a receptacle 750.

[0041] The lamp assembly 714 has a lamp 710, a lamp cover 712 and an electric line (not shown). A cold cathode fluorescent tube (CCFT) type of lamp as an example is used as the lamp 710. The light emitted radially from the CCFT type of the lamp 710 is collected in a first direction and transmitted to the light guide plate 720 by means of the lamp cover 712.

[0042] As the light emitted the first direction from the lamp assembly 714 has a line light shape, a brightness of the light is partially changed when the light in the line light shape reaches a surface having a predetermined area immediately.

[0043] To prevent the change of the brightness of the light, the line light source type of the light must be converted into a surface light source type of the light while a pathway for transmitting the light also must be changed. The light guide plate 720 for enhancing the brightness of the light is used to change the pathway and the formation of the surface source type light.

[0044] **FIG. 2** is a plan view of showing the light guide plate **720** for enhancing the brightness of the light according to the one embodiment of the present invention.

[0045] The light guide plate **720** for enhancing the brightness of the light includes a body **722** having a brightness enhancing recesses **721**.

[0046] The body **722** of the light guide plate **720** is a plate having a rectangular hexahedron shape and a uniform thickness or a wedge type of plate of which a thickness is gradually reduced from a first end to a second end which is opposite to the first end.

[0047] Hereinafter, a principle of enhancing the brightness of the light by means of the recesses **721** will be described as follows.

[0048] Firstly, when the light emitted from the lamp assembly **714** is incident into the body **722** of the light guide plate **720**, the light proceeds along pathways a, b, c and d as shown in **FIG. 2**.

[0049] Particularly, the light proceeds along the pathway a when the light is incident into the body **722** and reflected by a surface **722a** of the body **722** of the light guide plate **720**. The light proceeds along the pathway b when the light is incident into the body **722** and reflected by a side surface **722b** of the body **722**. When the light is incident into the body **722** and reflected by the other side surface **722c**, the light proceeds along the pathway c. The light is normally transmitted into the body **722** after being incident into the light guide plate **720** and then proceeds along the pathway d.

[0050] When grooves having a V shape in a sectional view are formed with parallel to the pathway c or b on a bottom surface of the body **722** of the light guide plate **720** in order to reflect and transmit the light that is incident into the light guide plate **720** toward the liquid crystal display panel assembly **600**, the light in the pathway a or b is reflected toward the liquid crystal display panel assembly **600**. However, it is difficult to reflect the light in the pathway c or d toward the liquid crystal display panel assembly **600**. As a result, an efficiency of the light can be deteriorated.

[0051] In order to increase the efficiency of the light, all light in the pathway a, b, c and d must be reflected toward the liquid crystal display panel assembly **600**.

[0052] According to the one embodiment of the present invention, recesses **721** for enhancing the brightness of the light are formed at the bottom surface of the light guide plate **720** in order to reflect all light moving along the pathways a, b, c and d toward the liquid crystal display panel assembly **600**.

[0053] For example, the recesses **721** for enhancing the brightness of the light have a polygonal horn shape to reflect all the light.

[0054] The recesses **721** for enhancing the brightness of the light are formed in various shapes, for example, a triangular horn shape, a tetragonal horn shape, a pentagonal horn shape a hexagonal horn shape and the like and may be formed in an injection molding method.

[0055] Since the recesses **721** for enhancing the brightness of the light are formed in the polygonal horn shape, the light

in the pathway a, b, c and d all is reflected toward the liquid crystal display panel assembly **600**.

[0056] With an amount of the light in the respective pathway, the amount of the light in the pathway d is more than that of the light in the pathways a, b and c. According to the pathway of the light, the amount of the light is somewhat changed.

[0057] When each area of the sidewalls of the recesses **721** is set to be proportional to the amount of the light, the brightness of the light is further improved.

[0058] If the amount of the light in the pathway d is the largest, the amount of the light in the pathway a is larger than that of the light in the pathway b and the amount of the light in the pathway c is the most small, the recesses **721** can be formed so that the area of the sidewall facing to the pathway d is the largest, the area of the sidewall facing to the pathway a is larger than that of the sidewall facing to the pathway b, and the area of the sidewall facing to the pathway c is most small.

[0059] It means that the area of the sidewalls of the recesses **721** for enhancing the brightness of the light is defined to be proportional to the amount of the light to be reflected by the sidewalls.

[0060] Meanwhile, the recesses **721** for enhancing the brightness of the light is formed such in a manner as the recesses are the most small in size at a portion of the body **722** adjacent to the lamp assembly **714** and gradually larger in size at a portion of the body **722** far away from the lamp assembly **714**.

[0061] The reason for forming the recesses having different size is that the light the light is uniformly reflected through the body **722** of the light guide plate.

[0062] It is possible to gain the light having the improved brightness and being diffused by the recesses **721** for enhancing the brightness of the light formed in the bottom surface of the body **722** of the light guide plate.

[0063] With the embodiment of the present inventions grooves **726** for collecting the light, which is diffused and reflected by the recesses **721** of the light guide plate body **722** for enhancing the brightness of the light, in the display region is illustrated with reference to **FIGS. 3 and 4**.

[0064] A plurality of grooves **726** is formed in a direction of axis X and in a profile of prism on an upper surface of the body **722** of the light guide plate **720** opposite to the bottom surface in which the recesses **721** for enhancing the brightness of the light are formed, so as to collect and transmit the light reflected and diffused by the recesses **721** for enhancing the light out of the light guide plate **720**.

[0065] The other embodiment of the light guide plate **720** for enhancing the brightness of the light is shown in **FIGS. 5 and 6**.

[0066] The light guide, plate **720** for enhancing the brightness of the light shown in **FIGS. 5 and 6** comprises a first light guide plate body **722** and a second light guide plate body **727**.

[0067] The description relating to the first light guide plate body **722** will be omitted since the first light guide plate body **722** has the same shape as that shown in **FIGS. 3 and 4**.

[0068] The second light guide plate body **727** has engagement grooves **727a** formed in a bottom surface thereof and light collecting grooves **724** formed on an upper surface thereof. The engagement grooves **727a** are engaged with the grooves **726** that are formed on the upper surface of the first light guide plate body **722** to collect the light. The light collecting grooves **726** are parallel with an axis Y and have a prism shape in a profile.

[0069] As described above, the light guide plate **720**, which includes the first and second light guide plate body **722** and **727** in order to enhance the brightness of the light, can perform an improved function of collecting the light and improve the brightness of the light.

[0070] When necessary, a plurality of diffusion sheets **730** may be formed on the upper surface of the light guide plate **720** for enhancing the brightness of the light according to the embodiment in **FIG. 2**, another embodiment in **FIGS. 3 and 4** and still another embodiment in **FIGS. 5 and 6**.

[0071] Also, the light reflecting plate **740** may optionally be mounted under the light guide plate **720** for enhancing the brightness of the light in order to return the light leaked out of the light guide plate **720**.

[0072] When the light reflecting plate **740**, the light guide plate **720** for enhancing the brightness of the light, the diffusion sheets **730** and the lamp assembly **714** are received in the receptacle **750**, the liquid crystal display panel assembly **600** is fixedly mounted on the diffusion sheets **730** in the receptacle **750**.

[0073] Then, the top chassis **900** is disposed on the liquid crystal display panel assembly **600** to protect the liquid crystal display panel assembly **600** for preventing a departure of the liquid crystal display panel assembly **600**. The top chassis **600** is combined with the receptacle **750** in such a manner as hooks of the top chassis **600** is latched to hooks of the receptacle **750**. Accordingly, the assembly of the liquid crystal display module is accomplished.

[0074] Finally, the liquid crystal display module is covered with the front cases **1010** and rear case **1020**, thereby finishing the manufacture of the liquid crystal display device **1100**.

[0075] As described above, as the recesses for enhancing the brightness of the light, which are formed in the bottom surface of the light guide plate, reflect the light and the light collecting grooves collect the light when the light is generated by the lamp and incident to the light guide plate, the brightness of the light can be greatly improved. As a result, there is an advantage in that the consumption of the electric energy to obtain the desired brightness of the light is reduced.

[0076] Although the preferred embodiments of the present invention have been described, it is understood that the present invention should not be limited to these preferred embodiments but various changes and modifications can be made by one skilled in the art within the spirit and scope of the present invention as hereinafter claimed.

What is claimed is:

1. A backlight assembly comprising:

a lamp assembly for generating and emitting light in a first direction; and

a first light guide plate for enhancing a brightness of the light, the light guide plate including a body for guiding the light transmitted from the lamp assembly, which has at least one brightness enhancing groove that is formed on a bottom surface thereof and has a polyhedron horn shape.

2. A backlight assembly as claimed in claim 1, wherein a first portion of the brightness enhancing recesses which are closest to the lamp assembly has a first size and a first density and a second portion of the brightness enhancing recesses which are farther away from the lamp assembly has a second size greater than the first size and a second density less than the first density.

3. A backlight assembly as claimed in claim 1, wherein a sidewall of each of the brightness enhancing recesses which is closest to the lamp assembly has a larger area than a rest sidewall of each of the brightness enhancing recesses.

4. A backlight assembly as claimed in claim 1, wherein the bright enhancing recesses has a shape selected from the group consisting of a trigonal horn shape, a tetragonal horn shape and a pentagonal horn shape.

5. A backlight assembly as claimed in claim 1, wherein the first light guide plate has at least one first light collecting groove, which is formed in a second direction perpendicular to the first direction on an upper surface thereof and has a V-shape in a sectional view.

6. A backlight assembly as claimed in claim 5, further comprising:

a second light guide plate having an engagement groove formed at a bottom surface thereof and a second light collecting groove formed in the first direction on an upper surface of the second light guide plate,

wherein the engagement groove is engaged with the first light collecting groove and the second light collecting groove has a V-shape in a sectional view.

7. A liquid crystal display device comprising;

a liquid crystal display panel assembly for controlling liquid crystal precisely to display an image; and

a backlight assembly including a lamp assembly for generating and emitting light in a first direction, a light guide plate for guiding the light provided from the lamp assembly, which has a plurality of the recesses for enhancing a brightness of the light formed in a polyhedron horn shape on a bottom surface thereof, optical sheets for transmitting the light out of the light guide plate and a receptacle for receiving the lamp assembly, the light guide plate and the optical sheets, said receptacle being combined with the liquid crystal display panel assembly.

* * * * *

专利名称(译)	背光组件和使用它的液晶显示装置		
公开(公告)号	US20030156404A1	公开(公告)日	2003-08-21
申请号	US10/393270	申请日	2003-03-21
[标]申请(专利权)人(译)	LEE HEA CHUN		
申请(专利权)人(译)	李HEA-CHUN		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	LEE HEA CHUN		
发明人	LEE, HEA-CHUN		
IPC分类号	G02F1/13357 F21V8/00 G02B6/00 G02F1/1335		
CPC分类号	G02B6/0036 G02B6/0038 G02B6/0071 G02B6/0061 G02B6/0046		
优先权	1020010018706 2001-04-09 KR		
其他公开文献	US6851815		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种用于提供具有较低电力消耗的增强的光亮度的背光和使用该背光的液晶显示装置。导光板具有形成在其底表面上的增亮凹槽和形成在其上表面上的聚光槽。亮度增强凹槽有效地反射具有不同方向的光，并且聚光槽收集由亮度增强凹槽反射的光。可以最小化灯产生的光的损失，从而增强光的亮度。因此，可以大大减少电力消耗。

