



US 20080310160A1

(19) **United States**(12) **Patent Application Publication**
Kim et al.(10) **Pub. No.: US 2008/0310160 A1**(43) **Pub. Date: Dec. 18, 2008**(54) **BACKLIGHT UNIT AND LIQUID CRYSTAL
DISPLAY DEVICE HAVING THE SAME**(30) **Foreign Application Priority Data**

Jun. 14, 2007 (KR) 0058251/2007

(76) Inventors: **Do Yune Kim, Guml (KR); Sung
Hoon Baek, Daegu (KR)****Publication Classification**(51) **Int. Cl.**
G02F 1/13357 (2006.01)
F21V 13/02 (2006.01)
G02F 1/1335 (2006.01)(52) **U.S. Cl. 362/245; 349/58; 349/67**(57) **ABSTRACT**

Disclosed are a backlight unit and a liquid crystal display device having the same. A supporting section is formed with a reflector, which is used for a direct type backlight unit, to support optical sheets and guide light, so that the assembling process is simplified and the manufacturing cost is reduced.

Correspondence Address:

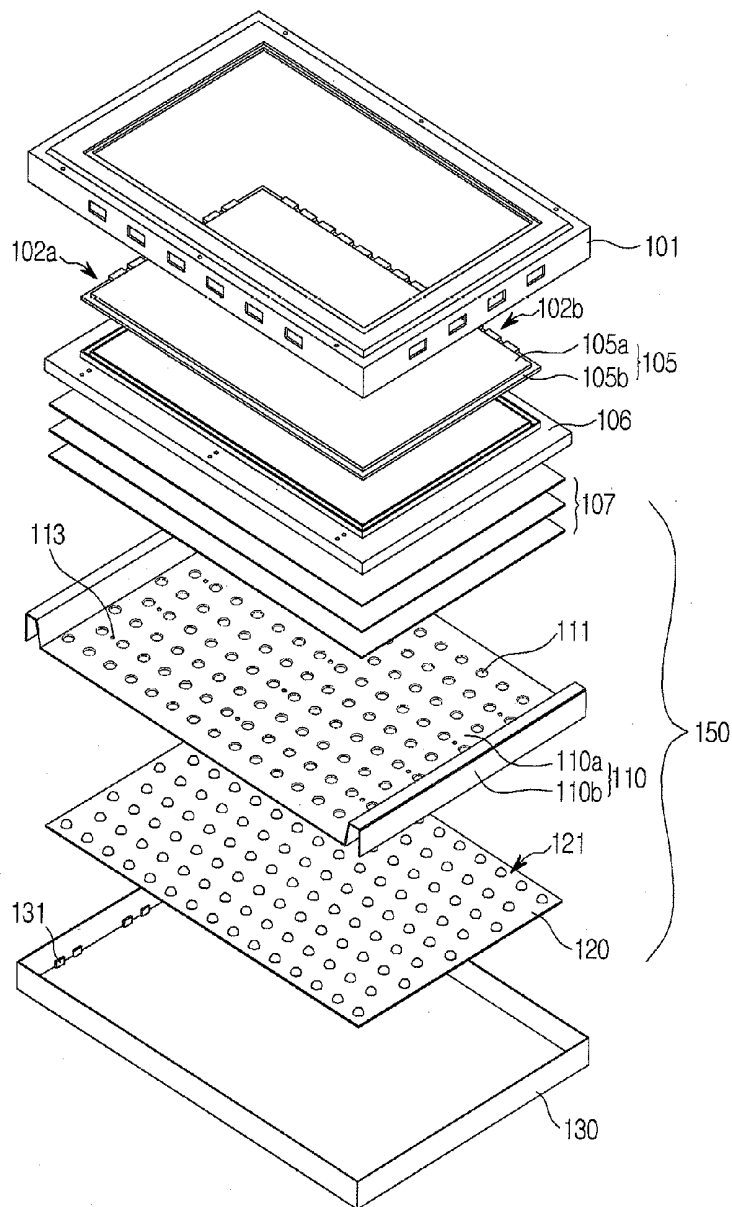
**BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, IL 60610 (US)**(21) Appl. No.: **12/138,798**(22) Filed: **Jun. 13, 2008**100

FIG. 1

100

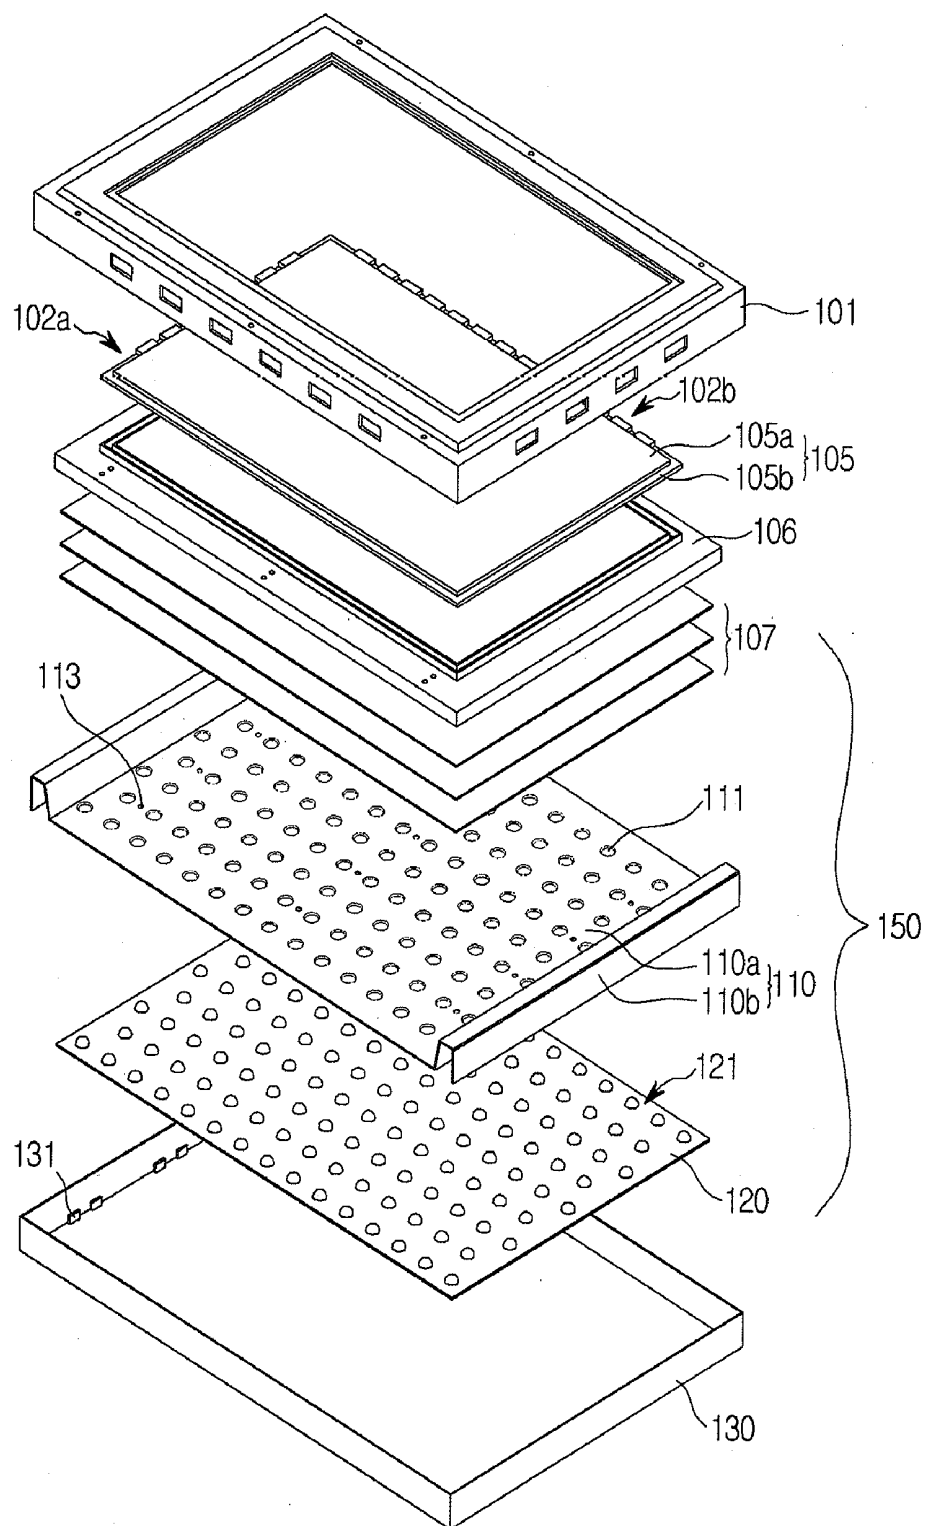


FIG.2

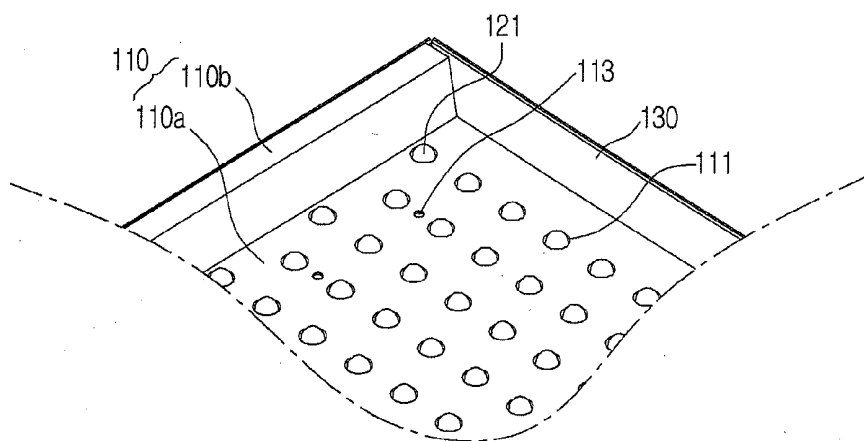


FIG.3A

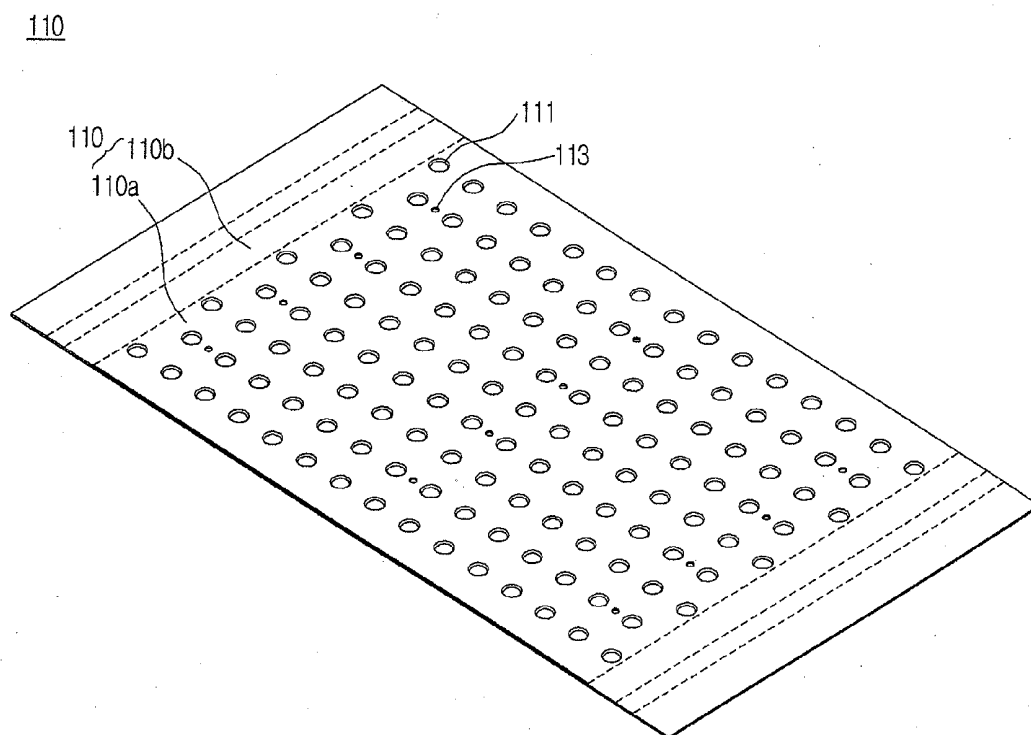


FIG.3B

110

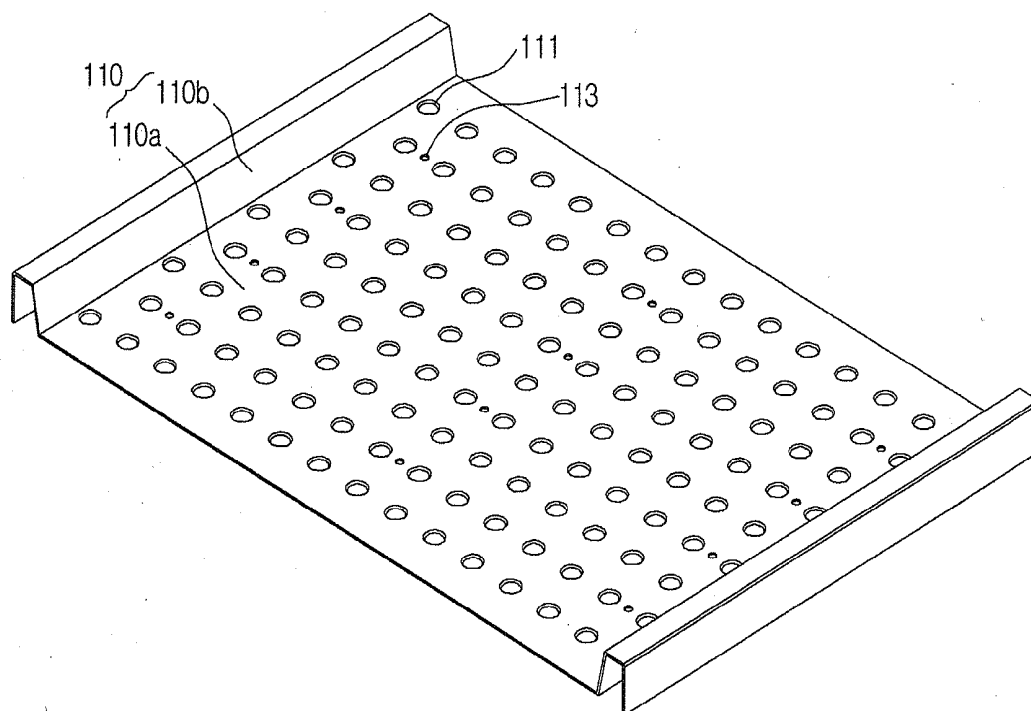
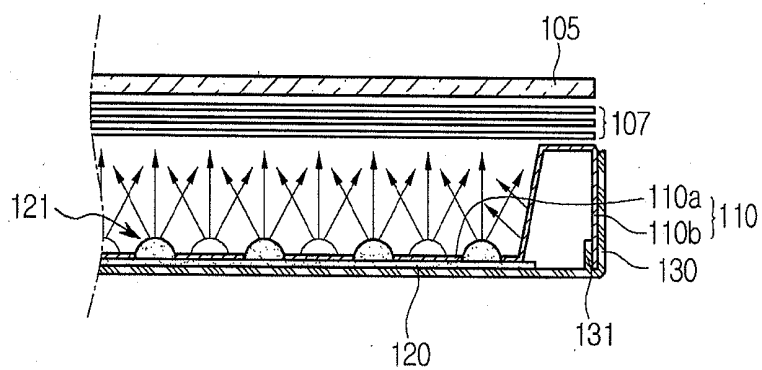


FIG.4



BACKLIGHT UNIT AND LIQUID CRYSTAL DISPLAY DEVICE HAVING THE SAME

[0001] This application relies for priority upon Korean Patent Application No. 10-2007-0058251 filed on Jun. 14, 2007, the contents of which are herein incorporated by reference in their entirety.

BACKGROUND

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display device.

[0004] 2. Description of the Related Art

[0005] In general, a CRT (Cathode Ray Tube) is extensively used as a monitor in measurement instruments and information terminals, as well as televisions. However, the heavy weight and large size of the CRT do not mate with a current trend of miniaturization and light weight of electronic appliances.

[0006] A liquid crystal display device has been developed as a solution for the above problems. Liquid crystal display devices have advantages of being lightweight, compact and having a slim structure, and low-power consumption as compared with the CRT. In particular, since the liquid crystal display device using a thin film transistor can realize high definition, a large structure and a colorful display of a display screen similar to the CRT, the liquid crystal display device has been recently used in various fields, such as a notebook computer and in the monitor market.

[0007] Since the liquid crystal display device is a non-emissive device, which displays an image by controlling the amount of light received from the outside light source, the liquid crystal display device must have an additional light source, such as a backlight unit, for irradiating light to a liquid crystal display panel. Such a backlight unit is divided into a direct type backlight unit and an edge type backlight unit according to the position of the light source that emits light.

[0008] The light source includes a CCFL (Cold Cathode Fluorescent Lamp) and an HCFL (Hot Cathode Fluorescent Lamp) According to the conventional direct type backlight unit, a plurality of fluorescent lamps are disposed on the inner side of a lower cover and a fixing structure is provided to fix both sides of the fluorescent lamps.

[0009] However, when using the fixing structure constituting the backlight unit, the assembling process of the liquid crystal display device may be complicated and the brightness of light emitted from the fluorescent lamp may be lowered. In addition, since the fixing structure must be fabricated through an additional process, the manufacturing cost is increased.

SUMMARY

[0010] A backlight unit and a liquid crystal display device having the same, are disclosed in which an LED (Light Emitting Diode) is used a light source of a direct type backlight unit and both edges of a reflector are modified to serve as a light guide and a supporting section.

[0011] It is to be understood that both the foregoing general description and the following detailed description of the

present invention are exemplary and explanatory, and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention.

[0013] FIG. 1 is an exploded perspective view representing a liquid crystal display device according to an embodiment;

[0014] FIG. 2 is a view representing the coupling state of an LED chip and a reflector of a backlight unit according to the embodiment;

[0015] FIGS. 3A and 3B are views representing a structure of the reflector used in the backlight unit according to the embodiment; and

[0016] FIG. 4 is an assembled sectional view representing a liquid crystal display device according to the embodiment.

DETAILED DESCRIPTION OF EMBODIMENTS

[0017] FIG. 1 is an exploded perspective view representing a liquid crystal display device according to an embodiment.

[0018] As shown in FIG. 1, the liquid crystal display device 100 includes a liquid crystal display panel 105 for displaying an image and a backlight unit 150, which is disposed on a rear side of the liquid crystal display panel 105 to irradiate light. The liquid crystal display device 100 further includes a mold frame 106, a lower cover 130 and an upper cover 101 to fixedly accommodate the backlight unit 150 and the liquid crystal display panel 105.

[0019] A liquid crystal display panel 105 includes a color filter substrate 105a having an RGB color filter layer and a TFT substrate 105b having a TFT (Thin Film Transistor) and a pixel electrode, in which the color filter substrate 105a is combined with the color TFT substrate 105b while interposing a liquid crystal layer (not shown) therebetween. A gate pad area 102a and a data pad area 102b are formed on an edge of the liquid crystal display panel 105 to provide a gate driving signal and a gate signal.

[0020] The backlight unit 150 includes a printed circuit board 120, on which a plurality of LED chips 121 including GRB LEDs or white LEDs are disposed, a reflector 110, which is disposed on the printed circuit board 120 to reflect light, and optical sheets 107, which are disposed on an upper part of the printed circuit board 120 to diffuse and collect light.

[0021] The reflector 110 according to the present invention includes a reflecting section 110a, which is attached to the printed circuit board 120 to reflect light, and a supporting section 110b, which is integrally formed with the reflecting section 110a and disposed at a rim of the printed circuit board 120 to guide light emitted from the LED chip 121 while supporting the optical sheets 107.

[0022] First holes 111 are formed in the reflecting section 110a of the reflector 110 to expose a plurality of LED chips 121 disposed on the printed circuit board 120. Second holes 113 are formed in the reflecting section 110 to fix the reflecting section 110a of the reflector 110 to the printed circuit board 120.

[0023] In addition, the supporting section 110b of the reflector 110 is formed by bending both edges of the reflector

110 in a predetermined direction to support the optical sheets **107**. The supporting section **110b** has an inclination surface adjacent to the reflecting section **110a** such that light emitted from the LED chips **121** is reflected from the inclination surface to travel toward the center region of the reflecting section **110a**.

[0024] Although the supporting section **110b** is formed only on the both edges of the reflector **110** in the drawing, the supporting section can also be formed along the rim of the reflector **110**.

[0025] The backlight unit **150** including the printed circuit board **120** on which the LED chips **121** are disposed, the reflector **110** and the optical sheets **107** is accommodated in the lower cover **130** and is encased by the mold frame **106**.

[0026] A plurality of fixing parts **131** are formed on the inner side of the lower cover **130** at a predetermined interval to prevent the supporting section **110b** of the reflector **110** from moving.

[0027] The fixing parts **131** are formed along an edge of the inner side of the lower cover **130** corresponding to the supporting section **110b** of the reflector **110**. When the printed circuit board **120** is accommodated in the lower cover **130** to be coupled with the reflector **110**, an edge of the supporting section **110b** is coupled between the lower cover **130** and the fixing part **131** formed on the inner side of the lower cover **130**. The structure of the fixing part **131** will be described in detail with reference to FIG. 4.

[0028] As described above, if the components of the backlight unit **150** have been accommodated in the lower cover **130** and then encased by the mold frame **106**, the liquid crystal display panel **105** is mounted on an upper side of the mold frame **106**. After that, the upper cover **101** is coupled with the mold frame **106** and the lower cover **130**.

[0029] According to the conventional direct type backlight unit, an additional structure is fixed to both edges of the lower cover to support the optical sheets and guide light. However, according to the present invention, the direct type LED backlight unit **150** is provided with the reflector **110** having a structure including the reflecting section **110a** and the supporting section **110b**, so that the process of assembling the structure for supporting the optical sheets and guiding light is omitted. That is, the supporting section **110b** integrally formed with the reflecting section **110a** serves to support the optical sheets and guide light.

[0030] As a result, according to the present invention, a portion of the reflector **110** having a superior reflective characteristic serves as a supporting section for supporting the optical sheets, so that the assembling work can be improved and the light efficiency can be enhanced.

[0031] FIG. 2 is a view representing the coupling state of the LED chips and the reflector of the backlight unit according to the present invention.

[0032] As shown in FIG. 2, the printed circuit board (not shown), on which a plurality of LED chips **121** are disposed, is accommodated in the lower cover **130** of the liquid crystal display device. The reflector **110** is attached on the printed circuit board.

[0033] The reflector **110** includes the reflecting section **110a** and the supporting section **110b**. The reflecting section **110a** is directly attached to the printed circuit board, and the supporting section **110b** is fixed to both edges of the lower cover **130**. The first and second holes **111** and **113** are formed in the reflecting section **110** of the reflector **110**. The first holes **111** allow the LED chips **121** to be exposed to the

outside of the reflecting section **110a**. The second hole **113** allows the reflecting section **110a** of the reflector **110** to be attached to the printed circuit board on which the LED chips **121** are disposed. Accordingly, a coupling part, such as a screw, a bolt, or a pin, is formed on an area of the second hole **113** such that the reflecting section **110a** of the reflector **110** can be fixed and attached to the printed circuit board on which the LED chips **121** are disposed.

[0034] In addition, the supporting section **110b** of the reflector **110** is integrally formed with the reflecting section **110a** except for an area of the lower cover **130** on which LED chips **121** are disposed. The supporting section **110b** has the inclination surface at an area where the supporting section **110b** makes contact with the reflecting section **110a**, and is provided with an upper surface having a predetermined width such that the optical sheets can be stably mounted on the upper surface.

[0035] Thus, according to the present invention, when the reflector **110** is assembled after the printed circuit board has been accommodated in the lower cover **130**, the supporting section **110b** for supporting the optical sheets is simultaneously assembled, so that the assembling process is simplified. In addition, additional structure is not required, so that the manufacturing cost can be reduced.

[0036] FIGS. 3A and 3B are views representing a structure of the reflector used in the backlight unit according to the present invention.

[0037] As shown in FIGS. 3A and 3B, the reflector **110** is divided into an area for the reflecting section **110a** and an area for the supporting section **110b** which are integrally formed with each other. In addition, since the reflector **110** includes hard material such as MCPET (Micro-foaming Polyethylene-terephthalate), the reflector **110** can support the optical sheets disposed on the upper side of the reflector **110**.

[0038] The first and second holes **111** and **113** are formed on the reflecting section **110a** of the reflector **110** such that the LED chips are exposed and the reflector **110** is attached to the printed circuit board. In addition, a plurality of slits are formed in the area for the supporting section **110b** such that the reflector **110** can be formed with the supporting section **110b** by folding a portion of the reflector **110** along the slits. That is, when the process of assembling the liquid crystal display device is performed, if the reflector **110** is folded along the slits, the supporting section **110b** can be formed at both edges of the reflecting section **110a** as shown in FIG. 3B, and then the reflector **110** is attached to the printed circuit board.

[0039] After that, the reflector **110** is coupled to the lower cover in which the printed circuit board is accommodated. The coupling part, such as a screw, a bolt, or a pin, is fastened into the second hole **113**, so that the reflecting section **110a** of the reflector **110** is attached to the printed circuit board on which the LED chips are disposed. The supporting section **110b** formed at both sides of the reflecting section **110a** is coupled to the fixing part (**131** shown in FIG. 1) formed on the inner side of the lower cover. The supporting section **110b** is provided with the upper surface having a few centimeters of width to support the optical sheets including a plurality of sheets.

[0040] In addition, the inclination surface is formed from an edge, at which the reflecting section **110a** and the supporting section **110b** of the reflector **110** intersect each other, toward the upper surface of the supporting section **110b**, such that light emitted from the LED chips of the printed circuit

board can be reflected from the inclination surface of the supporting section 110, thereby improving the light efficiency.

[0041] Although the supporting section 110b is formed at the both edges of the reflecting section 110a of the reflector 110 in the drawing, the supporting section 110b can also be formed on the rim of the reflecting section 110a.

[0042] FIG. 4 is an assembled sectional view representing the liquid crystal display device according to the present invention.

[0043] As shown in FIG. 4, according to the liquid crystal display device of the present invention, the printed circuit board 120, on which the LED chips 121 are disposed, is accommodated in the lower cover 130. The reflector 110 is disposed on the upper side of the printed circuit board 120. The reflector 110 includes the reflecting section 110a directly attached to the printed circuit board 120 and the supporting section 110b that serves to support the optical sheets 107 and guide light.

[0044] The LED chip 121 of the printed circuit board 120 is exposed to the upper side of the reflecting section 110a through the holes (shown in FIG. 2) formed in the reflecting section 110a. The supporting section 110b of the reflector 110 has the edge portion, which is inserted between the fixing part 131 formed on the inner side of the lower cover 130 and the inner side of the lower cover 130. The fixing parts 131 are disposed on the inner side of the lower cover 130 at a predetermined interval corresponding to the supporting section 110b of the reflector 110.

[0045] After the reflector 110 and the printed circuit board 130 have been assembled with the lower cover 130 as described above, the optical sheets 107 are disposed on the upper side of the reflector 110. As a result, the optical sheets 107 are mounted on the supporting section 110b of the reflector 110. After that, the backlight unit is fixed to the lower cover 130 by the mold frame (106, shown in FIG. 1), and the liquid crystal display panel 105 is assembled.

[0046] As shown in the drawings, the LED chips 121 disposed on the printed circuit board 120 are exposed on the reflecting section 110a of the reflector 110. In addition, light emitted from the LED chips 121 travels toward the optical sheets 107. The light traveling toward the supporting section 110b formed on the edge of the reflector 110 is reflected from the inclination surface of the supporting section 110b and then travels toward the center area of the lower cover 130.

[0047] According to the present invention, the supporting section 110b is integrally formed with the reflector 110 such that the supporting section 110b supports the optical sheets 107 and allows light leaking to the edge of the lower cover 130 to be collected to the center area of the lower cover 130, so that the light efficiency is improved.

[0048] As described above in detail, according to the present invention, the direct type backlight unit uses the LED (Light Emitting Diode) as a light source thereof and the both edges of the reflector are modified to serve as a light-guide and a supporter of the optical sheets.

[0049] In addition, the supporting section for supporting the optical sheets and guiding light is integrally formed with the reflector, so that the assembling process is simplified and the manufacturing cost is reduced.

[0050] It will be apparent to those skilled in the art that various modifications and variations can be made in the

present invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A backlight unit comprising:
 - a plurality of LED chips;
 - a printed circuit board on which a plurality of LED chips are disposed and a pattern for supplying power is formed;
 - optical sheets, which are disposed on an upper side of the printed circuit board, to collect and diffuse light emitted from the LED chips; and
 - a reflector, which is disposed on the printed circuit board and includes a reflecting section that reflects light emitted from the LED chips and a supporting section that supports the optical sheets.
2. The backlight unit as claimed in claim 1, wherein the supporting section of the reflector is integrally formed with the reflecting section of the reflector.
3. The backlight unit as claimed in claim 1, wherein the reflecting section of the reflector includes a plurality of first holes for exposing the LED chips of the printed circuit board to the outside and a plurality of second holes for fixing the reflecting section to the printed circuit board.
4. The backlight unit as claimed in claim 1, wherein the supporting section of the reflector is integrally formed with both edges of the reflecting section or a rim of the reflecting section.
5. The backlight unit as claimed in claim 1, wherein the LED chip includes RGB LEDs or white LEDs.
6. A liquid crystal display device comprising:
 - a liquid crystal display panel;
 - a backlight unit including a plurality of LED chips that supply light to the liquid crystal display panel, a printed circuit board on which the LED chips are disposed and a pattern for supplying power is formed, optical sheets, which are disposed on an upper side of the printed circuit board, to collect and distribute light emitted from the LED chips, and a reflector, which is disposed on the printed circuit board and includes a reflecting section for reflecting light emitted from the LED chips and a supporting section that supports the optical sheets; and
 - a lower cover that receives the backlight unit.
7. The liquid crystal display device as claimed in claim 6, wherein the supporting section of the reflector is integrally formed with the reflecting section of the reflector.
8. The liquid crystal display device as claimed in claim 6, wherein the reflecting section of the reflector includes a plurality of first holes for exposing the LED chips of the printed circuit board to the outside and a plurality of second holes for fixing the reflecting section to the printed circuit board.
9. The liquid crystal display device as claimed in claim 6, wherein the supporting section of the reflector is integrally formed with both edges of the reflecting section or a rim of the reflecting section.
10. The liquid crystal display device as claimed in claim 6, wherein a plurality of fixing parts are formed on an inner side of the lower cover corresponding to the supporting section of the reflector to fix the supporting section.

* * * * *

专利名称(译)	背光单元和具有该背光单元的液晶显示装置		
公开(公告)号	US20080310160A1	公开(公告)日	2008-12-18
申请号	US12/138798	申请日	2008-06-13
[标]申请(专利权)人(译)	KIM DO 晕哦 BAEK 成勋		
申请(专利权)人(译)	KIM DO 晕哦 BAEK 成勋		
当前申请(专利权)人(译)	KIM DO 晕哦 BAEK 成勋		
[标]发明人	KIM DO YUNE BAEK SUNG HOON		
发明人	KIM, DO YUNE BAEK, SUNG HOON		
IPC分类号	G02F1/13357 F21V13/02 G02F1/1335		
CPC分类号	G02F1/133603 G02F1/133605 Y10S362/80 G02F1/133611 G02F1/133608		
优先权	1020070058251 2007-06-14 KR		
其他公开文献	US8162500		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种背光单元和具有该背光单元的液晶显示装置。支撑部分形成有反射器，该反射器用于直下式背光单元，以支撑光学片和引导光，从而简化了组装过程并降低了制造成本。

