




US 20100014018A1

(19) **United States**(12) **Patent Application Publication**
Chuang et al.(10) **Pub. No.: US 2010/0014018 A1**(43) **Pub. Date: Jan. 21, 2010**(54) **LIQUID CRYSTAL DISPLAY AND
BACKLIGHT MODULE THEREOF**(75) Inventors: **Yung-Pin Chuang**, Hsinchu (TW);
Szu-Han Li, Hsinchu (TW);
Ching-Fu Tien, Hsinchu (TW);
Keng-Ju Lin, Hsinchu (TW);
Cheng-Hua Tien, Hsinchu (TW);
Tsung-Hsien Hsieh, Hsinchu (TW)Correspondence Address:
**JIANQ CHYUN INTELLECTUAL PROPERTY
OFFICE**
**7 FLOOR-1, NO. 100, ROOSEVELT ROAD, SEC-
TION 2**
TAIPEI 100 (TW)(73) Assignee: **AU OPTRONICS
CORPORATION**, Hsinchu (TW)(21) Appl. No.: **12/567,789**(22) Filed: **Sep. 27, 2009****Related U.S. Application Data**(63) Continuation of application No. 11/565,629, filed on
Dec. 1, 2006.(30) **Foreign Application Priority Data**

Oct. 3, 2006 (TW) 95136697

Publication Classification(51) **Int. Cl.**
G02F 1/1333 (2006.01)
G09F 13/04 (2006.01)(52) **U.S. Cl.** **349/58; 362/97.1**(57) **ABSTRACT**

A backlight module including a first frame, a light guide plate, and a light source is provided. The inner surface of the first frame has at least a first reflection area. In addition, the light guide plate is disposed in the first frame and located beside the first reflection area, and the light guide plate has a light incident surface. Moreover, the light source is disposed in the first frame and between the first reflection area and the light incident surface. A liquid crystal display using the backlight module is also provided.

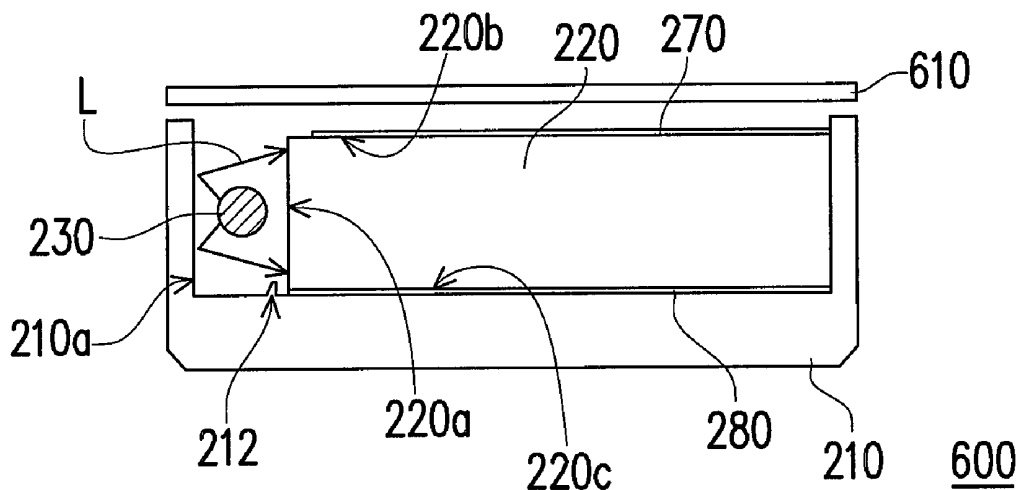

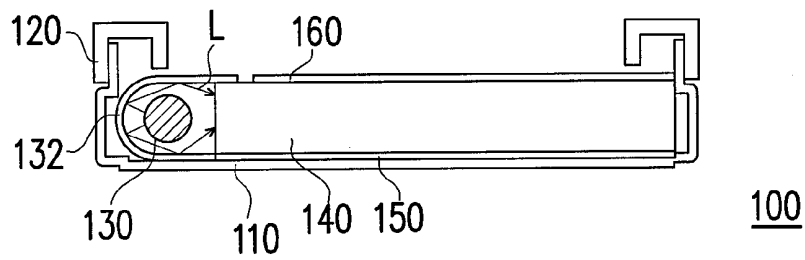


FIG. 1 (PRIOR ART)

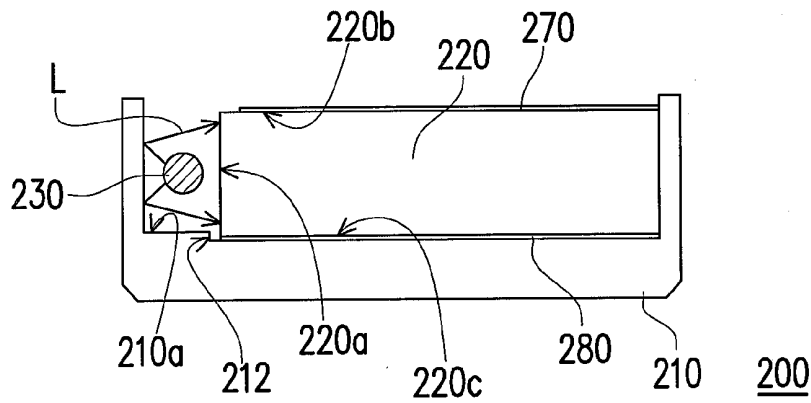


FIG. 2

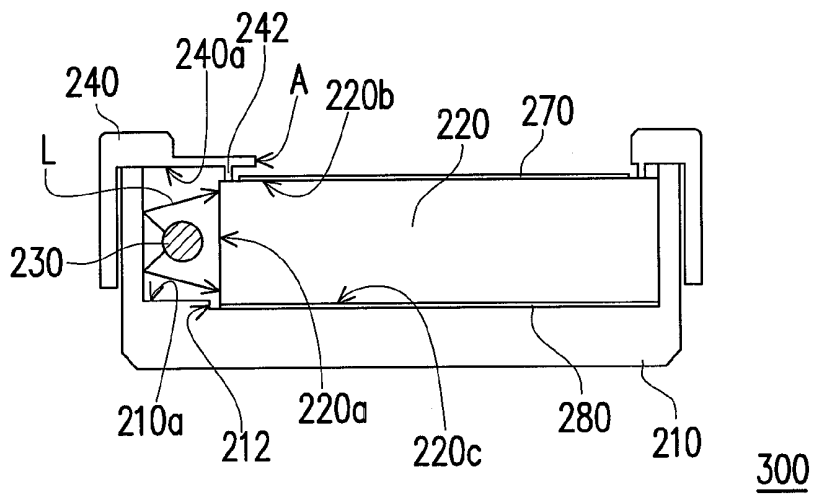


FIG. 3

LIQUID CRYSTAL DISPLAY AND BACKLIGHT MODULE THEREOF

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation application of a prior application Ser. No. 11/565,629, filed on Dec. 1, 2006. The prior application Ser. No. 11/565,629 claims the priority benefit of Taiwan application serial no. 95136697, filed on Oct. 3, 2006. All disclosure of the Taiwan application Ser. No. 95136697 and the prior application Ser. No. 11/565,629 is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display. More particularly, the present invention relates to a backlight module for a liquid crystal display.

[0004] 2. Description of Related Art

[0005] A common liquid crystal display usually includes a component with color display function, such as a liquid crystal display panel. As the liquid crystal display panel does not emit light, a backlight module must be disposed below the liquid crystal display panel to serve as a light source to illuminate the liquid crystal display panel for displaying images. [0006] FIG. 1 is a schematic sectional view of a conventional backlight module. Referring to FIG. 1, the conventional backlight module 100 includes a first frame 110, a second frame 120, a light source 130, a lampshade 132, a light guide plate 140, a reflector 150, and a diffuser film 160. The light source 130 and the lampshade 132 are disposed in the first frame 110, and the light guide plate 140 is disposed beside the light source 130. In particular, a part of the light L emitted from the light source 130 enters the light guide plate 140 after being reflected by the lampshade 132.

[0007] In addition, the reflector 150 is disposed at the bottom of the light guide plate 140, and the diffuser sheet 160 is disposed at the top of the light guide plate 140. In detail, the light that enters the light guide plate 140 is reflected by the reflector 150, and emits out through the diffuser film 160, so as to provide a uniform light source to the liquid crystal display panel (not shown). It should be noted that the lampshade 132 is generally made of a metal material, which not only more expensive, but also is heavy. Especially when a large-size backlight module 100 is assembled or is reworked, the lampshade 132 consumes the much time of the process, which adversely impacts the production throughput.

SUMMARY OF THE INVENTION

[0008] The present invention is directed to a backlight module, for solving the problem of high manufacturing cost.

[0009] The present invention is directed to a liquid crystal display including the aforementioned backlight module so as to improve the display quality and reduce the manufacturing cost of the liquid crystal display.

[0010] To achieve the aforementioned or other purposes, the present invention provides a backlight module including a first frame, a light guide plate, a light source, an optical film, and an optical film set. The first frame includes at least a first reflection area on an inner surface thereof. The light guide plate is disposed in the first frame and located beside to the first reflection area. The light guide plate has a light incident surface. The light source is disposed in the first frame and

between the first reflection area and the light incident surface. The optical film is disposed on the first reflection area of the first frame, beside the light incident surface, and between the light source and the first frame. The light incident surface faces the optical film, and the optical film is a brightness enhancement film or a prism sheet. The optical film set is disposed above the light guide plate. The light guide plate is disposed between the first frame and the optical film set. The optical film is separate from the optical film set.

[0011] According to an embodiment of the present invention, the backlight module further includes a second frame disposed on the first frame. The second frame includes an opening to expose the light guide plate, and an inner surface of the second frame includes at least one second reflection area.

[0012] According to an embodiment of the present invention, the optical film is further disposed on the first reflection area of the first frame and the second reflection area of the second frame.

[0013] According to an embodiment of the present invention, the optical film set at least includes a diffuser film, a prism sheet or a brightness enhancement film, or a combination thereof.

[0014] According to an embodiment of the present invention, the backlight module further includes a reflector disposed between the optical film and the first reflection area of the first frame.

[0015] The present invention provides a liquid crystal display which comprises the aforementioned backlight module and a liquid crystal display panel, wherein the liquid crystal display panel is disposed above the light guide plate.

[0016] The first reflection area of the first frame effectively reflects a part of the light emitted from the light source to the light guide plate. Therefore, the backlight module of the present invention can effectively reflect the light without using a lampshade. Thus, the manufacturing cost is reduced, and the assembly time is also reduced. The first frame and the second frame of the backlight module of the present invention can also be assembled together to further improve the reliability of the backlight module. The second frame of the present invention has the second reflection area which effectively reflects a part of the light emitted from the light source to the light guide plate, thus further improving the reuse rate of the light, such that the liquid crystal display has good display quality.

[0017] In order to make the aforementioned and other purposes, features and advantages of the present invention comprehensible, preferred embodiments accompanied with figures are described in detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a schematic sectional view of a conventional backlight module.

[0019] FIG. 2 is a schematic sectional view of a backlight module according to a first embodiment of the present invention.

[0020] FIG. 3 is a schematic sectional view of a backlight module according to a second embodiment of the present invention.

[0021] FIG. 4 is a schematic view of an optical film of the second embodiment according to an embodiment of the present invention.

[0022] FIG. 5 is a schematic sectional view of the backlight module according to a third embodiment of the present invention.

[0023] FIG. 6 is a schematic view of the liquid crystal display according to a fourth embodiment of the present invention.

DESCRIPTION OF EMBODIMENTS

The First Embodiment

[0024] FIG. 2 is a schematic sectional view of the backlight module of the first embodiment of the present invention. Referring to FIG. 2, the backlight module 200 of the present invention includes a first frame 210, a light guide plate 220, and a light source 230. The inner surface of the first frame 210 has at least a first reflection area 210a, and the position of the first reflection area 210a corresponds to the position of the light source 230. It should be noted that the first frame 210 of the present invention can be comprised of a high temperature resistant material of high reflectivity, for example, a metal material with high-reflectivity painting or coating, a plastic material added with high-reflectivity particles, a sheet material of high reflectivity, or the like. In other words, because the first frame 210 of the present invention can withstand the high temperature so that it will not get deformed even when the temperature of the backlight module 200 is very high after a long time use.

[0025] In addition, the light guide plate 220 is disposed in the first frame 210 and is located beside to the first reflection area 210a. Generally speaking, the light guide plate 220 includes a light incident surface 220a, a light emitted surface 220b, and a light diffusion surface 220c. In detail, a part of the light L emitted from the light source 230 enters the light guide plate 220 through the light incident surface 220a after being reflected by the first reflection area 210a. Thereafter, the light is diffused by the light diffusion surface 220c. Finally the light emits out through the light emitted surface 220b.

[0026] According to another aspect of the present invention, in order to firmly position the light guide plate 220 in the first frame 210, the first frame 210 of the present invention includes at least a first positioning portion 212. The first positioning portion 212 is located at the edge of the first reflection area 210a, so as to position the light guide plate 220. It should be noted that the first positioning portion 212 of FIG. 2 comprises a stair-case structure, however the shape of the first positioning portion 212 may be properly modified according to different requirements, and is not limited herein.

[0027] Moreover, the light source 230 is disposed in the first frame 210 and between the first reflection area 210a and the light incident surface 220a. The light source 230 may be a cold cathode fluorescent lamp (CCFL) or a light-emitting diode (LED). If the CCFL is used as the light source 230, as the light L emitted from the CCFL has a slight direction concentration, a part of the light L emitted towards the inner surface of the first frame 210 may enter the light guide plate 220 through the light incident surface 220a after being reflected by the first reflection area 210a, and thus the application rate of the light L is improved effectively. The backlight module 200 of the present invention reflects light by using the first frame 210 made of a high-reflectivity material, and does not need the conventional lampshade 132 (as shown in FIG. 1). Compared with the conventional backlight module 100 (as shown in FIG. 1), the backlight module 200 of the present invention includes fewer components, so the weight

and the manufacturing cost of the backlight module 200 are reduced effectively. Furthermore, the time for assembling or reworking the backlight module 200 of the present invention can be effectively reduced as well.

[0028] To further improve the optical display quality of the backlight module 200, the backlight module 200 of the present invention further includes an optical film set 270 disposed above the light guide plate 220. Moreover, the backlight module 200 of the present invention further includes a reflector 280 disposed at the bottom of the light guide plate 220. The optical film set 270 of the present invention includes at least a diffuser film, a brightness enhancement film (BEF), and a prism sheet, or a combination thereof. The diffuser film can diffuse the light emitted from the light source 220 more uniformly, the BEF enhances the brightness of the backlight module 200, and the prism sheet improves the correctness of the light exit direction.

The Second Embodiment

[0029] The second embodiment is similar to the first embodiment, while the difference mainly lies in that the backlight module 300 (as shown in FIG. 3) of the present invention further includes a second frame 240. To further improve the reliability of the backlight module 300, the second frame 240 of the present invention is disposed on the first frame 210, and the second frame 240 has an opening A to expose the light guide plate 220. It should be noted that the material of the second frame 240 and the first frame 210 of the present invention can be comprised of a high temperature resistant material of high reflectivity, for example, a metal material with high-reflectivity painting or coating, a plastic material added with high-reflectivity particles, a sheet material of high reflectivity, or the like. Moreover, the inner surface of the second frame 240 has at least a second reflection area 240a.

[0030] It should be noted that the second reflection area 240a and the first reflection area 210a are suitable for reflecting a part of the light emitted from the light source 230 to the light incident surface 220a. In practice, the position of the second reflection area 240a corresponds to that of the light source 230. It is known clearly from FIG. 3 that the second frame 240 of the present invention has at least a second positioning portion 242 located at the edge of the second reflection area 240a. The second positioning portion 242 is against the light guide plate 220, so as to position the light guide plate 220.

[0031] Moreover, the backlight module 400 (as shown in FIG. 4) of the present invention further includes an optical film 250, and the optical film 250 is disposed on the first reflection area 210a of the first frame 210 and the second reflection area 240a of the second frame 240. The optical film 250 includes at least a reflector, a BEF, and a prism sheet, or a combination thereof, so as to further improve the reuse rate of the light source 230.

The Third Embodiment

[0032] The third embodiment is closely similar to the second embodiment, while the difference mainly lies in that the backlight module 500 (as shown in FIG. 5) of the present invention further includes a positioning metal piece 260, and the second frame 240 has a retaining recess 240b. The positioning metal piece 260 of the present invention is disposed between the first reflection area 210a of the first frame 210 and the optical film 250, and the positioning metal piece 260

extends into the retaining recess **240b**, so as to position the second frame **240** and the first frame **210**. The positioning metal piece **260** is made of a high-reflectivity material, and the surface of the positioning metal piece **260** is polished to further improve the reflection effect for the light source **230**.

The Fourth Embodiment

[0033] FIG. 6 is a schematic view of the liquid crystal display of the fourth embodiment of the present invention. Referring to FIG. 6, the liquid crystal display **600** of the present invention includes the aforementioned backlight module **200** and a liquid crystal display panel **610**. The structure of the backlight module **200** has been clearly disclosed in the first embodiment, and the liquid crystal display panel **610** is disposed above the light guide plate **220**. The liquid crystal display panel **610** of the present invention together with the backlight module **300**, **400**, or **500** can form a liquid crystal display. Here, the structures of the backlight modules **300**, **400**, and **500** have been clearly disclosed in the first and the second embodiment. By using the backlight module **200**, **300**, **400**, or **500** of the present invention, the liquid crystal display of the present invention has the advantages of light weight, less time required for assembling and reworking, low manufacturing cost, and good optical display characteristic.

[0034] To sum up, the first frame of the backlight module of the present invention is made of a high-reflectivity material, and the first reflection area of the first frame effectively reflects a part of the light emitted from the light source to the light guide plate. Therefore, the backlight module of the present invention can effectively reflect a part of the light emitted from the light source to the light guide plate without using the lampshade. Thus, the backlight module of the present invention provides an area light source with high luminance, such that the liquid crystal display of the present invention has favorable optical display characteristic. Moreover, as the backlight module of the present invention uses fewer components, the backlight module of the present invention has the advantages of light weight, low manufacturing cost, and short assembly time, and the working hours for reworking are effectively reduced as well. The second frame of the present invention is made of a high reflectivity material, and the first frame and the second frame can be assembled together. Thus, the reliability of the entire backlight module and the reuse rate of the light are further improved.

[0035] It will be apparent to those skilled in the art that various modifications and variations can be made to the structure of the present invention without departing from the scope or spirit of the invention. In view of the foregoing, it is intended that the present invention cover modifications and variations of this invention provided they fall within the scope of the following claims and their equivalents.

What is claimed is:

1. A backlight module, comprising:

a first frame, comprising at least a first reflection area on an inner surface thereof;

a light guide plate, disposed in the first frame and located beside to the first reflection area, wherein the light guide plate has a light incident surface;

a light source, disposed in the first frame and between the first reflection area and the light incident surface;

an optical film, disposed on the first reflection area of the first frame, beside the light incident surface, and between the light source and the first frame, wherein the light incident surface faces the optical film, and the optical film is a brightness enhancement film or a prism sheet; and

an optical film set disposed above the light guide plate, wherein the light guide plate is disposed between the first frame and the optical film set, and the optical film is separate from the optical film set.

2. The backlight module of claim 1, further comprising a second frame disposed on the first frame, wherein the second frame comprises an opening to expose the light guide plate, and an inner surface of the second frame comprises at least one second reflection area.

3. The backlight module of claim 2, comprising the optical film further disposed on the first reflection area of the first frame and the second reflection area of the second frame.

4. The backlight module of claim 1, wherein the optical film set at least comprises a diffuser film, a prism sheet or a brightness enhancement film, or a combination thereof.

5. The backlight module of claim 1, further comprising a reflector disposed between the optical film and the first reflection area of the first frame.

6. A liquid crystal display comprising:

the backlight module of claim 1; and

a liquid crystal panel, disposed above the light guide plate.

* * * * *

专利名称(译)	液晶显示器及其背光模块		
公开(公告)号	US20100014018A1	公开(公告)日	2010-01-21
申请号	US12/567789	申请日	2009-09-27
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电股份有限公司		
当前申请(专利权)人(译)	友达光电股份有限公司		
[标]发明人	CHUANG YUNG PIN LI SZU HAN TIEN CHING FU LIN KENG JU TIEN CHENG HUA HSIEH TSUNG HSIEN		
发明人	CHUANG, YUNG-PIN LI, SZU-HAN TIEN, CHING-FU LIN, KENG-JU TIEN, CHENG-HUA HSIEH, TSUNG-HSIEN		
IPC分类号	G02F1/1333 G09F13/04		
CPC分类号	G02B6/0031 G02B6/0088 G02B6/0051		
优先权	095136697 2006-10-03 TW		
外部链接	Espacenet USPTO		

摘要(译)

提供一种背光模块，包括第一框架，导光板和光源。第一框架的内表面至少具有第一反射区域。另外，导光板设置在第一框架中并位于第一反射区域旁边，导光板具有光入射表面。而且，光源设置在第一框架中并位于第一反射区域和光入射表面之间。还提供了一种使用该背光模块的液晶显示器。

