



US 20030117544A1

(19) **United States**

(12) **Patent Application Publication**

Kim et al.

(10) **Pub. No.: US 2003/0117544 A1**

(43) **Pub. Date: Jun. 26, 2003**

(54) **STRUCTURE FOR ASSEMBLING LAMP
WIRE FOR BACKLIGHT ASSEMBLY INTO
LIQUID CRYSTAL DISPLAY MODULE**

Publication Classification

(51) **Int. Cl.⁷** **G02F 1/1333**

(52) **U.S. Cl.** **349/58**

(76) **Inventors: Hyo Jin Kim, Chinju-shi (KR); Sang
Hyun Park, Ulsan-Kwangyokshi (KR)**

Correspondence Address:
MCKENNA LONG & ALDRIDGE LLP
1900 K STREET, NW
WASHINGTON, DC 20006 (US)

(21) **Appl. No.: 10/326,402**

(22) **Filed: Dec. 23, 2002**

(30) **Foreign Application Priority Data**

Dec. 26, 2001 (KR) 2001-85172

(57) **ABSTRACT**

A structure for securing lamp wires of a backlight assembly within an LCD module includes a liquid crystal panel, a mold frame, a lamp, and a structure for securing lamp wires within a backlight assembly within the LCD module. The structure includes an through which the lamp wires extend, lower and upper inserting grooves in lower and upper portions of the opening for receiving the lamp wires, and a tube for covering portions of a lamp wire to which a high voltage is applied. The tube covers portions of the lamp wire between a location at a junction wherein the lamp wire and the lamp are connected and a portion where the lamp wire extends through the opening.

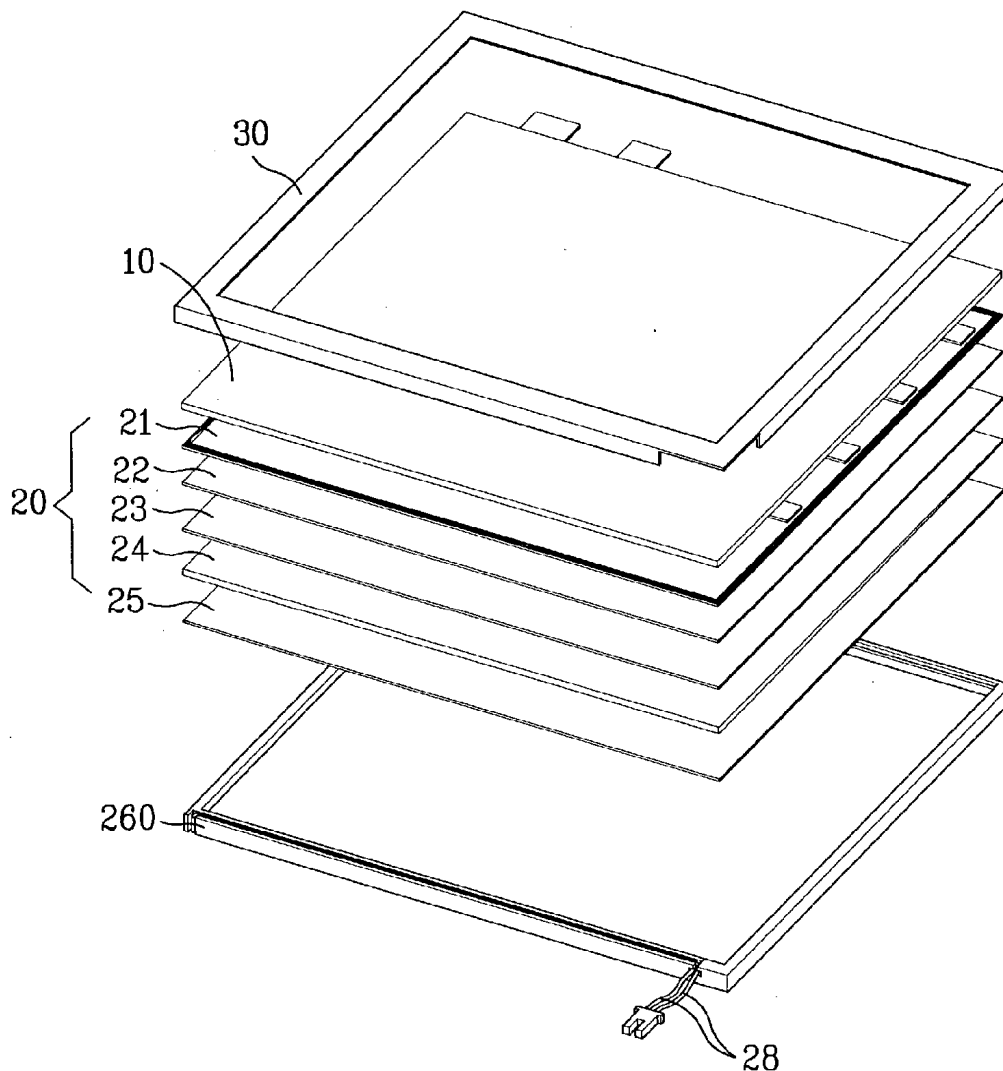


FIG. 1
Related Art

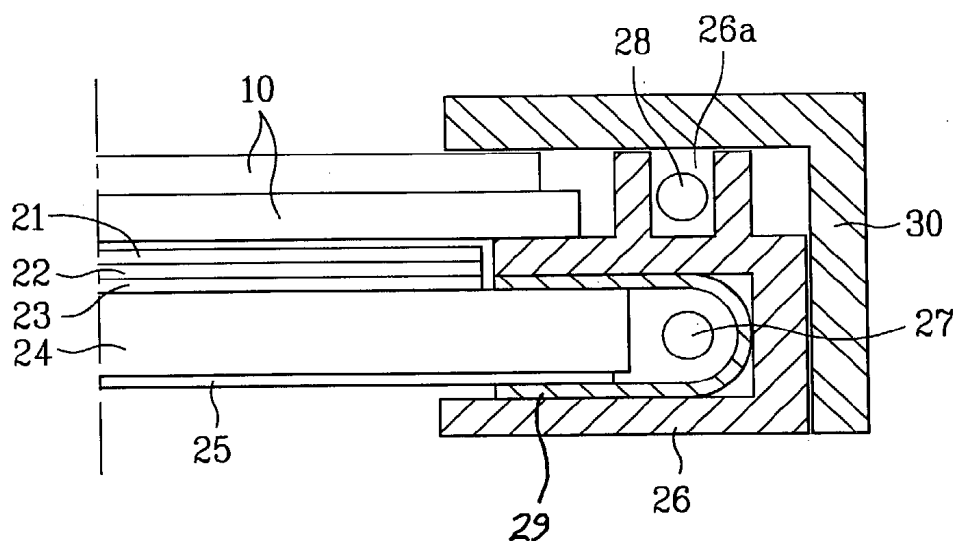


FIG. 2
Related Art

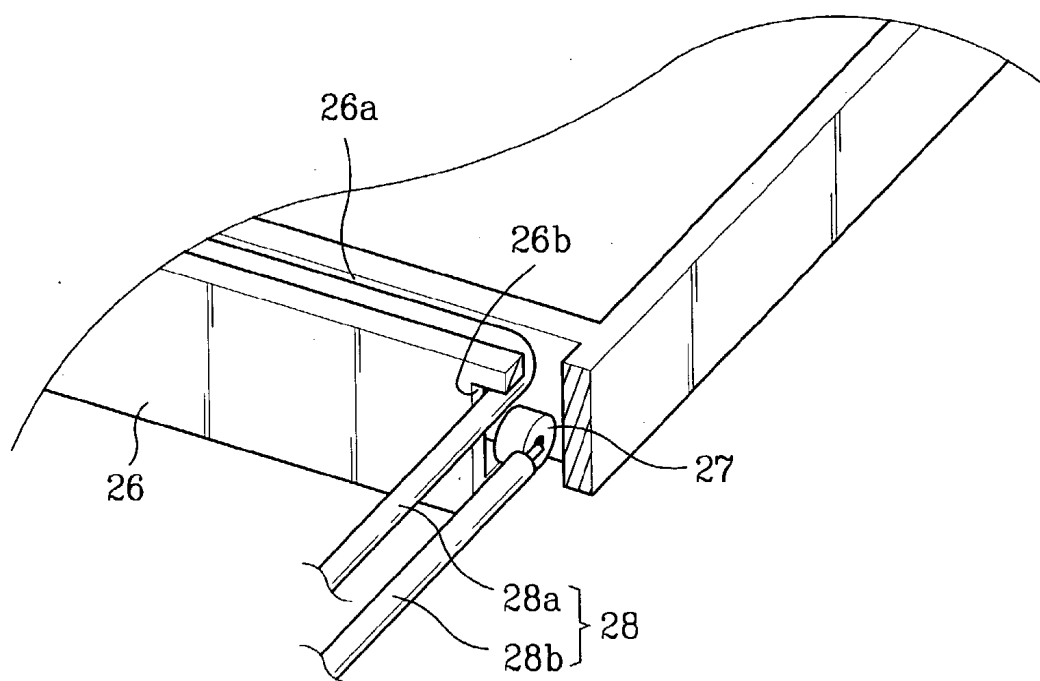


FIG. 3
Related Art

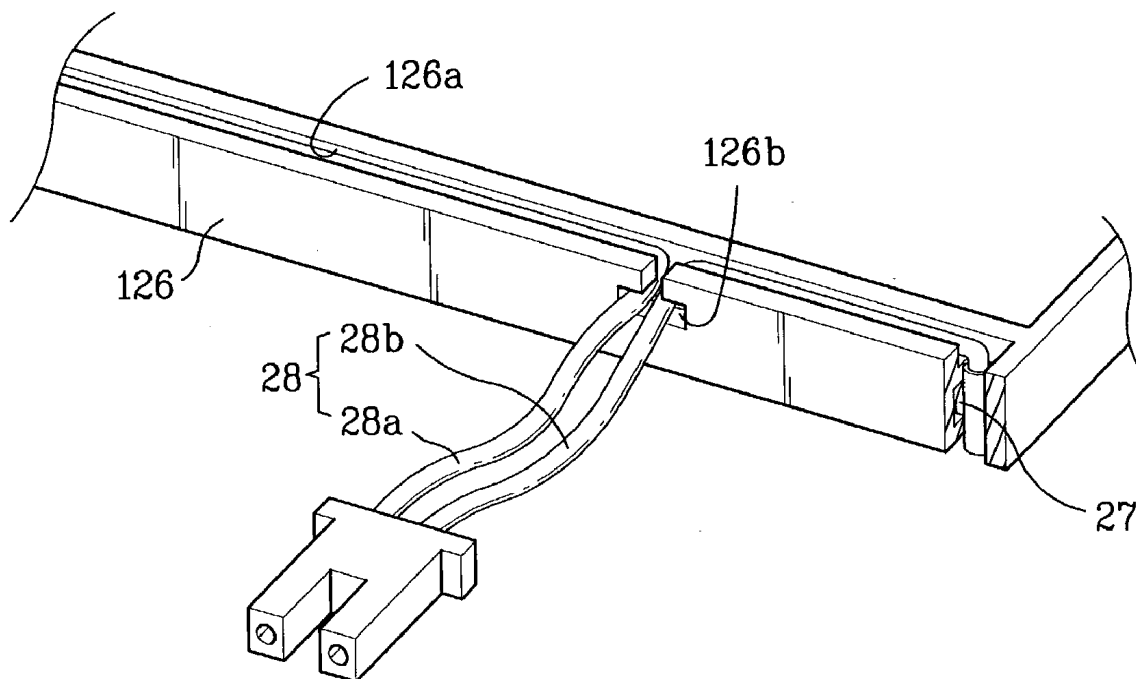


FIG. 4

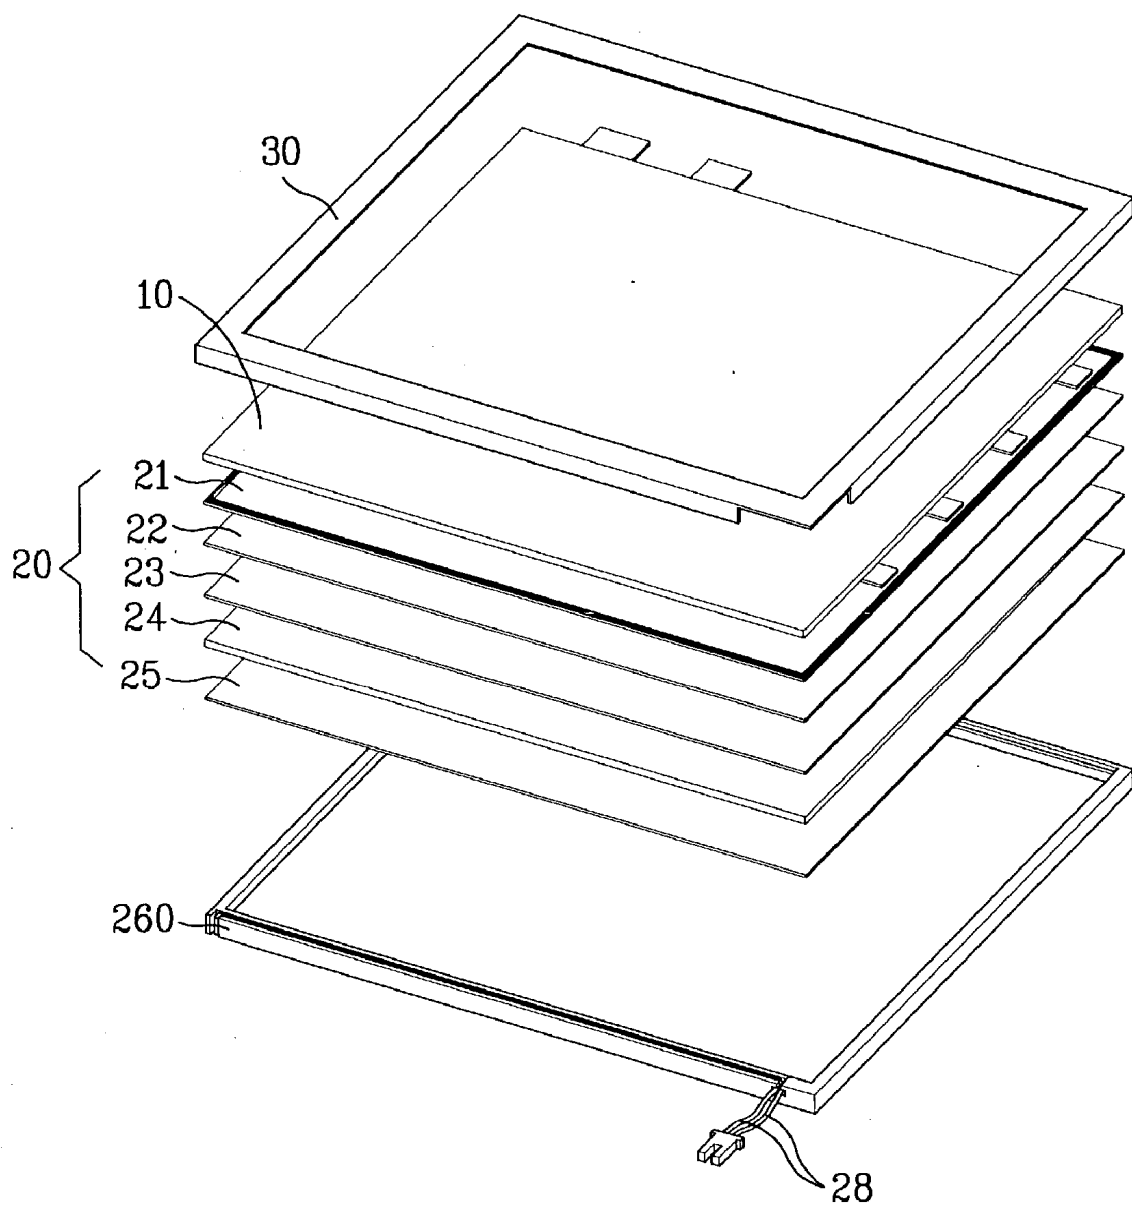


FIG. 5

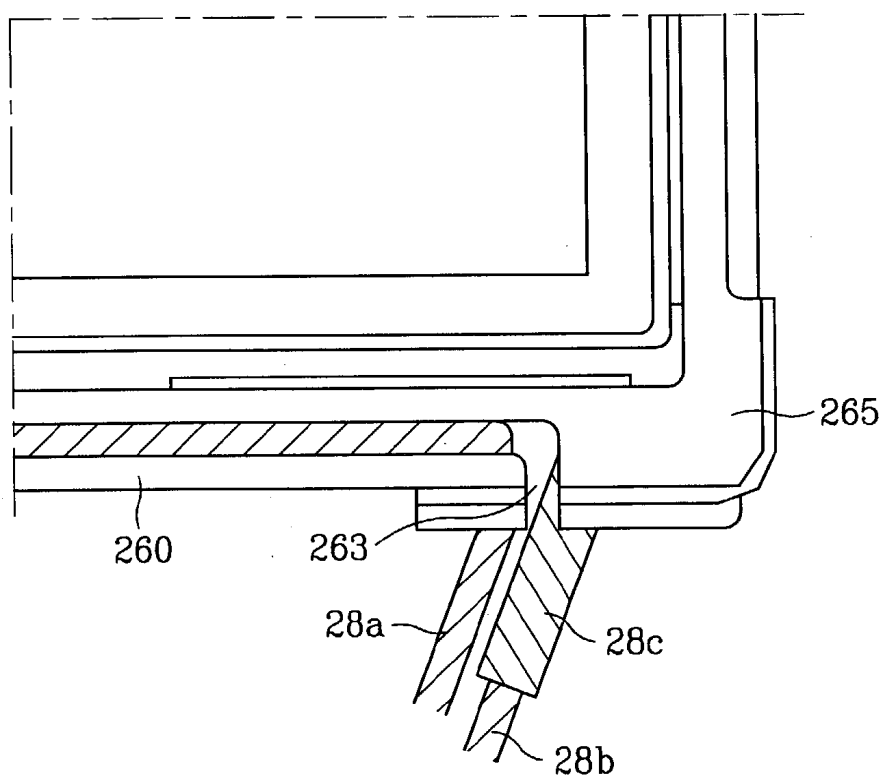


FIG. 6

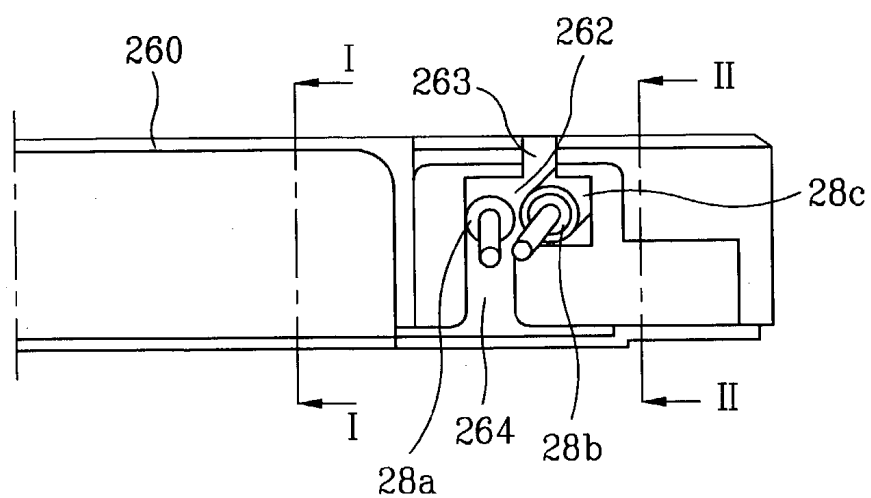


FIG. 7


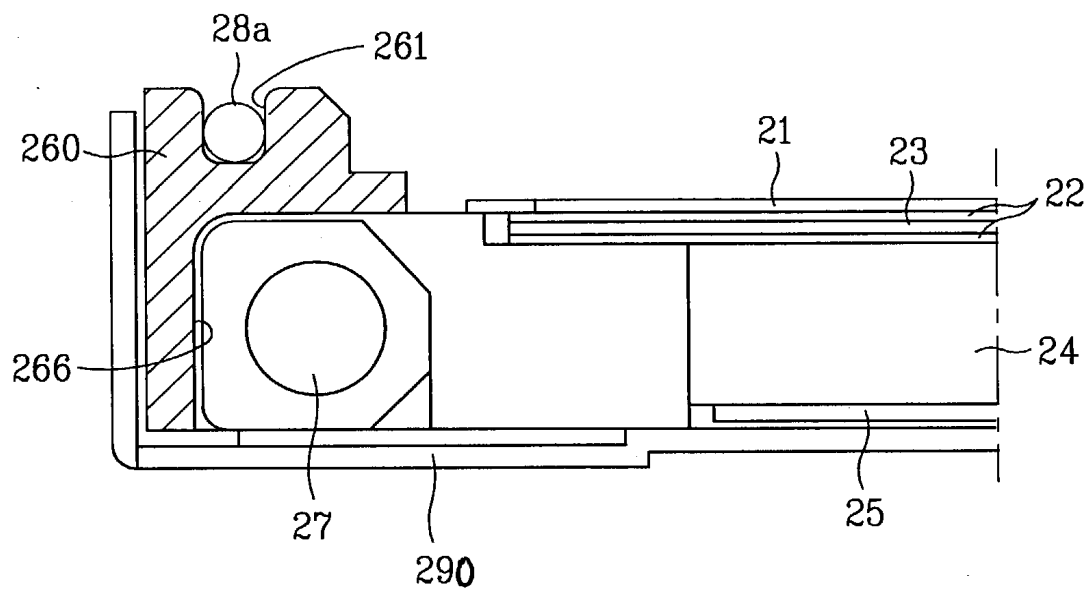


FIG. 8

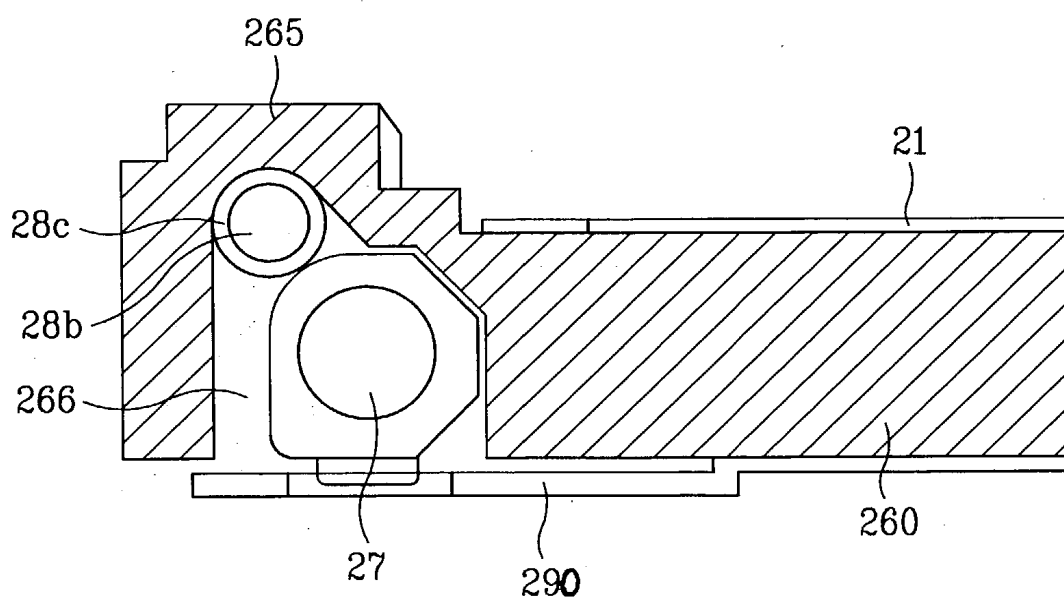

STRUCTURE FOR ASSEMBLING LAMP WIRE FOR BACKLIGHT ASSEMBLY INTO LIQUID CRYSTAL DISPLAY MODULE

[0001] This application claims the benefit of the Korean Application No. P2001-85172 filed on Dec. 26, 2001, which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to backlight assemblies within liquid crystal display (LCD) modules, and more particularly to a structure for securing lamp wires of the backlights within LCD modules.

[0004] 2. Discussion of the Related Art

[0005] Compared to cathode-ray tubes (CRTs), flat panel displays (e.g., liquid crystal displays (LCDs), plasma display panels (PDPs), field emission displays (FEDs), etc.) display high quality images, consume a relatively low amount of power, produce a low amount of heat, and may be fabricated in small sizes. Due to these characteristics, LCDs in particular are extensively used in devices such as watches, calculators, personal digital assistants (PDAs), cellular phones, notebook computers, monitors for personal computers (PCs), televisions, TV receivers, monitors in airplanes, etc.

[0006] LCDs typically include an LCD panel formed with two thin glass substrates having specially treated surfaces being connected to, and separated from each other via a layer of injected liquid crystal material. The phase of the injected liquid crystal material is between a solid phase and a liquid phase. An orientation of molecules within the injected layer of liquid crystal material may be selectively manipulated by applying a voltage to electrodes formed on the two thin glass substrates. By manipulating the orientation of the liquid crystal molecules, light transmittance characteristics of the LCD panel may be selectively controlled. Accordingly, images may be expressed to varying degrees of brightness by the LCD panel. It should be noted, however, that LCD panels are not, by themselves, capable of emitting light. Accordingly, a light source (e.g., a lamp) is required to display images on the LCD panel.

[0007] Generally, light sources included within LCD modules are provided as backlight assemblies arranged behind or along the LCD panel. Referring to FIG. 1, a backlight assembly of an LCD module includes a rectangular mold frame 26, a lamp 27, a metal reflecting plate 29, a light guide 24, a reflecting sheet 25, and a plurality of diffusion and prism sheets 21, 22, and 23.

[0008] The mold frame 26 is formed of plastic while the lamp 27 emits light and is mounted within an inner portion of the mold frame 26. The metal reflecting plate 29 is arranged within an inner portion of the mold frame 26 to surround one portion of the lamp 27 and reflect light emitted from the lamp 27. The light guide 24 is mounted within the mold frame 26 and adjacent the lamp 27 to guide light emitted from the lamp 27 uniformly toward the surface of the substrate 10. The reflecting sheet 25 is arranged under the light guide 24 while the diffusion and prism sheets 21, 22, and 23 are arranged on the light guide 24.

[0009] Referring to FIG. 2, each of the first and second lamp wires 28a and 28b, respectively, are connected to respective first and second ends of the lamp 27. Connected to the first and second lamp wires 28a and 28b, the lamp 27 is electrically connected to an external power source. A low voltage is applied to the first end of the lamp 27 via the first lamp wire 28a and a high voltage is applied to the second end of the lamp 27 via the second lamp wire 28b. The first and second lamp wires 28a and 28b extend outside the LCD module via an opening 26b formed at a corner of the mold frame 26.

[0010] The first lamp wire 28a is connected to a junction at the first end of the lamp 27 arranged away from the opening 26b. Accordingly, in order for the first lamp wire 28a to be connected to the external source, the first lamp wire 28a must be guided along a receiving groove 26a formed at an edge of the mold frame 26 through the opening 26b and outside the LCD module. The second lamp wire 28b is connected to a junction at the second end of the lamp 27 arranged near the opening 26b. Accordingly, the second lamp wire 28b may be guided directly through the opening 26b without the use of a structure such as the receiving groove 26a.

[0011] As tension is applied to the first and second lamp wires 28a and 28b, tensile forces are directly transmitted through the second lamp wire 28b to second end of the lamp 27 thereby bending the second lamp wire 28b and/or disconnecting the second lamp wire 28b from the second end of the lamp 27. Accordingly, as tension is applied to the first and second lamp wires 28a and 28b, the lamp 27 may become disconnected from the external power supply and the second end of the lamp 27 may further become damaged.

[0012] Referring to FIG. 3, the inventors of the present invention have disclosed a structure for securing lamp wires of backlight assemblies within LCD modules. The lamp wires 28 are arranged within the mold frame 126, and a metal chassis 30, similar to the metal chassis shown 30 in FIG. 1, contacts the edge of the liquid crystal display panel 10 and the mold frame 126 to connect the liquid crystal panel 10 to the backlight assembly. Accordingly, first and second lamp wires 28a and 28b may extend through an opening 126b formed within a portion of the mold frame 126 and spaced a predetermined distance from a corner of the mold frame 12 such that the second lamp wire 28b is bent at two locations when a portion of it extends outside the LCD module. Based on the structure shown in FIG. 3, tension applied to the second lamp wire 28b does not result in disconnection of the lamp 27. However, portions of the lamp wires 28 extending out from the opening 126b may become damaged due to sharp edges on the metal chassis 30 when the metal chassis 30 is connected to the mold frame 126.

SUMMARY OF THE INVENTION

[0013] Accordingly, the present invention is directed to structure for securing lamp wires of backlight assemblies within liquid crystal display modules that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

[0014] An advantage of the present invention provides a backlight assembly of an LCD device wherein a first end of a lamp wire connected to a low voltage source may be

securely connected to a lamp, wherein lamp wires may be prevented from being removed from a mold frame through an opening, and wherein lamp wires may be prevented from being disconnected from a lamp.

[0015] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. These and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0016] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, an LCD module may, for example, include a liquid crystal panel, a rectangular mold frame, for supporting the liquid crystal panel, arranged behind the liquid crystal panel, a lamp for emitting light arranged within an inner portion of the mold frame, and lamp wires, for electrically connecting the lamp to an external power source, connected to respective ends of the lamp.

[0017] In one aspect of the present invention, a structure for securing lamp wires of a backlight assembly within an LCD module may, for example, include an opening arranged proximate a corner of a mold frame, a first lamp wire connected to the first end of the lamp for transmitting a low voltage to the lamp, a second lamp wire connected to a second end of the lamp for transmitting a high voltage to the lamp, wherein the first and second lamp wires extend through the opening, an upper inserting groove formed in an upper portion of the opening, wherein the first lamp wire may be inserted from an upper portion of the mold frame, a lower inserting groove formed in a lower portion of the opening, wherein the second lamp wire may be inserted from a lower portion of the mold frame, and a tube for covering a portion of the second lamp wire between a junction location at the second end of the lamp and a location where the second lamp wire extends through the opening.

[0018] In one aspect of the present invention, the first and second lamp wires may be prevented from being pulled out of the opening.

[0019] In another aspect of the present invention, a protecting plate may be integrally formed with the mold frame for protecting the second lamp wire, wherein the protecting plate may be formed between the upper inserting groove and the junction location at the second end of the lamp.

[0020] In yet another aspect of the present invention, the first and second lamp wires may be prevented from being damaged during a connection of a metal chassis to the mold frame.

[0021] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification,

illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0023] In the drawings:

[0024] **FIG. 1** illustrates a sectional view of an LCD module in a related art LCD device;

[0025] **FIG. 2** illustrates a perspective view of a first structure for securing lamp wires of a backlight assembly within the LCD module shown in **FIG. 1**;

[0026] **FIG. 3** illustrates a perspective view of a second structure for securing lamp wires of a backlight assembly within a related art LCD module;

[0027] **FIG. 4** illustrates a perspective of a structure for securing lamp wires of a backlight assembly within an LCD module according to one aspect of the present invention;

[0028] **FIG. 5** illustrates a schematic view of a structure for securing lamp wires of a backlight assembly within the LCD module shown in **FIG. 4**;

[0029] **FIG. 6** illustrates a front view of a structure for securing lamp wires within the LCD module shown in **FIG. 5**;

[0030] **FIG. 7** illustrates a sectional view of the LCD module shown in **FIG. 6**, along line I-I; and

[0031] **FIG. 8** illustrates a sectional view of the LCD module shown in **FIG. 6**, along line II-II.

DETAILED DESCRIPTION OF THE INVENTION

[0032] Reference will now be made in detail to embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

[0033] **FIGS. 4 to 8** illustrate views of a structure for securing lamp wires of a backlight assembly within an LCD module according to one aspect of the present invention.

[0034] Referring to **FIGS. 4 to 8**, an LCD module may, for example, include a liquid crystal panel **10**, a backlight assembly **20**, a mold frame **260**, and a chassis **30** made out of material such as metal. The liquid crystal panel **10** may be arranged at a front portion of the LCD module and may be used to display images. The backlight assembly **20** may be arranged behind the liquid crystal panel **10** and provide light to the liquid crystal panel **10**. The rectangular mold frame **260** may be made of a material such as plastic and may support the liquid crystal panel **10** and the backlight assembly **20**. The chassis **30** may surround corners of the liquid crystal panel **10** and the mold frame **260**.

[0035] The backlight assembly **20** may further include a plurality of diffusion sheet **21** and prism sheets **22** and **23**, a light guide **24**, and a lamp **27** arranged within an inner portion of the mold frame **260**. A lower support **290** may be arranged under the mold frame **260** to prevent the lamp **27** from detaching from the mold frame **260**.

[0036] In accordance with the principles of the present invention, first and second ends of the lamp **27** may be respectively connected to first and second lamp wires **28a** and **28b**. Connected to the first and second lamp wires **28a** and **28b**, the lamp **27** may be electrically connected to an

external power source. In one aspect of the present invention, a low voltage may be transmitted through the first lamp wire **28a** and applied to the first end of the lamp **27**. In another aspect of the present invention, a high voltage may be transmitted through the second lamp wire **28b** and applied to the second end of the lamp **27**. The first and second lamp wires **28a** and **28b** may extend through an opening **262** formed within, and proximate a corner of, the mold frame **260** outside the LCD module. The first and second lamp wires **28a** and **28b** may be guided toward the opening **262** via a first receiving groove **261** formed at an edge of the mold frame **260**.

[0037] In one aspect of the present invention, the opening **262** may be spaced a predetermined distance from a corner of the mold frame **260** such that the first lamp wire **28a** may be bent at two different portions within the mold frame **260**. In another aspect of the present invention, the opening **262** may be arranged within the mold frame **260** such that the second end of the lamp **27** is closer to the opening **262** than the first end of the lamp **27**.

[0038] According to the principles of the present invention, an upper inserting groove **263** may be formed at an upper portion of the opening **262** such that the first lamp wire **28a** may be inserted through the upper inserting groove **263** to be secured within the opening **262**. A lower inserting groove **264** may, for example, be formed at a lower portion of the opening **262**, such that the second lamp wire **28b** may be inserted through the lower inserting groove **264** to be secured within the opening **262**. In one aspect of the present invention, the upper and lower inserting grooves **263** and **264**, respectively, may be formed in upper and lower portions of the mold frame **260**, respectively. A width of the upper inserting groove **263** may be slightly greater than the first diameter of the first lamp wire **28a**. In one aspect of the present invention, a tube **28c**, made of a material that shrinks upon being heated, may be provided to cover portions of the second lamp wire **28b** arranged between a junction location at the second end of the lamp **27** and a location where the second lamp wire **28b** extends through the opening **262**. A width of the lower inserting groove **264** may be slightly greater than the second diameter of the second lamp wire **28b**, covered by the tube **28c**.

[0039] Referring to FIGS. 5 and 6, due to the presence of the tube **28c**, the second diameter of the second lamp wire **28b** may be greater than the first diameter of the first lamp wire **28a**. Accordingly, the second lamp wire **28b** experiences greater tensile forces than the first lamp wire **28a**. Since the first and second lamp wires **28a** and **28b** are both arranged within the opening simultaneously, the second lamp wire **28b**, covered by the tube **28c**, may at least partially block the upper inserting groove **263**. Accordingly, the second lamp wire **28b** may press on the first lamp wire **28a** in a direction away from the corner of the mold frame **260** proximate the opening **262**, due to the tensile force induced by the tube **28c**. Since the second lamp wire **28b** presses on the first lamp wire **28a**, the first lamp wire **28a** is not capable of entering the upper inserting groove **263** nor is the first lamp wire **28a** capable of being removed from the opening **262**. In one aspect of the present invention, the first lamp wire **28a** may at least partially block the lower inserting groove **264**. In another aspect of the present invention, the lower support **290** may be arranged at a bottom surface

of the mold frame **260** to secure the lamp **27** and the first and second lamp wires **28a** and **28b** within the mold frame **260**.

[0040] In one aspect of the present invention, a portion of the first lamp wire **28a** may be covered with a tube (not shown), similar to the tube **28c**, to insulate an electrical junction between the first lamp wire **28a** and the first end of the lamp **27**.

[0041] A protecting plate **265** may, for example, be formed integrally at an upper edge of the mold frame **260** for protecting the lamp wires **28**. For example, the protecting plate **265** may be arranged at portions of the mold frame **260** between the upper inserting groove **263** and the junction at the second lamp wire **28b** and the second end of the lamp. Accordingly, the protecting plate **265** may prevent the second lamp wire **28b** from being removed from the mold frame **260** and prevent the second lamp wire **28b** from being damaged when the chassis **30** is coupled to the mold frame **260**.

[0042] A method for securing the lamp wires of the backlight within the LCD module will now be explained in greater detail.

[0043] According to the principles of the present invention, lamp connection ends of the first and second lamp wires **28a** and **28b** may be connected (e.g., welded) to first and second ends of the lamp **27**, respectively. Subsequently, the tube **28c** may be formed over the second lamp wire **28b**, subjected to heat, and shrunk conformably around the second lamp wire **28b** such that the tube **28c** may cover portions of the second lamp wire **28b** from at least between the second end of the lamp **27** to within the opening **262**.

[0044] Referring to FIGS. 6, 7, and 8, the lamp **27** may be mounted along a second receiving groove **266** formed within the mold frame **260**. Accordingly, the second lamp wire **28b** may be inserted from a lower portion of the lower inserting groove **264** in the mold frame **260** into the opening **262** and the first lamp wire **28a** may be inserted from an upper portion of the upper inserting groove **263** into the opening **262** and guided along the first receiving groove **261** to the first end of the lamp **27**.

[0045] According to the principles of the present invention, the first and second lamp wires may be bent at several locations, may be inserted from upper and lower portions of an opening formed in a mold frame, and may respectively extend through upper and lower portions of the opening. Additionally, the lamp wire transmitting high voltage may be in a state of higher tension force and have a greater diameter compared to the lamp wire transmitting low voltage. Accordingly, the lamp wire transmitting the high voltage may be prevented from being removed from the opening and the lamp wires may be prevented from being damaged when a chassis is coupled to the mold frame. Additionally, a protecting plate provided at an upper portion of the mold frame, may prevent the lamp wire transmitting the high voltage from being damaged from sharp edges of the chassis.

[0046] It will be apparent to those skilled in the art that various modifications and variation can be made in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. An LCD module, comprising:
 - a liquid crystal panel;
 - a mold frame for supporting the liquid crystal panel, the mold frame arranged behind the liquid crystal panel, the mold frame containing an opening arranged proximate a corner of the mold frame;
 - a lamp for emitting light, the light arranged within an inner portion of the mold frame;
 first and second lamp wires electrically connecting the lamp to an external power source through the opening, the first and second lamp wires connected first and second ends of the lamp, respectively, wherein the first end of the lamp is further away from the opening than the second end of the lamp;
- an upper inserting groove through which the first lamp wire is insertable, the upper inserting groove being formed in an upper portion of the opening;
- a lower inserting groove through which the second lamp wire is insertable being formed in a lower portion of the opening; and
- a tube for covering portions of the second lamp wire between a junction location at the second end of the lamp and a location where the second lamp wire extends through the opening.
2. The LCD module as claimed in claim 1, further comprising a protecting plate for protecting the second lamp wire, the protecting plate being arranged at portions of the mold frame between the upper inserting groove and the junction at the second lamp wire and the second end of the lamp.
3. The LCD module as claimed in claim 2, wherein the protecting plate is integrally formed with the mold frame.
4. The LCD module as claimed in claim 1, wherein the tube is formed of a material that shrinks upon being exposed to heat.
5. The LCD module as claimed in claim 1, wherein the first lamp wire transmits a low voltage.
6. The LCD module as claimed in claim 1, wherein the second lamp wire transmits a high voltage.
7. The LCD module as claimed in claim 1, wherein the upper inserting groove is arranged in an upper portion of the mold frame.
8. The LCD module as claimed in claim 1, wherein the lower inserting groove is arranged in a lower portion of the mold frame.
9. A structure for securing wires within an LCD module, comprising:
 - a lamp having first and second ends;
 - a first lamp wire having a first diameter connected to the first end of the lamp;
 - a second lamp wire having a second diameter, greater than the first diameter, connected to the second end of the lamp; and
 - a frame for supporting the lamp, the frame including a opening through which the first and second lamp wires extend, an upper inserting groove arranged at an upper portion of the opening, and a lower inserting groove arranged at a lower portion of the opening.

10. The structure for securing wires within an LCD module according to claim 9, further comprising a lower support for preventing the lamp from detaching from the frame, the lower support being arranged under the frame.

11. The structure for securing wires within an LCD module according to claim 9, further comprising a tube for covering portions of the second lamp wire between a junction location at the second end of the lamp wherein and a location where the second lamp wire extends through the opening.

12. The structure for securing wires within an LCD module according to claim 9, wherein the first lamp wire is insertable into the opening through the upper inserting groove.

13. The structure for securing wires within an LCD module according to claim 9, wherein the second lamp wire is insertable into the opening through the lower inserting groove.

14. The structure for securing wires within an LCD module according to claim 9, further comprising a protecting plate arranged at portions of the frame between the upper inserting groove and the junction at the second lamp wire and the second end of the lamp.

15. A structure for securing wires within an LCD module, comprising:

- a frame including an opening, a first receiving groove, and a second receiving groove;

- a lamp arranged within the second receiving groove, the lamp having first and second ends, wherein the second end of the lamp is closer to the opening than the first end of the lamp;

- a first lamp wire arranged within the first receiving groove, the first lamp wire connected to the first end of the lamp; and

- a second lamp wire connected to the second end of the lamp, wherein the first and second lamp wires extend through the opening.

16. The structure for securing wires within an LCD module according to claim 15, wherein a portion of the first lamp wire has a first diameter and a portion of the second lamp wire has a second diameter different from the first diameter.

17. The structure for securing wires within an LCD module according to claim 15, wherein a low voltage is transmitted through the first lamp wire and a high voltage is transmitted through the second lamp wire.

18. The structure for securing wires within an LCD module according to claim 15, wherein at least a portion of the second lamp wire has a greater diameter than at least a portion of the first lamp wire.

19. The structure for securing wires within an LCD module according to claim 15, further comprising an upper inserting groove formed in an upper portion of the frame in communication with the opening, wherein the first lamp wire is insertable into the upper inserting groove.

20. The structure for securing wires within an LCD module according to claim 15, further comprising a lower inserting groove formed in a lower portion of the frame in communication with the opening, wherein the second lamp wire is insertable into the lower inserting groove.

专利名称(译)	用于将用于背光组装的灯线组装到液晶显示模块中的结构		
公开(公告)号	US20030117544A1	公开(公告)日	2003-06-26
申请号	US10/326402	申请日	2002-12-23
[标]申请(专利权)人(译)	金孝珍 朴相HYUN		
申请(专利权)人(译)	金孝珍 朴相HYUN		
当前申请(专利权)人(译)	金孝珍 朴相HYUN		
[标]发明人	KIM HYO JIN PARK SANG HYUN		
发明人	KIM, HYO JIN PARK, SANG HYUN		
IPC分类号	G02F1/1335 G02F1/13 G02F1/13357 G02F1/1333		
CPC分类号	G02F1/133604 G02F2001/133612 G02F1/133615 G02F1/133608		
优先权	1020010085172 2001-12-26 KR		
其他公开文献	US7283184		
外部链接	Espacenet USPTO		

摘要(译)

用于将LCD背光组件的灯线固定在LCD模块内的结构包括液晶面板，模框，灯和用于将灯线固定在LCD模块内的背光组件内的结构。该结构包括灯线延伸穿过的通孔，用于接收灯线的开口的下部和上部中的下部和上部插入槽，以及用于覆盖施加有高电压的灯线部分的管。该管在灯线和灯连接处的连接处和灯线延伸通过开口的部分之间覆盖灯线的部分。

