



US 20060238680A1

(19) **United States**(12) **Patent Application Publication**
Park et al.(10) **Pub. No.: US 2006/0238680 A1**(43) **Pub. Date: Oct. 26, 2006**(54) **LIQUID CRYSTAL DISPLAY DEVICE**(30) **Foreign Application Priority Data**(75) Inventors: **Chi Hyuck Park**, Daegu (KR); **Tae Bong Jung**, Seoul (KR)

Apr. 22, 2005 (KR)..... 10-2005-0033709

Publication Classification(51) **Int. Cl.**
G02F 1/1335 (2006.01)(52) **U.S. Cl.** **349/117**(57) **ABSTRACT**

A liquid crystal display device includes a liquid crystal display panel, a compensation film for compensating a viewing angle decline caused by improper alignment of liquid crystal molecules in the liquid crystal display panel, and an isotropic layer between the compensation film and the liquid crystal display panel.

Correspondence Address:
JENKENS & GILCHRIST, P.C.
901 15TH STREET N.W.
SUITE 900
WASHINGTON, DC 20005 (US)

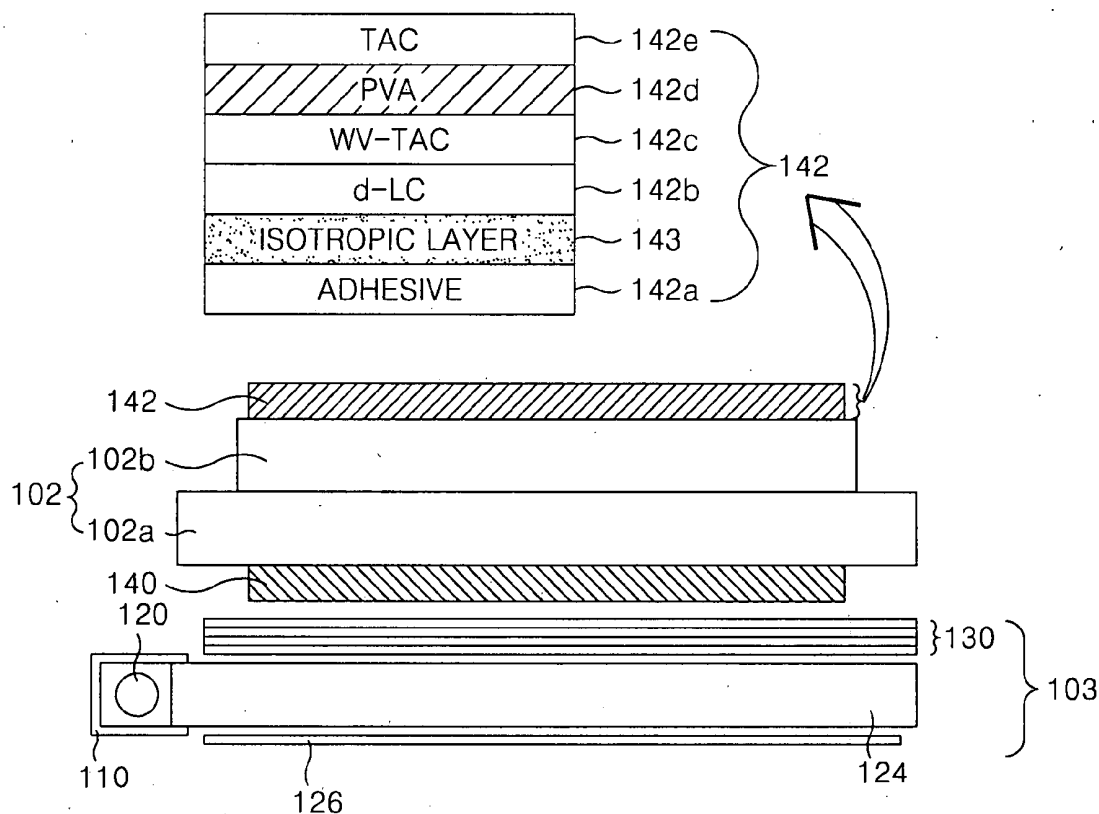
(73) Assignee: **LG.PHILIPS LCD CO., LTD.**, Seoul (KR)(21) Appl. No.: **11/404,834**(22) Filed: **Apr. 17, 2006**

FIG. 2
RELATED ART

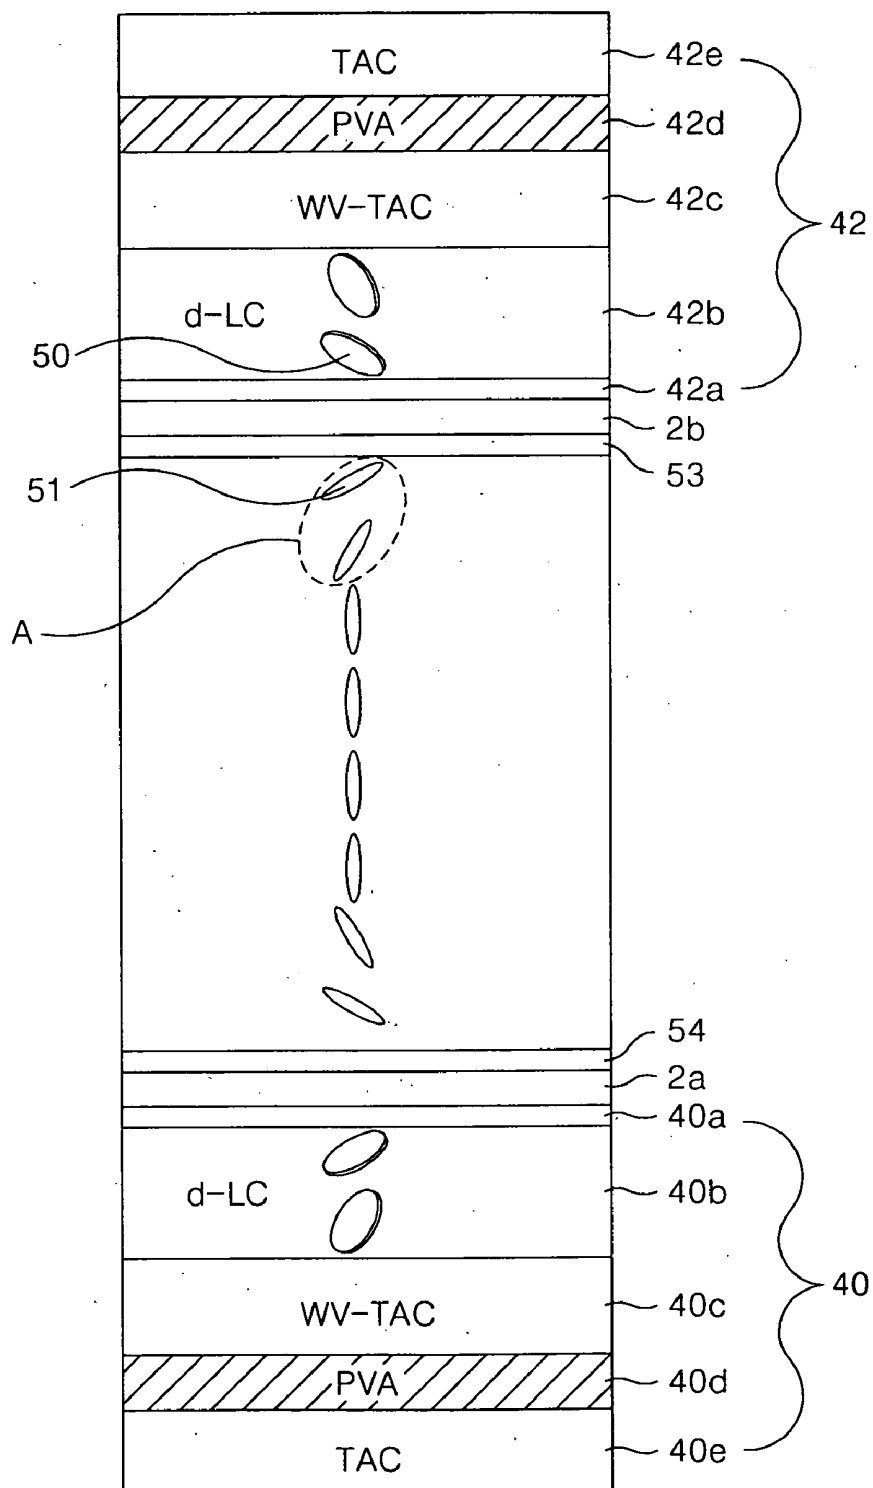


FIG. 3
RELATED ART

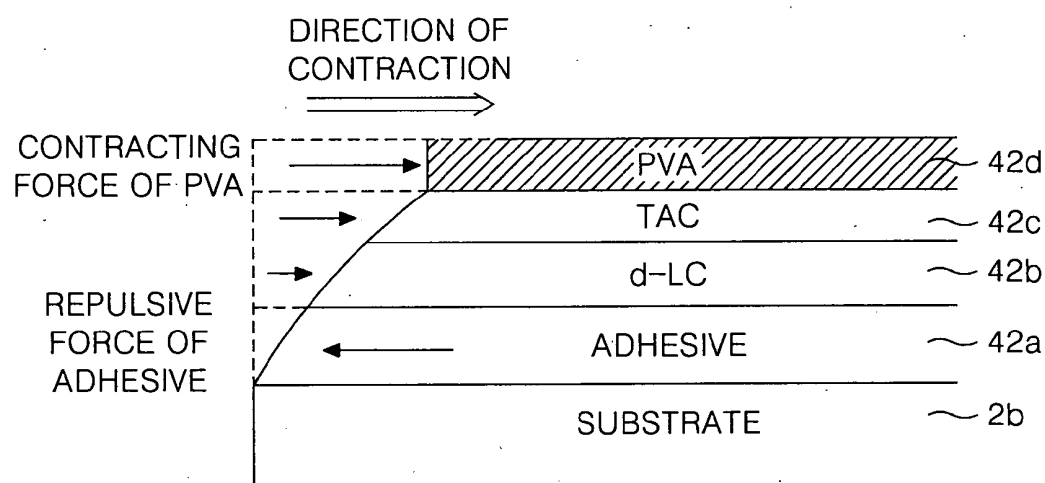


FIG. 4
RELATED ART

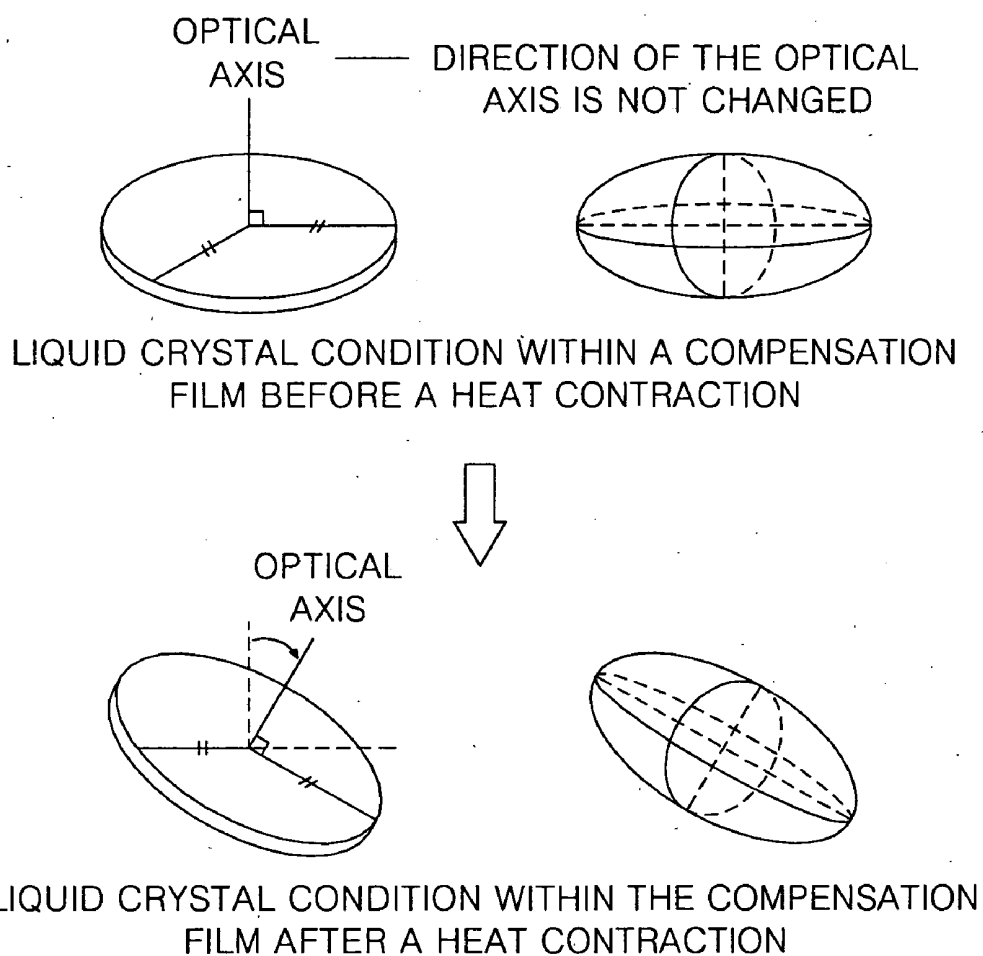


FIG. 5

RELATED ART

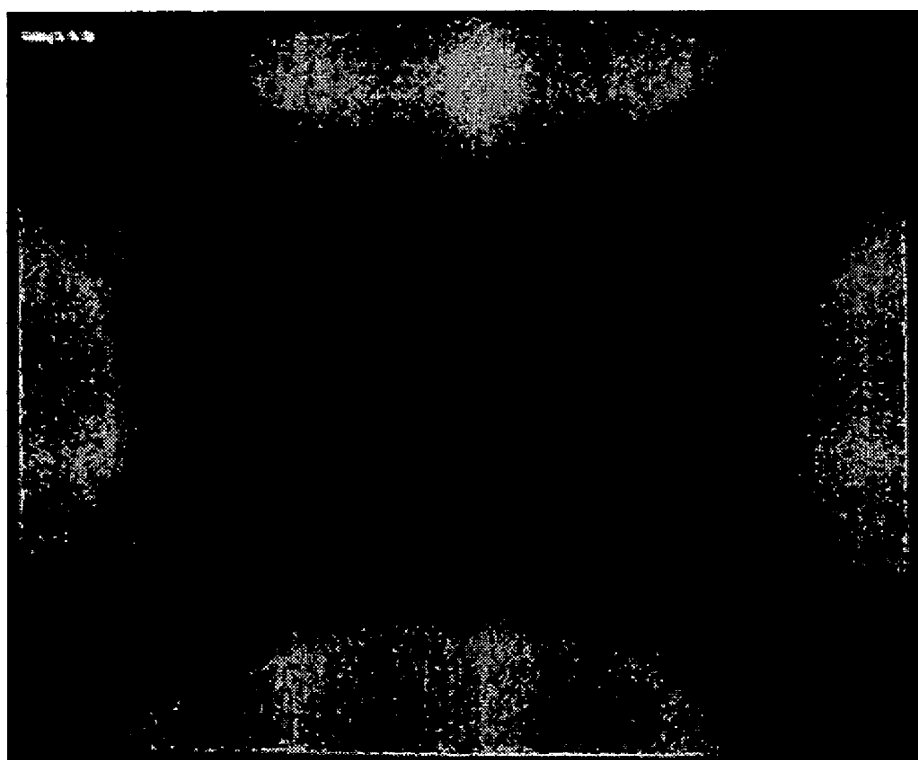


FIG. 6

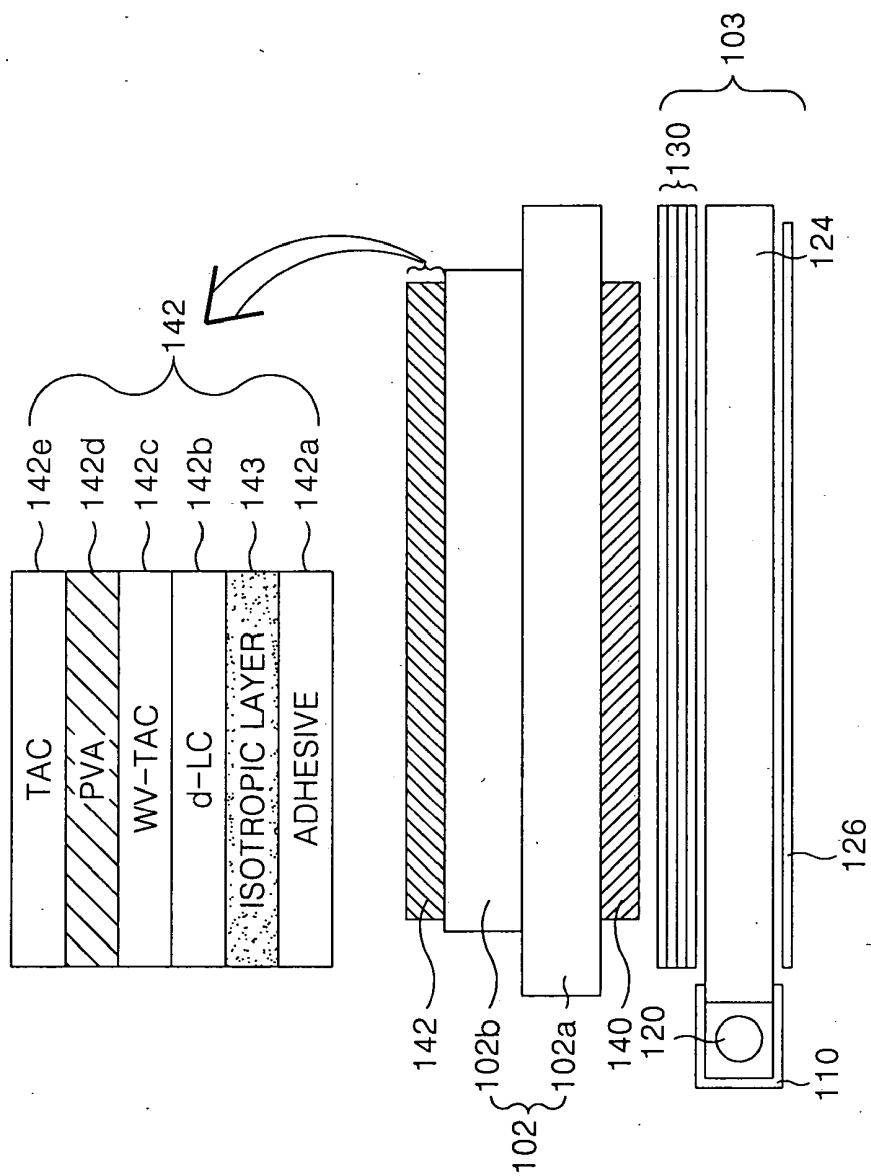


FIG. 7

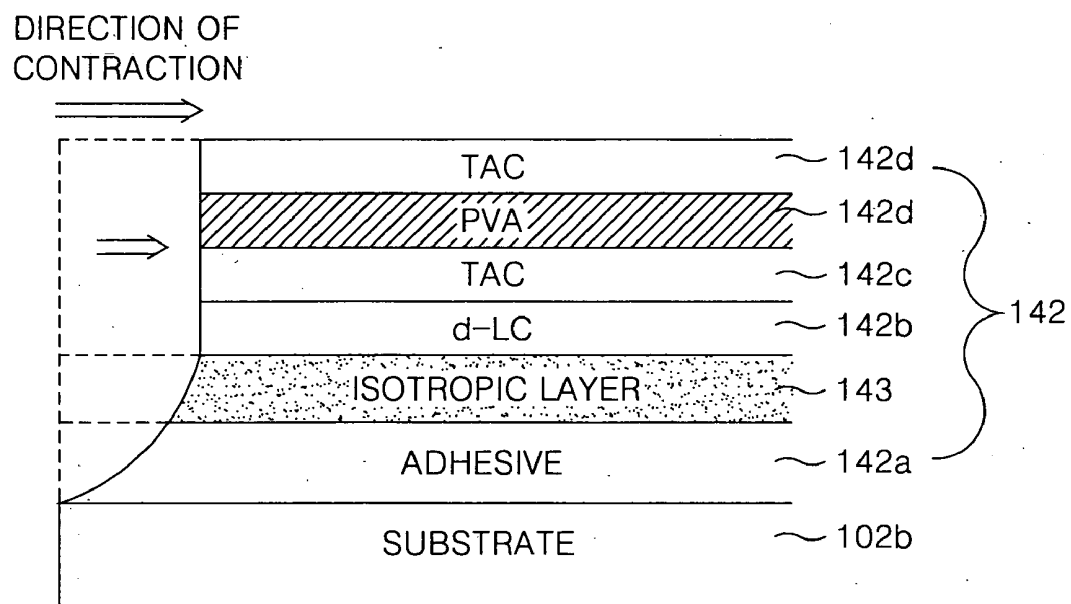


FIG. 8


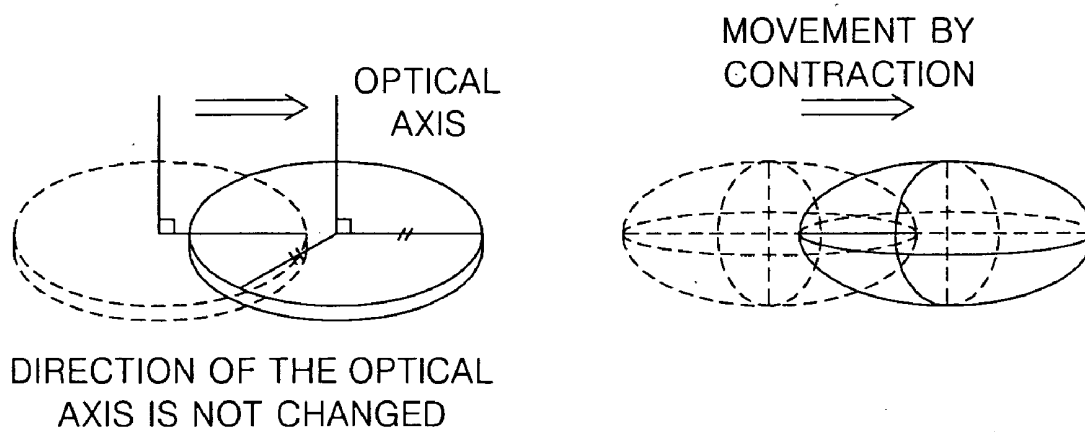


FIG. 9



LIQUID CRYSTAL DISPLAY DEVICE

[0001] This application claims the benefit of Korean Patent Application No. P2005-0033709 filed in Korea on Apr. 22, 2005, which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a display device, and more particularly to a liquid crystal display device.

[0004] 2. Description of the Related Art

[0005] Generally, a liquid crystal display device includes a liquid crystal module (hereinafter, "LCM"), a driving circuit for driving the LCM and a case. The LCM includes a liquid crystal display panel having liquid crystal cells arranged in a matrix between two substrates, a backlight unit for irradiating light to the liquid crystal display panel. The LCM also includes an optical sheet for directing light from the backlight unit into a vertical direction toward the liquid crystal display panel, a lower polarizing plate at a lower portion of the liquid crystal display panel for polarizing light emitted from the backlight unit in a first direction and an upper polarizing plate at an upper portion of the liquid crystal display panel for polarizing light emitted from the liquid crystal display panel in a second direction perpendicular to the first direction. Such a liquid crystal display panel, a backlight unit and an optical sheet work together to prevent a light loss. The case encloses and protects the outside of the LCM to prevent damage to the LCM by an outside force.

[0006] FIG. 1 is a cross-sectional view of the related art liquid crystal module. Referring to FIG. 1, a liquid crystal module 1 includes a liquid crystal display panel 2 having a liquid crystal cell matrix, an upper polarizing plate 42 is positioned at a front surface of the LCM and a lower polarizing plate 40 is positioned at a rear surface of the liquid crystal display panel 2. A backlight unit 3 is positioned under the lower portion of the lower polarizing plate 40.

[0007] The liquid crystal display panel 2 includes a thin film transistor array substrate 2a and a color filter array substrate 2b adhered to each other with a liquid crystal layer (not shown) between the two substrates. The thin film transistor array substrate 2a includes signal lines (not shown) and thin film transistors (not shown). The color filter array substrate 2b includes color filters (not shown) and a black matrix (not shown).

[0008] The backlight unit 3 includes a lamp 20 for generating light, a lamp housing 10 for enclosing the lamp 20, a light guide plate 24 for distributing light from the lamp 20 across the liquid crystal display panel 2, a reflector 26 at the rear surface of the light guide plate 24, and diffusing sheets 30 sequentially built on the light guide plate 24. The lower polarizing plate 40 is attached to the rear surface of the thin film transistor array substrate 2a so that the liquid crystal display panel 2 can receive polarized light from the backlight unit 3, and the upper polarizing plate 42 is attached to the front surface of the color filter array substrate 2b to emit polarized light from the liquid crystal display panel 2.

[0009] FIG. 2 is a diagram for explaining a structure of the related art polarizing plate and the viewing angle compen-

sation principle by the compensation film of the polarizing plate. FIG. 2 is a diagram of the related art polarizing plates 40 and 42 coupled with a liquid crystal display panel. As shown in FIG. 2, the related art polarizing plates 40 and 42 have a structure in which the compensation film (d-LC: discotic-LIQUID CRYSTAL) 40b and 42b, a first protective layer (wide view tree acetate cellulose: Wv-TAC) 40c and 42c, a polarizer (Poly Vinyl Alcohol: PVA) 40d and 42d and a second protective layer 40e and 42e are sequentially built on each of the upper and lower substrates 2a and 2b of the liquid crystal display panel. The compensation films 40b and 42b are attached to the outer surfaces of the substrates 2a and 2b of the liquid crystal display panel by adhesive 40a and 42a.

[0010] The compensation film 42b compensates for a viewing angle decline by orienting liquid crystal molecules 50 in the compensation film 42b to be symmetrical with respect to liquid crystal molecules 51 at an area A of an upper portion of the liquid crystal layer adjacent to an alignment film 53 in the liquid crystal display panel. As shown in FIG. 2, whenever an electric field is applied to liquid crystal molecules 51 (that is, a TN mode), a misalignment is generated in the liquid crystal molecules 51 at an area A of the liquid crystal display panel by an alignment force of the alignment film 53 inside of the upper substrate 2b. The decline of the viewing angle by such an improper liquid crystal alignment in the area A is prevented by the compensation film 42b including liquid crystal layer molecules 50 aligned in such a manner as to have symmetry with the liquid crystal molecules 51 in the misaligned liquid crystal area A. Compensation film 40b also including liquid crystal layer molecules aligned in such a manner as to have symmetry with the liquid crystal molecules that are improperly aligned adjacent to the alignment film 54 inside of the upper substrate 2a.

[0011] First protective layers 40c and 42c and second protective layers 40e and 42e are respectively positioned at the upper/lower surfaces of the polarizers 40d and 42d to protect the polarizers 40d and 42d. The first protective layers 40c and 42c also assists in the functions of the compensation films 40b and 42b in the role of viewing angle compensation. The polarizers 40d and 42d are a Poly Vinyl Alcohol film coated with iodine and stretched in a specific direction. The light is absorbed in the stretched direction and penetrates in the direction that is perpendicular to the stretched direction so as to polarize the light.

[0012] FIG. 3 is a diagram representing a transformation of each layer by a shear stress generated between a static upper substrate and a contracting force of a polarizer. After the polarizer 42d is stretched in a designated direction, it is then affixed in the stretched state by the first and second protective layers 42c and 42e so as to have a light polarization capability. But such a polarizer 42d has a tendency to contract in a direction opposite to that of the stretched direction when subjected to either or both internal heat from the backlight unit and external heat. As a result, the first protective layer 42c and the compensation film 42b also contract in a direction opposite to the stretched direction due to the contracting polarizer 42d, as shown in FIG. 3. Because a lower area of the compensation film 42b is firmly attached by an adhesive layer 142a to the upper substrate 2b while an upper area of the compensation film 142b is affected by a contracting force transmitted through the first protective

layer **142c** from the polarizer **142c**, a strong shear stress is generated at the lower area of the compensation film **142b**. Due to the shear stress, a refraction index anisotropy is generated in the liquid crystals within the compensation film **142b**.

[0013] **FIG. 4** is a diagram representing a change in optical axial direction of the liquid crystal molecules within a compensation film by shear stress on the compensation film. **FIG. 5** shows a related art liquid crystal module exhibiting a light leakage phenomenon due to a contracted polarization film. As shown in **FIG. 4**, the liquid crystal molecule has a steady state optical axial direction before a heat contraction. However, the optical axial direction of the liquid crystal molecule diverges from the steady state position due shear stress caused by a contraction at the upper portion of the compensation film **42b**, so that an optical axial direction of the liquid crystal is changed. Thus, the initial alignment of the liquid crystal molecules **51** positioned within the compensation film **42b** is disturbed and thus can no longer sufficiently compensate for the improperly aligned liquid crystal molecules of the liquid crystal display panel. As a result, light leakage is generated while realizing an image so as to cause a reduction in picture quality, as shown in **FIG. 5**.

SUMMARY OF THE INVENTION

[0014] Accordingly, the present invention is directed to a liquid crystal display device that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

[0015] An object of the present invention to provide a liquid crystal display device having a uniform brightness.

[0016] An object of the present invention to provide a fabricating method of a liquid crystal display device having a uniform brightness.

[0017] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0018] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, a liquid crystal display device includes a liquid crystal display panel, a compensation film for compensating a viewing angle decline caused by improper alignment of liquid crystal molecules in the liquid crystal display panel, and an isotropic layer between the compensation film and the liquid crystal display panel.

[0019] In another aspect, a liquid crystal display device includes a liquid crystal display panel, a polarizer for polarizing light, a compensation film positioned between the polarizer and the liquid crystal display panel, and an isotropic layer between the compensation film and the liquid crystal display panel.

[0020] In yet another aspect, a liquid crystal display device includes a liquid crystal display panel, a first compensation film at an upper side of the liquid crystal display

panel, a second compensation film at a lower side of the liquid crystal display panel, a first isotropic layer between the first compensation film and the liquid crystal display panel, and a second isotropic layer between the second compensation film and the liquid crystal display panel.

[0021] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0023] In the drawings:

[0024] **FIG. 1** is a cross-sectional view of the related art liquid crystal module;

[0025] **FIG. 2** is a diagram for explaining a structure of the related art polarizing plate and the viewing angle compensation principle by the compensation film of the polarizing plate;

[0026] **FIG. 3** is a diagram representing a transformation of each layer by a shear stress generated by an adhesion force of an adhesive and a contracting force of a polarizer;

[0027] **FIG. 4** is a diagram representing a change in optical axial direction of the liquid crystal molecule within a compensation film by shear stress on the compensation film;

[0028] **FIG. 5** shows the related art liquid crystal module exhibiting a light leakage phenomenon due to a contracted polarization film;

[0029] **FIG. 6** is a cross-sectional view of a liquid crystal module according to an embodiment of the present invention;

[0030] **FIG. 7** is a diagram for explaining the shear stress absorbing role of an isotropic layer shown in **FIG. 6**;

[0031] **FIG. 8** is a diagram representing a state of a liquid crystal layer of a compensation film before and after a contracting of a polarizer; and

[0032] **FIG. 9** shows a liquid crystal module according to an embodiment of the present invention having reduced light leakage and improved picture quality.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0033] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings of **FIGS. 6 to 9**.

[0034] **FIG. 6** is a cross-sectional view of a liquid crystal module (LCM) according to an embodiment of the present invention. Referring to **FIG. 6**, an LCM includes a liquid crystal display panel **102** having a liquid crystal cell matrix, an upper polarizing plate **142** positioned at a front surface of

the liquid crystal display panel **102**, a lower polarizing plate **140** positioned at a rear surface of the liquid crystal display panel **102**, and a backlight unit **103** positioned under a lower portion of the lower polarizing plate **140**.

[0035] The liquid crystal display panel **102** includes a thin film transistor array substrate **102a** and a color filter array substrate **102b** adhered to each other with a liquid crystal layer between the substrates. The thin film transistor array substrate **102a** includes signal lines, thin film transistors and a lower alignment film. The color filter array substrate **102b** includes color filters, a black matrix and an upper alignment film.

[0036] The backlight unit includes a lamp **120** for generating light, a lamp housing **110** enclosing the lamp **120**, a light guide plate **124** for distributing light from the lamp **120** across the liquid crystal display panel **102**, a reflector **126** at the rear surface of the light guide plate **124**, and diffusing sheets **130** sequentially built on the light guide plate **124**.

[0037] The lower polarizing plate **140** is attached to the rear surface of the thin film transistor array substrate **102a** so that the liquid crystal display panel **102** receives polarized light from the backlight unit **103** and the upper polarizing plate **142** is attached to the front surface of the color filter array substrate **102b** so as to emit polarized light from the liquid crystal display panel **102**.

[0038] The polarizing plates **140** and **142** have a structure in which an isotropic layer **143**, a compensation film (d-LC: discotic-LIQUID CRYSTAL) **142b**, a first protective layer (wide view tree acetate cellulose: WV-TAC) **142c**, a polarizer (Poly Vinyl Alcohol: PVA) **142d** and a second protective layer **142e** are sequentially built on the substrate (upper or lower substrate). The compensation film **142b** is attached to the substrate of the liquid crystal display panel through the isotropic layer **143** by an adhesive **142a** so as to compensate a decline in viewing angle by differentially aligning liquid crystal molecules at an area of the upper portion of the liquid crystal display panel and a lower alignment film.

[0039] The first and second protective layers **142c** and **142e** are positioned on the upper/lower portions of the polarizer **142d** to protect the polarizer **142d**. Further, the first protective layer **142c** assists in the function of the compensation film **142b** by playing a role in realizing a wider viewing angle. The polarizer **142d** is a Poly Vinyl Alcohol film coated with iodine and stretched in a specific direction. The light is absorbed in the stretched direction of the polarizer **142d** and penetrates through the polarizer **142d** in a direction perpendicular to the stretched direction so as to polarize the light.

[0040] The isotropic layer **143** includes an isotropic medium to absorb a shear stress due to the contracting of the polarizer **142d** between an adhesive on the color filter array substrate **102b** and the compensation film **142b**. Accordingly, divergence in optical axial directions of the liquid crystal molecules within the compensation film **142b** is prevented. The isotropic layer **143** can have a cyclo orefin polymer as the isotropic medium, for example.

[0041] Hereinafter, absorption of the shear stress will be described in more detail with reference to **FIG. 7** to **FIG. 9**. **FIG. 7** is a diagram for explaining the shear stress absorbing role of an isotropic layer shown in **FIG. 6**. **FIG. 8** is a diagram representing a state of a liquid crystal layer of a

compensation film before and after a contracting polarizer. **FIG. 9** shows a liquid crystal module according to an embodiment of the present invention having reduced light leakage and improved picture quality.

[0042] The polarizer **142d** is stretched in a designated direction and then is fixed in the stretched state by the first and second protective layers **142c** and **142e**. However, such a polarizer **142d** can contract in a direction opposite to the stretched direction in response to heat or over time due to aging. A strong shear stress can be generated in a lower area of the compensation film **142b** since the lower area of the compensation film **142b** is attached to a static substrate with an adhesive while an upper area of the compensation film **142b** is attached to a contracting polarizer **142d** via the protective layer **142c**. Such a shear stress can affect the liquid crystal molecules of the compensation film **142b** such that the liquid crystal molecules are disturbed to cause a misalignment or change in the optical axial direction of the liquid crystal molecules in the compensation film. To solve this problem, an isotropic layer is positioned between an adhesive on a substrate and a compensation film in embodiments of the present invention.

[0043] As shown in **FIG. 7**, the isotropic layer **143** absorbs the shear stress generated by a contracting polarizer **142d**. Accordingly, the amount of shear stress affecting the compensation film **142b** is very small, so that a change in the optical axial direction of the liquid crystal molecules within the compensation film **142b** does not occur. Although the liquid crystal molecules of the compensation film **142b** may be shifted by the contracting polarizer **142d**, a refractive index anisotropy is not generated within the liquid crystal layer of the compensation film **142b** because the optical axial direction of the liquid crystal molecules is not changed, as shown in **FIG. 8**. In other words, a contraction of the compensation film **142b** is not entirely removed by contracting of the polarizer **142d**. But the shear stress is absorbed by the isotropic layer **143** rather than the lower area of the compensation film **142d**, the optical axial direction of the liquid crystal molecules in the is the compensation film **142d** is not changed. As a result, the liquid crystal molecules within the compensation film **142b** corrects a decline in viewing angle by an abnormally aligned liquid crystal molecules within the liquid crystal display panel, so that the light leakage does not occur and the picture quality is considerably improved, as shown in **FIG. 9**.

[0044] As above-mentioned, a liquid crystal module according to embodiments of the present invention includes a polarizer sandwiched by protective layers on a compensation film, which is on an isotropic layer that is attached to a liquid crystal display panel by an adhesive. The isotropic layer absorbs a shear stress generated by a contracting polarizer so as to prevent a change of the optical axial direction in the liquid crystal molecules within the compensation film. As a result of the isotropic layer absorbing the shear stress, the compensation film functions normally to prevent light leakage and maintain picture quality with a uniform brightness.

[0045] It will be apparent to those skilled in the art that various modifications and variations can be made in the liquid crystal display device of the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications

and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A liquid crystal display device, comprising:
 - a liquid crystal display panel;
 - a compensation film for compensating a viewing angle decline caused by improper alignment of liquid crystal molecules in the liquid crystal display panel; and
 - an isotropic layer between the compensation film and the liquid crystal display panel.
2. The liquid crystal display device as claimed in claim 1, further comprising an adhesive layer between the isotropic layer and the liquid crystal display panel for bonding the isotropic layer to the liquid crystal display panel.
3. The liquid crystal module as claimed in claim 1, further-comprising a first polarizing plate on the compensation film.
4. The liquid crystal module as claimed in claim 3, wherein the compensation film contracts along with contraction of the polarizing plate.
5. The liquid crystal module as claimed in claim 1, wherein the isotropic layer includes cyclo orefin polymer.
6. A liquid crystal display device, comprising:
 - a liquid crystal display panel;
 - a polarizer for polarizing light;
 - a compensation film between the polarizer and the liquid crystal display panel; and
 - an isotropic layer between the compensation film and the liquid crystal display panel.
7. The liquid crystal display device as claimed in claim 6, further comprising upper and lower protective layers at upper and lower surfaces of the polarizer.
8. The liquid crystal display device as claimed in claim 7, further comprising an adhesive layer between the isotropic layer and the liquid crystal display panel for bonding the isotropic layer to the liquid crystal display panel.
9. The liquid crystal display device as claimed in claim 6, wherein the isotropic layer absorbs a shear stress generated by a contraction of the polarizer.
10. The liquid crystal display device as claimed in claim 9, wherein the compensation film contracts along with the contraction of the polarizer.
11. The liquid crystal display device as claimed in claim 6, wherein the isotropic layer includes cyclo orefin polymer.
12. The liquid crystal display device as claimed in claim 6, wherein the isotropic layer prevents a change in optical axial direction of liquid crystal molecules within the compensation film.
13. The liquid crystal display device as claimed in claim 6, wherein the compensation film includes a liquid crystal molecules arranged symmetrically to misaligned liquid crystal molecules within the liquid crystal display panel.
14. The liquid crystal display device as claimed in claim 13, wherein the compensation film compensates for a decline of viewing angle by improperly aligned liquid crystal molecules within the liquid crystal display panel.
15. A liquid crystal display device, comprising:
 - a liquid crystal display panel;
 - a first compensation film at an upper side of the liquid crystal display panel;
 - a second compensation film at a lower side of the liquid crystal display panel;
 - a first isotropic layer between the first compensation film and the liquid crystal display panel; and
 - a second isotropic layer between the second compensation film and the liquid crystal display panel.
16. The liquid crystal display device as claimed in claim 15, further comprising:
 - a first polarizer at the upper side of the liquid crystal display panel; and
 - a second polarizer at the lower side of the liquid crystal display panel;
17. The liquid crystal display device as claimed in claim 16, wherein each of the first and second polarizers includes upper and lower protective layers at upper and lower surfaces of each of the first and second polarizers.
18. The liquid crystal display device as claimed in claim 16, wherein the first compensation film is positioned between the first polarizer and the first isotropic layer, and the second compensation film is positioned between the second polarizer and the second isotropic layer.
19. The liquid crystal display device as claimed in claim 15, further comprising:
 - a first adhesive layer between the first isotropic layer and the liquid crystal display panel for bonding the first isotropic layer to, the liquid crystal display panel; and
 - a second adhesive layer between the second isotropic layer and the liquid crystal display panel for bonding the second isotropic layer to the liquid crystal display panel.
20. The liquid crystal display device as claimed in claim 15, wherein the first and second isotropic layers include cyclo orefin polymer.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US20060238680A1	公开(公告)日	2006-10-26
申请号	US11/404834	申请日	2006-04-17
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG.PHILIPS LCD CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	PARK CHI HYUCK JUNG TAE BONG		
发明人	PARK, CHI HYUCK JUNG, TAE BONG		
IPC分类号	G02F1/1335		
CPC分类号	G02F1/1335 G02F2413/10 G02F2201/50 G02F2201/07		
优先权	1020050033709 2005-04-22 KR		
其他公开文献	US7692737		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示装置包括液晶显示面板，用于补偿由液晶显示面板中的液晶分子的不正确对准引起的视角下降的补偿膜，以及补偿膜和液晶显示面板之间的各向同性层。

