



US 20070002231A1

(19) **United States**(12) **Patent Application Publication****Lee et al.**(10) **Pub. No.: US 2007/0002231 A1**(43) **Pub. Date:****Jan. 4, 2007**(54) **IN-PLANE SWITCHING LIQUID CRYSTAL
DISPLAY DEVICE AND METHOD OF
FABRICATING THE SAME**

Mar. 2, 2006 (KR)..... 2006-0020037

Publication Classification(75) Inventors: **Joun-Ho Lee**, Daegu (KR); **Gi-Dong
Lee**, Busan (KR)Correspondence Address:
JENKENS & GILCHRIST, P.C.
901 15TH STREET N.W.
SUITE 900
WASHINGTON, DC 20005 (US)(51) **Int. Cl.****G02F 1/1335** (2006.01)**G02F 1/1343** (2006.01)(52) **U.S. Cl.** **349/117; 349/141**

(57)


ABSTRACT

An in-plane switching liquid crystal display device includes a liquid crystal display panel having first and second substrates, a first polarizer disposed at a first surface of the liquid crystal display panel and having a first protective film, a first polarizing film, and a second protective film, a second polarizer disposed at a second surface of the liquid crystal display panel and having a third protective film, a second polarizing film, and a fourth protective film, and a first optical compensation film between the first polarizer and the liquid crystal display panel, the third protective film being adjacent to the liquid crystal display panel and having a substantially zero retardation value.

(73) Assignee: **LG.PHILIPS LCD CO., LTD.**, Seoul
(KR)(21) Appl. No.: **11/370,987**(22) Filed: **Mar. 9, 2006**(30) **Foreign Application Priority Data**

Jun. 30, 2005 (KR)..... 2005-0057876

Jun. 30, 2005 (KR)..... 2005-0057901

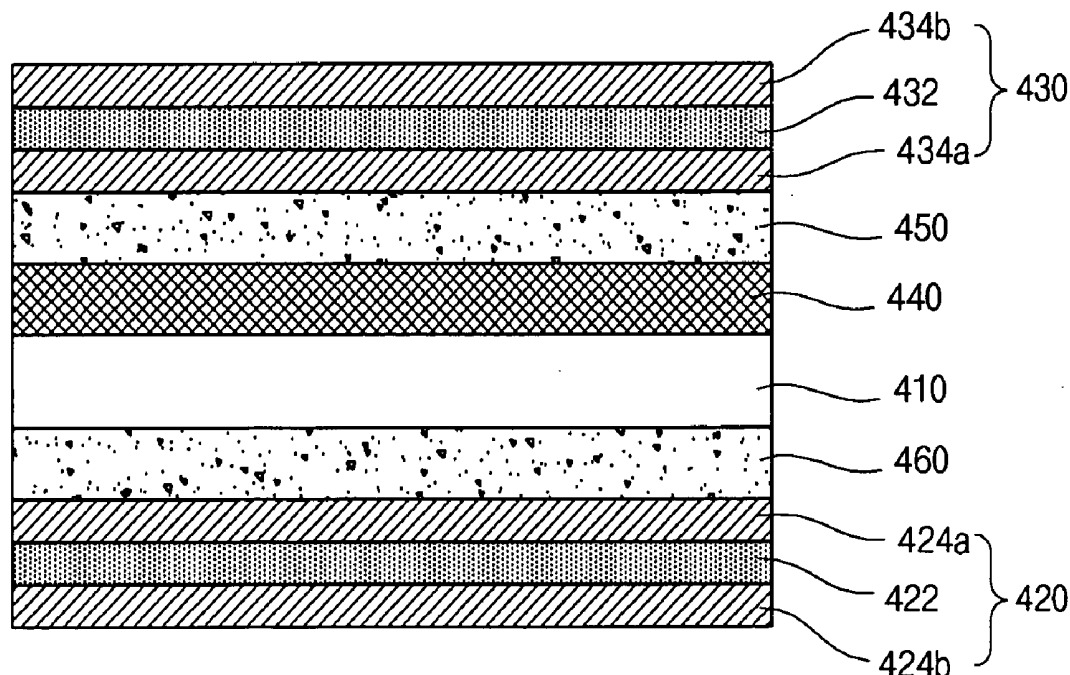

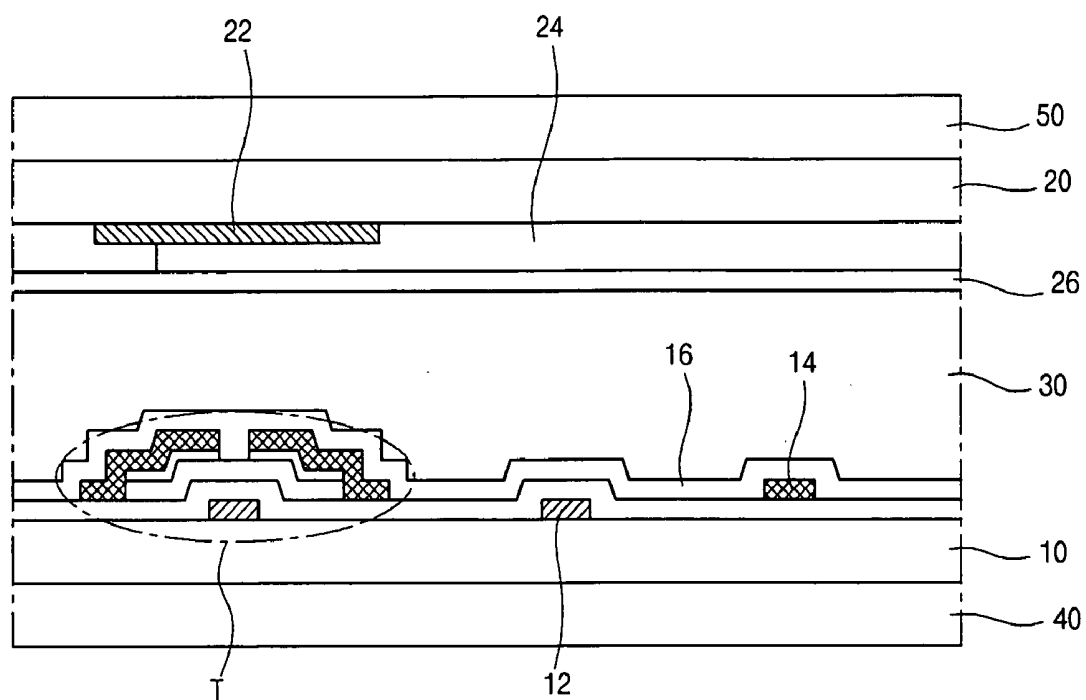


FIG. 1
RELATED ART

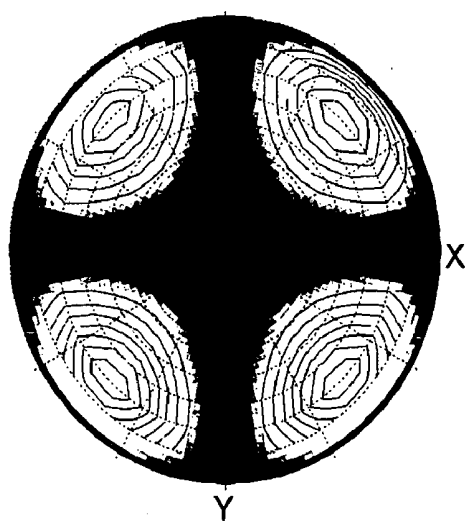


FIG. 2
RELATED ART

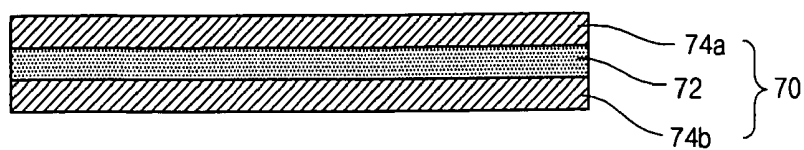


FIG. 3
RELATED ART

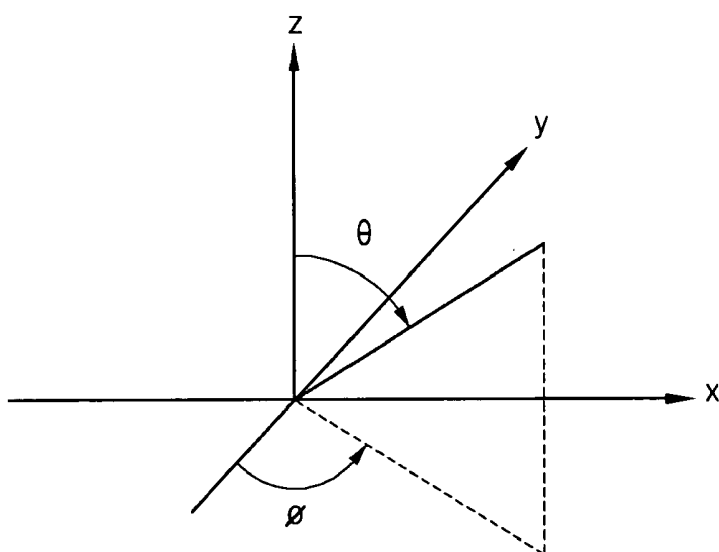


FIG. 4
RELATED ART

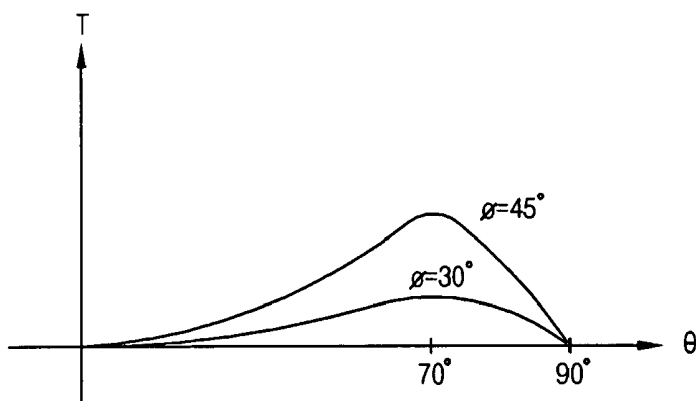


FIG. 5
RELATED ART

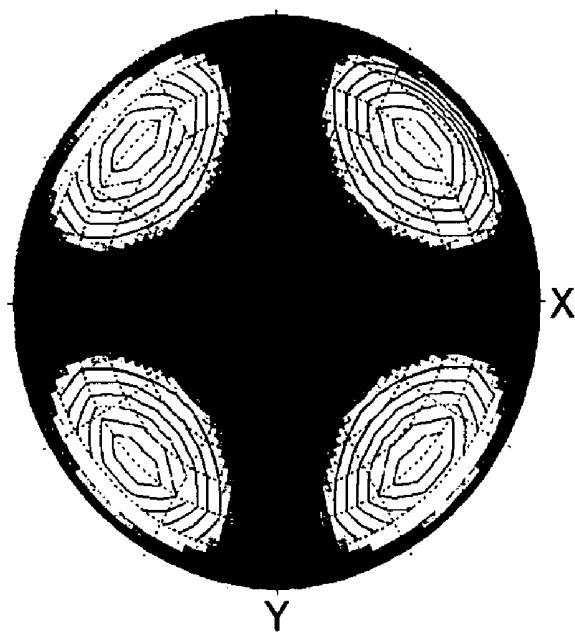


FIG. 6
RELATED ART

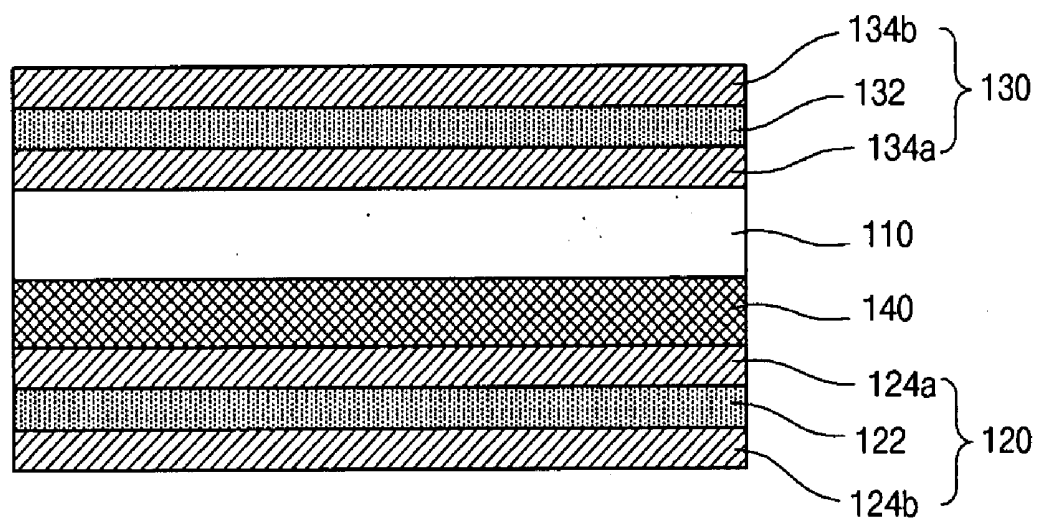


FIG. 7

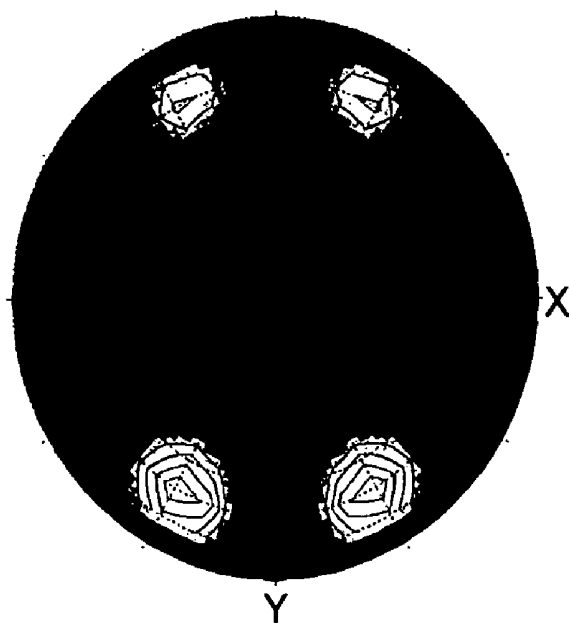


FIG. 8

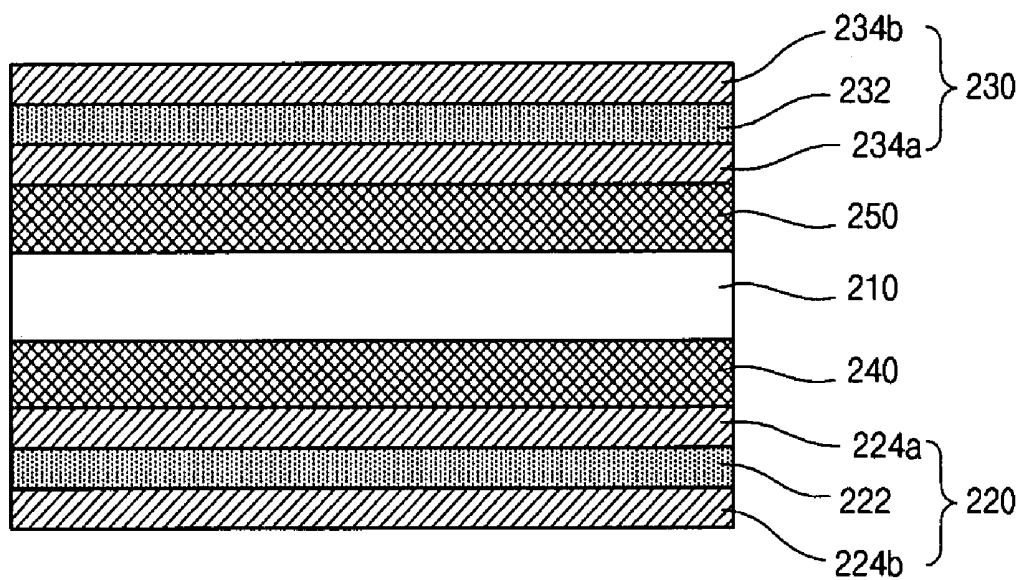


FIG. 9

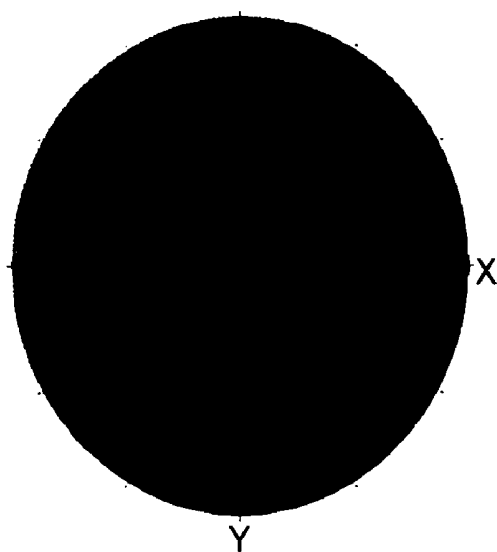


FIG. 10

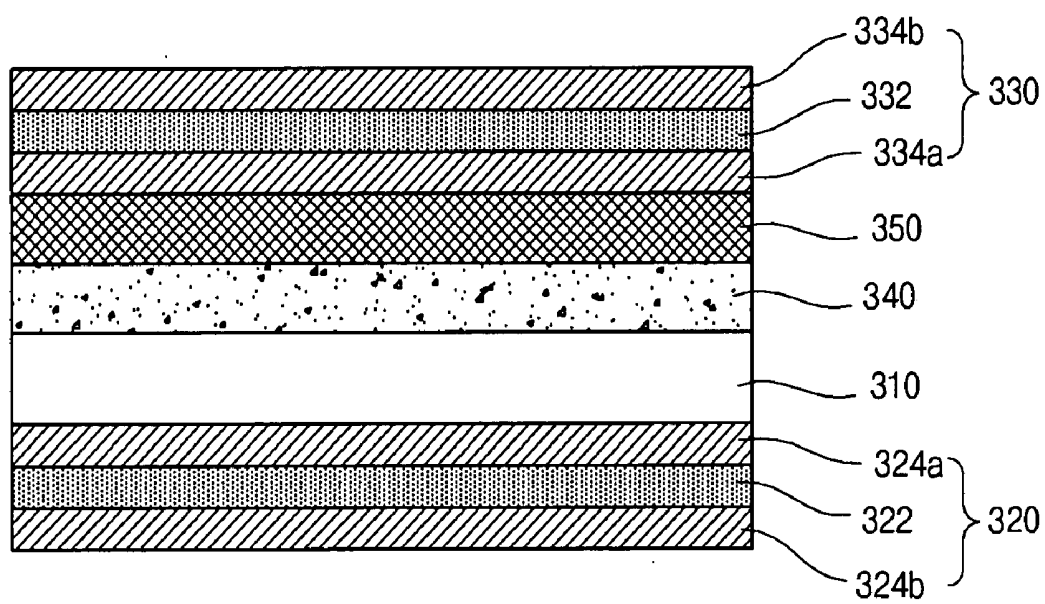


FIG. 11

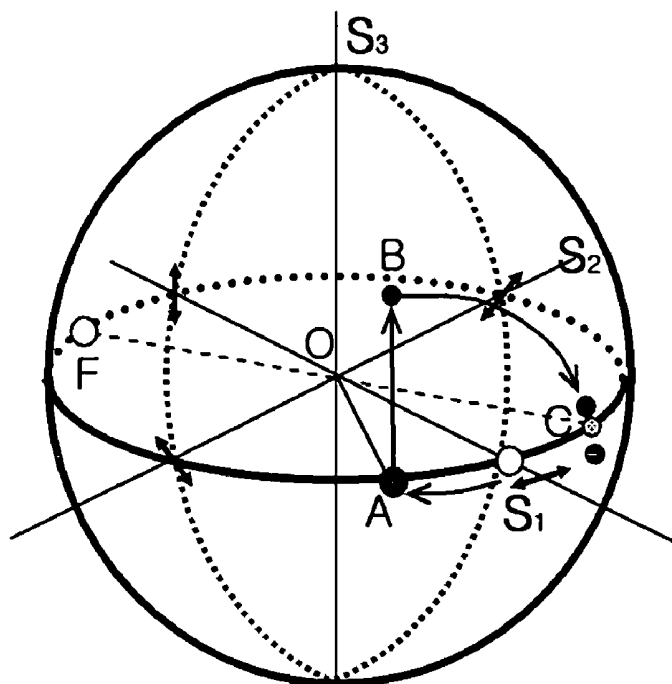


FIG. 12

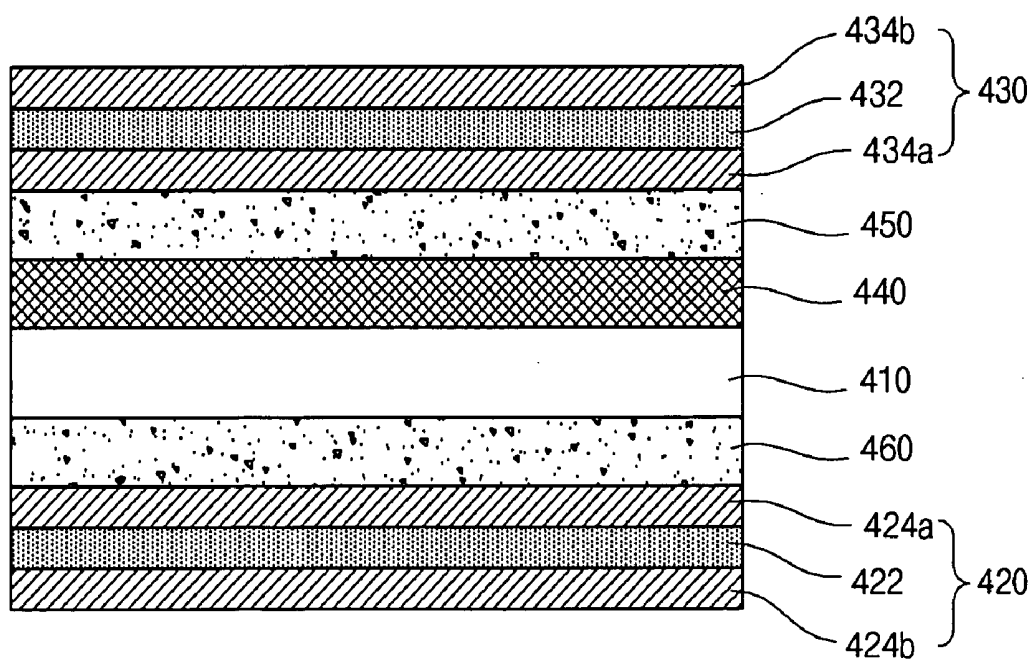


FIG. 13

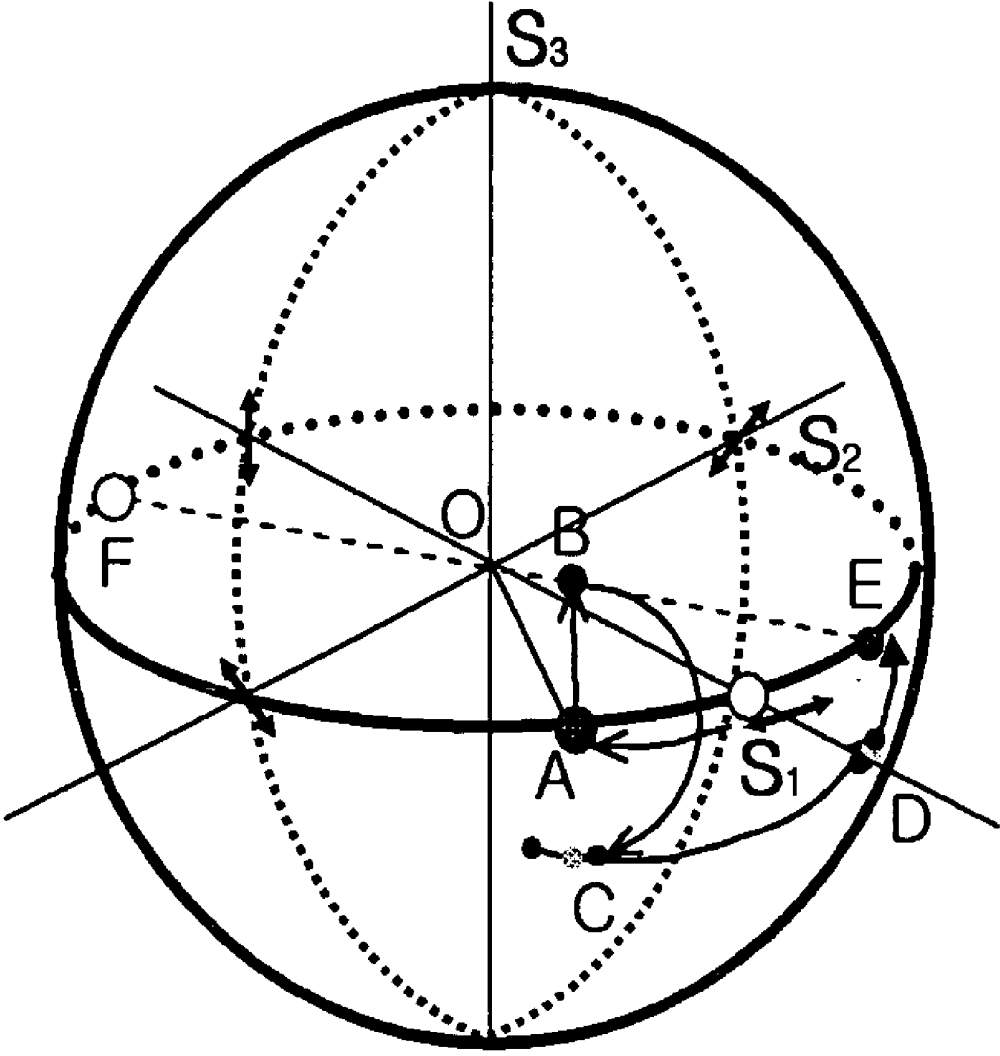


FIG. 14

**IN-PLANE SWITCHING LIQUID CRYSTAL
DISPLAY DEVICE AND METHOD OF
FABRICATING THE SAME**

[0001] The present invention claims the benefit of Korean Patent Application Nos. 2005-0057876 and 2005-0057901 both filed on Jun. 30, 2005 and 2006-0020037 filed on Mar. 2, 2006, which are hereby incorporated by reference in their entirety.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display (LCD) device. More particularly, the present invention relates to an in-plane switching liquid crystal display (IPS-LCD) device and a method of fabricating the same.

[0004] 2. Discussion of the Related Art

[0005] In general, a liquid crystal display (LCD) device includes two substrates, which are spaced apart and face each other, and a liquid crystal layer interposed between the two substrates. Electrodes are formed on the both substrates and face each other. A voltage is applied to each of the electrodes, and an electric field is induced between the electrodes. An arrangement of liquid crystal molecules is changed by varying the intensity of the electric field, and the transmittance of light is varied due to the arrangement of the liquid crystal molecules. Thus, by properly controlling the applied electric field, an image can be produced.

[0006] Of the different types of known liquid crystal display (LCD) devices, twisted nematic (TN) liquid crystal display devices are widely used. In a TN LCD device, liquid crystal molecules are parallel to two substrates and are arranged to be twisted between the two substrates, so that the liquid crystal molecules adjacent to the two substrates are perpendicular to each other. The liquid crystal molecules are driven by an electric field, which is induced between a pixel electrode of a lower substrate and a common electrode of an upper substrate. The electric field is applied to be perpendicular to the upper and lower substrates. When a voltage is not applied, the liquid crystal molecules are arranged parallel to the substrates. On the other hand, when a voltage is applied, the liquid crystal molecules are arranged perpendicular to the substrates. However, the TN LCD devices provide a narrow viewing angle because of the longitudinal electric field. In order to solve such a problem, in-plane switching liquid crystal display (IPS-LCD) devices have been proposed. In the IPS-LCD device, both a pixel electrode and a common electrode are configured to be formed on the same substrate.

[0007] FIG. 1 is a cross-sectional view illustrating an IPS-LCD device according to the related art. As shown in FIG. 1, a lower substrate 10 and an upper substrate 20 are spaced apart from each other. A thin film transistor T, which includes a gate electrode, a semiconductor layer, a source electrode and a drain electrode, is formed on an inner surface of the lower substrate 10. A common electrode 12 and a pixel electrode 14 are formed on the inner surface of the lower substrate 10 in a pixel region and are spaced apart from each other. Although not shown in the figure, the common electrode 12 and the pixel electrode 14 are parallel to each other, and the pixel electrode 14 is electrically connected to the drain electrode of the thin film transistor T. A passivation

layer 16 covers the thin film transistor T, the common electrode 12 and the pixel electrode 14.

[0008] The common electrode 12 and the pixel electrode 14 are formed of different layers, and the common electrode 12 and the pixel electrode 14 may be formed of the same layer. In addition, the pixel electrode 14 is formed of the same layer as the source and drain electrodes of the thin film transistor T as shown in FIG. 1. The pixel electrode 14 may be formed on the passivation layer 16.

[0009] A black matrix 22 is formed on an inner surface of the upper substrate 20, and the black matrix 22 has an opening corresponding to the pixel region. A color filter layer 24 is formed on the inner surface of the upper substrate 20 and corresponds to the opening of the black matrix 22. The black matrix 22 also corresponds to the thin film transistor T to prevent photo leakage currents in the thin film transistor T and blocks the light in a region excluding the pixel region. The color filter layer 24 includes red, green and blue color filters, and each color filter corresponds to the pixel region. The color filter layer 24 partly covers the black matrix 22, and thus the borderline between adjacent color filters is disposed on the black matrix 22.

[0010] An overcoat layer 26 is formed on the color filter layer 24. The overcoat layer 26 protects the color filter layer 24 and prevents a material of the color filter layer 24 from gushing out. The overcoat layer 26 also flattens the surface of the upper substrate 20 including the color filter layer 24.

[0011] A liquid crystal layer 30 is interposed between the lower substrate 10 and the upper substrate 20. Liquid crystal molecules of the liquid crystal layer 30 are arranged parallel to the lower and upper substrates 10 and 20. Although not shown in the figure, alignment layers are formed on the lower and upper substrates 10 and 20 adjacent to the liquid crystal layer 30. The alignment layers are arranged by a rubbing method, for example, and determine an initial arrangement direction of the liquid crystal molecules.

[0012] Lower and upper polarizers 40 and 50 are disposed at outer surfaces of the lower and upper substrates 10 and 20, respectively. A light transmissive axis of the lower polarizer 40 is perpendicular to a light transmissive axis of the upper polarizer 50.

[0013] In the IPS-LCD device, when a voltage is applied to the common electrode 12 and the pixel electrode 14, an electric field parallel with the substrates 10 and 20 is induced between the electrodes 12 and 14. Then, the liquid crystal molecules of the liquid crystal layer 30 are arranged to be parallel with the electric field and perpendicular to the electrodes 12 and 14.

[0014] As described above, the pixel electrode and the common electrode in the IPS-LCD device are formed on the same substrate, and a horizontal electric field parallel with the substrate is induced between the electrodes. In turn, the liquid crystal molecules are arranged to be parallel to the horizontal electric field, to thereby increase viewing angles of the LCD device. However, there may be a light leakage in the IPS-LCD device when a black state is formed, and thus a contrast ratio is lowered.

[0015] FIG. 2 is a view illustrating simulations of contrast ratios of a related art IPS-LCD device in a black state. Here, a light transmissive axis of a lower polarizer is parallel to a

length of a liquid crystal panel and corresponds to the x-axis in FIG. 2, and a light transmissive axis of an upper polarizer is parallel to a width of the liquid crystal panel and corresponds to the y-axis in FIG. 2. In addition, an optical axis of a liquid crystal layer is parallel to the light transmissive axis of the upper polarizer. As shown in FIG. 2, there are light leakages at angles of about 45 degrees, 135 degrees, 225 degrees and 315 degrees, which are diagonal directions of the liquid crystal panel, in the black state, and the brightness of the IPS-LCD device is increased. Accordingly, the contrast ratio of the IPS-LCD device is lowered. This problem occurs due to the polarizers.

[0016] FIG. 3 is a cross-sectional view schematically illustrating a related art polarizer. As shown in FIG. 3, the related art polarizer 70 includes first and second protective films 74a and 74b and a polarizing film 72 between the first and second protective films 74a and 74b. In general, the polarizing film 72 is formed of polyvinyl alcohol (PVA), and the first and second protective films 74a and 74b is formed of triacetyl cellulose (TAC).

[0017] The polarizer 70 of FIG. 3 may be attached to either upper or lower surface of a liquid crystal panel by using an adhesive layer. Here, the protective films adjacent to the liquid crystal panel may have phase retardation, and may include a -C plate (negative C plate), in which $n_x = n_y > n_z$, wherein n_x is a first refractive index according to x-direction, n_y is a second refractive index according to y-direction, n_z is a third refractive index according to z-direction.

[0018] A polarizer is classified into O-type and E-type, and the O-type polarizer is widely used because the O-type polarizer has more properties in the black state as compared with the E-type polarizer.

[0019] When two O-type polarizers are arranged such that light transmissive axes are perpendicular to each other, a light transmittance is determined by the following equation:

$$T = \frac{1}{2} \left| \vec{O}_1 \cdot \vec{O}_2 \right|^2$$

$$= \frac{1}{8} \frac{\sin^2 2\phi \sin^4 \theta}{(1 - \cos^2 \phi \sin^2 \theta)(1 - \sin^2 \phi \sin^2 \theta)},$$

wherein $\vec{O}_1$ and $\vec{O}_2$ are vectors illustrating polarizing directions of the polarizers, and ϕ and θ are directions of a viewing angle. In FIG. 4, ϕ and θ are defined as an azimuthal angle and a polar angle in xyz polar coordinates, respectively.

[0020] FIG. 5 illustrates light transmittances of orthogonal polarizers resulting from the above equation according to an azimuthal angle ϕ and a polar angle θ . As shown in FIG. 5, there is a light leakage around the polar angle θ of about 70 degrees, and the light leakage may be maximized at the azimuthal angle ϕ of about 45 degrees.

[0021] FIG. 6 is a view illustrating simulations of contrast ratios of the orthogonal polarizers in a black state using the above results. As shown in FIG. 6, there are light leakages at angles of about 45 degrees, 135 degrees, 225 degrees and 315 degrees. This is because orthogonality of the polarizers

is broken according to viewing angles even if the light transmissive axes of the polarizers are perpendicular to each other.

[0022] As stated above, the light leakage increases the brightness of the IPS-LCD device in the black state, and thus the contrast ratio is lowered.

SUMMARY OF THE INVENTION

[0023] Accordingly, the present invention is directed to an in-plane switching liquid crystal display device and a method of fabricating the same that substantially obviate one or more problems due to limitations and disadvantages of the related art.

[0024] An object of the present invention is to provide an in-plane switching liquid crystal display device and a method of fabricating the same in which a light leakage is prevented in a black state and a contrast ratio is improved.

[0025] Another object of the present invention is to provide an in-plane switching liquid crystal display device and a method of fabricating the same, so that the LCD device has less color shift and an improved viewing angle.

[0026] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0027] To achieve these and other advantages and in accordance with the purpose of embodiments of the present invention, as embodied and broadly described, an in-plane switching liquid crystal display device includes a liquid crystal display panel having first and second substrates, a first polarizer disposed at a first surface of the liquid crystal display panel and having a first protective film, a first polarizing film, and a second protective film, a second polarizer disposed at a second surface of the liquid crystal display panel and having a third protective film, a second polarizing film, and a fourth protective film, and a first optical compensation film between the first polarizer and the liquid crystal display panel, the third protective film being adjacent to the liquid crystal display panel and having a substantially zero retardation value.

[0028] In another aspect of an embodiment, an in-plane switching liquid crystal display device includes a liquid crystal display panel having first and second substrates and a liquid crystal layer, a first polarizer disposed at a first surface of the liquid crystal display panel and having a first protective film, a first polarizing film, and a second protective film, a second polarizer disposed at a second surface of the liquid crystal display panel having a third protective film, a second polarizing film, and a fourth protective film, a first optical compensation film between the liquid crystal display panel and the second polarizer, and a second optical compensation film between the first optical compensation film and the second polarizer, the third protective film being adjacent to the liquid crystal display panel and having a substantially zero retardation value.

[0029] In another aspect of an embodiment, a method of fabricating an in-plane switching liquid crystal display

device includes forming a liquid crystal display panel having first and second substrates, forming a first polarizer at a first surface of the liquid crystal display panel, the first polarizer having a first protective film, a first polarizing film, and a second protective film, forming a second polarizer at a second surface of the liquid crystal display panel, the second polarizer having a third protective film, a second polarizing film, and a fourth protective film, and forming a first optical compensation film between the first polarizer and the liquid crystal display panel, the third protective film being adjacent to the liquid crystal display panel and having a substantially zero retardation value.

[0030] In a further aspect of an embodiment, a method of fabricating an in-plane switching liquid crystal display device includes forming a liquid crystal display panel having first and second substrates and a liquid crystal layer, forming a first polarizer at a first surface of the liquid crystal display panel, the first polarizer having a first protective film, a first polarizing film, and a second protective film, forming a second polarizer at a second surface of the liquid crystal display panel, the second polarizer having a third protective film, a second polarizing film, and a fourth protective film, a first optical compensation film between the liquid crystal display panel and the second polarizer, and forming a second optical compensation film between the first optical compensation film and the second polarizer, the third protective film being adjacent to the liquid crystal display panel and having a substantially zero retardation value.

[0031] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

[0033] FIG. 1 is a cross-sectional view illustrating an IPS-LCD device according to the related art;

[0034] FIG. 2 is a view illustrating simulations of contrast ratios of the related art IPS-LCD device in a black state;

[0035] FIG. 3 is a cross-sectional view schematically illustrating a related art polarizer;

[0036] FIG. 4 is a view illustrating an azimuthal angle and a polar angle in xyz polar coordinates;

[0037] FIG. 5 is a view illustrating light transmittances of orthogonal polarizers according to an azimuthal angle and a polar angle;

[0038] FIG. 6 is a view illustrating simulations of contrast ratios of the orthogonal polarizers in a black state;

[0039] FIG. 7 is a cross-sectional view illustrating an IPS-LCD device according to a first embodiment of the present invention;

[0040] FIG. 8 is a view illustrating simulations of contrast ratios of an IPS-LCD device in a black state according to the first embodiment of the present invention;

[0041] FIG. 9 is a cross-sectional view schematically illustrating an IPS-LCD device according to a second embodiment of the present invention.

[0042] FIG. 10 is a view illustrating simulations of contrast ratios of an IPS-LCD device in a black state according to the second embodiment of the present invention;

[0043] FIG. 11 is a cross-sectional view schematically illustrating an IPS-LCD device according to a third embodiment of the present invention;

[0044] FIG. 12 is a view illustrating a Poincare sphere showing polarization states of light that passes through optical elements of an IPS-LCD device according to the third embodiment of the present invention;

[0045] FIG. 13 is a cross-sectional view illustrating an IPS-LCD device according to a fourth embodiment of the present invention; and

[0046] FIG. 14 is a view illustrating a Poincare sphere showing polarization states of light that passes through optical elements of an IPS-LCD device according to the fourth embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0047] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

[0048] FIG. 7 is a cross-sectional view illustrating an IPS-LCD device according to a first embodiment of the present invention. In FIG. 7, the IPS-LCD device includes a liquid crystal panel 110, a first polarizer 120 at a lower surface of the liquid crystal panel 110, and a second polarizer 130 at an upper surface of the liquid crystal panel 110. An optical compensation film 140 is disposed between the first polarizer 120 and the liquid crystal panel 110.

[0049] Although not shown in the FIG. 7, the liquid crystal panel 110 further includes a first substrate, a second substrate, and a liquid crystal layer interposed between the first and second substrates. The liquid crystal panel 110 is operated in an in-plane switching mode, in which a thin film transistor, a common electrode and a pixel electrode are formed on an inner surface of the first substrate, and a black matrix and a color filter layer are formed on an inner surface of the second substrate. An overcoat layer may be further formed on the inner surface of the second substrate and cover the black matrix and the color filter layer.

[0050] As shown in the figure, the first polarizer 120 further includes first and second protective films 124a and 124b and a first polarizing film 122 between the first and second protective films 124a and 124b. Similarly, the second polarizer 130 further includes third and fourth protective films 134a and 134b and a second polarizing film 132 between the third and fourth protective films 134a and 134b. Here, the first and second polarizing films 122 and 132 may be formed of polyvinyl alcohol (PVA), and the first, second, third and fourth polarizing films 124a, 124b, 134a and 134b may be formed of triacetylcellulose (TAC). The first and third protective films 124a and 134a adjacent to the liquid crystal panel 110 may be formed of a material having a retardation value of about zero ranging from -10 nanometer to +10 nanometer.

[0051] The optical compensation film **140** may include a +C plate (positive C plate), in which $n_x = n_y < n_z$, wherein n_x is a first refractive index according to the x-direction, n_y is a second refractive index according to the y-direction, n_z is a third refractive index according to the z-direction. The optical compensation film **140** may have a retardation value less than or equal to $\lambda/2$, wherein λ is a wavelength of visible light. The +C plate may be formed by a coating or drawing method.

[0052] In the first embodiment of the present invention, the first protective film **124a** may have a retardation value of a -C plate. When the first protective film **124a** has a retardation value, a retardation value of the optical compensation film **140** depends on the retardation value of the first protective film **124a**.

[0053] FIG. 8 illustrates simulations of contrast ratios of an IPS-LCD device in a black state according to the first embodiment of the present invention. A light transmissive axis of the first polarizer is parallel to a length of the panel and corresponds to the x-axis in FIG. 8, and a light transmissive axis of the second polarizer is parallel to a width of the panel and corresponds to the y-axis in FIG. 8. An optical axis of the liquid crystal layer is parallel to the light transmissive axis of the second polarizer.

[0054] As shown in FIG. 8, a light leakage is decreased at diagonal directions of the panel in the black state. Therefore, the contrast ratio may be improved. A second embodiment of the present invention provides a structure having a better contrast ratio than the first embodiment.

[0055] FIG. 9 is a cross-sectional view schematically illustrating an IPS-LCD device according to the second embodiment of the present invention. As shown in FIG. 9, the IPS-LCD device includes a liquid crystal panel **210**, a first polarizer **220** at a lower surface of the liquid crystal panel **210**, and a second polarizer **230** at an upper surface of the liquid crystal panel **210**. A first optical compensation film **240** is disposed between the first polarizer **220** and the liquid crystal panel **210**, and a second optical compensation film **250** is disposed between the second polarizer **230** and the liquid crystal panel **210**.

[0056] Similar to the structure of the first embodiment, the liquid crystal panel **210** further includes a first substrate, a second substrate, and a liquid crystal layer interposed between the first and second substrates. The liquid crystal panel **210** is operated in an in-plane switching mode, in which a thin film transistor, a common electrode and a pixel electrode are formed on an inner surface of the first substrate whereas a black matrix and a color filter layer are formed on an inner surface of the second substrate. An overcoat layer may be further formed on the inner surface of the second substrate and cover the black matrix and the color filter layer.

[0057] The first polarizer **220** includes first and second protective films **224a** and **224b** and a first polarizing film **222** between the first and second protective films **224a** and **224b**. The second polarizer **230** further includes third and fourth protective films **234a** and **234b** and a second polarizing film **232** between the third and fourth protective films **234a** and **234b**. Here, the first and second polarizing films **222** and **232** may be formed of polyvinyl alcohol (PVA), and the first, second, third and fourth polarizing films **224a**,

224b, **234a** and **234b** may be formed of triacetylcellulose (TAC). The first and third protective films **224a** and **234a** adjacent to the liquid crystal panel **210** may be formed of a material having a retardation value of about zero ranging from -10 nanometer to +10 nanometer.

[0058] The first and second optical compensation films **240** and **250** may include a +C plate (positive C plate), in which $n_x = n_y < n_z$, wherein n_x is a first refractive index according to the x-direction, n_y is a second refractive index according to the y-direction, n_z is a third refractive index according to the z-direction. The first and second optical compensation films **240** and **250** may have a retardation value less than or equal to $\lambda/4$, wherein λ is a wavelength of visible light. The +C plate may be formed by a coating or drawing method.

[0059] In the second embodiment of the present invention, the first protective film **224a** may include a -C plate having a retardation value. When the first protective film **224a** has a retardation value, the retardation value of the first optical compensation film **240** is controlled by the retardation value of the first protective film **224a**, to thereby obtain the same effect as the case that the first protective film **224a** has a retardation value of about zero ranging from -10 nanometer to +10 nanometer.

[0060] FIG. 10 illustrates simulations of contrast ratios of an IPS-LCD device in a black state according to the second embodiment of the present invention. As shown in FIG. 10, the light leakage is minimized at the diagonal directions of the panel in the black state as comparison with the first embodiment. Accordingly, the contrast ratio in the second embodiment is improved more than the first embodiment.

[0061] FIG. 11 is a cross-sectional view schematically illustrating an IPS-LCD device according to a third embodiment of the present invention. As shown in FIG. 11, the IPS-LCD device includes a liquid crystal panel **310**, a first polarizer **320** at a lower surface of the liquid crystal panel **310**, and a second polarizer **330** at an upper surface of the liquid crystal panel **310**. First and second optical compensation films **340** and **350** are disposed between the liquid crystal panel **310** and the second polarizer **320**.

[0062] Although not shown in the figure, the liquid crystal panel **310** includes first and second substrates and a liquid crystal layer interposed between the first and second substrates. The liquid crystal panel **310** is operated in an in-plane switching mode, in which a thin film transistor, a common electrode and a pixel electrode are formed on an inner surface of the first substrate whereas a black matrix and a color filter layer are formed on an inner surface of the second substrate. An overcoat layer may be further formed on the inner surface of the second substrate and cover the black matrix and the color filter layer.

[0063] The first polarizer **320** further includes first and second protective films **324a** and **324b** and a first polarizing film **322** between the first and second protective films **324a** and **324b**. The second polarizer **330** includes third and fourth protective films **334a** and **334b** and a second polarizing film **332** between the third and fourth protective films **334a** and **334b**. The first and second polarizing films **322** and **332** may be formed of polyvinyl alcohol (PVA), and the first, second, third and fourth polarizing films **324a**, **324b**, **334a** and **334b** may be formed of triacetylcellulose (TAC). The first and third protective films **324a** and **334a** adjacent to the liquid

crystal panel **310** may be formed of a material having a retardation value of about zero ranging from -10 nanometer to $+10$ nanometer.

[0064] The first optical compensation film **340** may include a +C plate (positive C plate), in which $n_x = n_y < n_z$, wherein n_x is a first refractive index according to the x-direction, n_y is a second refractive index according to the y-direction, n_z is a third refractive index according to the z-direction. The +C plate may be formed by a coating or drawing method.

[0065] The second optical compensation film **350** may include an A plate, in which $n_x \neq n_y = n_z$. In addition, an optical axis of the A plate may be parallel with or perpendicular to a rubbing direction of the liquid crystal layer (i.e., an optical axis of the liquid crystal layer). The optical axis of the liquid crystal layer is parallel with a light transmissive axis of the second polarizer **330** and is perpendicular to a light transmissive axis of the first polarizer **320**. The light transmissive axis of the first polarizer **320** may be parallel to a length of the liquid crystal panel **310**, and the light transmissive axis of the second polarizer **330** may be parallel to a width of the liquid crystal panel **310**.

[0066] In the third embodiment of the present invention, to prevent light leakages in different viewing angles, the first optical compensation film **340**, which is a +C plate, may have a phase retardation value less than or equal to $\lambda/4$, wherein λ is a wavelength of visible light. The liquid crystal layer of the liquid crystal panel **310** may have a phase retardation value more than or equal to $\lambda/4$, and less than λ . Further, the second optical compensation film **350**, which is an A plate, may have a phase retardation value more than or equal to $\lambda/4$, and less than λ .

[0067] In the third embodiment of the present invention, the first protective film **324a** may have a retardation value. In this case, the first protective film **324a** may include a -C plate. When the first protective film **324a** has a retardation value, the retardation values of the first and second optical compensation films **340** and **350** can be controlled by the retardation value of the first protective film **324a**.

[0068] FIG. 12 illustrates a Poincare sphere showing polarization states of light passing through optical elements of an IPS-LCD device of FIG. 11. The Poincare sphere represents polarization states of light on a spherical surface. The Poincare sphere is widely used for designing compensation films because polarization states are easily predicted by using the Poincare sphere if optical axes and phase retardation values of the optical elements are known.

[0069] In the Poincare sphere, the equator designates the linear polarization, the polar point S3 designates the left handed circular polarization, the polar point -S3 designates the right handed circular polarization, the upper hemisphere designates the left handed elliptical polarization, and the lower hemisphere designates right handed elliptical polarization.

[0070] In FIG. 12, when the IPS-LCD device of the present invention is observed from the front, the point S1 on the equator designates a polarization state of the first polarizer, and the point -S1 designates a polarization state of the second polarizer. The polarization states of the first and second polarizers are symmetrical with respect to the center O of the Poincare sphere. Thus, the polarization states of the

first and second polarizers are perpendicular to each other, to thereby generate the perfect black state.

[0071] On the other hand, when the IPS-LCD device is observed from the side, the polarization state of the first polarizer is observed on the point A on the equator, and the polarization state of the second polarizer is observed on the point F. The point A and the point F are not symmetrical with respect to the center O, so that the polarization states of the first and second polarizers are not perpendicular to each other. Accordingly, a polarization state of light reaching the second polarizer becomes perpendicular to the polarization state of the second polarizer due to optical compensation films.

[0072] As shown in FIG. 12, when the IPS-LCD device according to the third embodiment of the present invention is observed from the side, the polarization states of light passing through optical elements are changed from the point A into the point B due to the first optical compensation film **340** of FIG. 11, a +C plate, and then are changed from the point B into the point C due to the second optical compensation film **350** of FIG. 11, an A plate. The point C moved by the optical films is symmetrical to the point F with respect to the center O. Therefore, the polarization state on the point C, which corresponds to light reaching the second polarizer, is perpendicular to the polarization state of the second polarizer. In turn, light is blocked, thereby generating a good black state.

[0073] As described above, a light leakage is prevented in the third embodiment of the present invention, by controlling polarization states using a +C plate and an A plate. As a result, the contrast ratio is improved.

[0074] However, because the +C plate and the A plate have different phase retardation values depending upon the wavelengths of light, R, G, and B lights rotating differently, polarization states for the R, G, and B lights reaching the second polarizer are not coincident with the point C. Therefore, color shift occurs in different viewing angles in the IPS-LCD device.

[0075] FIG. 13 is a cross-sectional view illustrating an IPS-LCD device according to a fourth embodiment of the present invention. The fourth embodiment of the present invention is to provide an IPS LCD device having both improved contrast ratio and color shift.

[0076] As shown in FIG. 13, the IPS-LCD device includes a liquid crystal panel **410**, a first polarizer **420** at a lower surface of the liquid crystal panel **410**, and a second polarizer **430** at an upper surface of the liquid crystal panel **410**. First and second optical compensation films **440** and **450** are sequentially disposed between the liquid crystal panel **410** and the second polarizer **420**, while a third optical compensation film **460** is disposed between the liquid crystal panel **410** and the first polarizer **420**.

[0077] Although not shown in the figure, the liquid crystal panel **410** includes a first substrate, a second substrate, and a liquid crystal layer interposed between the first and second substrates. The liquid crystal panel **410** is operated in an in-plane switching mode, in which a thin film transistor, a common electrode and a pixel electrode are formed on an inner surface of the first substrate, while a black matrix and a color filter layer are formed on an inner surface of the second substrate. An overcoat layer may be further formed

on the inner surface of the second substrate and cover the black matrix and the color filter layer.

[0078] The first polarizer 420 further includes first and second protective films 424a and 424b and a first polarizing film 422 between the first and second protective films 424a and 424b. Similarly, the second polarizer 430 includes third and fourth protective films 434a and 434b and a second polarizing film 432 between the third and fourth protective films 434a and 434b. For example, the first and second polarizing films 422 and 432 may be formed of polyvinyl alcohol (PVA), and the first, second, third and fourth polarizing films 424a, 424b, 434a and 434b may be formed of triacetylcellulose (TAC). The first and third protective films 424a and 434a adjacent to the liquid crystal panel 410 may be formed of a material having a retardation value of about zero ranging from -10 nanometer to +10 nanometer.

[0079] The first optical compensation film 440 may include an A plate, in which $n_x \neq n_y = n_z$, wherein n_x is a first refractive index according to the x-direction, n_y is a second refractive index according to the y-direction, n_z is a third refractive index according to the z-direction. An optical axis of the A plate may be parallel with or perpendicular to a rubbing direction of the liquid crystal layer (i.e., an optical axis of the liquid crystal layer). The optical axis of the liquid crystal layer is parallel with a light transmissive axis of the second polarizer 430 and is perpendicular to a light transmissive axis of the first polarizer 420. The light transmissive axis of the first polarizer 420 may be parallel to a length of the liquid crystal panel 410, and the light transmissive axis of the second polarizer 430 may be parallel to a width of the liquid crystal panel 410. The second and third optical compensation films 450 and 460 may include a +C plate (positive C plate), in which $n_x = n_y < n_z$. The +C plate may be formed by a coating or drawing method.

[0080] In the fourth embodiment of the present invention, to prevent light leakages in different viewing angles, the second and third optical compensation films 450 and 460, which are +C plates, may have a phase retardation value less than or equal to $\lambda/4$, wherein λ is a wavelength of visible light, the liquid crystal layer of the liquid crystal panel 410 may have a phase retardation value more than or equal to $\lambda/4$, and less than λ , and the first optical compensation film 440, which is an A plate, may have a phase retardation value more than or equal to $\lambda/4$, and less than λ .

[0081] FIG. 14 illustrates a Poincare sphere showing polarization states of light passing through optical elements of an IPS-LCD device of FIG. 13. As shown in FIG. 14, when the IPS-LCD device is observed from the side, the polarization state of the first polarizer is shown on the point A on the equator, and the polarization state of the second polarizer is shown on the point F. The polarization states of light passing through the IPS-LCD device are changed from the point A into the point B due to the third optical compensation film 460 of FIG. 13, a +C plate, and then are changed from the point B into the point C due to the liquid crystal layer of the liquid crystal panel 410 of FIG. 13.

[0082] In turn, the polarization states of the light are changed from the point C into the point D due to the first optical compensation film 440 of FIG. 13, an A plate. The phase differences in different wavelengths are compensated by the first optical compensation film 440 of FIG. 13, and thus the polarization states of R, G and B lights are nearly

coincident at the point D. Then, the polarization states of the R, G and B lights are changed from the point D into the point E due to the second optical compensation film 450 of FIG. 13, the +C plate. The point E moved by the optical films is symmetrical to the point F with respect to the center O. Thus, the polarization states of lights for almost every wavelength are disposed at one point. Therefore, the polarization state on the point D, which corresponds to light reaching the second polarizer, is perpendicular to the polarization state of the second polarizer. As a result, light is blocked, thereby increasing the contrast ratio. In addition, there occurs a relatively little color shift, so that viewing angles are improved.

[0083] As described above, in embodiments of the present invention, the protective films adjacent to the liquid crystal panel have a retardation value of about zero ranging from -10 nanometer to +10 nanometer, and a +C plate is used as the compensation film. Therefore, the light leakage is prevented in a black state, and the contrast ratio is improved. Moreover, by using an A plate in addition, the color shift and the viewing angles are improved in the IPS LCD device.

[0084] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. An in-plane switching liquid crystal display device, comprising:

a liquid crystal display panel having first and second substrates;

a first polarizer disposed at a first surface of the liquid crystal display panel and having a first protective film, a first polarizing film, and a second protective film;

a second polarizer disposed at a second surface of the liquid crystal display panel and having a third protective film, a second polarizing film, and a fourth protective film; and

a first optical compensation film between the first polarizer and the liquid crystal display panel, the third protective film being adjacent to the liquid crystal display panel and having a substantially zero retardation value.

2. The device according to claim 1, wherein the third protective film has a retardation value ranging from -10 nanometer to +10 nanometer.

3. The device according to claim 1, wherein the first protective film is adjacent to the liquid crystal display panel and has a substantially zero retardation value.

4. The device according to claim 3, wherein the first protective film has a retardation value ranging from -10 nanometer to +10 nanometer.

5. The device according to claim 1, wherein the first, second, third, and fourth protective films are formed of triacetylcellulose.

6. The device according to claim 1, wherein the first optical compensation film includes a +C plate, in which $n_x = n_y < n_z$, wherein n_x is a first refractive index according to

an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

7. The device according to claim 6, wherein the +C plate has a retardation value less than or equal to $\lambda/2$, wherein λ is a wavelength of visible light.

8. The device according to claim 7, wherein the first protective film includes a -C plate, in which $n_x=n_y>n_z$, wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

9. The device according to claim 1, further comprising a second optical compensation film between the second polarizer and the liquid crystal display panel.

10. The device according to claim 9, wherein the first and second optical compensation films include a +C plate, in which $n_x=n_y<n_z$, wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

11. The device according to claim 10, wherein the +C plate has a retardation value less than or equal to $\lambda/4$, wherein λ is a wavelength of visible light.

12. The device according to claim 1, wherein the first protective film includes a -C plate, in which $n_x=n_y>n_z$, wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

13. The device according to claim 1, wherein the first polarizing film is interposed between the first and second protective films.

14. The device according to claim 1, wherein the second polarizing film is interposed between the third and fourth protective films.

15. An in-plane switching liquid crystal display device, comprising:

a liquid crystal display panel having first and second substrates and a liquid crystal layer;

a first polarizer disposed at a first surface of the liquid crystal display panel and having a first protective film, a first polarizing film, and a second protective film;

a second polarizer disposed at a second surface of the liquid crystal display panel having a third protective film, a second polarizing film, and a fourth protective film;

a first optical compensation film between the liquid crystal panel and the second polarizer; and

a second optical compensation film between the first optical compensation film and the second polarizer, the third protective film being adjacent to the liquid crystal panel and having a substantially zero retardation value.

16. The device according to claim 15, wherein the third protective film has a retardation value ranging from -10 nanometer to +10 nanometer.

17. The device according to claim 15, wherein the first protective film is adjacent to the liquid crystal display panel and has a substantially zero retardation value.

18. The device according to claim 17, wherein the first protective film has a retardation value ranging from -10 nanometer to +10 nanometer.

19. The device according to claim 15, wherein the first, second, third, and fourth protective films are formed of triacetylcellulose.

20. The device according to claim 15, wherein the first optical compensation film includes a +C plate, in which $n_x=n_y<n_z$, wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

21. The device according to claim 15, wherein the second optical compensation film includes an A plate, in which $n_x=n_y=n_z$, wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

22. The device according to claim 21, wherein the A plate has an optical axis parallel with or perpendicular to an optical axis of the liquid crystal layer.

23. The device according to claim 20, wherein the +C plate has a retardation value less than or equal to $\lambda/4$, wherein λ is a wavelength of visible light.

24. The device according to claim 21, wherein the A plate has a retardation value more than or equal to $\lambda/4$, and less than λ , wherein λ is a wavelength of visible light.

25. The device according to claim 15, wherein the liquid crystal layer has a retardation value more than or equal to $\lambda/4$, and less than λ , wherein λ is a wavelength of visible light.

26. The device according to claim 15, further comprising a third optical compensation film between the liquid crystal display panel and the first polarizer.

27. The device according to claim 26, wherein the first optical compensation film includes an A plate, in which $n_x=n_y=n_z$, and the second and third optical compensation films include a +C plate, in which $n_x=n_y<n_z$, wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

28. The device according to claim 27, wherein the A plate has an optical axis perpendicular to an optical axis of the liquid crystal layer.

29. The device according to claim 27, wherein the +C plate has a retardation value less than or equal to $\lambda/4$, wherein λ is a wavelength of visible light, and the liquid crystal layer and the A plate have retardation values more than or equal to $\lambda/4$, and less than λ .

30. The device according to claim 15, wherein the first protective film includes a -C plate, in which $n_x=n_y>n_z$, wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

31. The device according to claim 15, wherein the first polarizing film is interposed between the first and second protective films.

32. The device according to claim 15, wherein the second polarizing film is interposed between the third and fourth protective films.

33. A method of fabricating an in-plane switching liquid crystal display device, comprising:

forming a liquid crystal display panel having first and second substrates;

forming a first polarizer at a first surface of the liquid crystal display panel, the first polarizer having a first protective film, a first polarizing film, and a second protective film;

forming a second polarizer at a second surface of the liquid crystal display panel, the second polarizer having a third protective film, a second polarizing film, and a fourth protective film; and

forming a first optical compensation film between the first polarizer and the liquid crystal display panel, the third protective film being adjacent to the liquid crystal display panel and having a substantially zero retardation value.

34. The method according to claim 33, wherein the third protective film has a retardation value ranging from -10 nanometer to $+10$ nanometer.

35. The method according to claim 33, wherein the first protective film is formed to be adjacent to the liquid crystal display panel and has a substantially zero retardation value.

36. The method according to claim 35, wherein the first protective film has a retardation value ranging from -10 nanometer to $+10$ nanometer.

37. The method according to claim 33, wherein the first, second, third, and fourth protective films are formed of triacetylcellulose.

38. The method according to claim 33, wherein the first optical compensation film includes a $+C$ plate, in which $n_x = n_y < n_z$, wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

39. The method according to claim 38, wherein the $+C$ plate has a retardation value less than or equal to $\lambda/2$, wherein λ is a wavelength of visible light.

40. The method according to claim 39, wherein the first protective film includes a $-C$ plate, in which $n_x = n_y > n_z$ wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

41. The method according to claim 33, further comprising forming a second optical compensation film between the second polarizer and the liquid crystal display panel.

42. The method according to claim 41, wherein the first and second optical compensation films include a $+C$ plate, in which $n_x = n_y < n_z$, wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

43. The method according to claim 42, wherein the $+C$ plate has a retardation value less than or equal to $\lambda/4$, wherein λ is a wavelength of visible light.

44. The method according to claim 33, wherein the first protective film includes a $-C$ plate, in which $n_x = n_y > n_z$ wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

45. The method according to claim 33, wherein the first polarizing film is formed between the first and second protective films.

46. The method according to claim 33, wherein the second polarizing film is formed between the third and fourth protective films.

47. A method of fabricating an in-plane switching liquid crystal display device, comprising:

forming a liquid crystal display panel having first and second substrates and a liquid crystal layer;

forming a first polarizer at a first surface of the liquid crystal display panel, the first polarizer having a first protective film, a first polarizing film, and a second protective film;

forming a second polarizer at a second surface of the liquid crystal display panel, the second polarizer having a third protective film, a second polarizing film, and a fourth protective film;

forming a first optical compensation film between the liquid crystal panel and the second polarizer; and

forming a second optical compensation film between the first optical compensation film and the second polarizer, the third protective film being adjacent to the liquid crystal panel and having a substantially zero retardation value.

48. The method according to claim 47, wherein the third protective film has a retardation value ranging from -10 nanometer to $+10$ nanometer.

49. The method according to claim 47, wherein the first protective film is formed to be adjacent to the liquid crystal display panel and has a substantially zero retardation value.

50. The method according to claim 49, wherein the first protective film has a retardation value ranging from -10 nanometer to $+10$ nanometer.

51. The method according to claim 47, wherein the first, second, third, and fourth protective films are formed of triacetylcellulose.

52. The method according to claim 47, wherein the first optical compensation film includes a $+C$ plate, in which $n_x = n_y < n_z$, wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

53. The method according to claim 47, wherein the second optical compensation film includes an A plate, in which $n_x \neq n_y = n_z$ wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

54. The method according to claim 53, wherein the A plate has an optical axis parallel with or perpendicular to an optical axis of the liquid crystal layer.

55. The method according to claim 52, wherein the $+C$ plate has a retardation value less than or equal to $\lambda/4$, wherein λ is a wavelength of visible light.

56. The method according to claim 53, wherein the A plate has a retardation value more than or equal to $\lambda/4$, and less than λ , wherein λ is a wavelength of visible light.

57. The method according to claim 47, wherein the liquid crystal layer has a retardation value more than or equal to $\lambda/4$, and less than λ , wherein λ is a wavelength of visible light.

58. The method according to claim 47, further comprising forming a third optical compensation film between the liquid crystal display panel and the first polarizer.

59. The method according to claim 58, wherein the first optical compensation film includes an A plate, in which $n_x \neq n_y = n_z$, and the second and third optical compensation films include a +C plate, in which $n_x = n_y < n_z$, wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

60. The method according to claim 59, wherein the A plate has an optical axis perpendicular to an optical axis of the liquid crystal layer.

61. The method according to claim 59, wherein the +C plate has a retardation value less than or equal to $\lambda/4$, wherein λ is a wavelength of visible light, and the liquid crystal layer and the A plate have retardation values more than or equal to $\lambda/4$, and less than λ .

62. The method according to claim 47, wherein the first protective film includes a -C plate, in which $n_x = n_y > n_z$, wherein n_x is a first refractive index according to an x-direction, n_y is a second refractive index according to a y-direction, n_z is a third refractive index according to a z-direction.

63. The method according to claim 47, wherein the first polarizing film is formed between the first and second protective films.

64. The method according to claim 47, wherein the second polarizing film is formed between the third and fourth protective films.

* * * * *

专利名称(译)	面内切换液晶显示装置及其制造方法		
公开(公告)号	US20070002231A1	公开(公告)日	2007-01-04
申请号	US11/370987	申请日	2006-03-09
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG.PHILIPS LCD CO. , LTD.		
当前申请(专利权)人(译)	LG.PHILIPS LCD CO. , LTD.		
[标]发明人	LEE JOUN HO LEE GI DONG		
发明人	LEE, JOUN-HO LEE, GI-DONG		
IPC分类号	G02F1/1335 G02F1/1343		
CPC分类号	G02F1/133528 G02F1/133634 G02F2201/50 G02F2001/133638 G02F1/134363		
优先权	1020050057876 2005-06-30 KR 1020050057901 2005-06-30 KR 1020060020037 2006-03-02 KR		
其他公开文献	US7961275		
外部链接	Espacenet USPTO		

摘要(译)

面内切换液晶显示装置包括具有第一和第二基板的液晶显示面板，设置在液晶显示面板的第一表面上并具有第一保护膜，第一偏振膜和第二保护膜的第一偏振器保护膜，设置在液晶显示面板的第二表面上并具有第三保护膜，第二偏振膜和第四保护膜的第三偏振器，以及在第一偏振器和液晶显示器之间的第一光学补偿膜如图3所示，第三保护膜与液晶显示板相邻并具有基本为零的延迟值。

