



US 20040174491A1

(19) **United States**(12) **Patent Application Publication****Yu Kao et al.**(10) **Pub. No.: US 2004/0174491 A1**(43) **Pub. Date: Sep. 9, 2004**(54) **PROCESS AND STRUCTURE OF LIQUID CRYSTAL PANEL WITH ONE DROP FILL**(30) **Foreign Application Priority Data**


Feb. 14, 2003 (TW)..... 092103039

(76) Inventors: **Tsung-Yu Yu Kao**, Tao-Yuan City
(TW); **Po-Hsiu Shih**, Taipei-Hsien
(TW)**Publication Classification**(51) **Int. Cl.⁷** **G02F 1/1339**(52) **U.S. Cl.** **349/190**

Correspondence Address:

BIRCH STEWART KOLASCH & BIRCH
PO BOX 747**FALLS CHURCH, VA 22040-0747 (US)**(57) **ABSTRACT**

This present invention relates to a process of liquid crystal panel with one drop fill (ODF). A black matrix, which can not be penetrated by an ultraviolet light while curing a sealant, is formed on the other substrate. Hence, in this present invention, it can avoid the aforementioned problem during the curing process and simplifies the curing process.

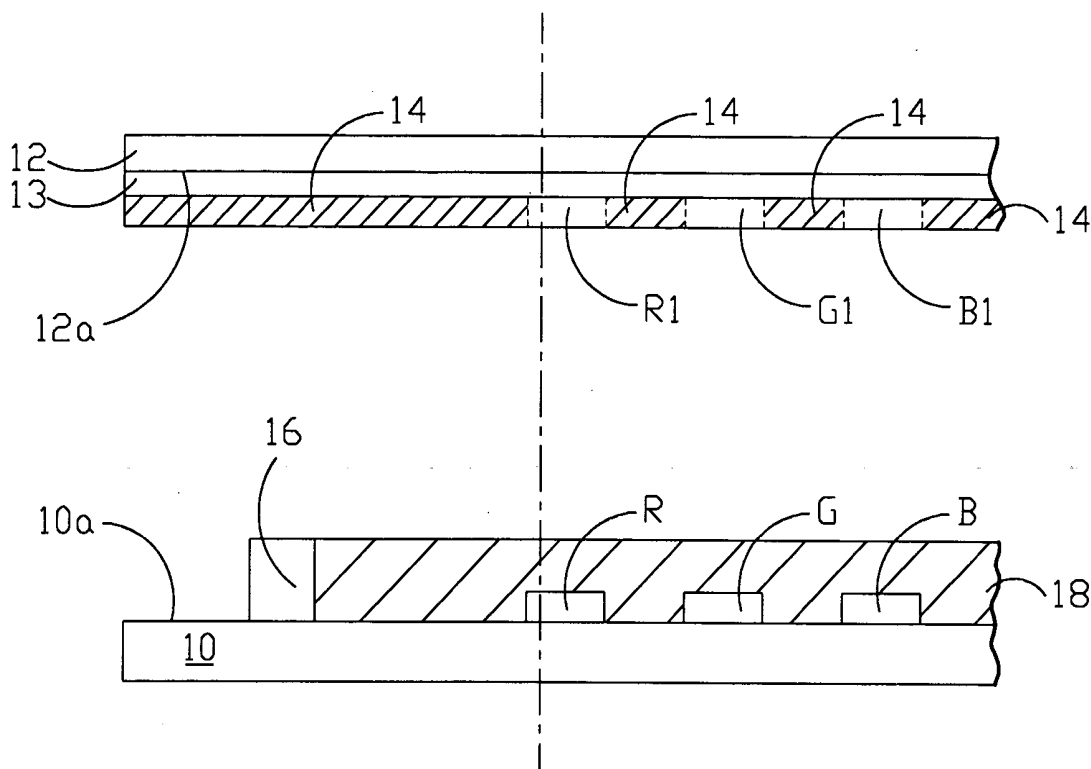(21) Appl. No.: **10/777,752**(22) Filed: **Feb. 13, 2004**

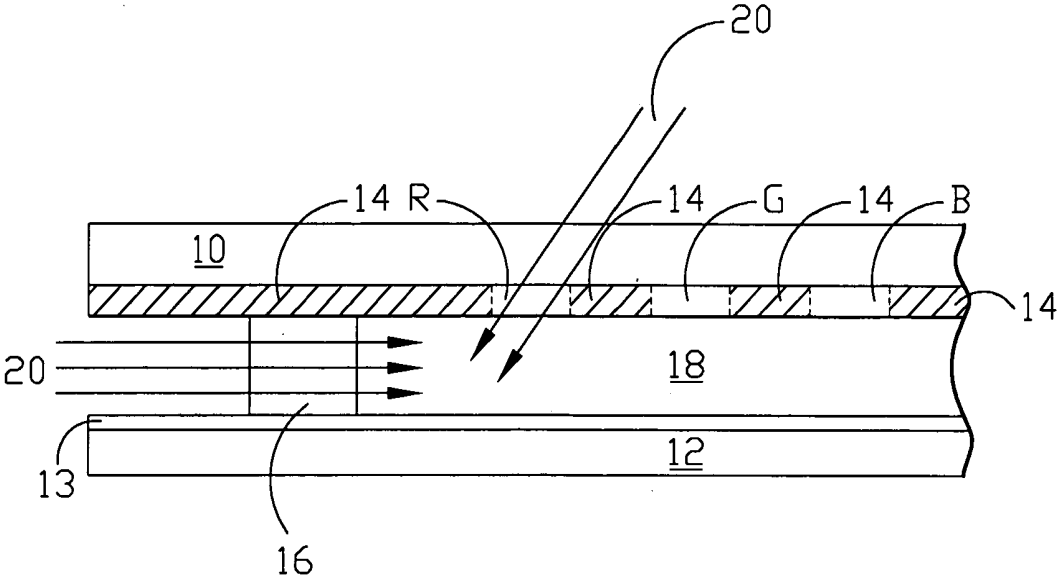


FIG.1(Prior Art)

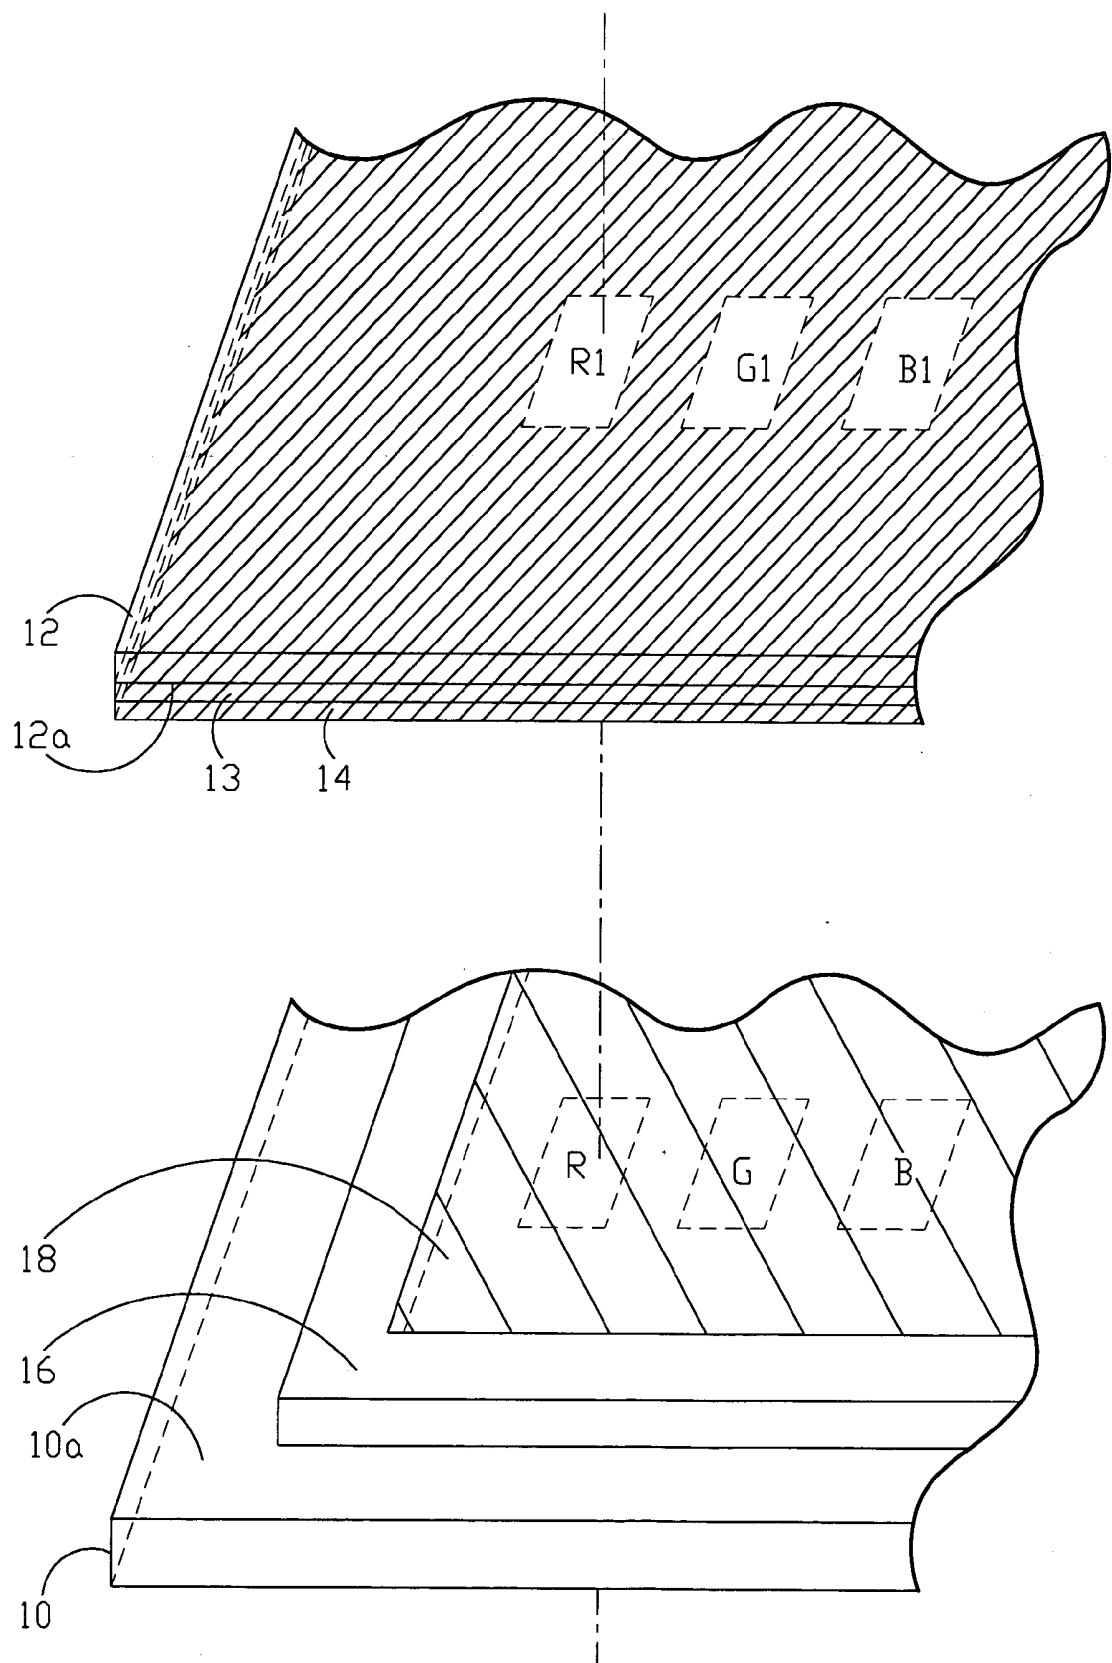


FIG.2A

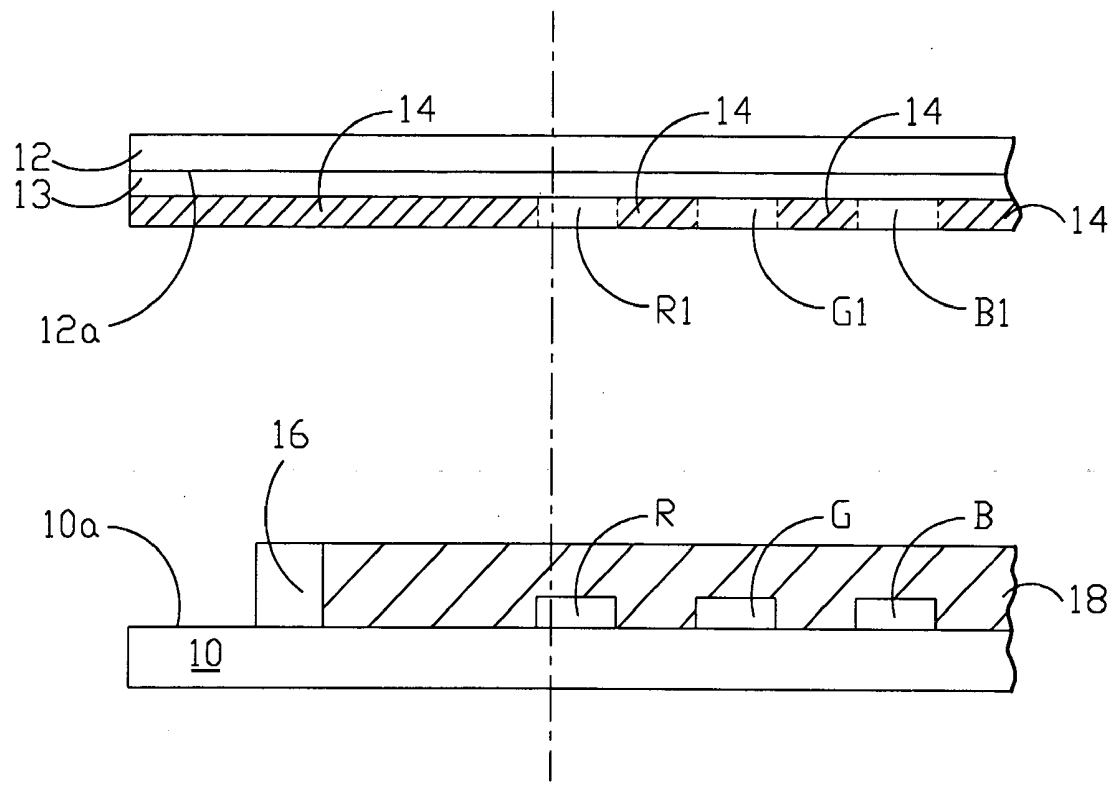


FIG.2B

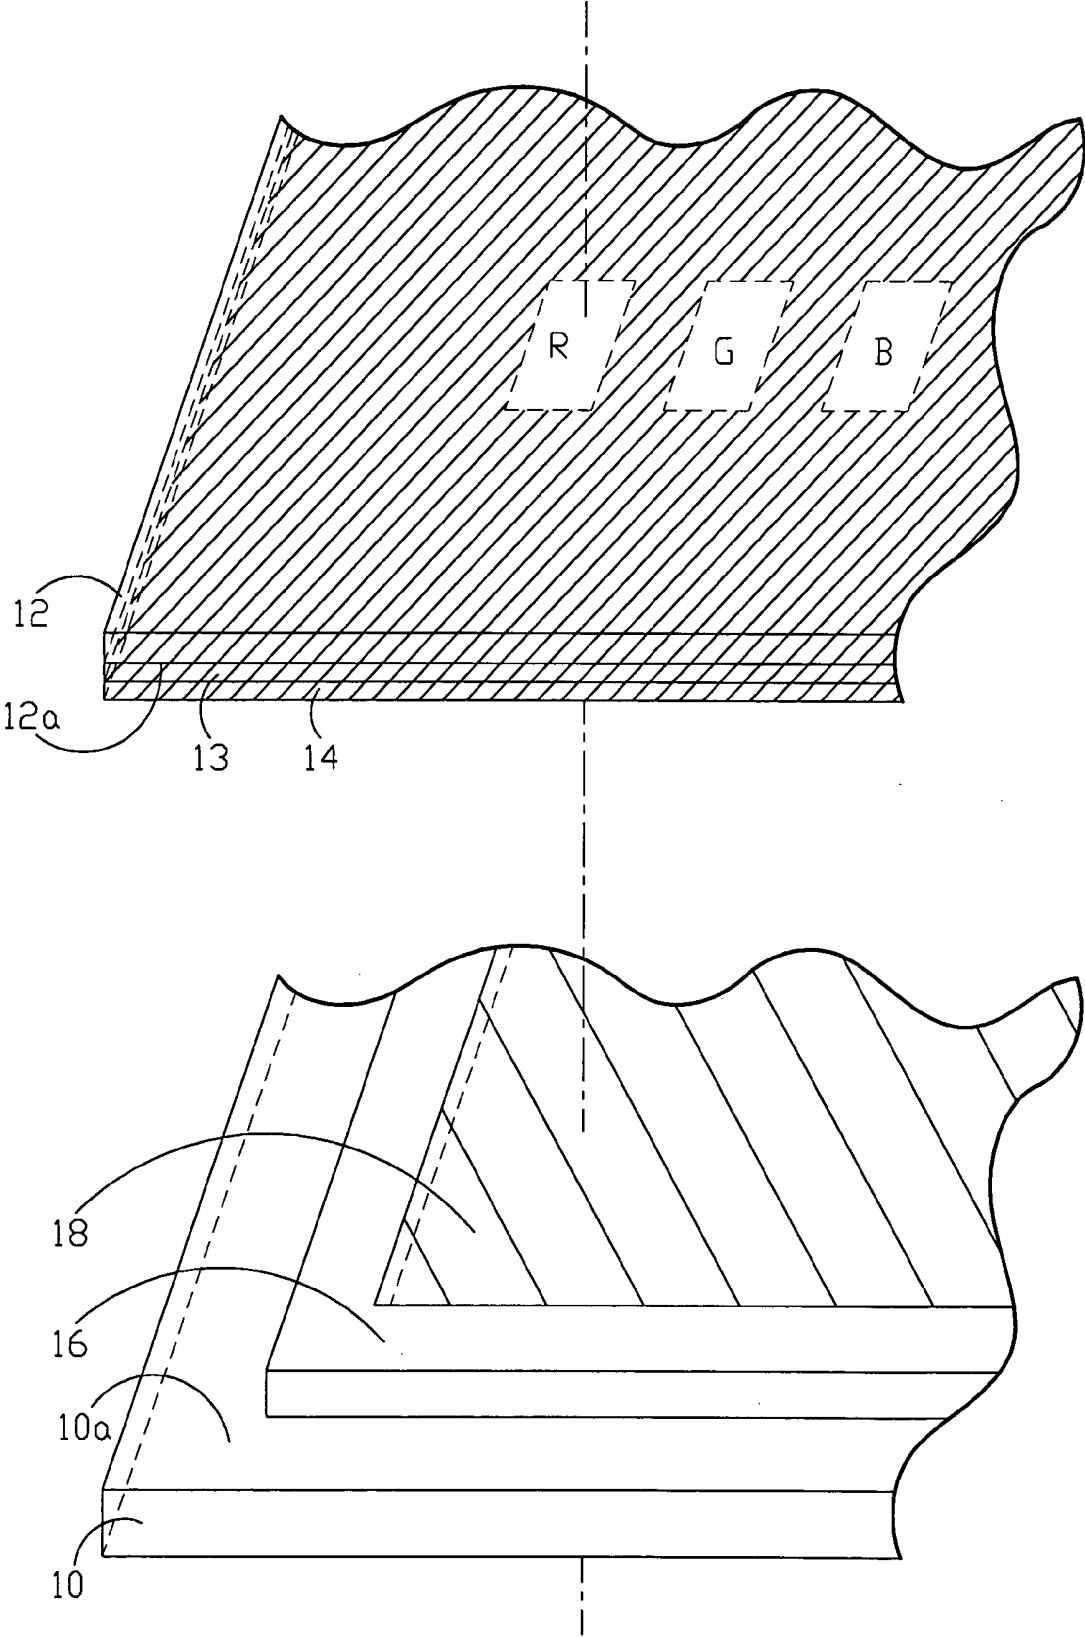


FIG.3A

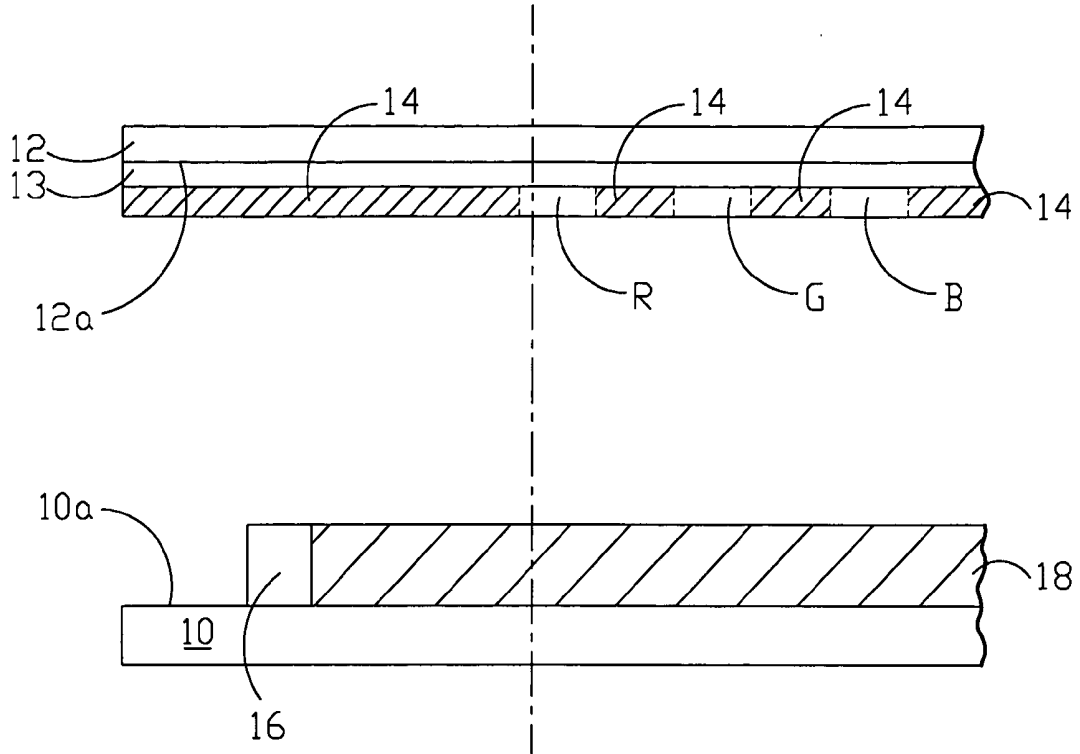


FIG.3B

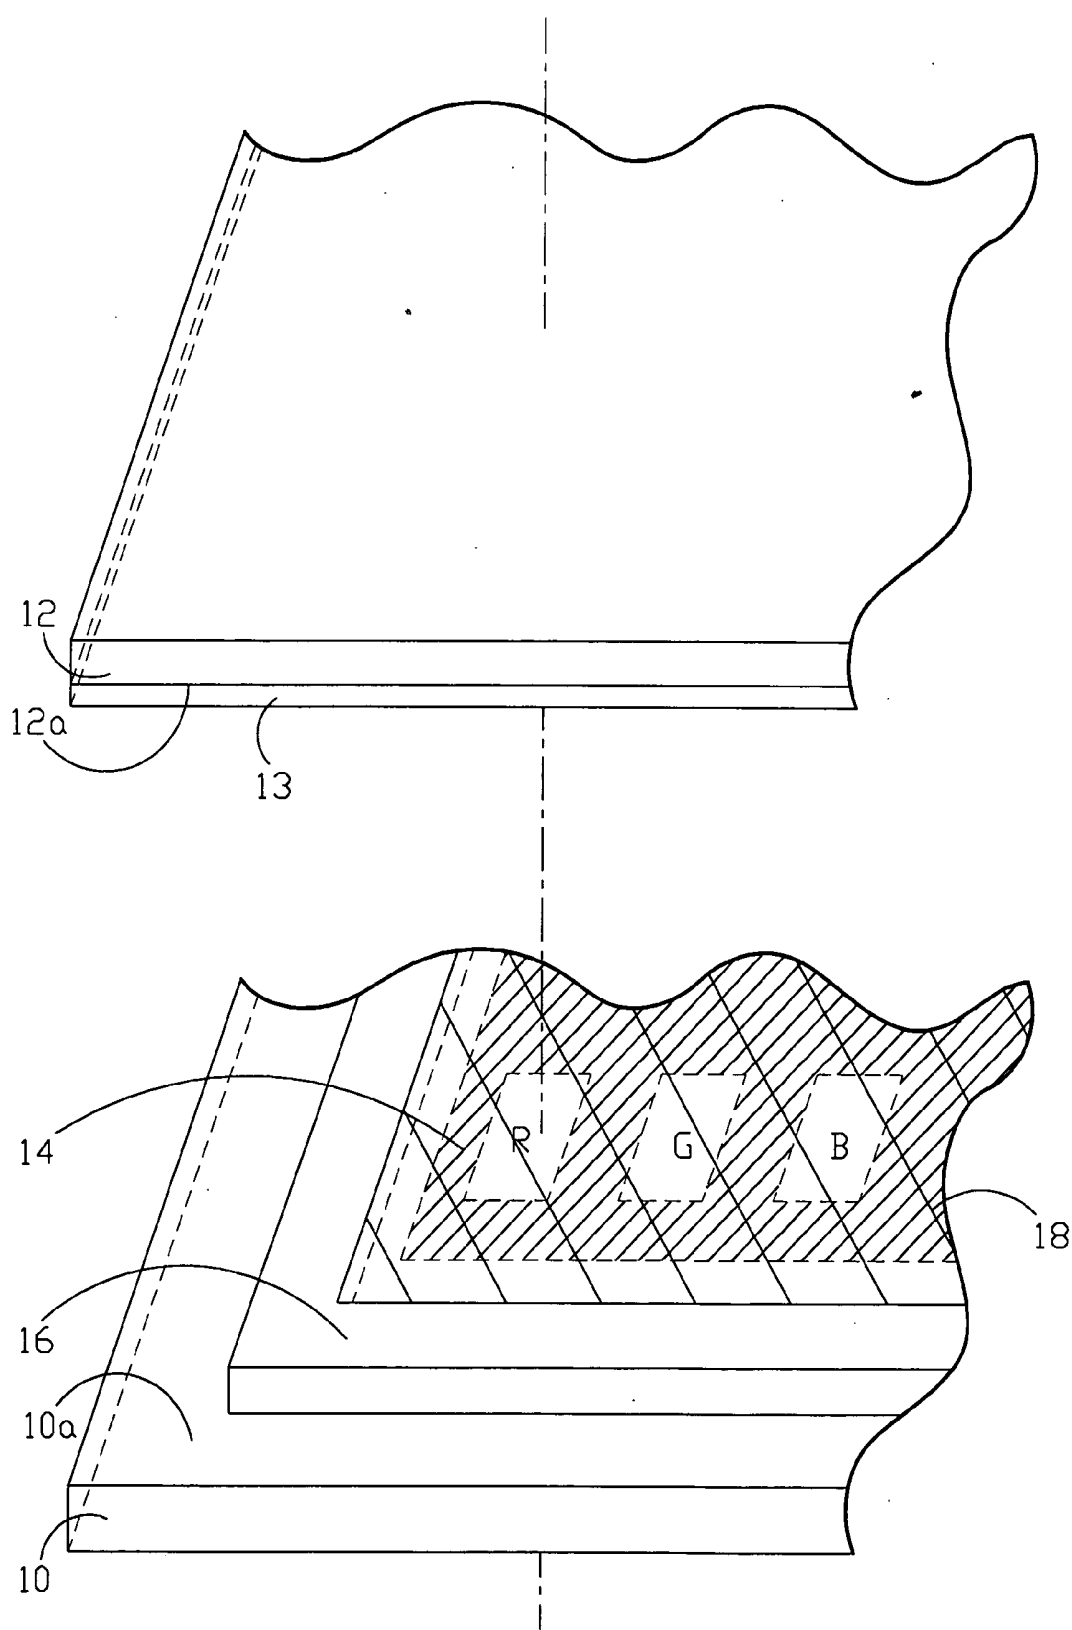


FIG. 4A

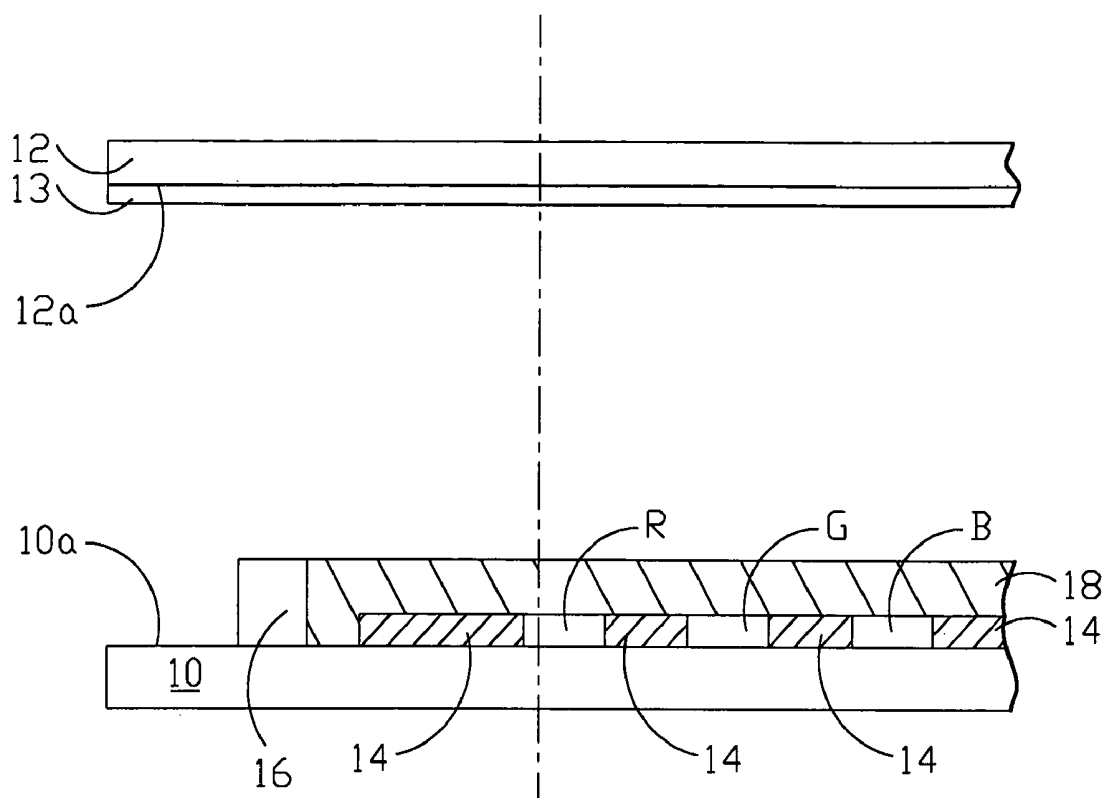


FIG.4B

PROCESS AND STRUCTURE OF LIQUID CRYSTAL PANEL WITH ONE DROP FILL

FIELD OF THE INVENTION

[0001] The present invention relates to a method and a structure for a liquid crystal panel by using one drop fill (ODF). More particularly, the present invention relates to a method for forming the liquid crystal panel to deposit the black matrix above the thin film transistor (TFT) or not to deposit the black matrix between the sealant and glass substrate, whereby avoid the sheltering effect of black matrix when executing curing processing of a sealant.

DESCRIPTION OF THE PRIOR ART

[0002] Materials of liquid crystal has the characteristic of flowing, hence, molecules of liquid crystal move and lead into different arrangement statuses with just a tiny force. To give an example of a most widespread familiar nematic type liquid crystal, the molecules of liquid crystal change the orientation by the effect of electric field. Since the optic axis of liquid crystal and its molecular axis are identical, the orientation of polarizing will change according to the arrangement orientation of liquid crystal molecules when the polarized light that is irradiated from backlight module by way of polarizing film passes through liquid crystal. Furthermore, by using another polarizing film the transmittancy will varies depending on the polarization direction of polarized light. By using a distinct electric field on a distinct region of the liquid crystal to cause the distinct arrangement orientation, a liquid crystal display mainly depending on the two polarizing films and the liquid crystal within them displays distinct brightness representation of the distinct regions of the liquid crystal according to the pattern to be displayed. By using trichromatic color filters (red, blue and green (R, G, and B)) to present different colors, colorful images can be displayed on the liquid crystal displays. Because of the flowing characteristic of the liquid crystal, it is necessary to adhere to two substrates held spaced apart to form an empty cavity by using a sealant disposed in a peripheral region of them, wherein the cavity is then infused with the liquid crystal. Transistors and electrodes are deposited on the glass substrate to provide the electric field for changing the orientation of the liquid crystal. The aforementioned two polarizing films are also deposited on these two glass substrates.

[0003] Most of the prior arts for injecting the liquid crystal are applied to use a vacuum insertion process and it is as follows. The two glass substrates (Liquid Crystal Display Panel; LCD Panel), being composed to form an empty cavity, are put into a vacuum chamber. The cavity of the composed glass substrates is reserved an downward opening and fastened by way of a base, wherein a shallow container with the liquid crystal is set below the opening for providing liquid crystal. Since there is vacuumed in the vacuum chamber, by way of and butting the shallow container by using a spring action means and then let in the air, the cavity between the two substrates is fully filled with liquid crystal by capillary action. Finally, seal the opening, whereby the infusing of the liquid crystal is complete.

[0004] It is required a considerable longtime to complete the process for injecting the cavity with the liquid crystal. For example, if the cell gap of a 15-inch liquid crystal

display panel is 3.5 μm , it costs 40 hours to complete the vacuum insertion process with the liquid crystal. Moreover, the time being required to complete the process of injecting the cavity with the liquid crystal increases when the size of the liquid crystal display panel increases or the cell gap between the glass substrates decreases. Hence the process time can not be reduced, even the cost increases with the increasing of the panel size.

[0005] In order to reduce the process time, a faster process for injecting the liquid crystal has been proposed, which is called one-drop fill (ODF) technique. Before proceeding the technique, a high-adhesive sealant must be smeared over the glass substrates for being the adhesive to adhere to the glass substrates and confining the liquid crystal. The technique applies a dropping apparatus to control the dropping amount. Firstly, drop an amount of liquid crystal directly on one glass substrate and then proceed the assembling with another substrates in vacuum. After assembling, execute a sealant compressing procedure and a sealant curing procedure irradiated by ultraviolet (UV) rays, the cell process is complete. When the cell gap of a 15-inch liquid crystal display is 3.5 μm , the time being required for the process of one-drop fill technique is reduced to be about 1.5 hours and not dependant on the size of liquid crystal display and the cell gap. Thus one-drop fill technique has the advantages of simplifying the process and reduces time of the process.

[0006] Although one-drop fill technique has the aforementioned advantages, it also suffers some problems. Because a high-adhesive sealant, being the adhesive to adhere to the glass substrates and confining the liquid crystal, must be formed on a substrate before liquid crystal is dropped onto the substrate. And then the sealant must be irradiated by ultraviolet rays to archive completely curing after assembling, wherein the black matrix on the glass substrates will shelter from ultraviolet rays to cause the problems of process complexity increasing and incompletely curing in the process for curing. Besides, the liquid crystal contacts with the uncured sealant while it is dropped onto a substrate, the monomers or polymers of epoxy resin in the sealant will diffuse into the liquid crystal to cause the liquid crystal contaminated and driven abnormally, whereby the damage is produced.

[0007] In order to resolve the problem of incompletely curing in the prior art, the methods of incident irradiating and substrate reflecting are applied with increased curing process complexity or the danger irradiated by ultraviolet rays. Referring to **FIG. 1**, form a black matrix **14** and color filters, i.e. red color filter, green color filter and blue color filter, on the first glass substrate **10**. Using a sealant **16** to assemble the first glass substrate **10** and the second glass substrate **12**. However, the ultraviolet rays can not penetrate the black matrix **14** and an opaque thin film transistor **13** formed on the second substrate **12** to irradiate the sealant **16**. Thus, the sealant **16** cannot accept enough ultraviolet light to be cured. Furthermore, the ultraviolet rays must cure the sealant **16** through the said of the substrates **10** and **12** to prevent liquid crystal **18** from dissolved.

[0008] Therefor, the prior arts still can not effectively handling and resolving the problems resulting from curing by ultraviolet rays in the process of one-drop fill.

SUMMARY OF THE INVENTION

[0009] In the prior art, the shielding of the black matrix causes the uncured sealant that is irradiated incompletely or the liquid crystal that is explored under the ultraviolet rays. The methods of incident irradiating is used for resolving the problem of incompletely irradiation. In consideration of the prior art, it is one object of the present invention to form the black matrix upon the TFT (thin film transistor) of the bottom glass substrate, whereby it ensures that the sealant is cured completely when the light irradiates from the top glass substrates.

[0010] It is another object of the present invention to form the black matrix upon the TFT of the bottom glass substrates to avoid the light being shielded by the black matrix when the light irradiates the sealant from the top glass substrate. Thus, the light can irradiate the sealant perpendicular to the top glass substrate and the bottom glass substrate to reduce the irradiating and to ensure the quality of the liquid crystal.

[0011] It is further object of the present invention not to form the black matrix on the area where the sealant is deposited on the top glass substrate to avoid the light being shielded by the black matrix when the light irradiates the sealant from the top glass substrate. Thus the curing process is easier and the restriction of the one-drop fill (ODF) process is looser.

[0012] The present invention provides a method for manufacturing a liquid crystal panel. The method provides a first glass substrate for forming a thin film transistor thereon. A black matrix is formed on a first surface of the first glass substrate, wherein the black matrix includes a plurality of openings. A sealant is formed on the peripheral region of a first surface of a second glass substrate. An amount of liquid crystal is dropped in a space surrounded by the sealant disposed on the first surface of said second glass substrate. The first glass substrate and the second glass substrate is assembled by the sealant. The first surface of the first glass substrate faces the first surface of the second glass substrate. The sealant is then cured by irradiating a light from a side of the second glass substrate.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The objectives and features of the present invention as well as advantages thereof will become apparent from the following detailed description, considered in conjunction with the accompanying drawings.

[0014] FIG. 1 is a diagram for incident irradiating to cure the sealant in the prior art;

[0015] FIG. 2A and FIG. 2B are diagrams of one preferred embodiment of the present invention;

[0016] FIG. 3A and FIG. 3B are diagrams of another preferred embodiment of the present invention; and

[0017] FIG. 4A and FIG. 4B are diagrams of one preferred embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0018] The first embodiment of the present invention is shown as FIG. 2A and FIG. 2B is a lateral view of FIG. 2A. The drawings of the embodiment (the other drawing of the

following embodiment is also included) are inverted over to make them easily understood, wherein insulating layer, indium tin oxide(ITO), PI film, spacer and polarizing film are not shown. There are the color filters (Red, Green and Blue (R, G and B)) and a sealant 16 in the first surface 10a of the top glass substrate 10, where the preferred materials of the sealant 16 are acrylic resin or the synthetic material of acrylic resin and epoxy resin. There are a thin film transistor 13 and black matrix 14 on the first surface 12a of the bottom glass substrate 12, wherein the black matrix 14 is a material that can be used to shield the light and the preferred one can be chosen from the group consisting of chromium (Cr), chromium oxide (CRO) or any of the three elements of the opaque resin. The black matrix 14 is used to avoid the phenomenon of light leak during using the liquid crystal panel to enhance the quality of the contrast and the displaying. If the black matrix 14 is an opaque material with electric conductivity, a dielectric can be deposited under it to prevent the conductive phenomenon caused by contacting the other wiring. There is no black matrix 14 on some portions R₁, G₁ and B₁, i.e. openings, of the first surface 12a of the bottom substrate 12. The portions are mapped vertically to the areas of the color pixels on the first surface 10a of the top glass substrate 10. The color filters are formed on the first surface 10a off the top substrate 10, wherein the color filters face the openings of the black matrix 14 respectively. The color is shown by a light from the backlight module (not shown) irradiating the color filters R, G and B through the areas R₁, G₁ and B₁.

[0019] The proceed the one drop fill (ODF) process. Put the first surface 10a of the top glass substrate 10 upward and drop a suitable amount of liquid crystal 18, being evaluated according the size of the panel and the thickness, on a peripheral region of the first surface 10a surrounded of the sealant 16. Assemble the first surface 12a of the bottom glass substrate 12 with the first surface 10a of the top glass substrate 10 face to face. Then, a light is used to irradiate the sealant 16 through the upward surface of the top glass substrate 10 to cure the sealant 16. The light can be the ultraviolet or the visible light to cure the sealant depending on the sensitizer in the sealant 16. Comparing to the incident irradiating or substrate reflecting, irradiating the sealant 16 vertically can reduce the process complexity, thus the constraint for curing is looser.

[0020] Another embodiment of the present invention is shown in FIG. 3A and FIG. 3B is a lateral view of FIG. 3A, wherein the insulating layer indium tin oxide (ITO), PI film, spacer and polarizing film are not shown. There is a sealant 16 on the first surface 10a of the top glass substrate 10, wherein the material of the sealant is acrylic resin and synthetic material. There are a thin film transistor 13 and a black matrix 14 on the first surface 12a of the bottom glass substrate 12, wherein the black matrix 14 is a material that can be used to shield the light and the preferred one can be chosen from the group consisting of chromium (Cr), chromium oxide (CrO) or any of the three elements of the opaque resin. The black matrix 14 is used to avoid the phenomenon of light leak during using the liquid crystal panel to enhance the quality of the contrast and the displaying. The color filters are formed on the first surface 12a of the bottom substrate 12, wherein the color filters in the openings of the black matrix 14 respectively. If the black matrix 14 is an opaque material with electric conductivity, a dielectric can

be deposited under it to prevent the conductive phenomenon caused by contacting the other wiring.

[0021] Put the first surface **10a** of the top glass substrate **10** upward and drop a suitable amount of liquid crystal **18**, being evaluated according the size of the panel and the thickness, on a peripheral region of the first surface **10a** surrounded of the sealant **16**. Assemble the first surface **12a** of the bottom glass substrate **12** with the first surface **10a** of the top glass substrate **10** face to face. Then, a light is used to irradiate the sealant **16** through the upward surface of the top glass substrate **10** to cure the sealant **16**.

[0022] The third embodiment of the present invention is shown as **FIG. 4A** and **FIG. 4B** is a lateral view of **FIG. 4A**, wherein the insulating layer, PI film, spacer and polarizing film are not shown. There is a thin film transistor **13** on a first surface **12a** of a bottom glass substrate **12**. There are the color filters R, G and B, a black matrix **14** and a sealant **16** in the first surface **10a** of the top glass substrate **10**, wherein the preferred materials of the sealant **16** are acrylic resin or the synthetic material of acrylic resin and synthetic material. There is no black matrix **14** on the area with the sealant **16**. The black matrix **14** is a material that can be used to shield the light and the preferred one can be chosen from the group consisting of chromium (Cr), chromium oxide (CrO) or any of the three elements of the opaque resin. The black matrix **14** is used to avoid the phenomenon of light leak during using the liquid crystal panel to enhance the quality of the contrast and the displaying. The color filters are formed on the first surface **10a** of the top substrate **10**, wherein the color filters are formed in the openings of the black matrix **14** respectively. The black matrix **14** can also be formed on the area on the first surface **12a** of the bottom glass substrate **12** mapping vertically to the first surface **10a** of the top glass substrate **10**. If the black matrix **14** is an opaque material with electric conductivity, a dielectric can be deposited under it to prevent the conductive phenomenon caused by contacting the other wiring.

[0023] Drop a suitable amount of liquid crystal **18**, being evaluated according the size of the panel and the thickness, on a peripheral region of the first surface **10a** surrounded of the sealant **16**. Assemble the first surface **12a** of the bottom glass substrate **12** with the first surface **10a** of the top glass substrate **10** face to face in a preferred circumstance (such as a vacuum). Then, a light is used to irradiate the sealant **16** through the upward surface of the top glass substrate **10** to cure the sealant **16** to complete the process.

[0024] The sealant **16** can be deposited on one of the two glass substrates. The embodiment is a preferred embodiment and not used to limit the way to deposit the sealant. The light used in the embodiment is adaptive depending on the sensitizer in the sealant **16**.

[0025] In the conclusion, the present invention discloses the manufacturing method and structure for forming the liquid crystal panels with ODF. Comparing to the prior art, the problems of the incompletely curing, the increasing process complexity caused by the incident irradiating or the substrate reflecting and the increasing are exposed by the ultraviolet rays will be reduced. The present invention can make the complete curing of the sealant, the irradiating of the line to the sealant perpendicular to the glass substrates. Furthermore the curing process is easier and the restriction of the one drop fill (ODF) process is looser.

[0026] The embodiments are only used to illustrate the present invention, not intended to limit the scope thereof. Many modifications of the embodiments can be made without departing from the spirit of the present invention.

What is claimed is:

1. A method for manufacturing a liquid crystal panel, comprising:

providing a first glass substrate for forming a thin film transistor thereon;

forming a black matrix on a first surface of said first glass substrate, wherein said black matrix includes a plurality of openings;

forming a sealant on the peripheral region of a first surface of a second glass substrate;

dropping an amount of liquid crystal on said first surface of said second glass substrate surrounded by said sealant;

assembling said first glass substrate and said second glass substrate by said sealant, wherein said first surface of said first glass substrate faces said first surface of said second glass substrate; and

curing said sealant by a light irradiation from a side of said second glass substrate.

2. The method of claim 1, further comprising forming a plurality of color filters on said first surface of said second glass substrate, wherein said color filters face said openings of said black matrix respectively.

3. The method of claim 1, further comprising forming a plurality of color filters on said first surface of said first glass substrate, wherein said color filters are formed in said openings of said black matrix respectively.

4. The method of claim 1, wherein said light irradiation is ultraviolet ray.

5. The method of claim 1, wherein said light irradiation is visible light.

6. The method of claim 1, wherein the material of said sealant is acrylic resin.

7. Then method of claim 1, wherein the material of said sealant is the synthetic material of acrylic resin and epoxy resin.

8. The method of claim 1, wherein the direction of said light radiation is perpendicular to said first surface of said second glass substrate.

9. The method of claim 1, wherein the material of said black matrix is selected from the group consisting of chromium, chromium oxide and an opaque resin.

10. The method of claim 1, further comprising forming another sealant on the peripheral region of said first surface of said first glass substrate, wherein said sealant and said another sealant face each other.

11. A method for manufacturing a liquid crystal panel, comprising:

providing a first glass substrate;

forming a sealant, a black matrix and a plurality of color filters on a first surface of a second glass substrate, wherein said sealant is formed on the peripheral region of said second glass substrate without covering by said black matrix, said color filters are formed in a plurality of openings of said black matrix;

dropping an amount of liquid crystal on said first surface of said second glass substrate surrounded by said sealant;

assembling said first glass substrate and said second glass substrate, wherein said first surface of said first glass substrate faces said first surface of said second glass substrate; and

curing said sealant by a visible light.

12. The method of claim 11, wherein the material of said sealant is acrylic resin.

13. The method of claim 11, wherein the material of said sealant is the synthetic material of acrylic resin and epoxy resin.

14. The method of claim 11, wherein said light is irradiated said sealant from a side of one of said glass substrates.

15. The method of claim 11, wherein the material of said black matrix is selected from the group consisting of chromium, chromium oxide and an opaque resin.

16. A liquid crystal panel, comprising:

a first glass substrate wherein a thin film transistor thereon;

a second glass substrate assembling with said first glass substrate by a sealant;

a liquid crystal layer disposed between said first glass substrate and said second glass substrate and surrounded by said sealant; and

a black matrix including a plurality of openings formed on a first surface of said first glass substrate, wherein said sealant is disposed on the peripheral region of a first surface of said second glass substrate.

17. liquid crystal panel of claim 16, further comprising a plurality of color filters formed on said first surface of said second glass substrate, wherein said color filters face said openings of said black matrix respectively.

18. The liquid crystal panel of claim 16, further comprising a plurality of color filters formed in said openings of said black matrix on said first surface of said first glass substrate.

19. The liquid crystal panel of claim 16, wherein said sealant is cured by a light irradiation.

* * * * *

专利名称(译)	具有一滴填充的液晶面板的工艺和结构		
公开(公告)号	US20040174491A1	公开(公告)日	2004-09-09
申请号	US10/777752	申请日	2004-02-13
[标]申请(专利权)人(译)	余崇KAO YU SHIH PO阿秀		
申请(专利权)人(译)	YU KAO崇余 SHIH PO-阿秀		
当前申请(专利权)人(译)	YU KAO崇余 SHIH PO-阿秀		
[标]发明人	YU KAO TSUNG YU SHIH PO HSIU		
发明人	YU KAO, TSUNG-YU SHIH, PO-HSIU		
IPC分类号	G02F1/1339 G02F1/1341		
CPC分类号	G02F1/1339 G02F2001/13415 G02F1/1341		
优先权	092103039 2003-02-14 TW		
其他公开文献	US7297223		
外部链接	Espacenet USPTO		

摘要(译)

本发明涉及一种具有一滴填充 (ODF) 的液晶面板的方法。在另一个基板上形成黑色矩阵，其在固化密封剂时不能被紫外光穿透。因此，在本发明中，可以避免固化过程中的上述问题并简化固化过程。

