



US 20050195146A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0195146 A1**
(43) **Pub. Date: Sep. 8, 2005****Senda**(54) **ACTIVE MATRIX LIQUID CRYSTAL
DISPLAY DEVICE**(30) **Foreign Application Priority Data**

Mar. 4, 2004 (JP) 2004-060783

(75) Inventor: **Michiru Senda, Gifu-shi (JP)****Publication Classification**(51) **Int. Cl.⁷** **G09G 3/36**(52) **U.S. Cl.** **345/94**Correspondence Address:
Barry E. Bretschneider
Morrison & Foerster LLP
Suite 300
1650 Tysons Boulevard
McLean, VA 22102 (US)(57) **ABSTRACT**

The non-linear amplifier performs a gamma correction to the analog video signal inputted from outside along with the non-linear correction for eliminating the effect of the dependency of the dielectric constant of the liquid crystal on the pixel potential V_p . The analog video signal corrected by the non-linear amplifier is then applied to a pair of amplifiers and that output a pair of signals with the polarity inverted against the potential V_{com} of the common electrode. A switching circuit switches and outputs the output from the pair of the amplifiers according to the inverted signal.

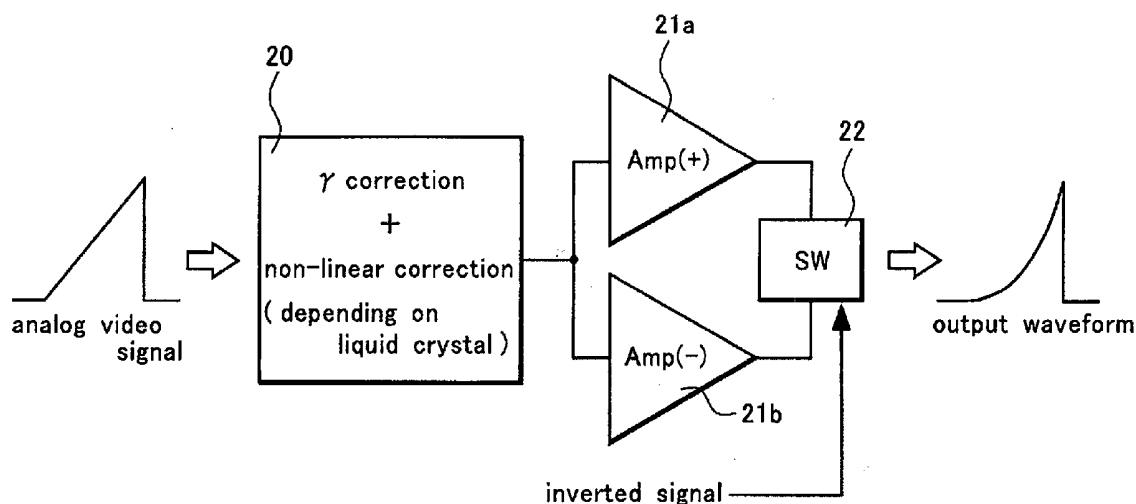
(73) Assignee: **Sanyo Electric Co., Ltd., Moriguchi-city (JP)**(21) Appl. No.: **11/069,060**(22) Filed: **Mar. 2, 2005**

FIG. 1

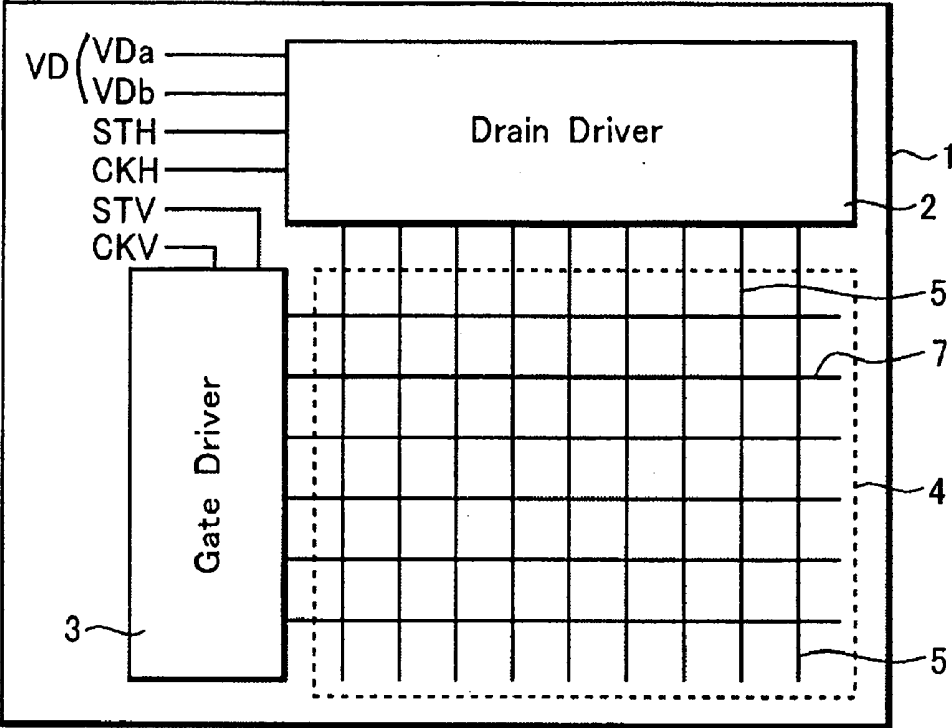


FIG.2

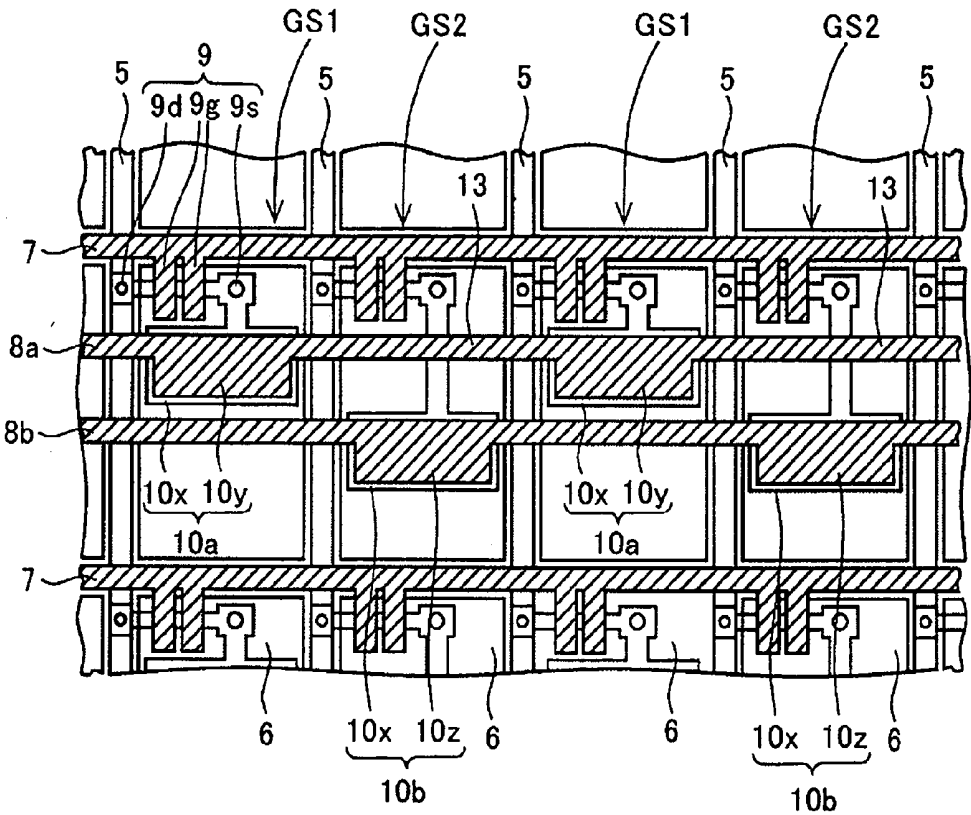


FIG.4

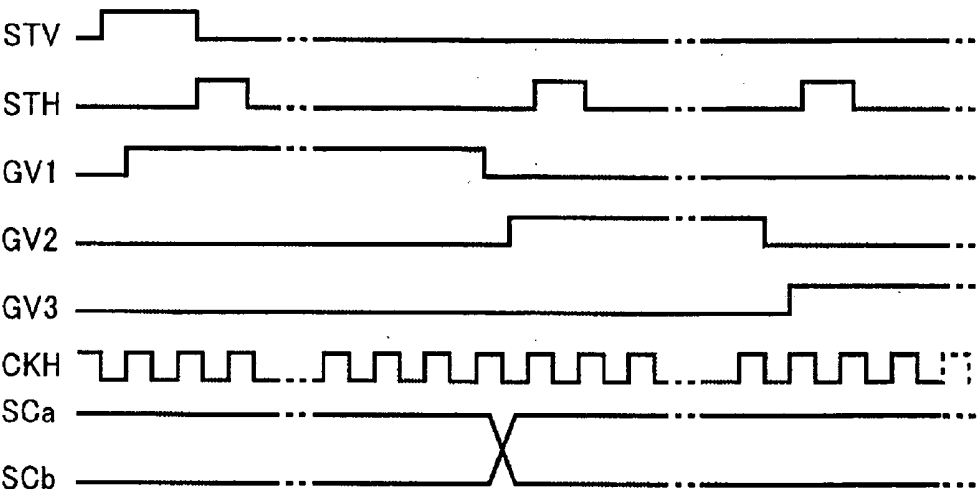


FIG.5A

pixel potential V_P (the first pixel GS1)

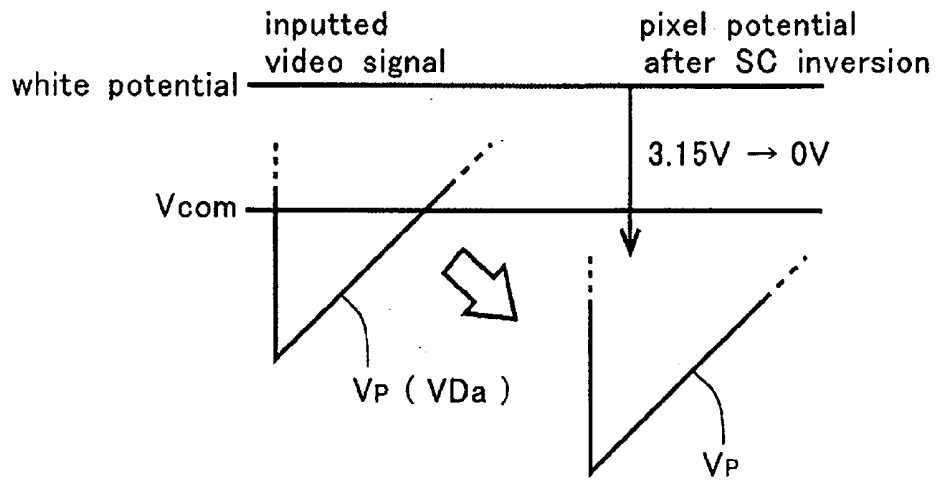


FIG.5B

pixel potential V_P (the second pixel GS2)

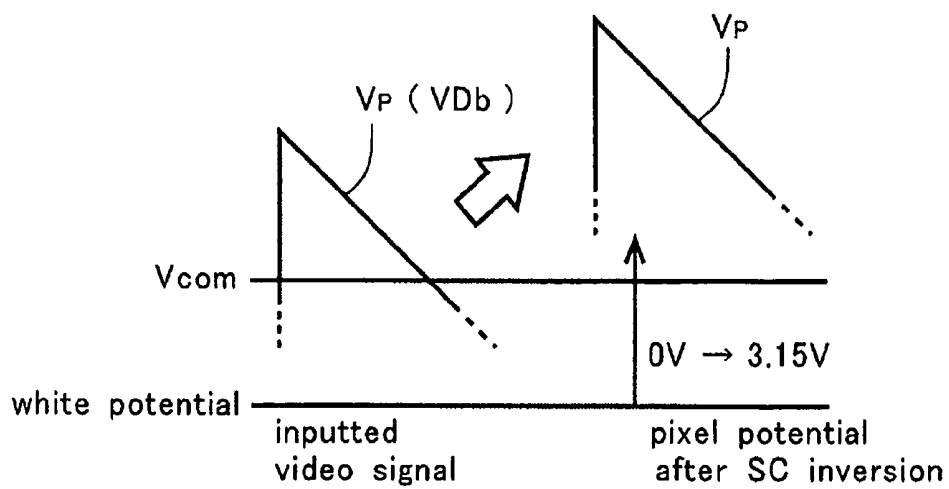


FIG. 6

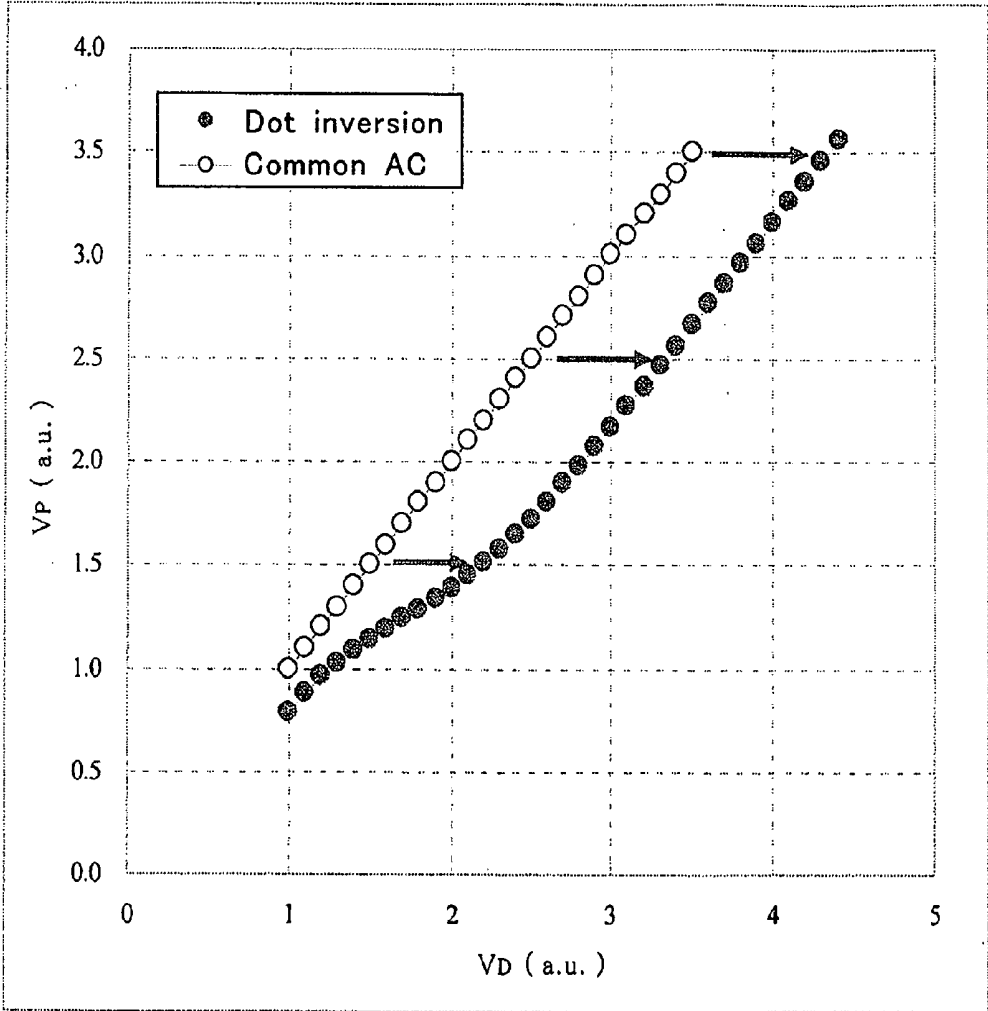


FIG. 7

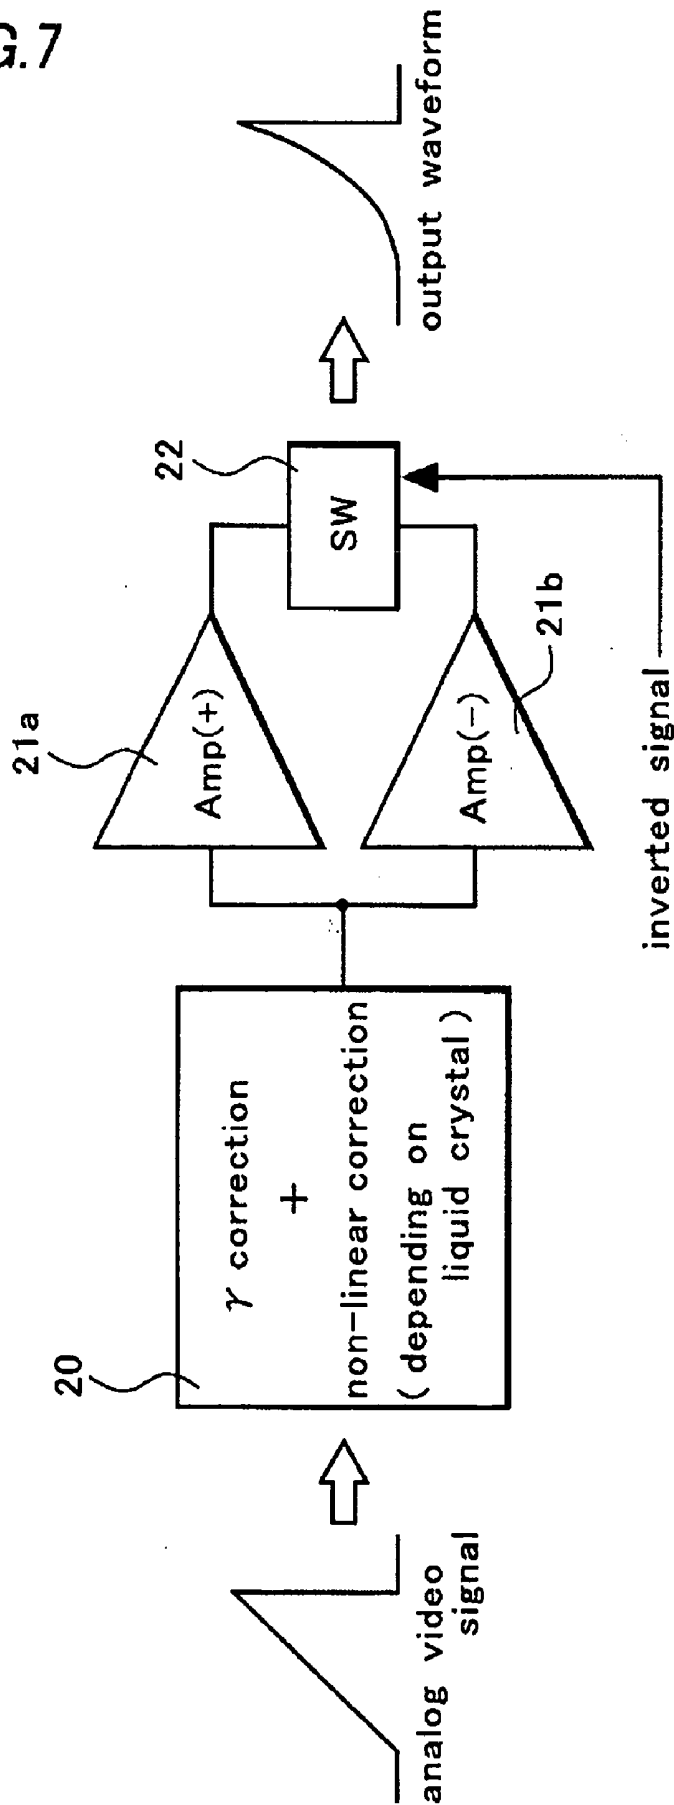


FIG. 8

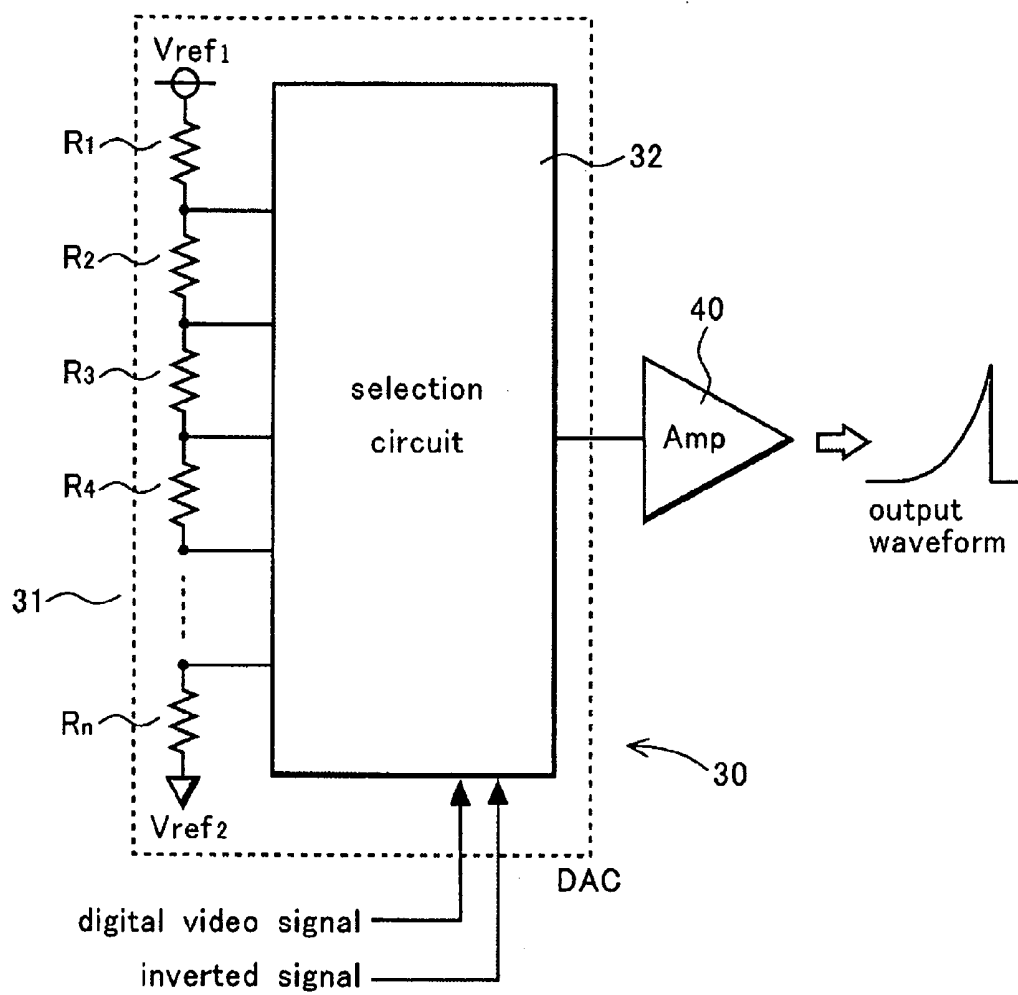


FIG.9

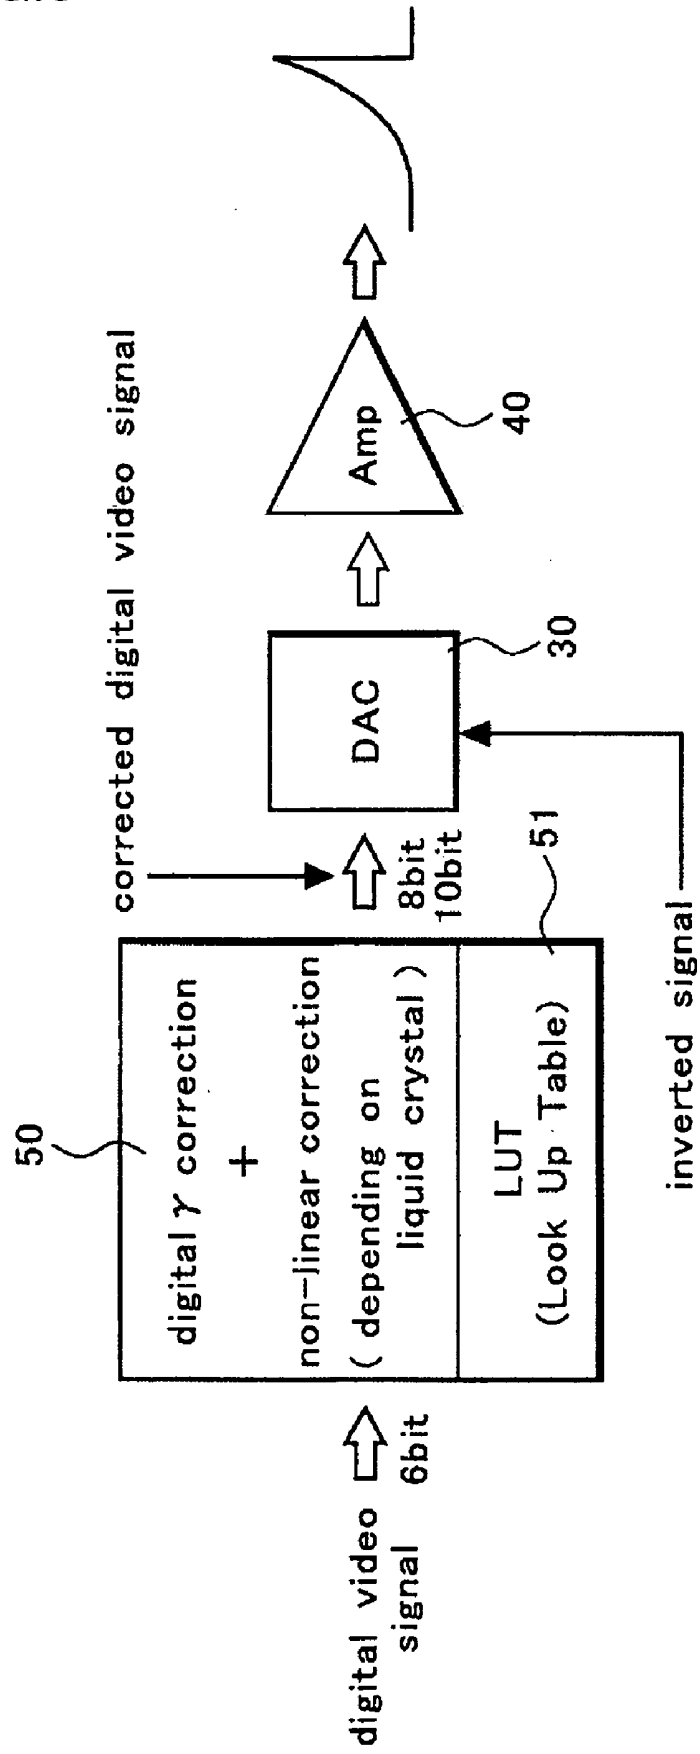


FIG. 10


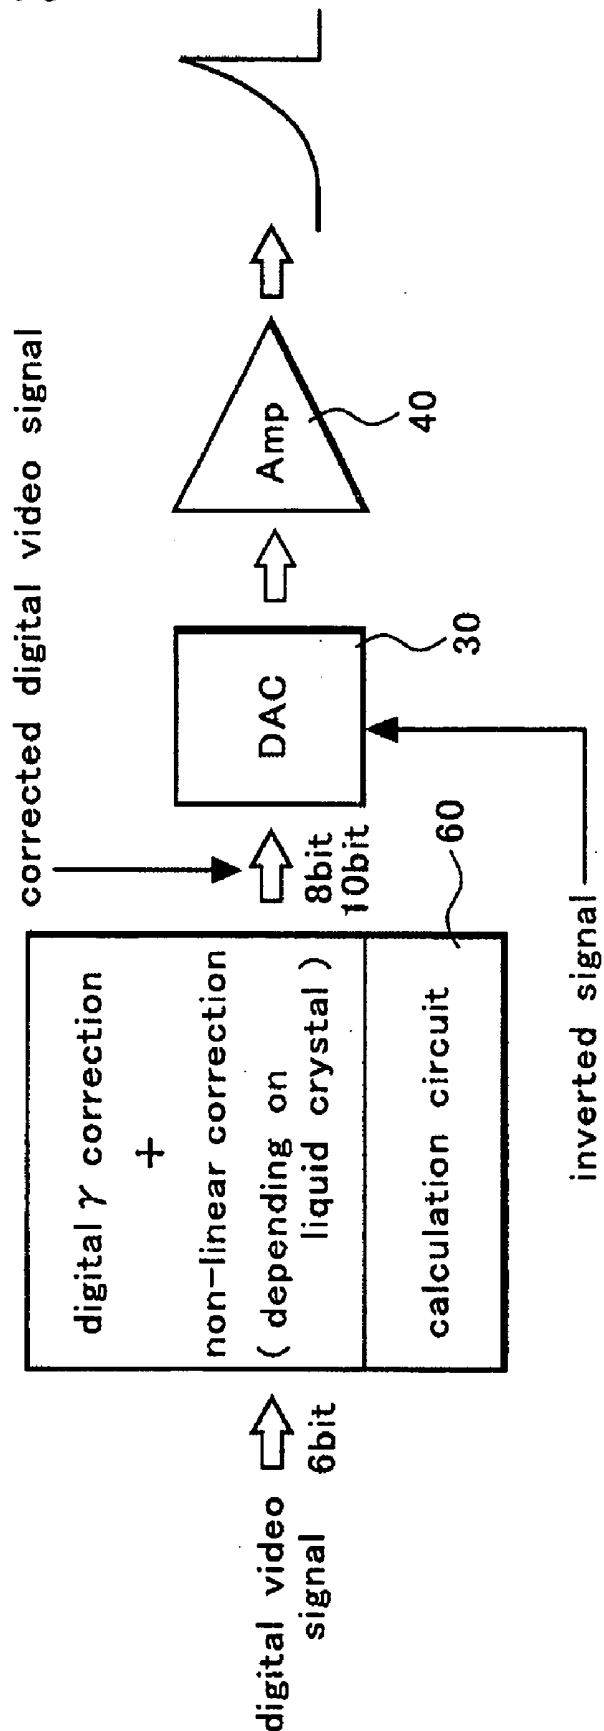


FIG. 11

PRIOR ART

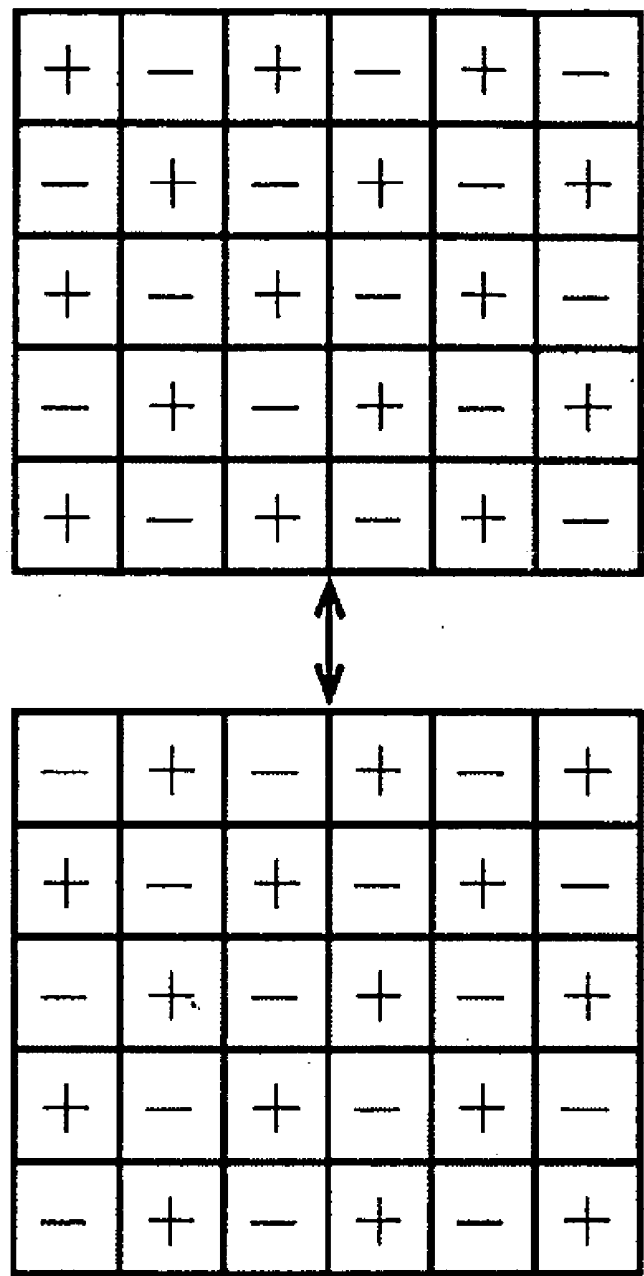

ACTIVE MATRIX LIQUID CRYSTAL DISPLAY DEVICE

CROSS-REFERENCE OF THE INVENTION

[0001] This invention is based on Japanese Patent Application No. 2004-060783, the content of which is incorporated herein by reference in its entirety.

BACKGROUND OF THE INVENTION

[0002] 1. Field of Invention

[0003] This invention relates to an active matrix display device.

[0004] 2. Description of Related Art

[0005] The deterioration of liquid crystal is prevented by the common AC driving that gives AC potential to a common electrode and a supplemental capacitance. Low energy consumption is achieved by lowering both electric current and voltage of a drain driver through the minimization of the potential difference between the positive and negative polarities of the video signal inputted to the drain driver in the active matrix display device, in which a video signal is supplied to an independent pixel electrode through a switching element such as a thin film transistor (TFT).

[0006] However, the load and the energy consumption of the capacitance in the common electrode and all the supplemental capacitance lines are still large because the voltage polarity of the common electrode and the supplemental capacitance lines are inverted at each horizontal period with the horizontal inversion common AC driving that inverts the polarity of the video signal given to the drain line at each horizontal period.

[0007] Japanese Patent Application Publication No. Hei 12-81606 discloses a driving method that can significantly lower the energy consumption by stabilizing the common electrode voltage and by inverting the polarity of the supplemental capacitance voltage and that can simultaneously lower both electric current and voltage of the drain driver through minimization of the potential difference between the positive and negative polarities of the video signal (referred to as "SC driving", hereinafter).

[0008] Also, Japanese Patent Application Publication No. 2003-150127 discloses the dot inversion driving system, in which the voltage with opposite polarity is applied to the pixels in such way that any pair of the adjacent pixels have opposite polarity from each other by supplying the voltage with opposite polarity to the pixel electrodes next to each other in gate line direction, as shown in **FIG. 11**. The dot inversion driving system can prevent capacitance coupling and the irregularity of the image due to the capacitance coupling that takes place in the SC driving.

[0009] However, the dielectric constant of liquid crystal changes according to the change in an applied voltage in the SC driving and the dot inversion driving. Therefore, the potential of the pixel electrode depends on the liquid crystal capacitance and changes non-linearly against the inputted video signal. The potential of the pixel electrode adequate for the inputted video signal voltage cannot be obtained, leading to the deterioration of the gradation characteristics.

SUMMARY OF THE INVENTION

[0010] The invention provides an active matrix display device comprising, a plurality of pixel electrodes disposed

on a substrate in a matrix configuration, a liquid crystal sealed between the pixel electrodes and a common electrode, a plurality of switching elements connected to corresponding pixel electrodes, a first supplemental capacitance line supplied with a first potential, and a second supplemental capacitance line supplied with a second potential. The first and second potentials alternate with a first cycle. The display device also includes a supplemental capacitance electrode provided for each of the pixel electrodes so that each supplemental capacitance electrode forms a capacitance between said each supplemental capacitance electrode and the first supplemental capacitance line or the second supplemental capacitance line, a driver circuit supplying to the pixel electrodes and the supplemental capacitance electrodes through the switching elements a first video signal and a second video signal that are opposite in polarity and alternate in a second cycle, and a correction circuit correcting the first and second video signals so as to reduce an effect of dielectric constant of the liquid crystal that changes in response to a change in a potential applied to the liquid crystal on potentials of the pixel electrodes receiving the first video signal or the second video signal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] **FIG. 1** is a plan view of the display panel of the active matrix display device of an embodiment of this invention.

[0012] **FIG. 2** is a pattern diagram of the display region in the display panel of the active matrix display device of the embodiment of this invention.

[0013] **FIG. 3** is an equivalent circuit diagram of the display region shown in **FIG. 2**.

[0014] **FIG. 4** is a timing chart showing the relation among the signals of the display panel of the active matrix display device of the embodiment of this invention.

[0015] **FIGS. 5A and 5B** are waveforms of the signal showing the driving method of the active matrix display device of the embodiment of this invention.

[0016] **FIG. 6** shows the relation between the video signal voltage and the pixel voltage of the embodiment.

[0017] **FIG. 7** is a block diagram showing the correction method of the video signal of the active matrix display device of the embodiment of this invention.

[0018] **FIG. 8** is a block diagram showing the correction method of the video signal of the active matrix display device of the embodiment of this invention.

[0019] **FIG. 9** is a block diagram showing the correction method of the video signal of the active matrix display device of the embodiment of this invention.

[0020] **FIG. 10** is a block diagram showing the correction method of the video signal of the active matrix display device of the embodiment of this invention.

[0021] **FIG. 11** is a diagram showing the dot inversion driving method of a conventional active matrix display device.

DETAILED DESCRIPTION OF THE INVENTION

[0022] Next, an embodiment of this invention will be explained by referring to figures. **FIG. 1** is a plan view of the

display panel of the active matrix display device of this invention. **FIG. 2** is a pattern diagram of the display region of the display panel of the active matrix display device of this invention. And **FIG. 3** is an equivalent circuit diagram.

[0023] A drain driver **2** is disposed in row direction and a gate driver **3** is disposed in column direction on a display panel as shown **1** in **FIG. 1**. A display region **4** for displaying image is formed surrounded with the drain driver **2** and gate driver **3**.

[0024] A plurality of drain lines **5** and a plurality of rectangular pixel electrodes **6** with the longitudinal side in the column direction are disposed in column direction and a gate line **7**, a first supplemental capacitance line **8a** and a second supplemental capacitance line **8b** are disposed in row direction in the display region **4**, as shown in **FIGS. 2** and **3**. A TFT **9** and either one of a first supplemental capacitance **10a** or a second supplemental capacitance **10b** are disposed in the region with the pixel electrode **6** (referred to as "a pixel" hereinafter). That is, the first supplemental capacitance **10a** is disposed in the first pixel GS1 and the second supplemental capacitance **10b** is disposed in the second pixel GS2 adjacent to the first pixel GS1. The first pixel GS1 and the second pixel GS2 are alternatively formed in row direction.

[0025] The TFT **9** includes a gate electrode **9g** extending from the gate line **7**, a drain region **9d** that is a semiconductor layer electrically connected to the drain line **5** through a contact, and a source region **9s** that is a semiconductor layer electrically connected to the pixel electrode **6** through a contact. The first supplemental capacitance **10a** includes a supplemental capacitance electrode **10x** that is a semiconductor layer connected to the TFT **9** and a supplemental capacitance electrode **10y** extending from the first supplemental capacitance line **8a** and superimposing over the supplemental capacitance electrode **10x** with a capacitance-insulating layer between them. The second supplemental capacitance **10b** includes the supplemental capacitance electrode **10x** mentioned above and a supplemental capacitance electrode **10z** extending from the second supplemental capacitance line **8b** and superimposing over the supplemental capacitance electrode **10x** with a capacitance-insulating layer between them.

[0026] A first parasitic capacitance **15a** is formed between the pixel electrode **6** and the second supplemental capacitance line **8b** in the first pixel GS1, and a second parasitic capacitance **15b** is formed between the pixel electrode **6** and the first supplemental capacitance line **8a** in the second pixel GS2.

[0027] A liquid crystal is sealed in between the first substrate with the TFT **9** and the other substrate facing the first substrate. A common electrode **11** is formed on the substrate that does not have the TFT **9**, operating as a capacitance electrode corresponding to the pixel electrode **6** of a liquid crystal capacitance **12**. A first video signal voltage VDa or a second video signal voltage VDb that have the polarities opposite from each other against the potential Vcom of the common electrode **11** are inputted to the drain driver **2** as shown in **FIG. 1**, and the drain driver **2** applied the first video signal voltage VDa or the second video signal voltage VDb to the drain line **5** consecutively selected.

[0028] The gate driver **3** consecutively selects the gate line **7** and applies a gate signal GV. The display region **4** is a

region for image display with a plurality of pixel electrodes **6**. The drain line **5** is the wiring for transmitting either the first video signal voltage VDa or the second video signal voltage VDb that have the polarities opposite from each other to the TFT **9** through a contact. The pixel electrode **6**, which is a display unit of the pixel region, is the electrode for driving the liquid crystal together with the common electrode **11** by the video signal voltage VD transmitted from the drain line **5** through TFT **9**.

[0029] The gate line **7** selected by the gate driver **3** receives the gate signal GV, turning the TFT **9** on. The first supplemental capacitance line **8a** is formed together with the supplemental capacitance electrode **10y** arranged in row direction in the same layer as the layer of the gate line **7**, connecting the first supplemental capacitance **10a** formed in each row. The second supplemental capacitance line **8b** is formed together with the supplemental capacitance electrode **10z** arranged in row direction in the same layer as the layer of the gate line **7**, connecting the second supplemental capacitance **10b** formed in each row. The first supplemental capacitance line **8a** receives the first supplemental capacitance voltage and the second supplemental capacitance line **8b** receives the second supplemental capacitance voltage with the polarity opposite from that of the first supplemental capacitance voltage. The polarity of the first and the second supplemental capacitance voltages is inverted with a certain circle, as it will be mentioned later.

[0030] The TFT **9** is a switching element in which the electric current go through a channel region, a semiconductor layer located directly under the gate electrode **9g**, either from the source region **9s** to the drain region **9d** or from the drain region **9d** to the source region **9s** only when the voltage is applied to the gate electrode **9g**. The first supplemental capacitance **10a** and the second supplemental capacitance **10b** holds the electric charge coming from the video signal voltage VD supplied from the drain line **5** through the TFT **9** for one frame period, supplementing the loss of electric charge by the liquid crystal capacitance **12**. The common electrode **11**, with a certain amount of voltage applied, drives the liquid crystal with the pixel electrode **6** according to the video signal voltage VD applied to the pixel electrode **6**. The electric charge of the liquid crystal capacitance **12** comes from the video signal voltage VD supplied from the drain line **5** through the TFT **9** and held by the liquid crystal.

[0031] However, the electric charge held by the liquid crystal **12** leaks easily due to the leakage current while the TFT **9** is off because of current leakage due to the impurity in the liquid crystal. The electric charge of the liquid crystal capacitance **12** is supplemented with the electric charge held in the first supplemental capacitance **10a** and the second supplemental capacitance **10b**.

[0032] Next, the driving method will be explained. **FIG. 4** is a timing chart showing the relation among signals in the display panel. The chart shows the change of a vertical start signal STV, a gate signal GV, a horizontal start signal STH, a horizontal clock signal CKH, a potential SCa of the first supplemental capacitance line **8a** and a potential SCb of the second supplemental capacitance line **8b**.

[0033] First, the pulse of the gate signal GV1 gets started after the pulse of the vertical start signal STV becomes high level, turning on the TFT **9** connected to the gate line **7** in the first row which receives the gate signal GV1. Then, the

pulse of the horizontal start signal STH becomes high level, and it is synchronized with the pulse of the horizontal clock signal CKH while the gate signal GV1 is supplied to the gate line 7 in the first row. The drain line 5 is consecutively selected and the video signal voltage VD is consecutively applied to the pixel electrode 6, the first supplemental capacitance 10a, and the second supplemental capacitance 10b through the TFT 9.

[0034] The first video signal voltage VDa is fed to the pixel electrode 6 of the first pixel GS1, the first supplemental capacitance 10a and the first parasitic capacitance 15a, and the second video signal voltage VDb is fed to the pixel electrode 6 of the second pixel GS2, the second supplemental capacitance 10b and the first parasitic capacitance 15b. The gate signal GV1 stops being supplied to the gate line 7 on the first row, turning off the TFT 9 connected to the gate line 7 when the video signal voltage VD is fed to all the drain lines 5. Then, the pulse of the gate signal GV2 and gate signal GV3 consecutively starts up, feeding the gate signal GV2 to the gate line 7 on the second row and the gate signal GV3 to the gate line 7 on the third row. This operation is repeated. The polarity of the potential SCa of the first supplemental capacitance line 8a and the potential SCb of the second supplemental capacitance line 8b are inverted while the TFT 9 connected to the gate line 7 is off because the gate line 7 does not receive the gate signal GV. That is, the polarity is inverted for the duration starting from the time when the gate signal GV1 drops down and till the time when the gate signal GV 2 becomes high level. The inversion of the polarity between the potential SCa of the first supplemental capacitance line 8a and the potential SCb of the second supplemental capacitance line 8b takes place for each row for each frame circle.

[0035] The potential of the pixel electrode 6 (referred to as the pixel potential Vp, hereinafter) changes either to the positive potential direction or the negative potential direction through the capacitance coupling of the pixel electrode 6 with the first supplemental capacitance 10a and first parasitic capacitance 15a or the capacitance coupling with the second supplemental capacitance 10b and the second parasitic capacitance 15b, performing the dot inversion driving, based on the potential change ΔV s of the supplemental capacitance line. Then, the pulse of the vertical start signal STV starts up again when the gate signal GV is fed to all the gate line 7, feeding the gate signal GV to the gate line 7 on the first row. The same operation is repeated. FIGS. 5A and 5B are the waveform showing the driving method of the display device of an embodiment of this embodiment. FIG. 5A shows the change of the pixel potential Vp of the first pixel GS1 around the time when the polarity of the potential SCa of the first supplemental capacitance line 8a is inverted. FIG. 5B shows the change of the pixel potential Vp of the second pixel GS2 around the time when the polarity of the potential SCb of the second supplemental capacitance line 8b is inverted.

[0036] It shows that the potential SCa of the first supplemental capacitance line 8a is inverted from 3.15V to 0V and the potential SCb of the second supplemental capacitance line 8b is inverted from 0V to 3.15V after the gate signal GV1 becomes low level. The pixel potential Vp of the first pixel GS1 changes in negative voltage direction against the stable potential Vcom of the common electrode 11 and the pixel potential Vp of the second pixel electrode GS2 changes

in positive voltage direction against the stable potential Vcom of the common electrode 11 through the capacitance coupling mentioned above according to the potential change ΔV sc.

[0037] The display device of this embodiment performs the dot inversion driving for eliminating the effect of the video signal voltages adjacent to each other, preventing the irregularity of the image due to the capacitance coupling. Additionally, the display device can make the dynamic range of the inputted video signal voltage narrower by feeding either the first or the second supplemental capacitance voltage to the first and the second supplemental capacitance lines 8a and 8b while the switching element is off, leading to the lower energy consumption.

[0038] Next, the correction of the signal level of the first and the second video signal voltages VDa and VDb will be explained in detail. The pixel potential Vp after the change due to the inversion between the polarities of the potential SCa of the first supplemental capacitance line 8a and the potential SCb of the second supplemental capacitance line 8b can be expressed as follows:

$$Vp = VD \pm (Csc - Cpa) \times \Delta Vsc / Call \quad (1)$$

$$Call = Clc + Csc + Cpa + Cgs \quad (2)$$

[0039] where VD is either the first video signal voltage VDa or the second video signal voltage VDb, Csc is the capacitance value of either the first supplemental capacitance 10a or the second supplemental capacitance 10b, Cpa is the capacitance value of either the first parasitic capacitance 15a or the second parasitic capacitance 15b, Clc is the capacitance value of the liquid crystal 12, Cgs is the parasitic capacitance between the gate and the source of the TFT 9, Call is the total capacitance value, and ΔV sc is the potential change of either the potential SCa of the first supplemental capacitance line 8a or the potential SCb of the second supplemental capacitance line 8b upon the inversion.

[0040] The pixel potential Vp depends on the capacitance value Cls of the liquid crystal capacitance 12 because Call in the second part of the first equation (1) includes the capacitance value Clc of the liquid crystal capacitance 12. However, the pixel potential Vp takes a non-linear change against the video signal voltage VD because the dielectric constant of the liquid crystal changes depending on the applied voltage, that is, the potential difference between the pixel potential Vp and the potential Vcom of the common electrode 11. Therefore, without the correction schemes described below, the pixel potential adequate to the video signal voltage VD cannot be obtained, deteriorating the gradation characteristics.

[0041] FIG. 6 shows the relation between the video signal voltage VD (the first video signal voltage VDa and the second video signal voltage VDb) and the pixel potential Vp. The x-axis corresponds to the video signal voltage VD (more specifically, the video signal voltage with the potential Vcom of the common electrode 11 as the reference voltage) and the y-axis corresponds to the pixel potential Vp. The pixel potential Vp changes linearly with the common AC driving but the pixel potential Vp changes non-linearly with the dot inversion driving of this embodiment, as seen from the figure.

[0042] The reason why the potential changes non-linearly will be explained by using the case of TN liquid crystal as

an example. The dielectric constant of a TN liquid crystal becomes small when the applied voltage becomes small, and it becomes large when the applied voltage becomes large. Therefore, the influence of the capacitance value C_{lc} of the liquid crystal capacitance **12** to the total capacitance value C_{all} in the equation (2) becomes larger as the video signal voltage V_D gets larger. Thus, the pixel potential V_p of the equation (1) changes non-linearly against the video signal voltage V_D as shown in **FIG. 6**. This non-linear change takes place not only in TN liquid crystal, but it also occurs in other kinds of liquid crystal.

[0043] Therefore, the display device of this embodiment has a correction scheme correcting the first and the second video signal voltages V_{Da} and V_{Db} for eliminating the effect of the dependency of the dielectric constant of the liquid crystal to the pixel potential V_p .

[0044] Next, examples of the correction scheme will be explained by referring to the figures. **FIG. 7** is the circuit diagram of a correction circuit when the inputted video signal is an analog video signal. A non-linear amplifier **20** performs a gamma correction to the analog video signal inputted from outside along with the non-linear correction for eliminating the effect of the dependency of the dielectric constant of the liquid crystal to the pixel potential V_p . The analog video signal corrected by the non-linear amplifier **20** is then applied to a pair of amplifiers **21a** and **21b** that output a pair of signals with the polarity inverted against the potential V_{com} of the common electrode **11**. A switching circuit **22** switches and outputs the output from the pair of the amplifiers **21a** and **21b** according to an inverted signal. The signal from the switching circuit **22** corresponds to either the first video signal voltage V_{Da} or the second video signal voltage V_{Db} .

[0045] **FIG. 8** is the circuit diagram of a correction circuit when the inputted video signal is a digital video signal. The numeral **30** indicates a digital analog converter (DAC). It has a divider resistor **31** configured from a plurality of resistors in series $R_1, R_2, \dots, R_n$ with reference voltages V_{ref1} and V_{ref2} applied to both ends and a voltage selection circuit **32** for selecting and outputting the voltage of the connection point of each resistor of resistors in series $R_1, R_2, \dots, R_n$.

[0046] Each resistor value of the resistors in series $R_1, R_2, \dots, R_n$ is adjusted to receive the gamma correction and non-linear correction for eliminating the effect of the dependency of the dielectric constant of the liquid crystal to the pixel potential V_p based on the digital video signal. Also, the digital analog converter **30** has a function for inverting the polarity of an output signal by inverting the polarity of the reference voltages V_{ref1} and V_{ref2} based on an inversion signal. The output of the digital analog converter **30** is outputted through the amplifier **40**. The output signal of the amplifier **40** corresponds to either the first video signal voltage V_{Da} or the second video signal voltage V_{Db} .

[0047] **FIG. 9** is the circuit diagram of another correction scheme when the inputted video signal is a digital video signal. For example, a 6-bit digital video signal is inputted to a digital correction circuit **50**. The digital correction circuit **50** digitally corrects the digital video signal by referring to the digital video signal and a look-up table **51** with a corrected value corresponding to the digital video signal.

[0048] Here, the value corrected by the look-up table **51** is the corrected value for eliminating the effect of the dependency of the dielectric constant of the liquid crystal to the pixel potential V_p . The digital correction circuit **50** expands the 6-bit digital video signal into 8-bit or 10-bit digital video signal upon the correction in order to acquire better precision. Additionally the digital correction circuit **50** performs the gamma correction to the digital video signal. The digital video signal corrected by the digital correction circuit **50** is then converted into analog video signal by the digital analog converter **30** and amplified by the amplifier **40**. The output signal of the amplifier **40** corresponds to either the first video signal voltage V_{Da} or the second video signal voltage V_{Db} .

[0049] **FIG. 10** is the circuit diagram of yet another correction scheme when the inputted video signal is also a digital video signal. The correction using the look-up table **51** is not performed in this correction means. A digital calculation circuit **60** expands the bit data of the digital video signal and performs the gamma correction as well as the correction for eliminating the effect of the dependency of the dielectric constant of the liquid crystal to the pixel potential V_p . The digital video signal corrected by the digital calculation circuit **60** is then converted into analog video signal by the digital analog converter **30** and amplified by the amplifier **40**. The output signal of the amplifier **40** corresponds to either the first video signal voltage V_{Da} or the second video signal voltage V_{Db} .

[0050] The correction means shown in **FIGS. 7-10** can be formed either in the display panel or in the LSI outside of the display panel.

What is claimed is:

1. An active matrix display device comprising:

- a plurality of pixel electrodes disposed on a substrate in a matrix configuration;
- a liquid crystal sealed between the pixel electrodes and a common electrode;
- a plurality of switching elements connected to corresponding pixel electrodes;
- a first supplemental capacitance line supplied with a first potential;
- a second supplemental capacitance line supplied with a second potential, the first and second potentials alternating with a first cycle;
- a supplemental capacitance electrode provided for each of the pixel electrodes so that each supplemental capacitance electrode forms a capacitance between said each supplemental capacitance electrode and the first supplemental capacitance line or the second supplemental capacitance line;
- a driver circuit supplying to the pixel electrodes and the supplemental capacitance electrodes through the switching elements a first video signal and a second video signal that are opposite in polarity and alternate in a second cycle; and
- a correction circuit correcting the first and second video signals so as to reduce an effect of a dielectric constant of the liquid crystal that changes in response to a change in a potential applied to the liquid crystal on

potentials of the pixel electrodes receiving the first video signal or the second video signal.

2. The active matrix display device of claim 1, wherein the correction circuit comprises a non-linear amplifier correcting an analog video signal that the correction circuit receives.

3. The active matrix display device of claim 1, wherein the correction circuit comprises a divider resistor receiving reference voltages at both ends thereof and a voltage selection circuit selecting a voltage of a connection point of the divider resistor according to an digital video signal the correction circuit receives.

4. The active matrix display device of claim 1, wherein the correction circuit comprises a circuit that digitally corrects a digital video signal that the correction circuit receives based on the digital video signal and a look-up table for correcting the digital video signal.

5. The active matrix display device of claim 1, wherein the correction circuit comprises a digital calculation circuit that digitally corrects a digital video signal the correction circuit receives.

6. The active matrix display device of claim 1, wherein the potential of the common electrode is a DC voltage.

7. The active matrix display device of claim 1, wherein the display is configured so that the polarity of the first and second video signals is inverted for each frame period.

8. The active matrix display device of claim 1, wherein the display is configured so that the first and the second potentials change while the switching elements are off.

9. The active matrix display device of claim 1, wherein the display is configured so that the first and the second potentials change for each frame period.

* * * * *

专利名称(译)	有源矩阵液晶显示装置		
公开(公告)号	US20050195146A1	公开(公告)日	2005-09-08
申请号	US11/069060	申请日	2005-03-02
[标]申请(专利权)人(译)	三洋电机株式会社		
申请(专利权)人(译)	SANYO ELECTRIC CO. , LTD.		
当前申请(专利权)人(译)	SANYO ELECTRIC CO. , LTD.		
[标]发明人	SENDA MICHIRU		
发明人	SENDA, MICHIRU		
IPC分类号	G02F1/1368 G02F1/133 G09G3/20 G09G3/36		
CPC分类号	G09G3/3614 G09G3/3648 G09G2320/0276 G09G2300/0876 G09G2300/043		
优先权	2004060783 2004-03-04 JP		
其他公开文献	US7417615		
外部链接	Espacenet USPTO		

摘要(译)

非线性放大器对从外部输入的模拟视频信号执行伽马校正以及非线性校正，以消除液晶的介电常数对像素电位 V_p 的依赖性的影响。然后，由非线性放大器校正的模拟视频信号被施加到一对放大器，并输出一对信号，其极性相对于公共电极的电位 V_{com} 反转。开关电路根据反相信号切换并输出来自一对放大器的输出。

