



US 20030107695A1

(19) **United States**

(12) **Patent Application Publication**

Kubo et al.

(10) **Pub. No.: US 2003/0107695 A1**

(43) **Pub. Date: Jun. 12, 2003**

(54) **LIQUID CRYSTAL DISPLAY DEVICE**

(52) **U.S. Cl. 349/129**

(76) Inventors: **Masumi Kubo**, Nara (JP); **Kiyoshi Ogishima**, Kyoto (JP); **Takashi Ochi**, Nara (JP); **Keizoh Watanabe**, Mie (JP)

(57) **ABSTRACT**

Correspondence Address:
NIXON & VANDERHYE P.C.
1100 North Glebe Rd., 8th Floor
Arlington, VA 22201-4714 (US)

A first substrate includes, on one side thereof that is closer to a liquid crystal layer, a picture element electrode provided for each picture element region, a switching element, and a bus line. A second substrate includes a counter electrode opposing the picture element electrode. The picture element electrode includes a plurality of openings and a solid portion that includes a plurality of unit solid portions. In each picture element region, the liquid crystal layer takes a vertical alignment in the absence of an applied voltage, and forms a plurality of liquid crystal domains, each of which takes a radially-inclined orientation, in the plurality of openings and the solid portion by inclined electric fields produced at respective edge portions of the plurality of openings of the picture element electrode in response to an applied voltage. In each picture element region, at least one of the plurality of openings of the picture element electrode that is located along the bus line and located between two adjacent ones of the plurality of unit solid portions is superposed on the bus line.

(21) Appl. No.: **10/307,432**

(22) Filed: **Dec. 2, 2002**

(30) **Foreign Application Priority Data**

Nov. 30, 2001 (JP) 2001-366092
Sep. 27, 2002 (JP) 2002-282664

Publication Classification

(51) **Int. Cl.⁷ G02F 1/1337**

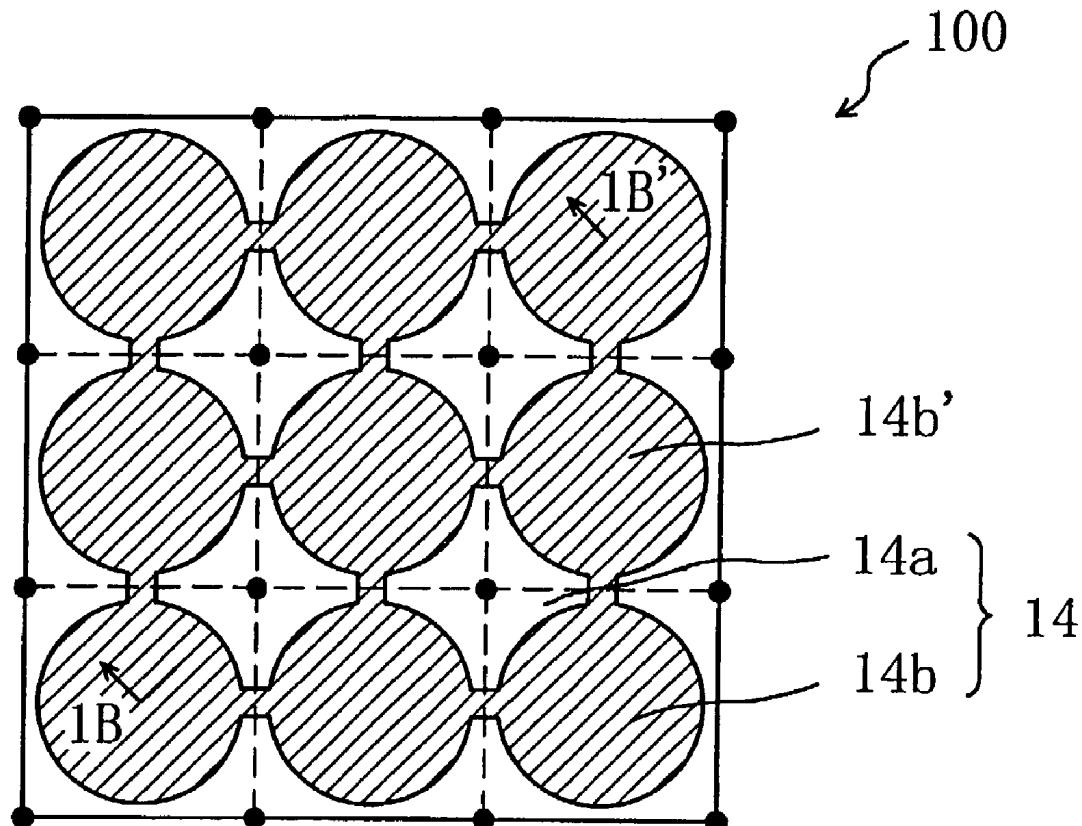


FIG. 1A

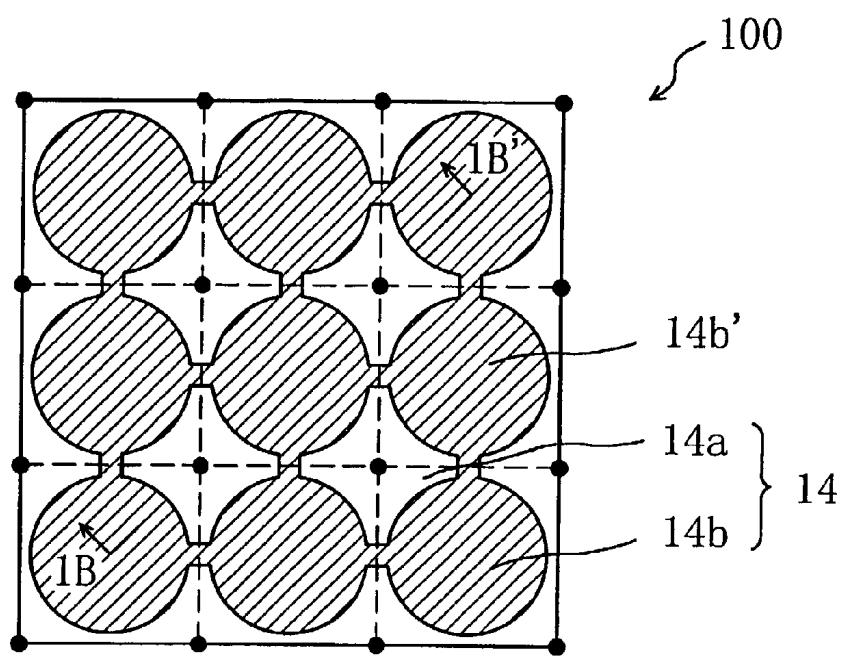


FIG. 1B

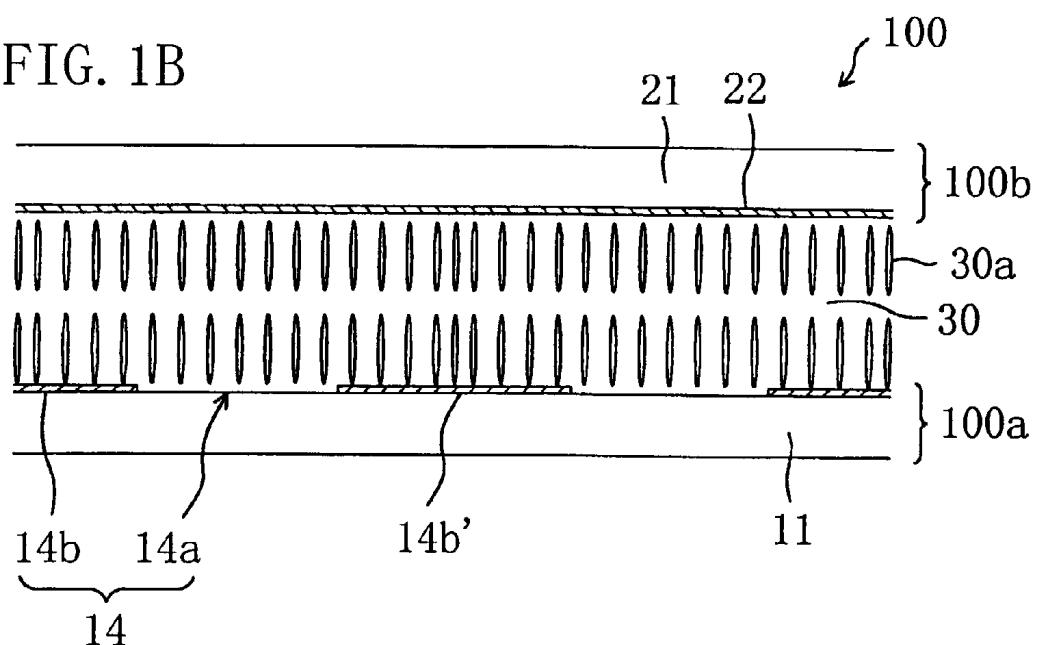


FIG. 2A

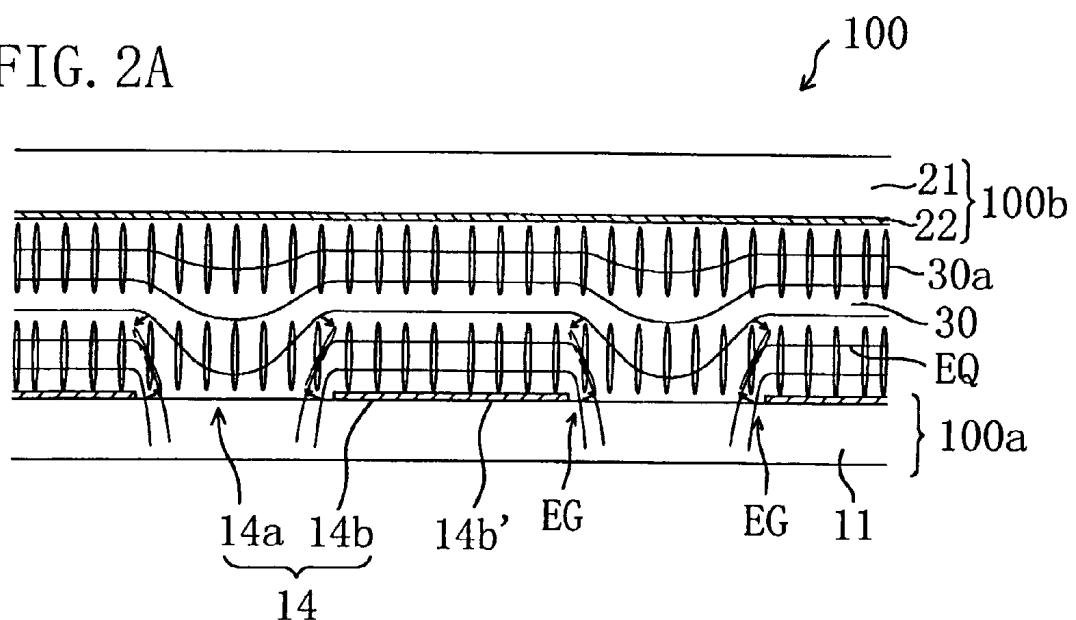


FIG. 2B SA SA SA

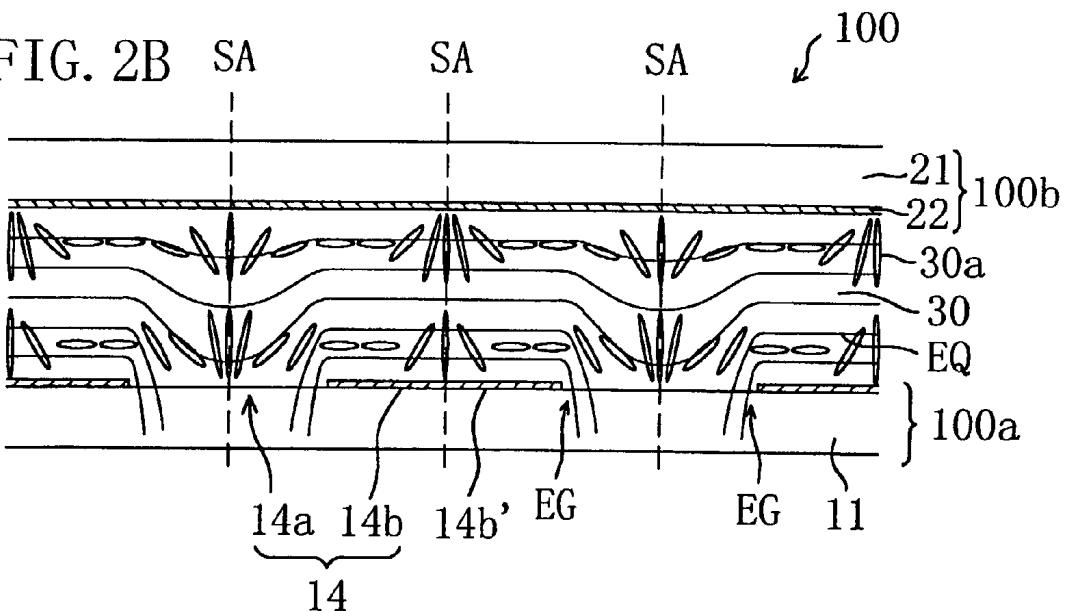


FIG. 3A

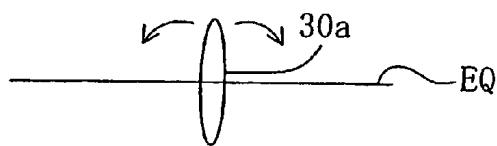


FIG. 3B




FIG. 3C

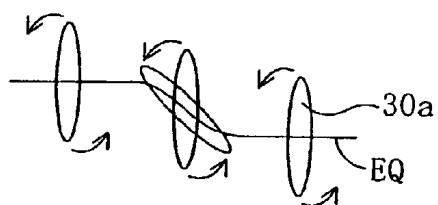


FIG. 3D

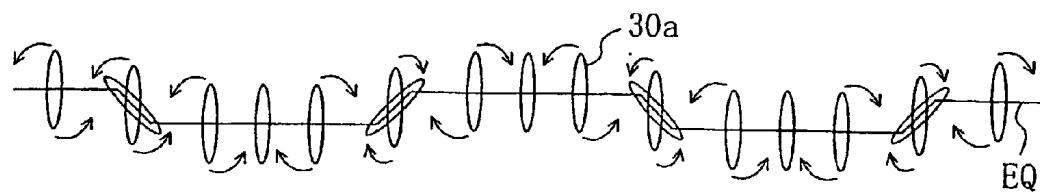


FIG. 4A

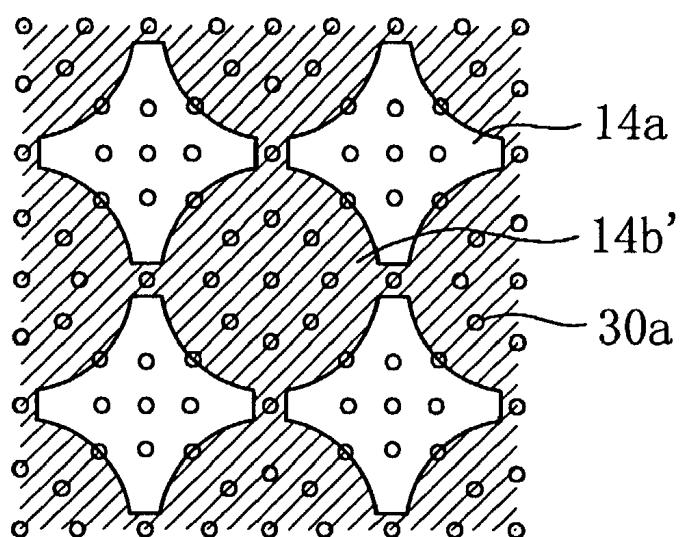


FIG. 4B

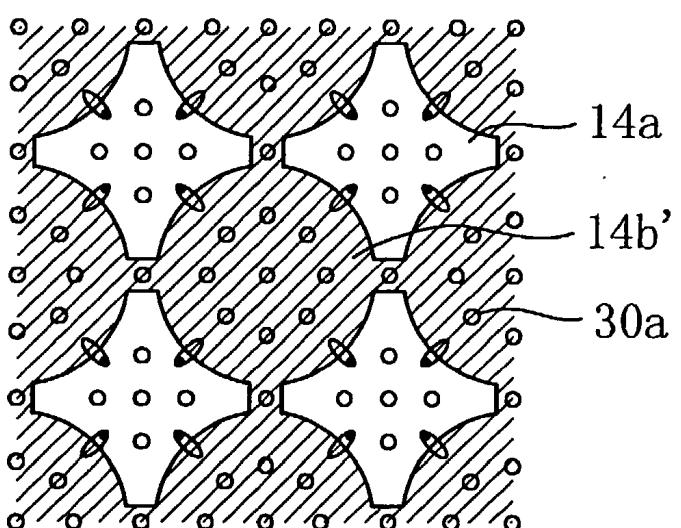


FIG. 4C

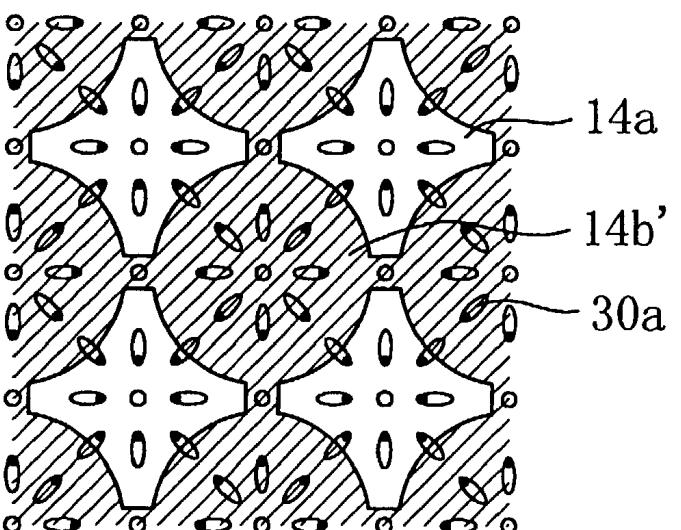


FIG. 5A

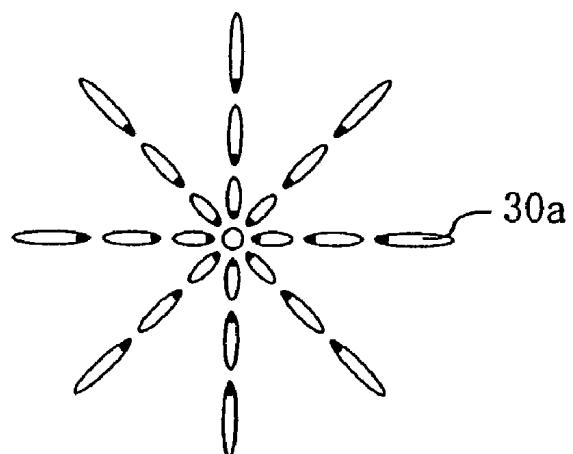


FIG. 5B

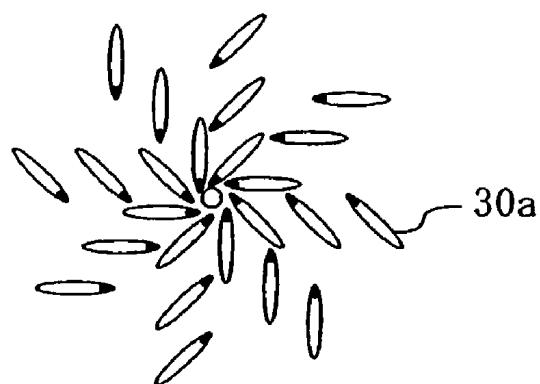


FIG. 5C

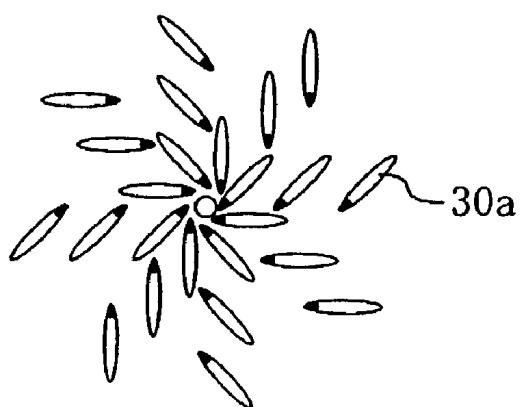


FIG. 6A

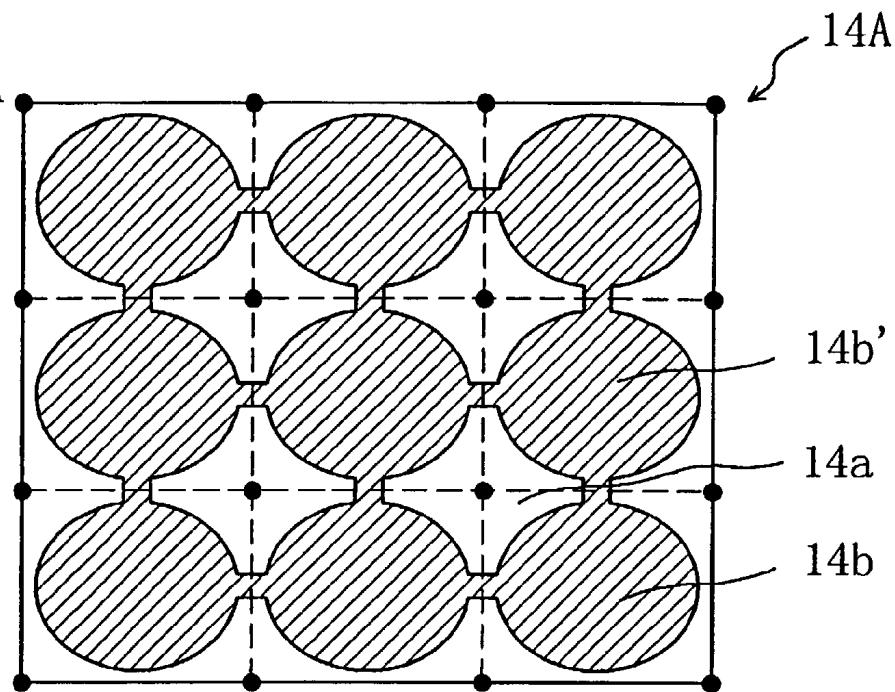


FIG. 6B

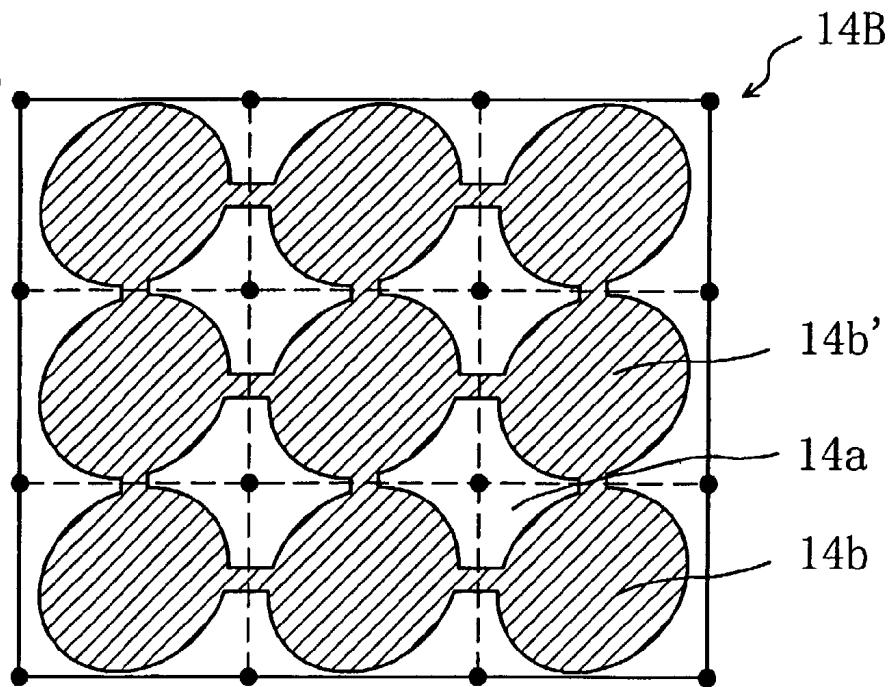


FIG. 7A

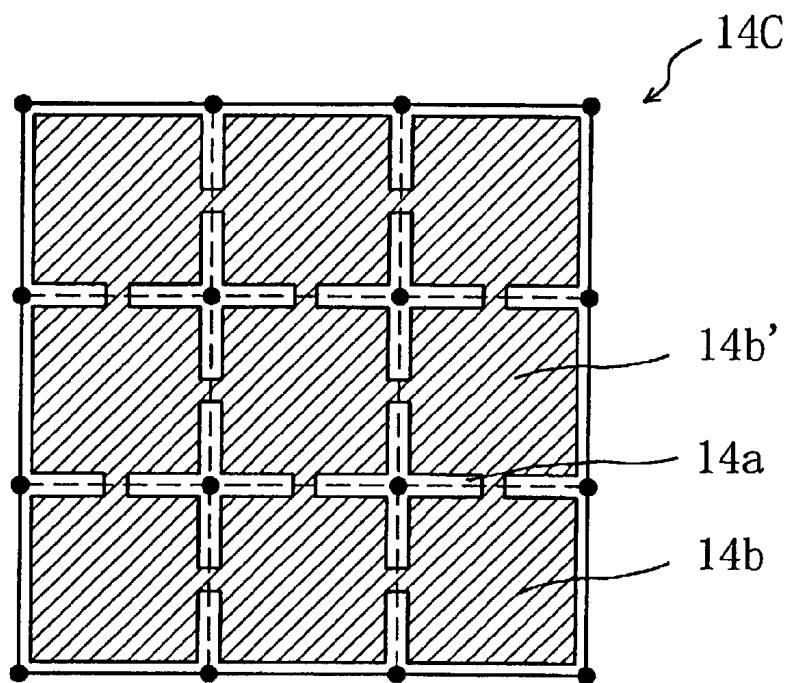


FIG. 7B

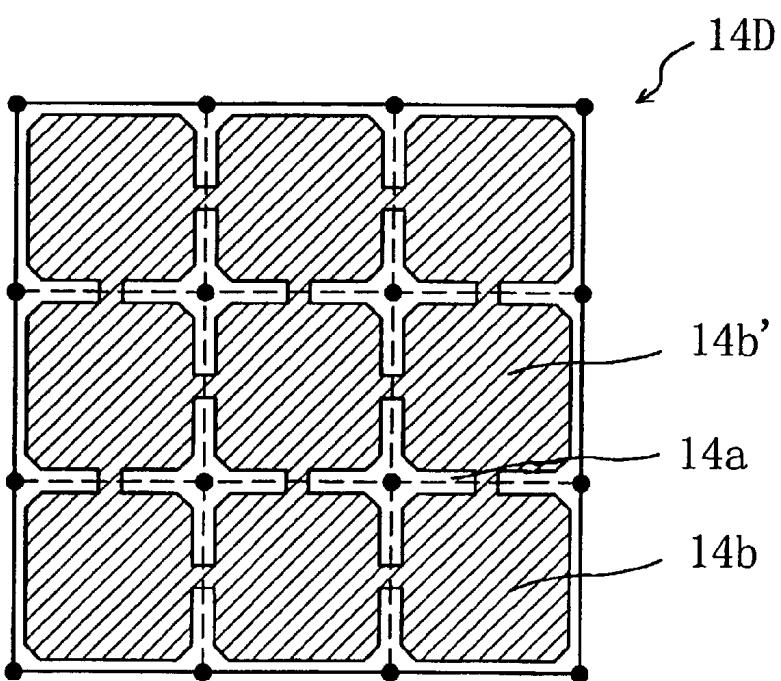


FIG. 8A

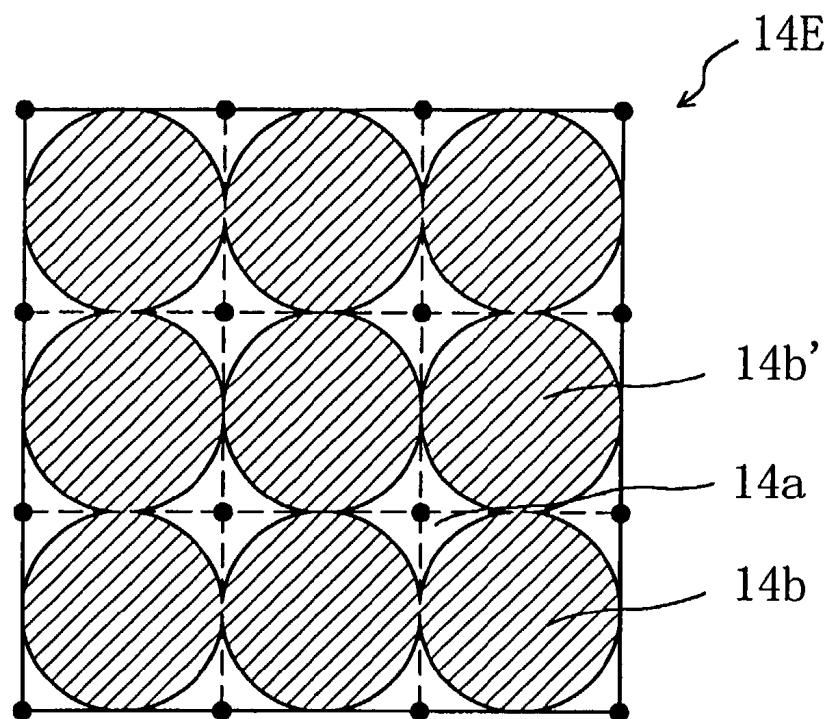


FIG. 8B

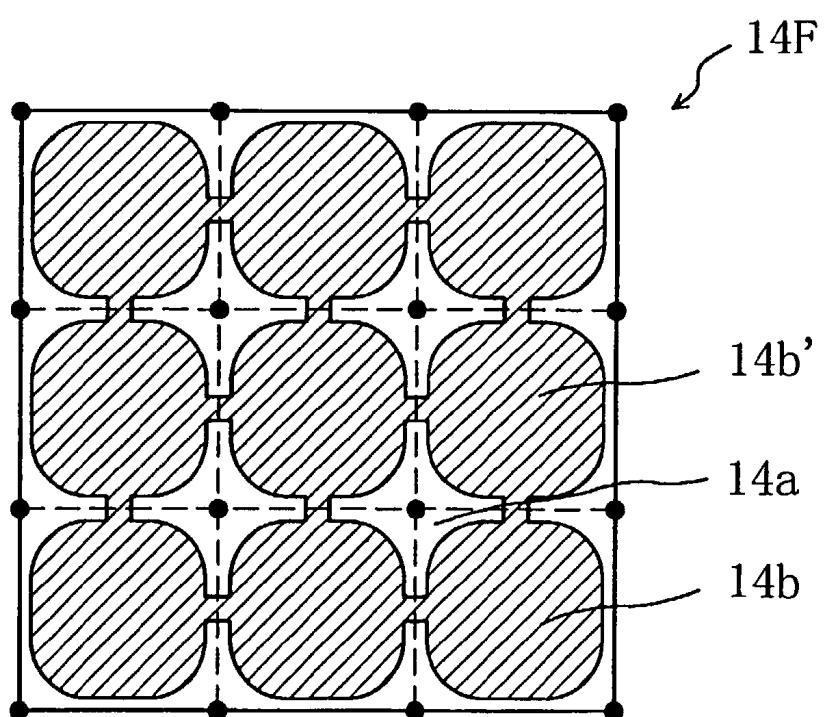


FIG. 9

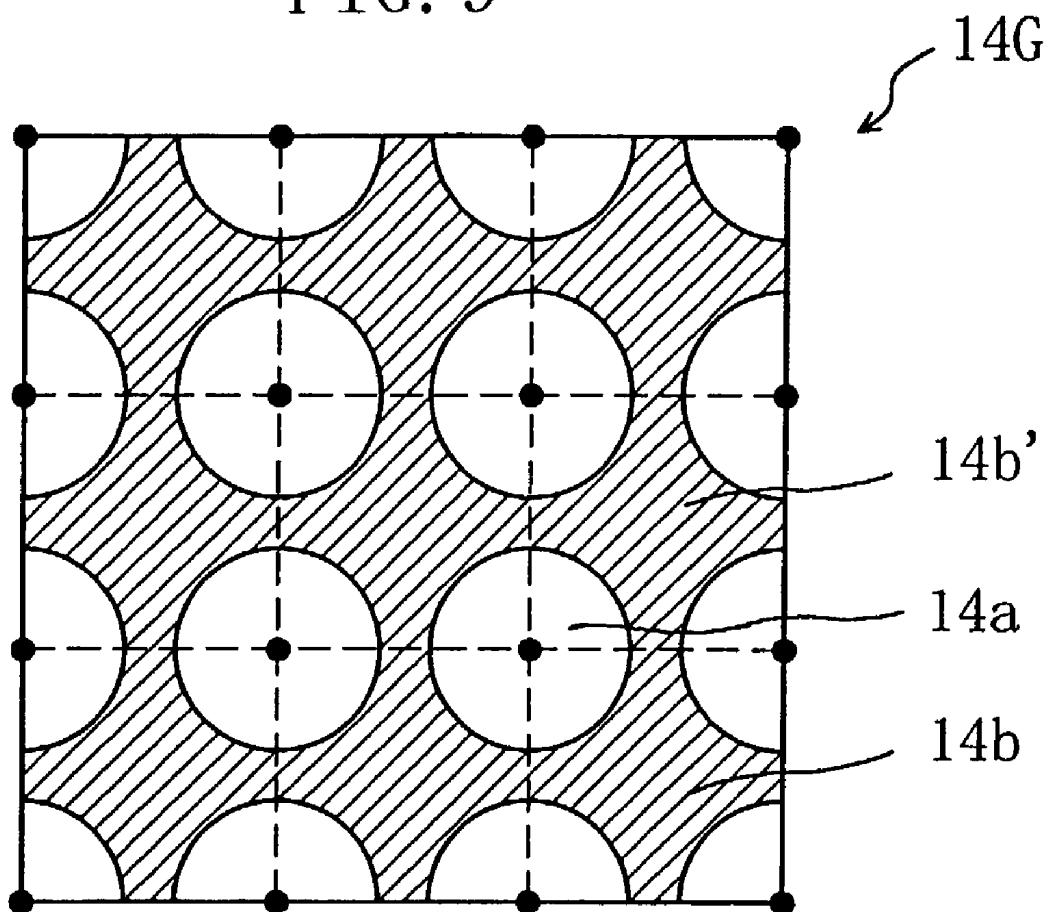


FIG. 10A

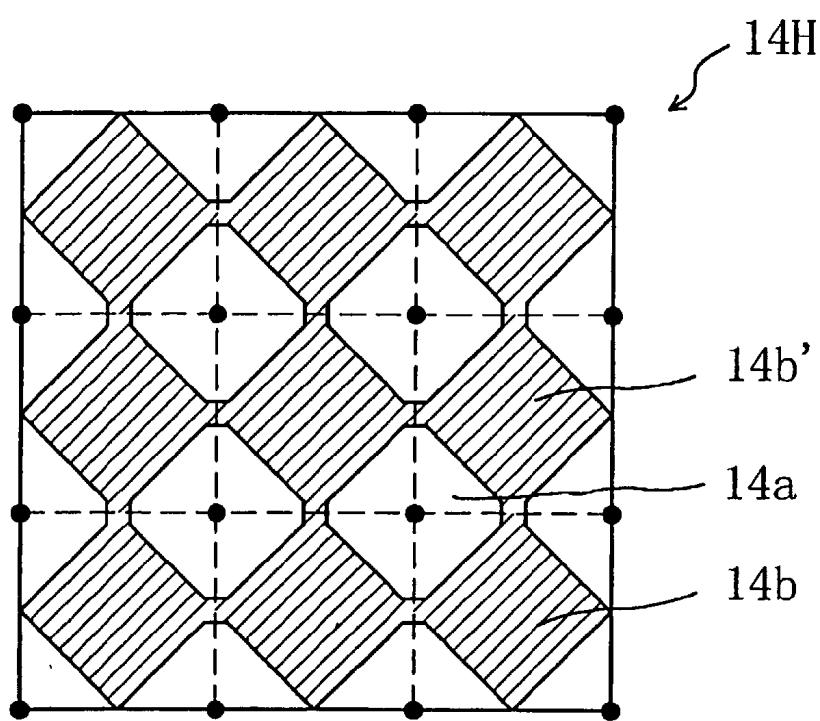


FIG. 10B

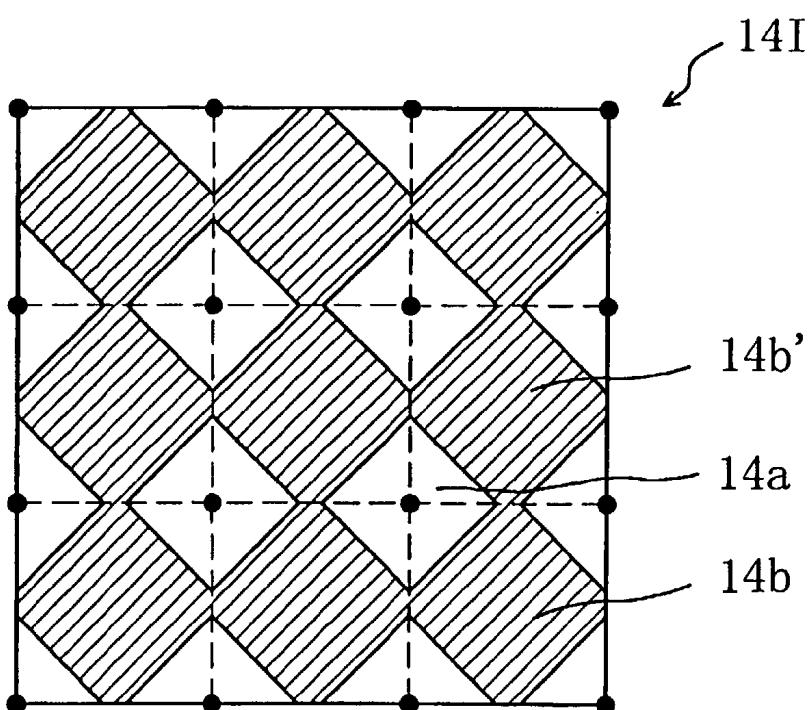


FIG. 11A

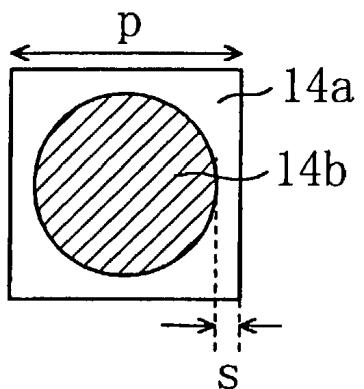


FIG. 11B

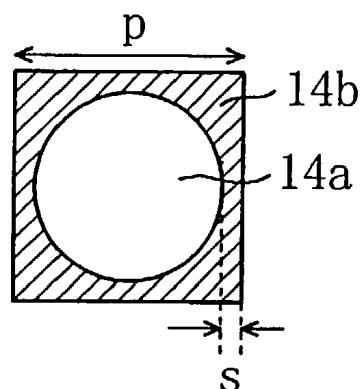


FIG. 11C

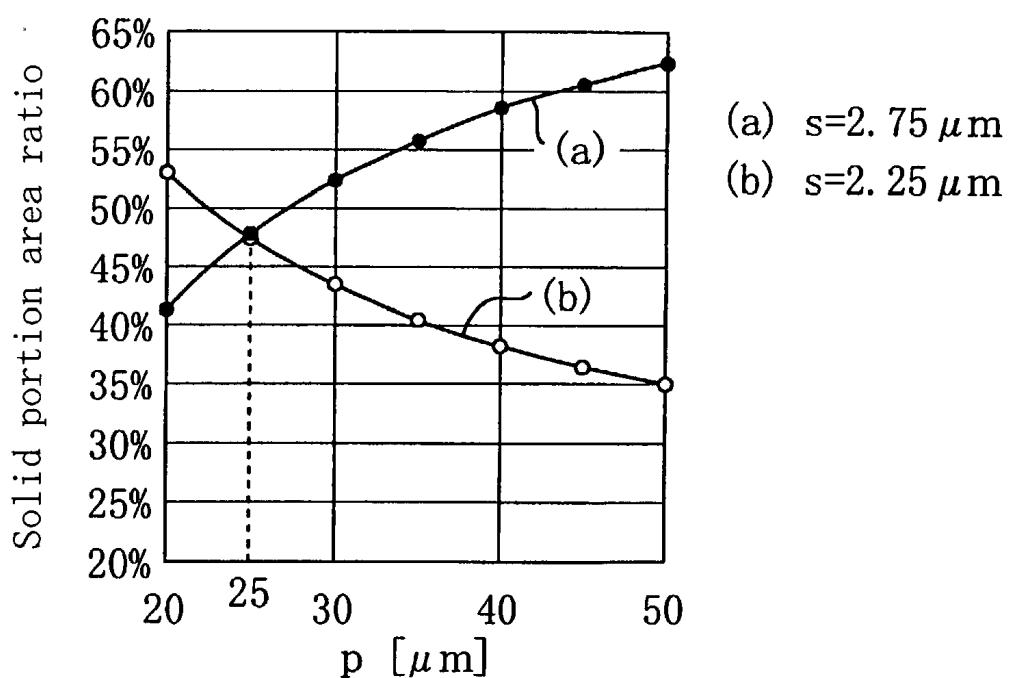


FIG. 12

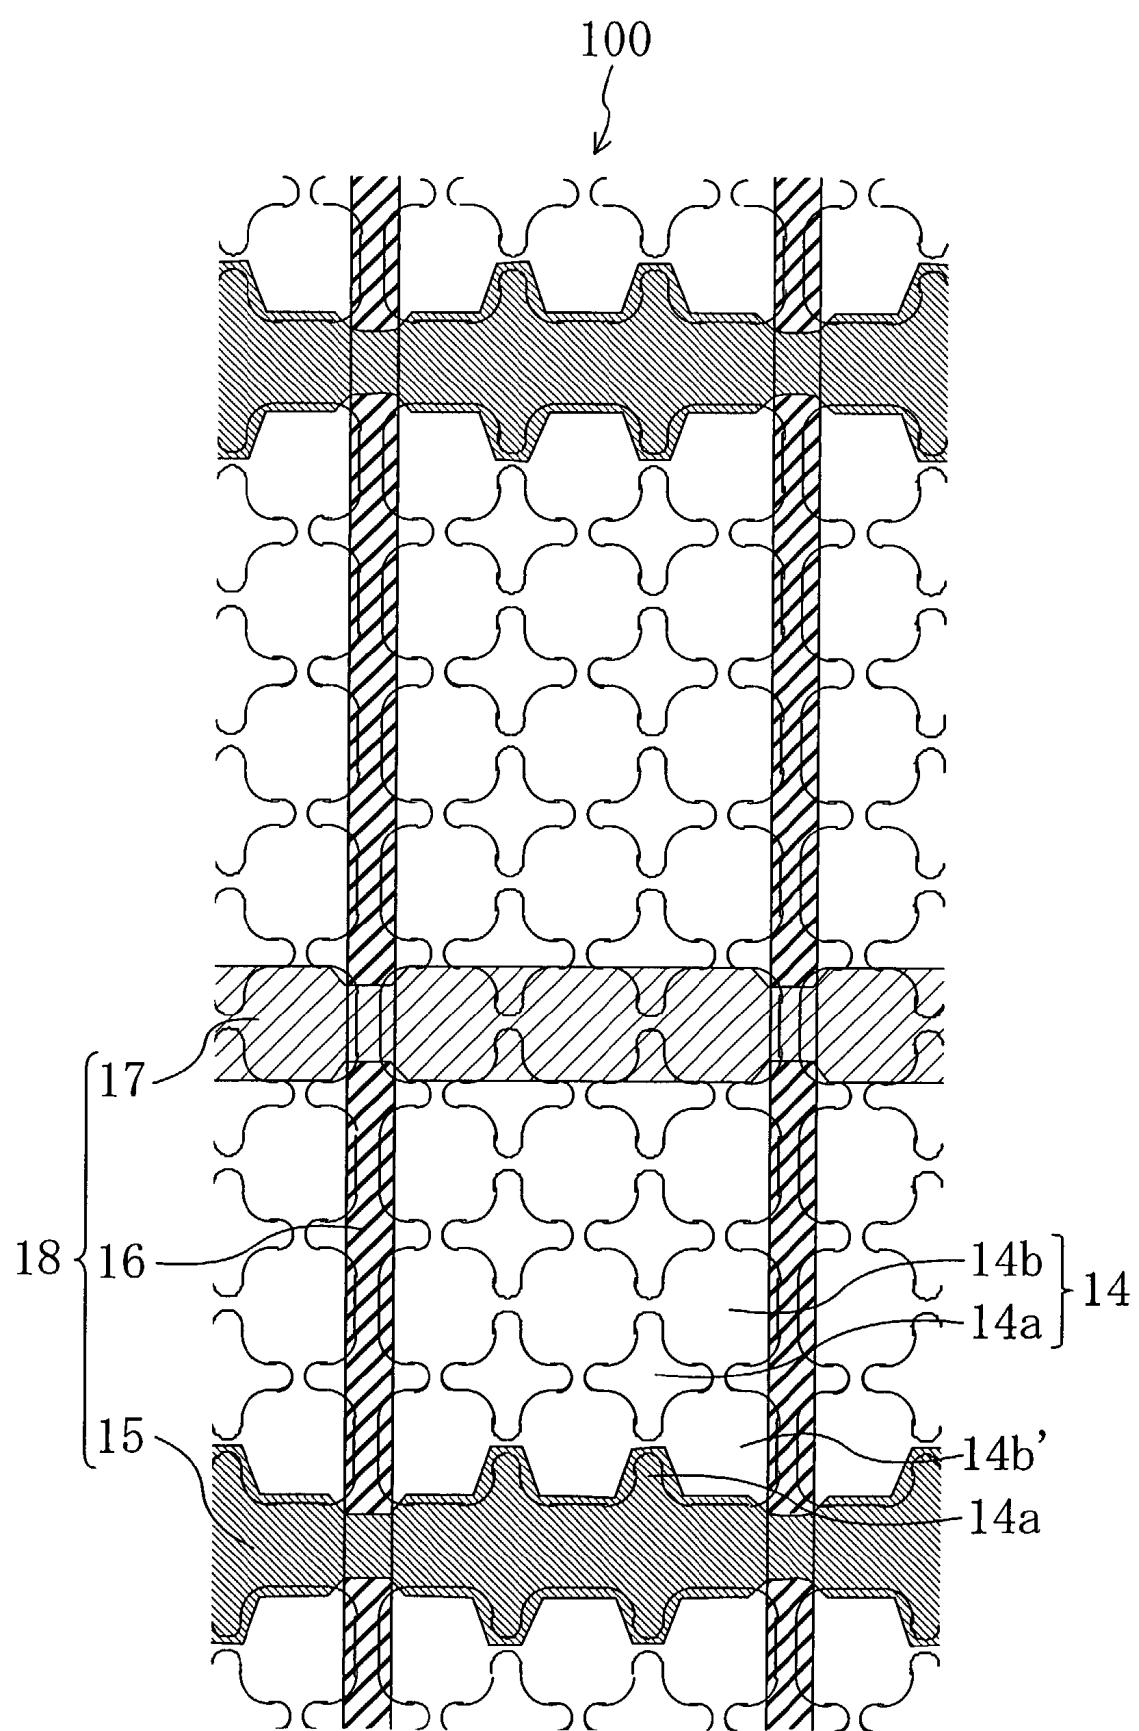


FIG. 13

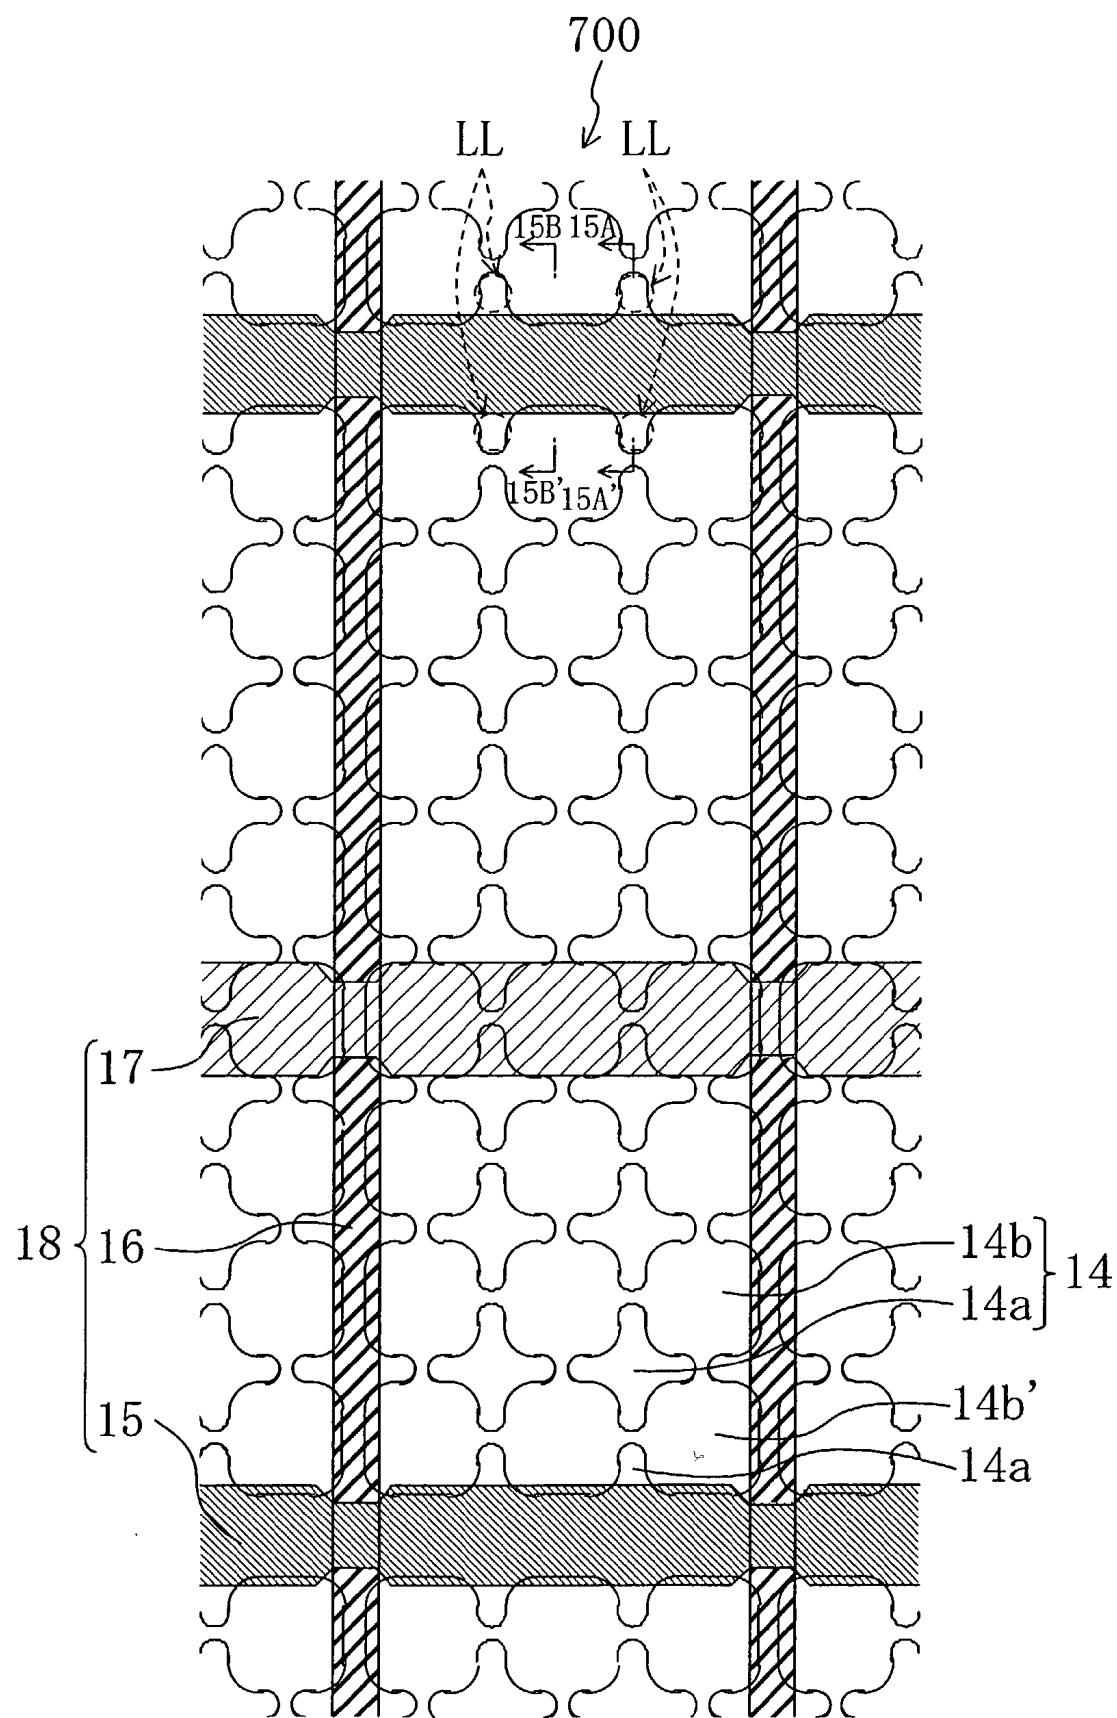


FIG. 14A

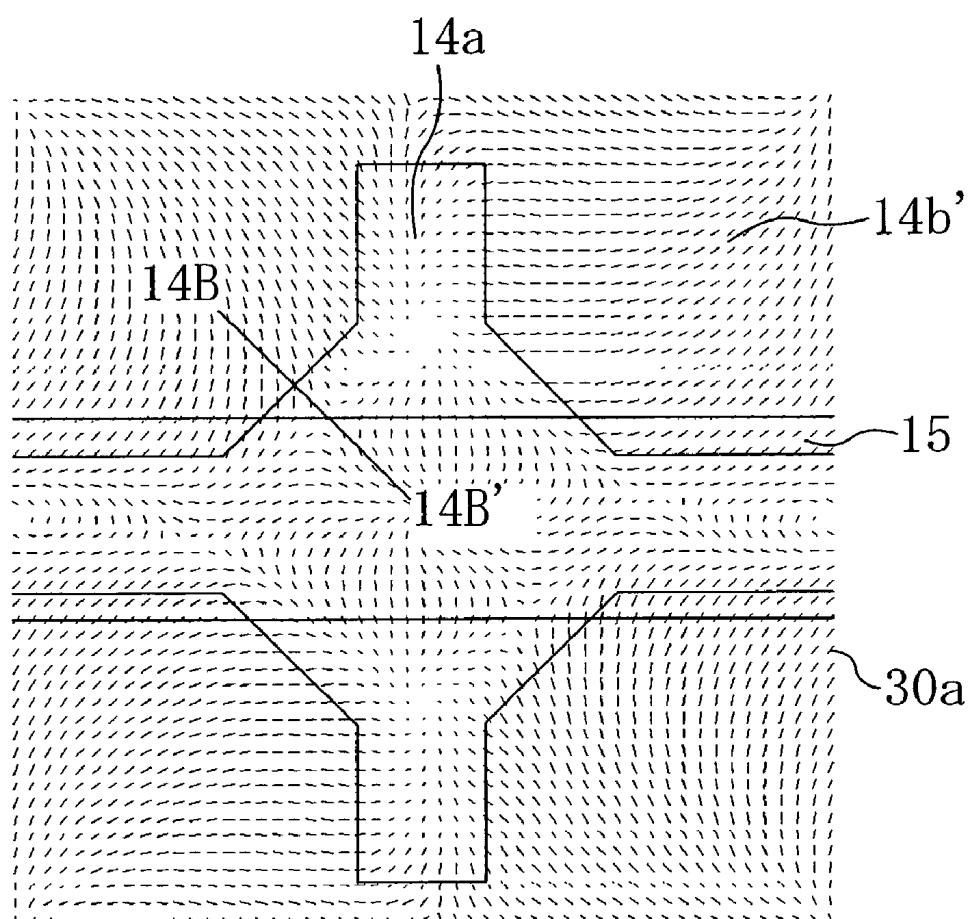


FIG. 14B

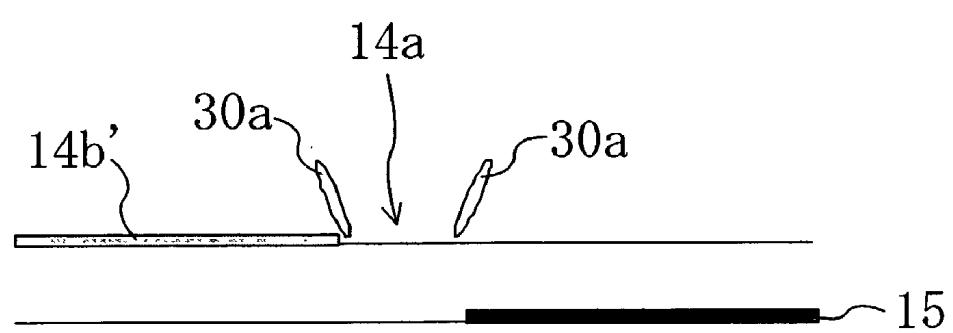


FIG. 15A

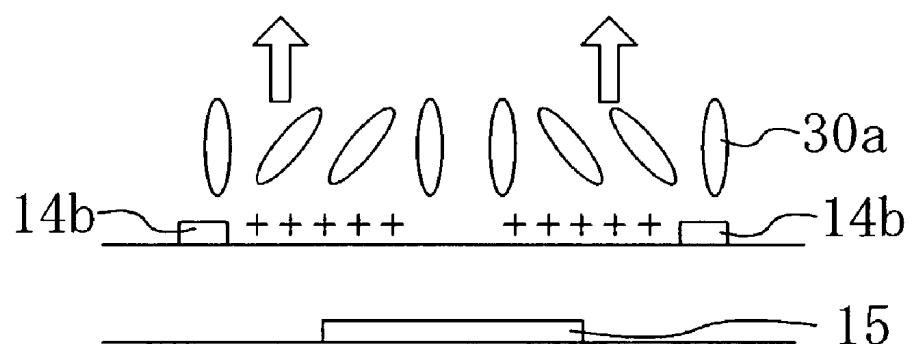


FIG. 15B

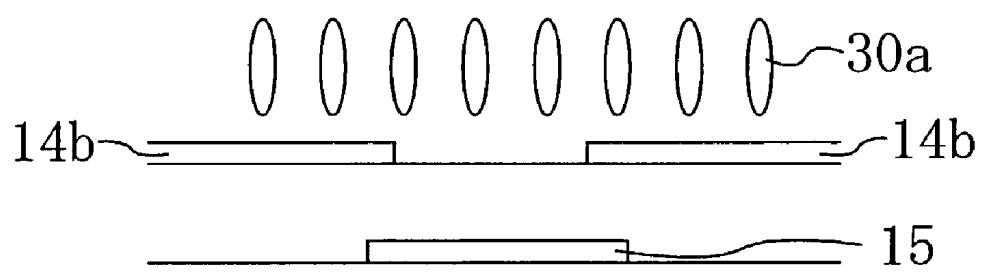


FIG. 16A

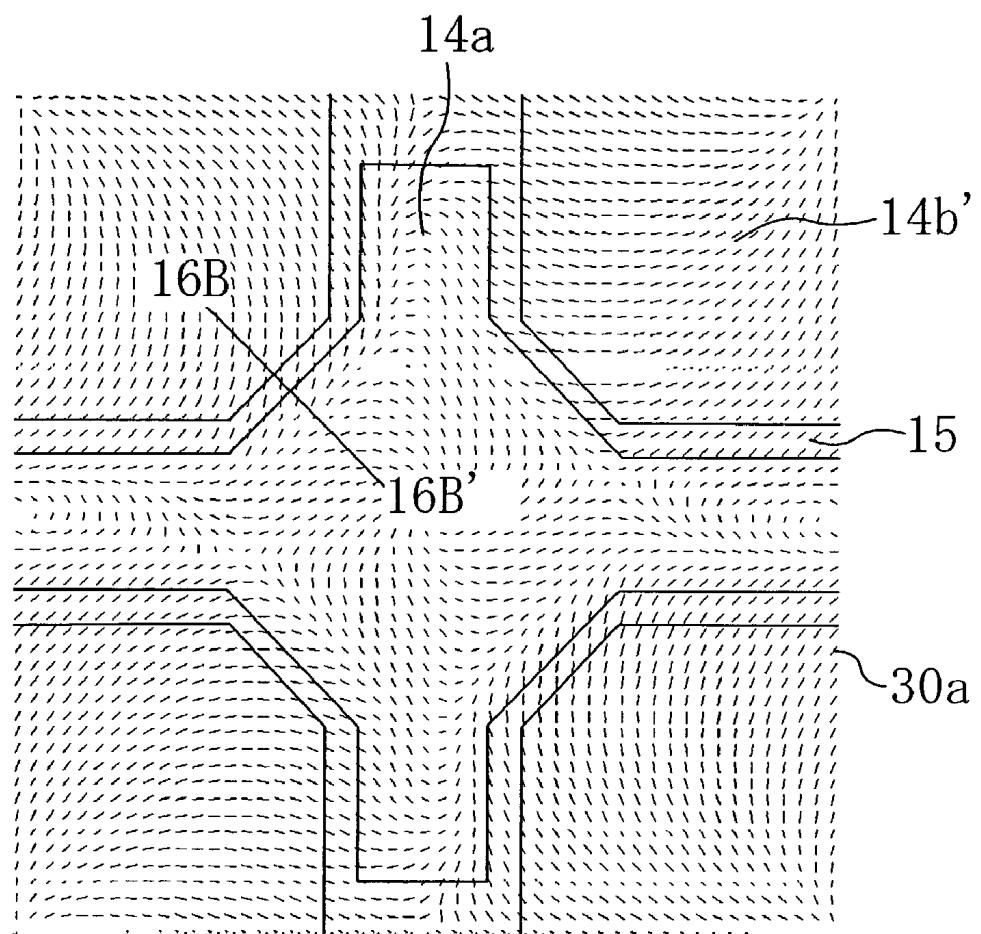


FIG. 16B

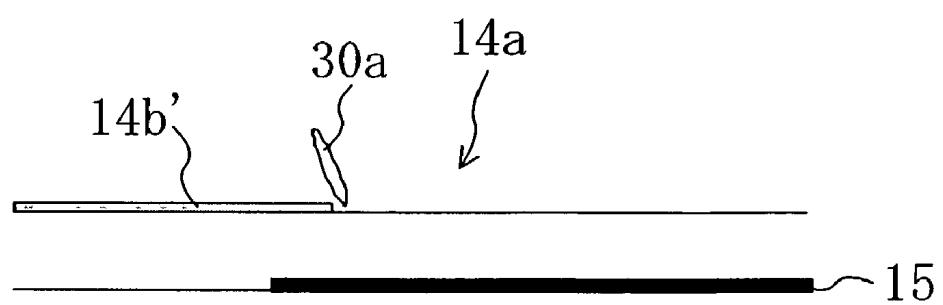


FIG. 17

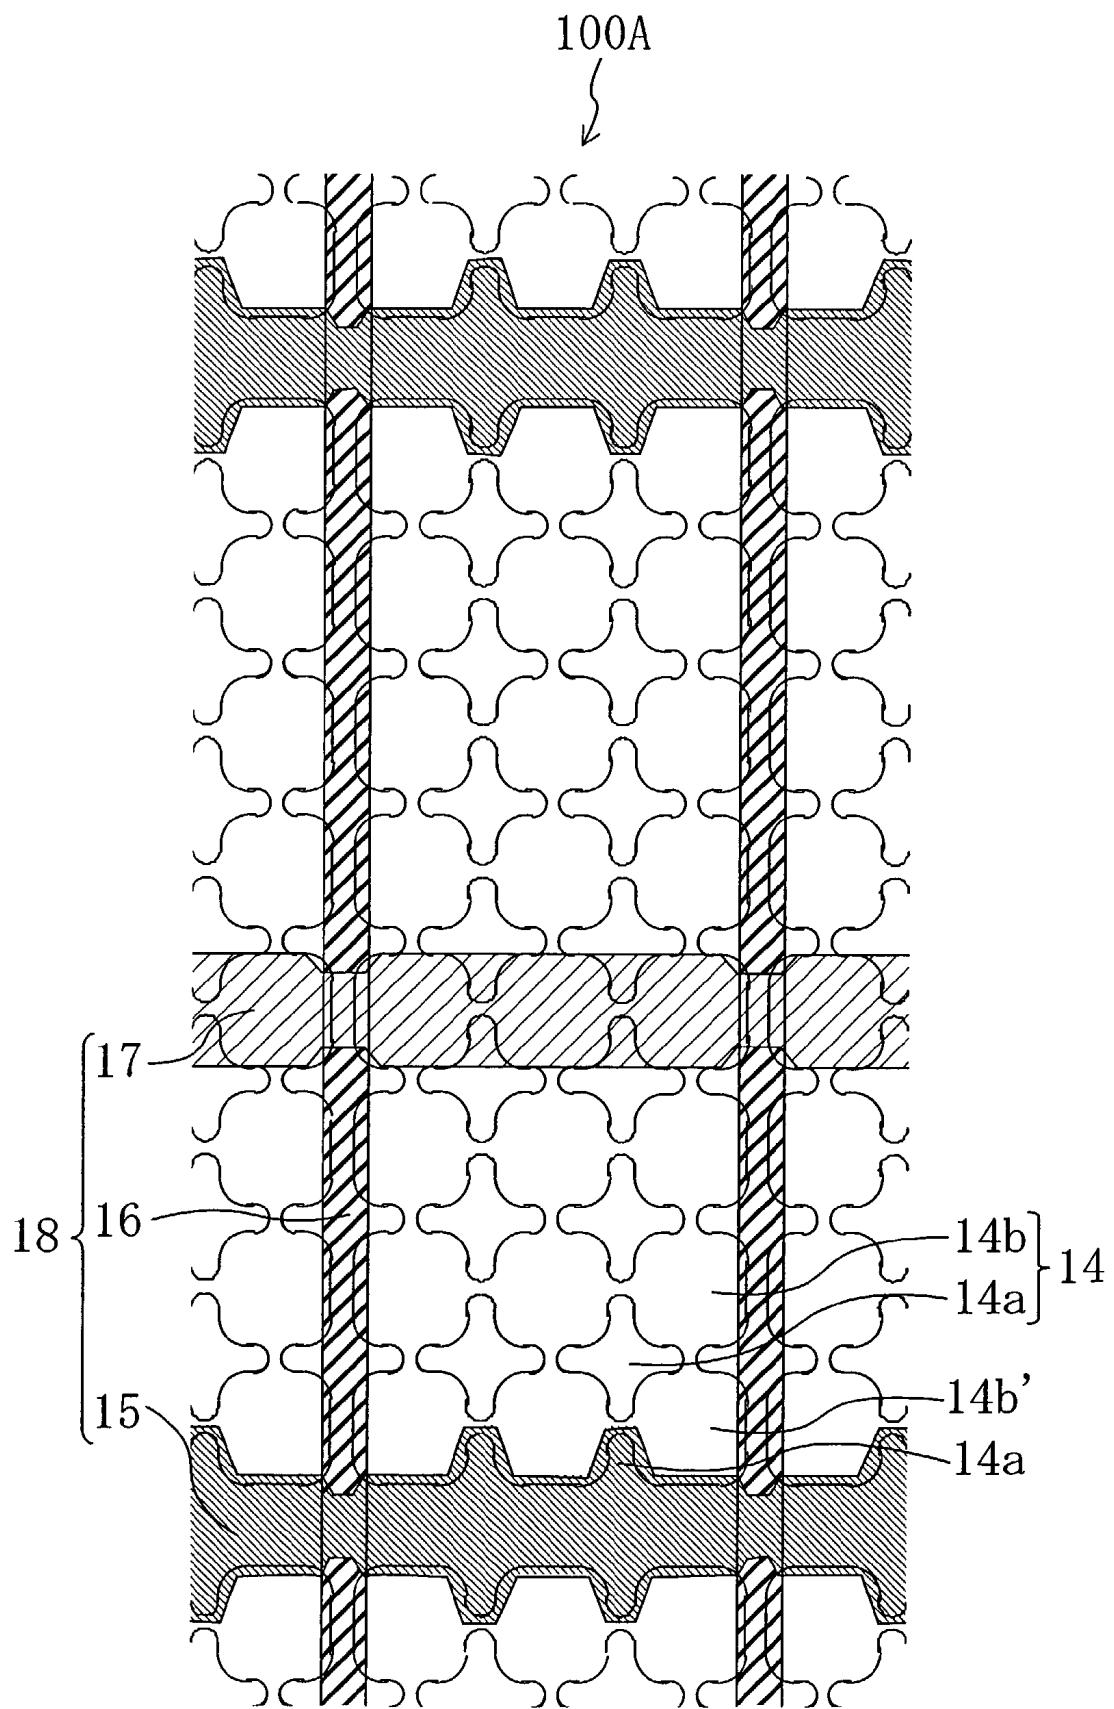


FIG. 18

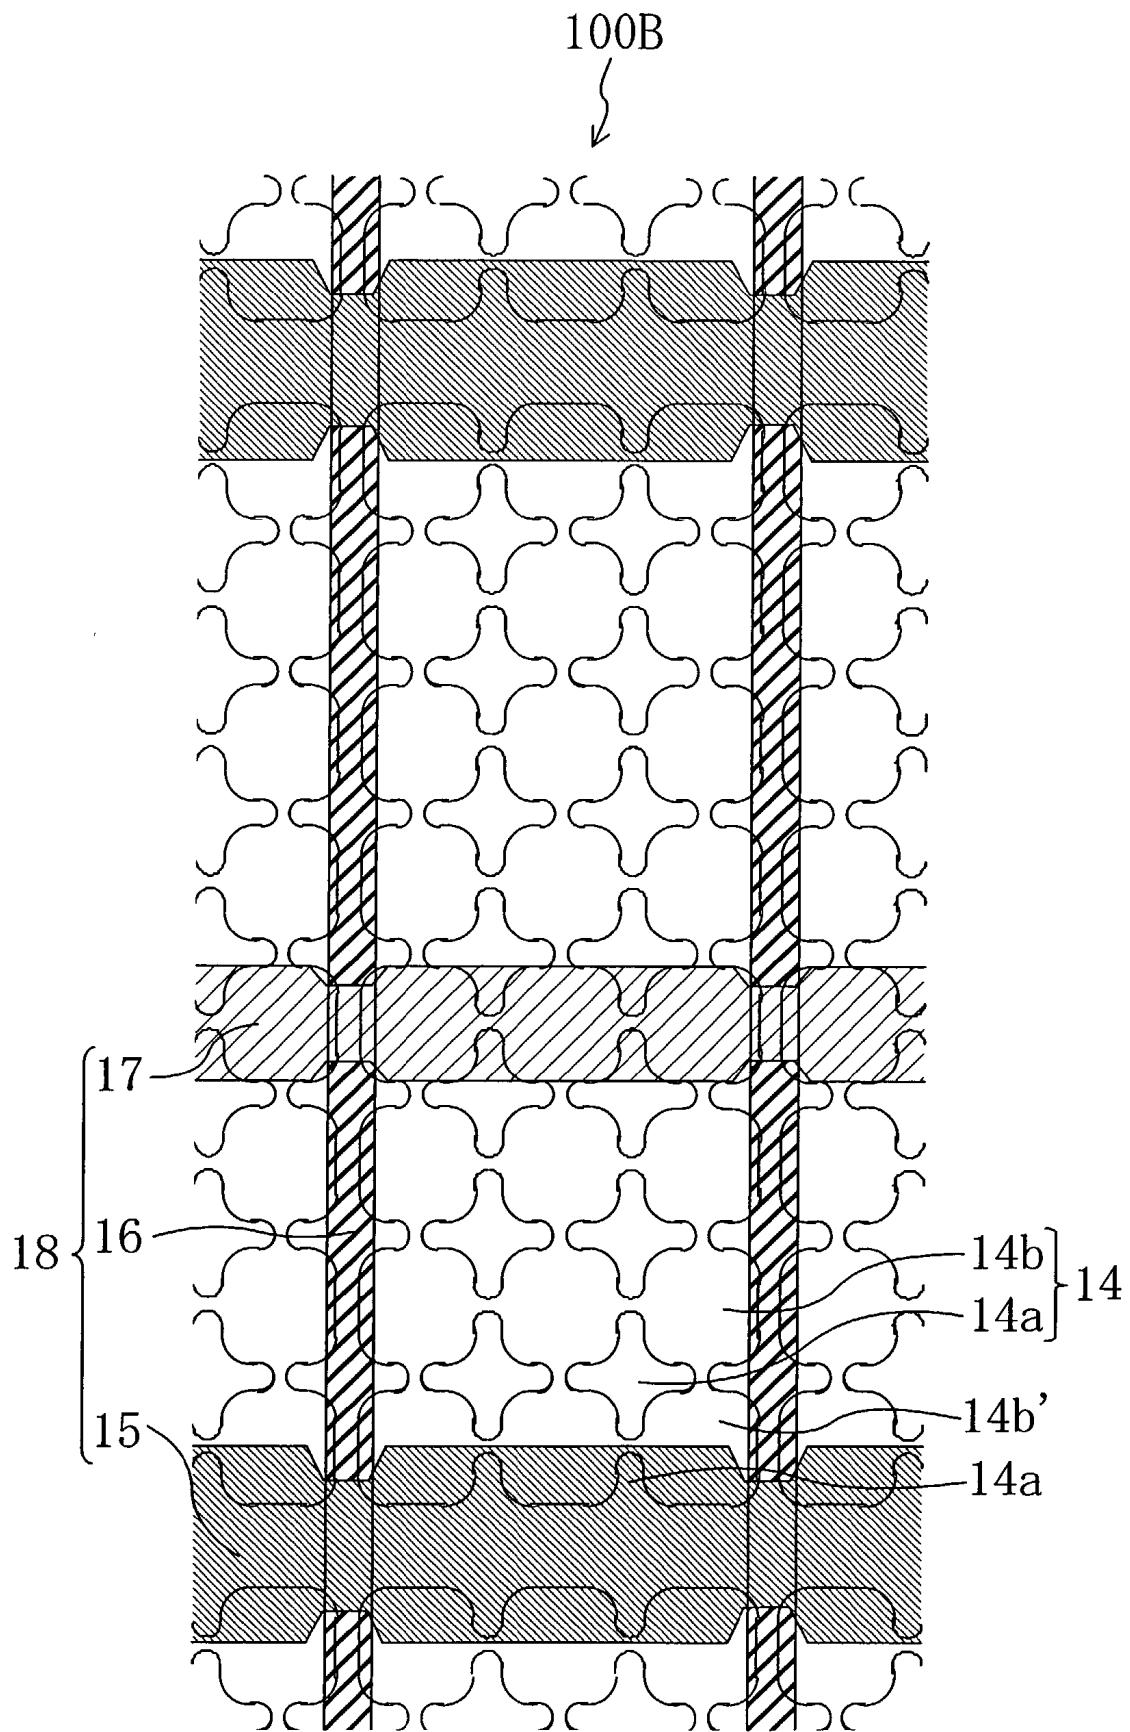


FIG. 19

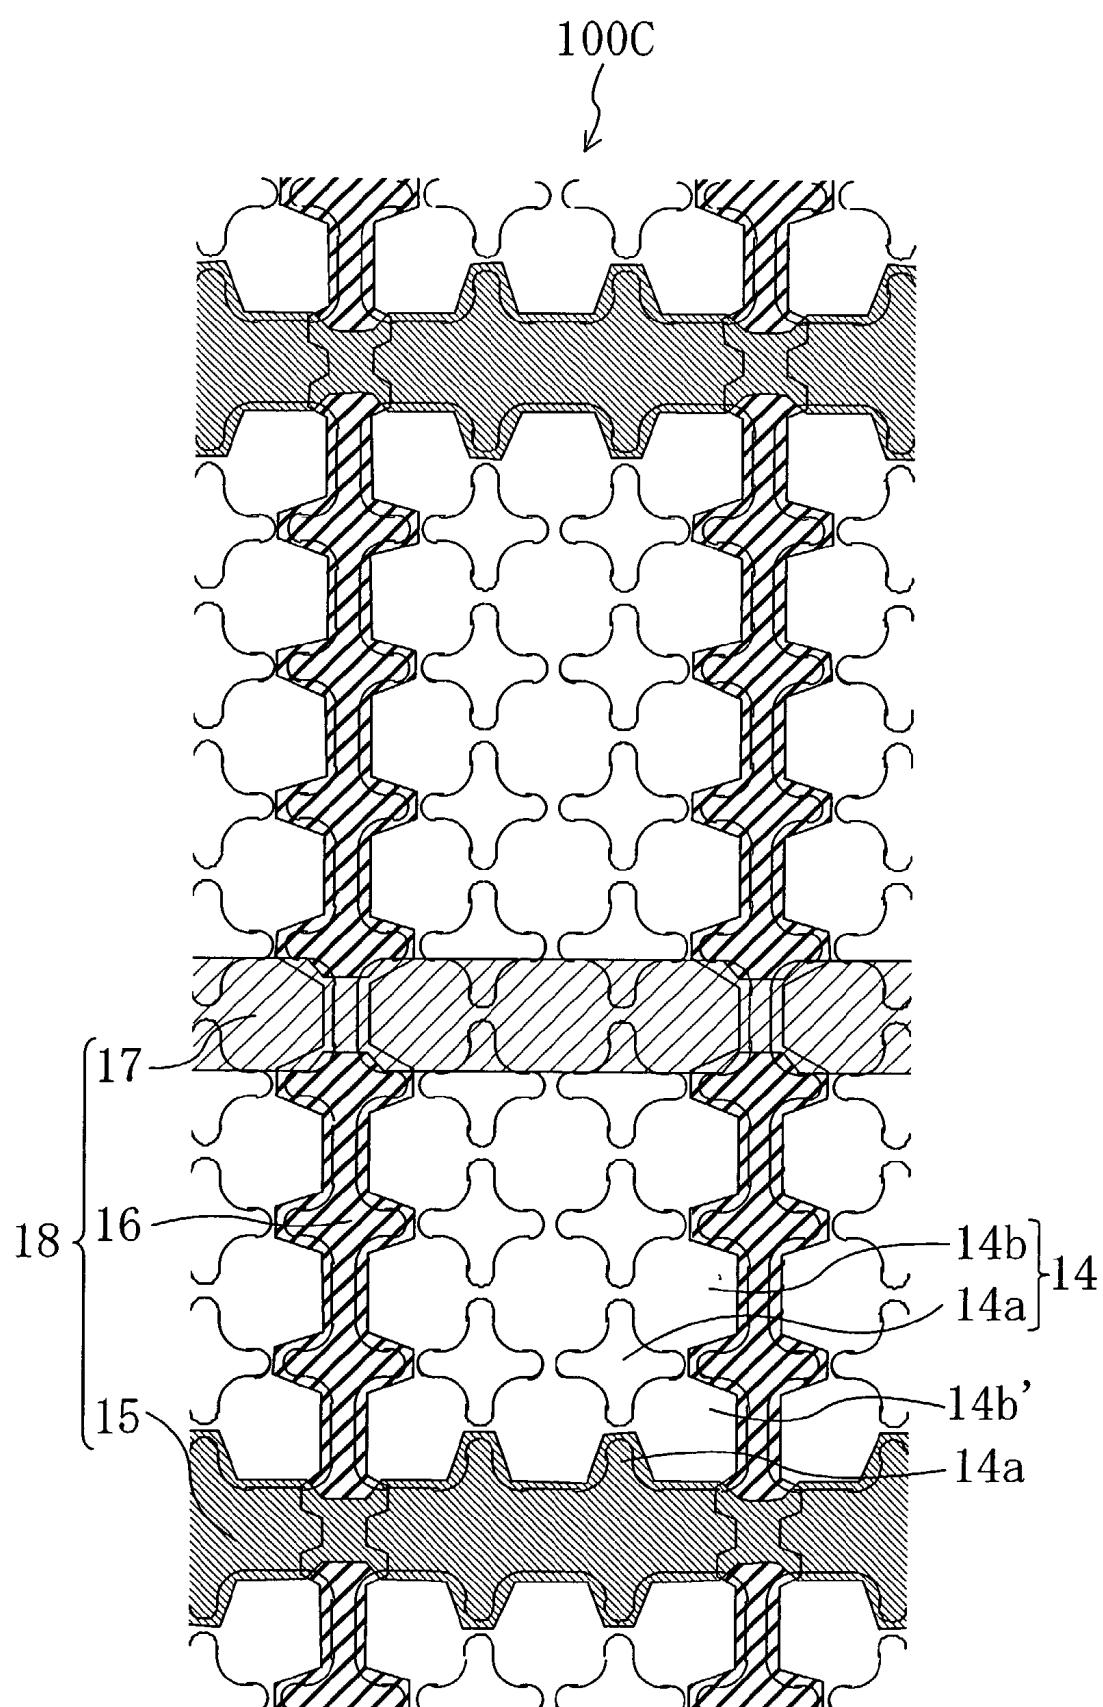
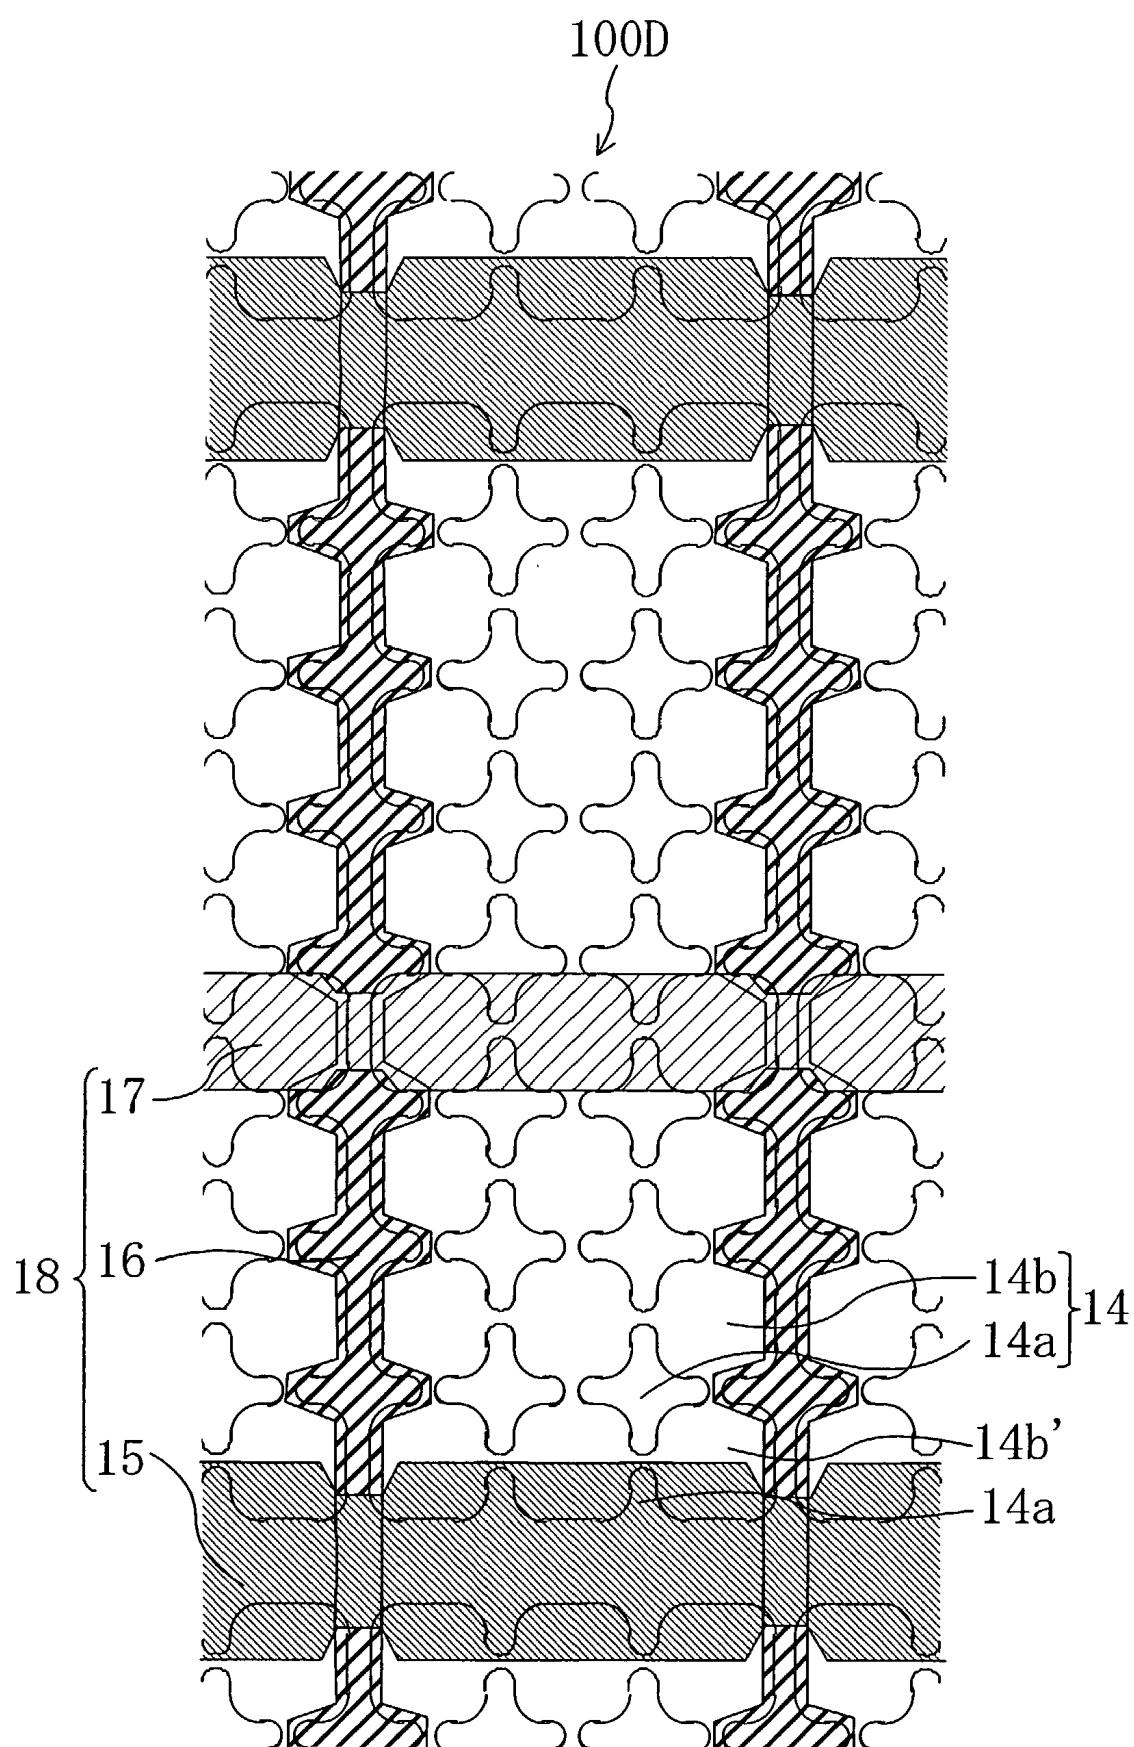
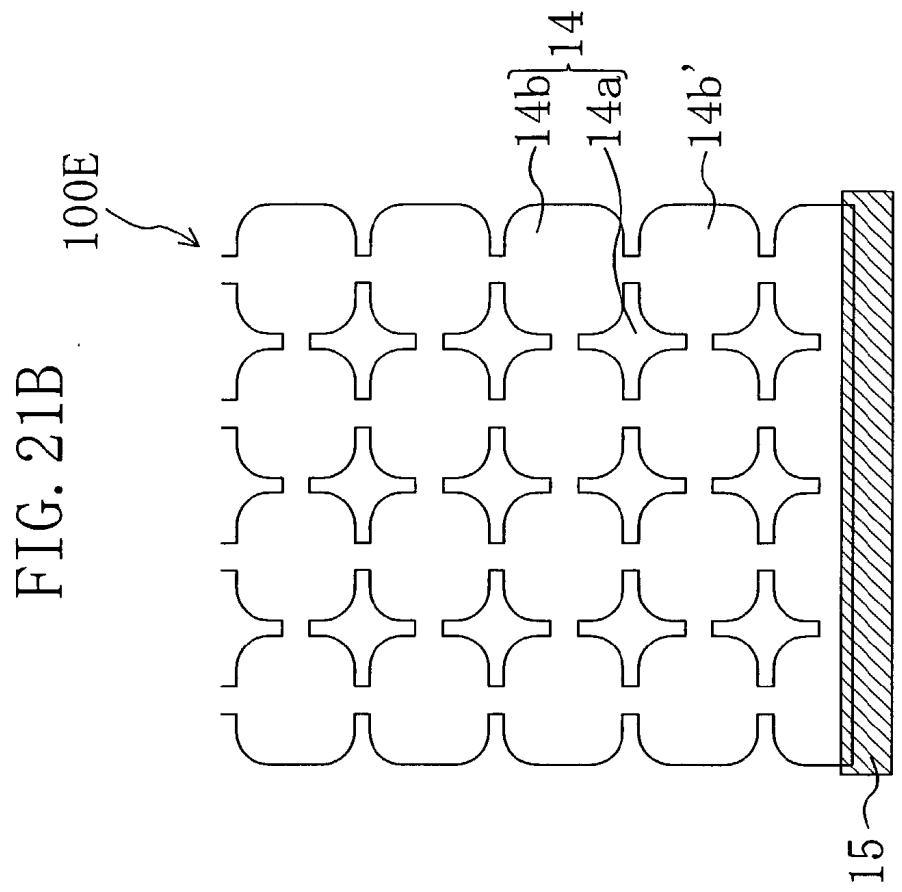
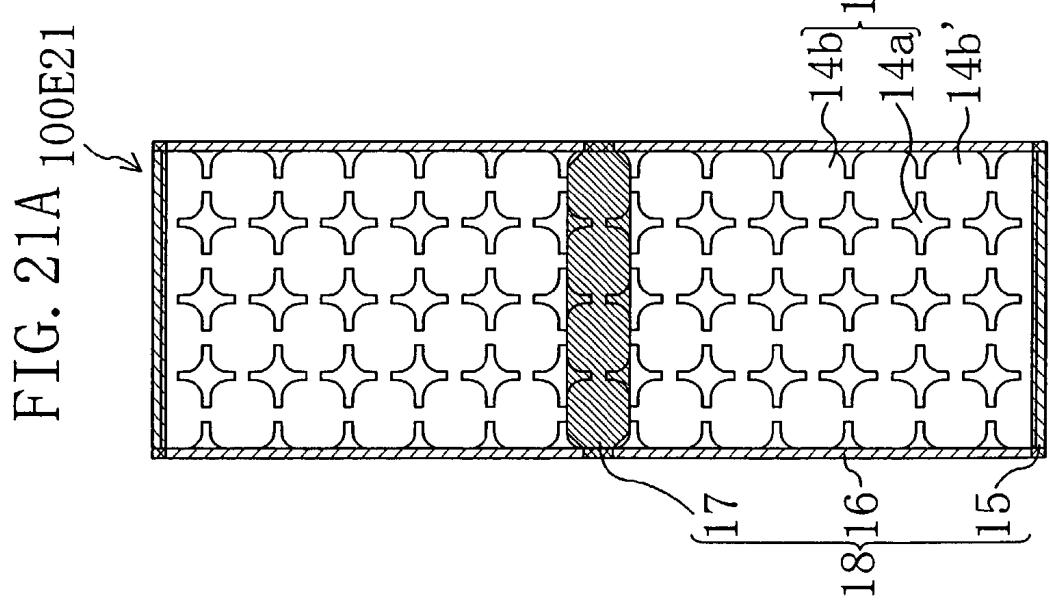


FIG. 20





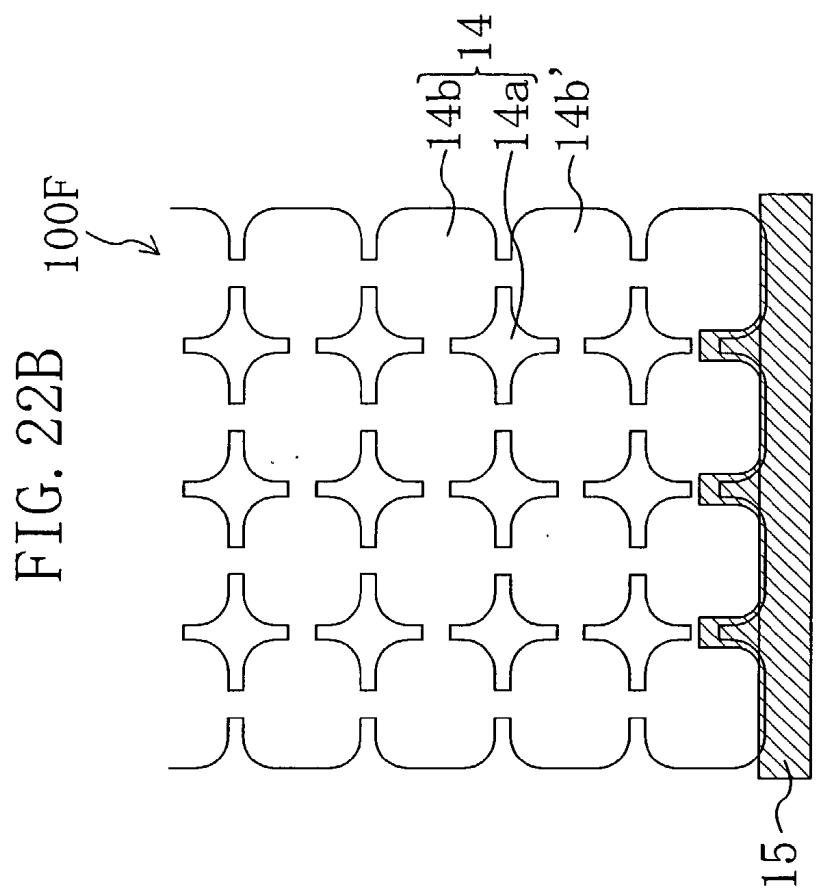
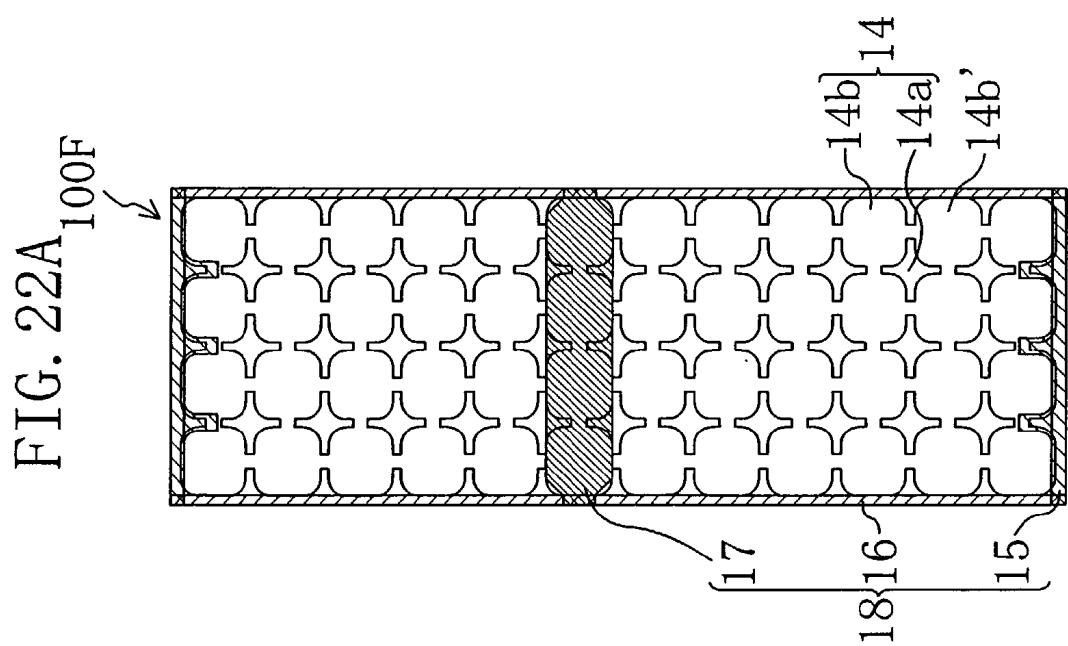


FIG. 23

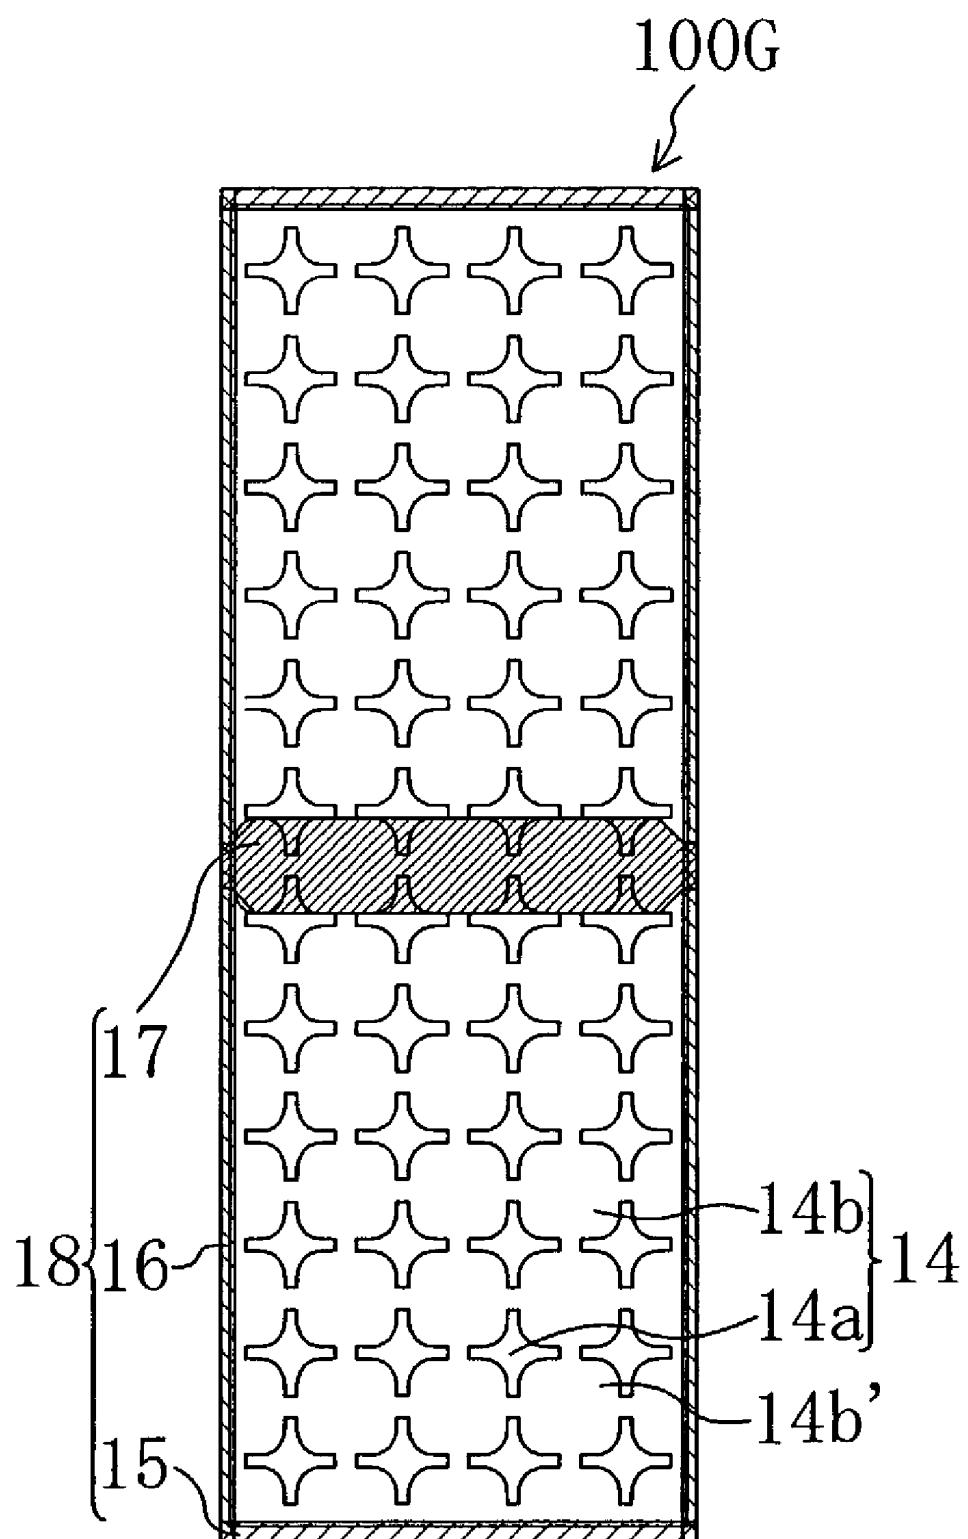


FIG. 24A 100H

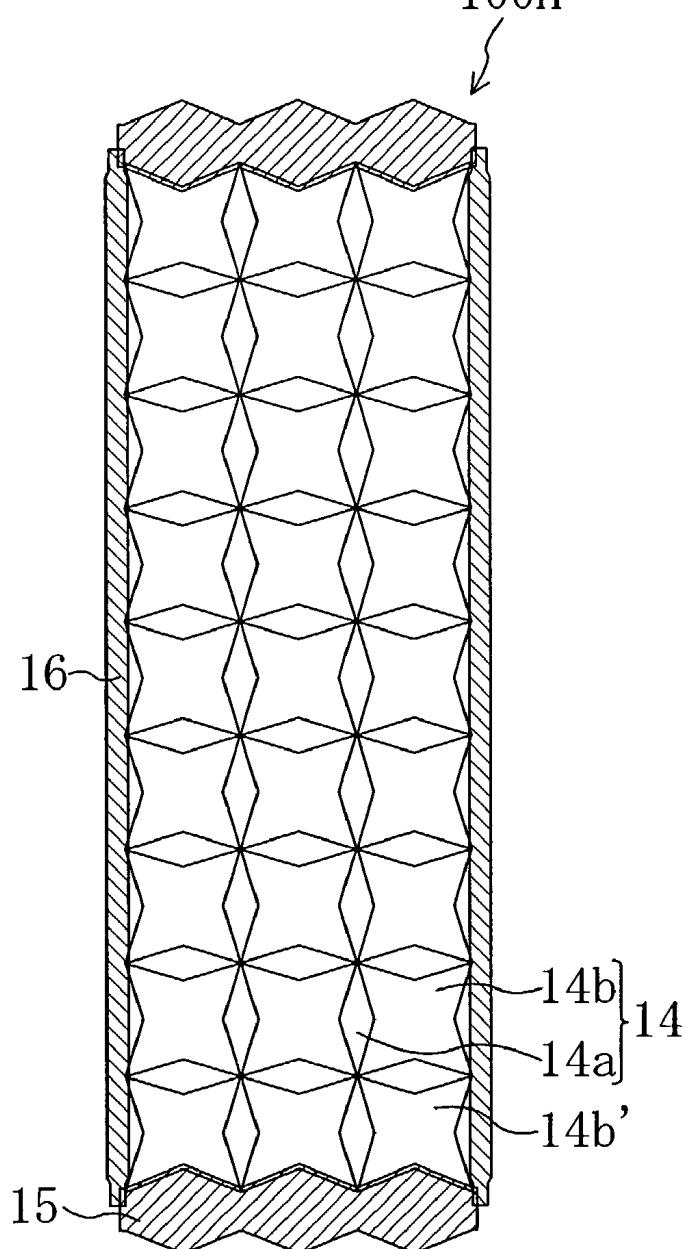


FIG. 24B

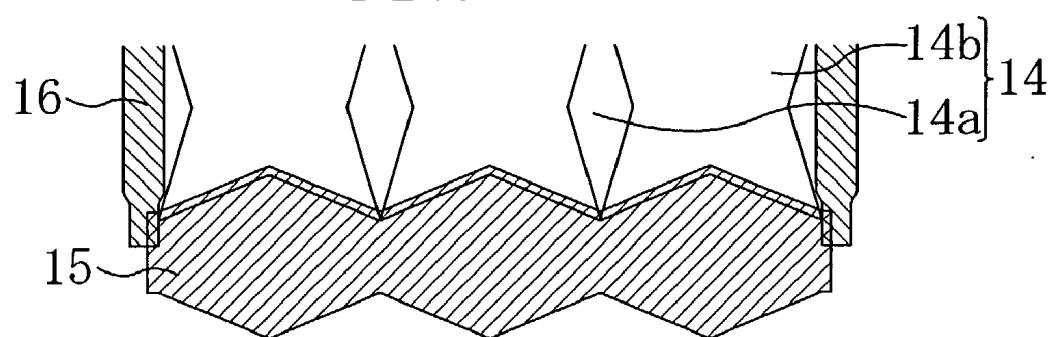


FIG. 25A 100I

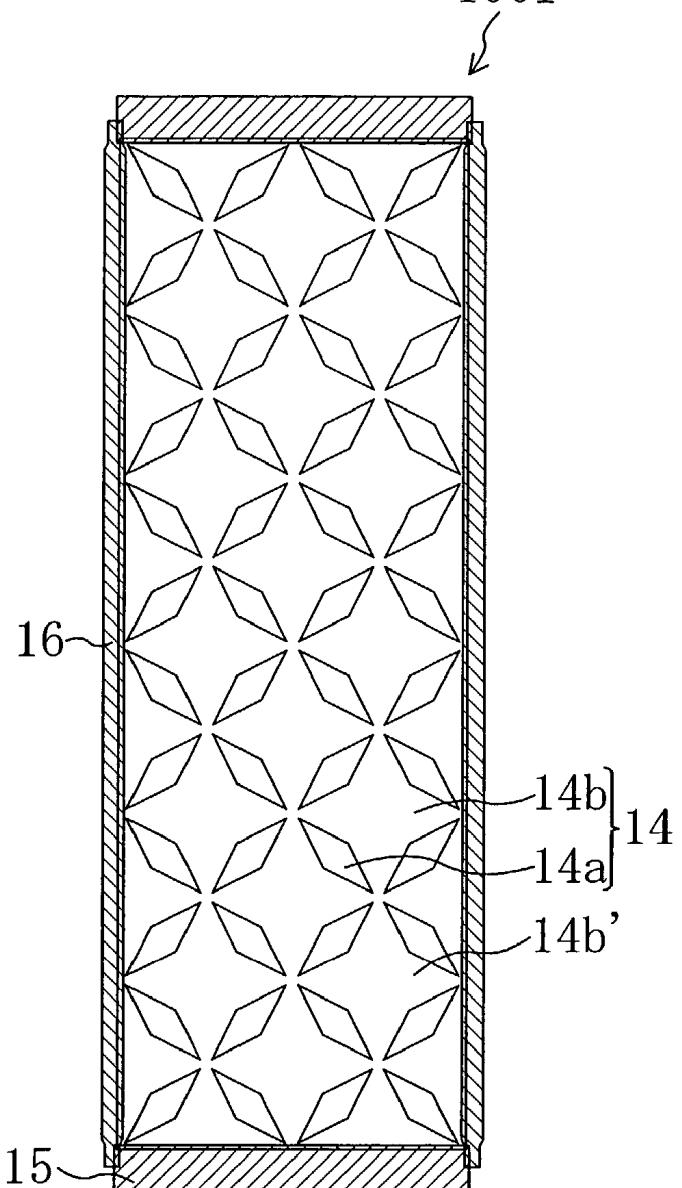


FIG. 25B

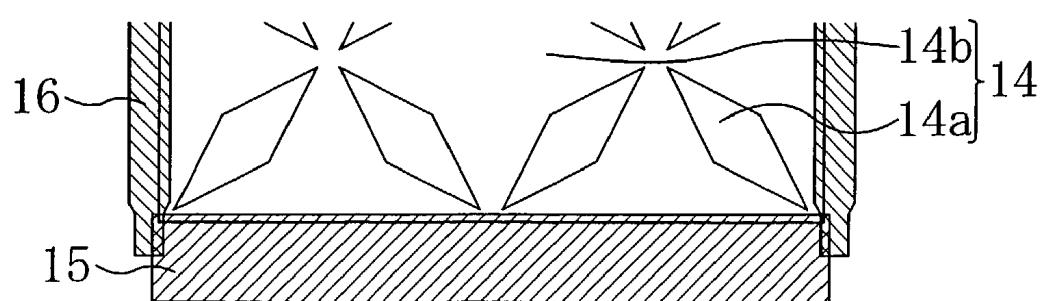


FIG. 26A

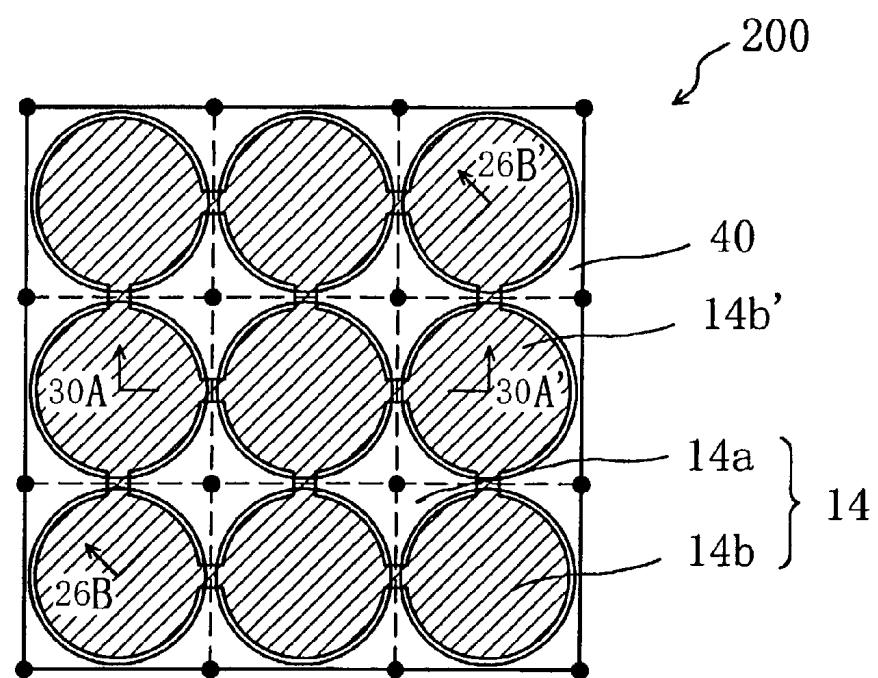


FIG. 26B

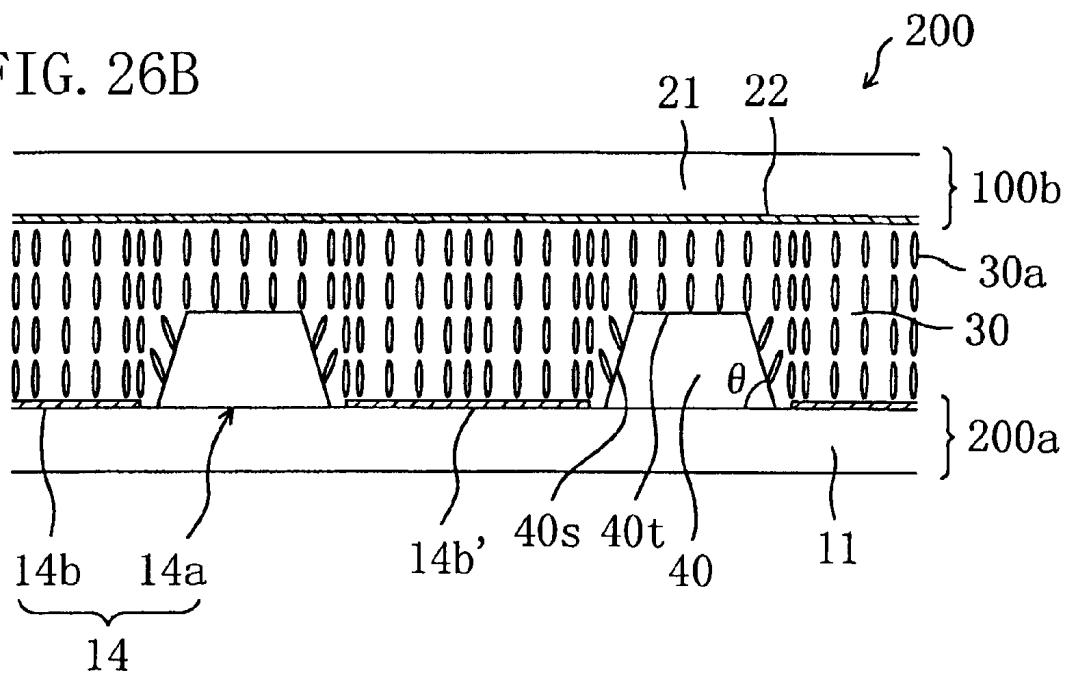


FIG. 27A

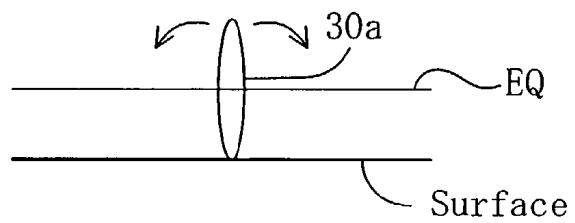


FIG. 27B

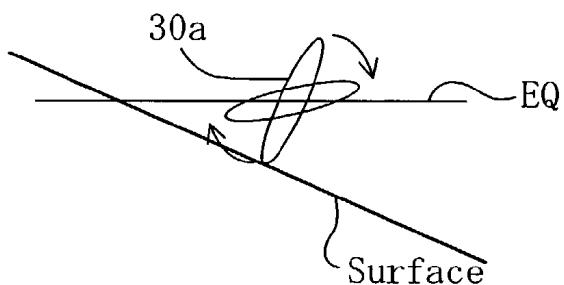


FIG. 27C

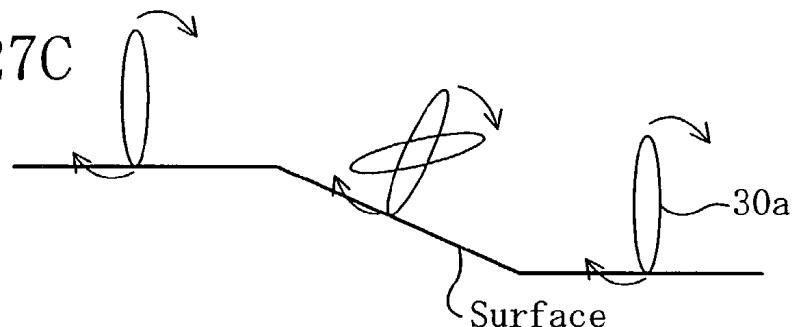


FIG. 27D

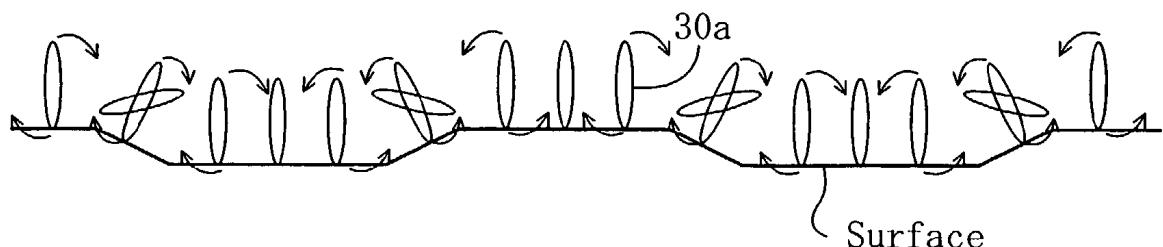


FIG. 28A

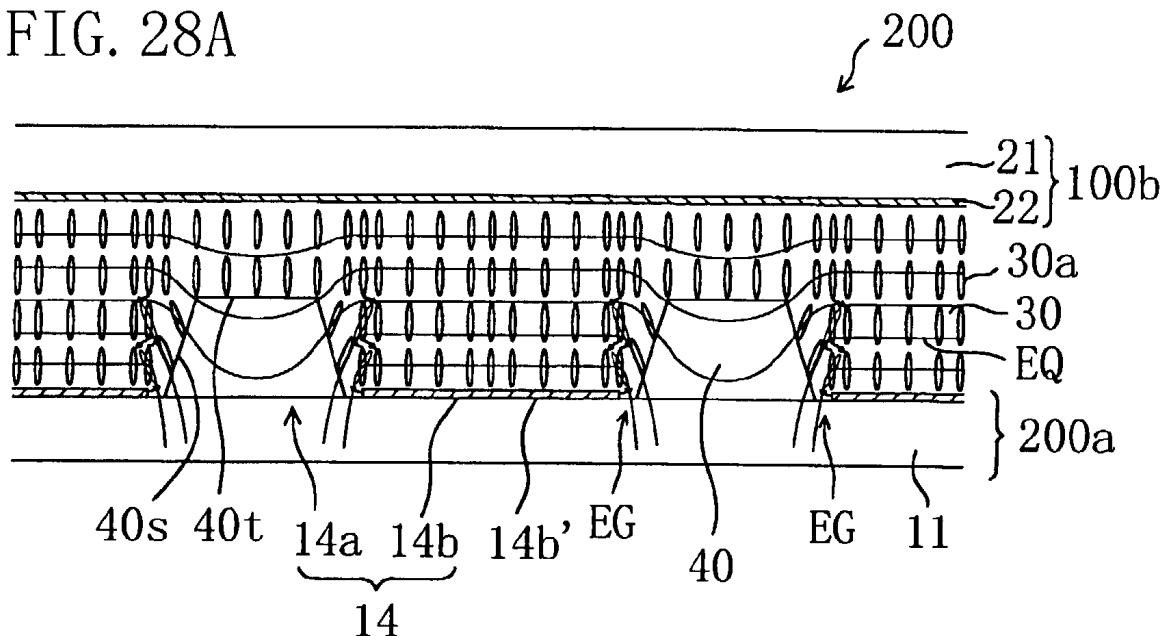


FIG. 28B SA

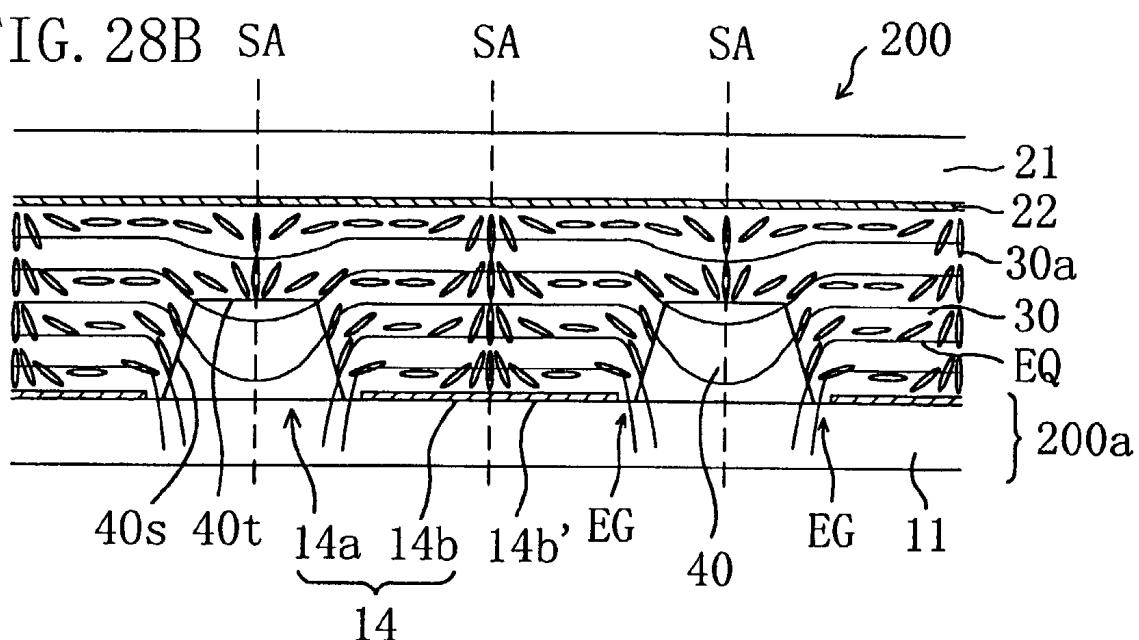


FIG. 29A

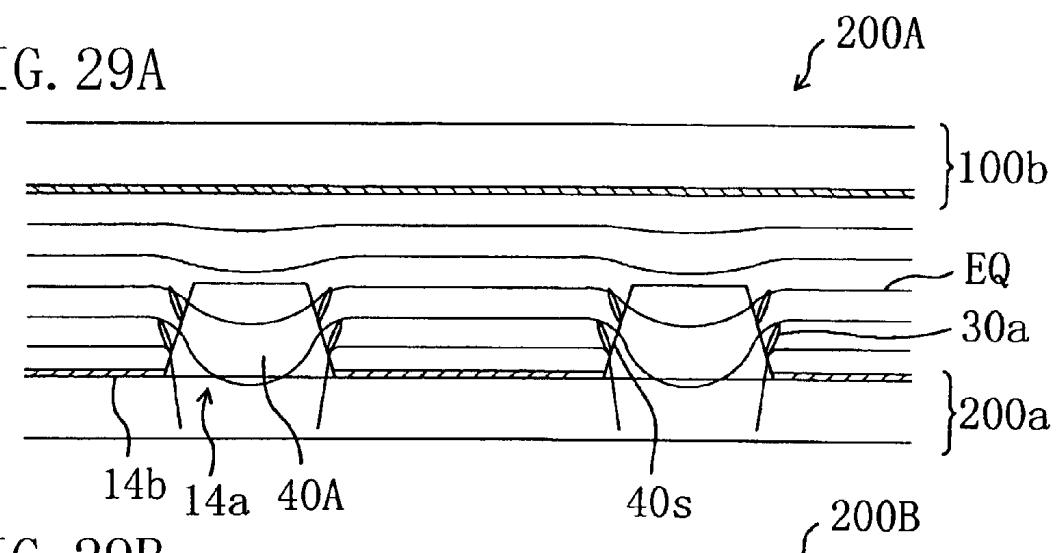


FIG. 29B

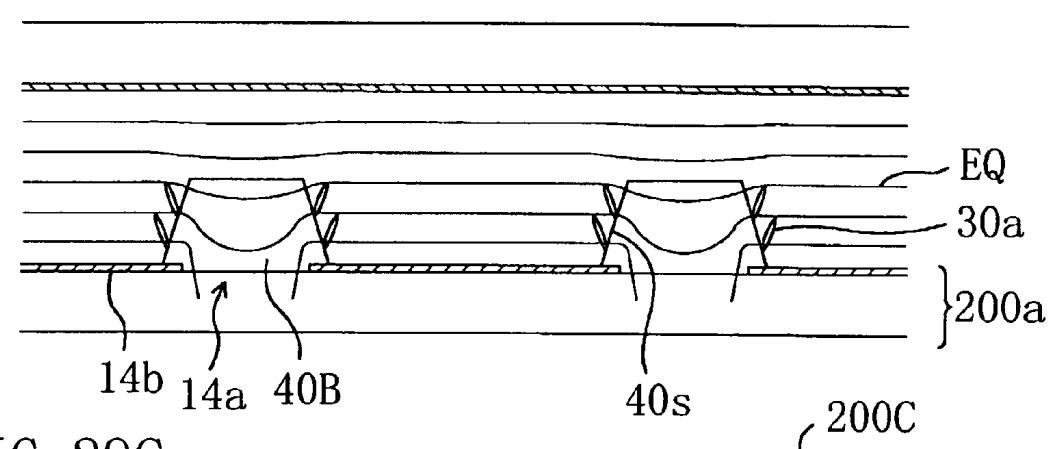


FIG. 29C

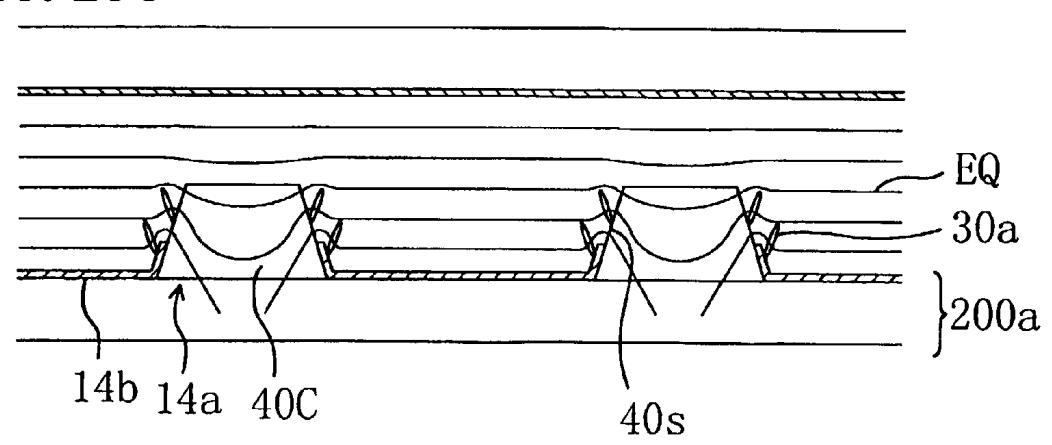


FIG. 30

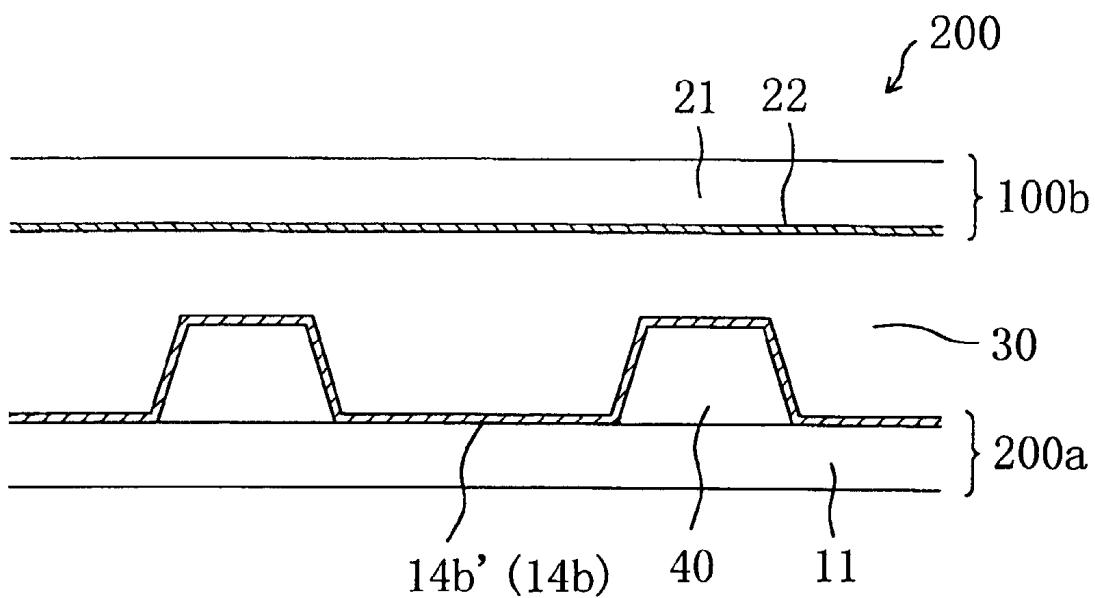


FIG. 31A

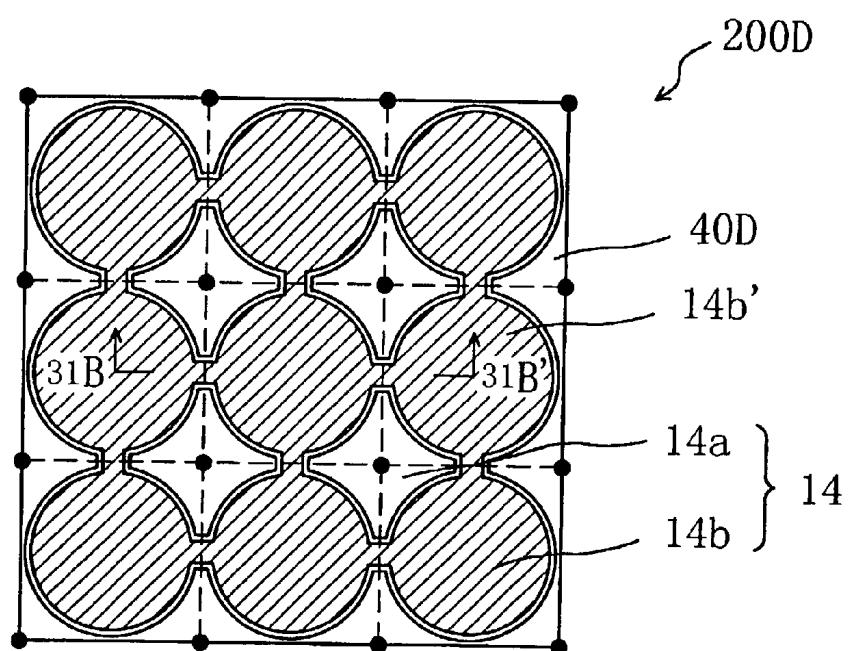


FIG. 31B

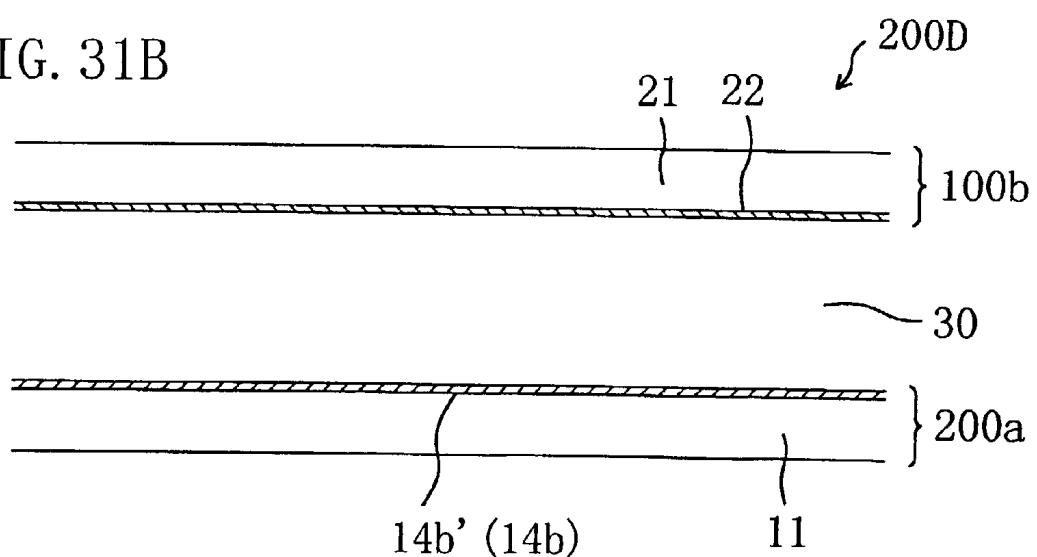


FIG. 32A

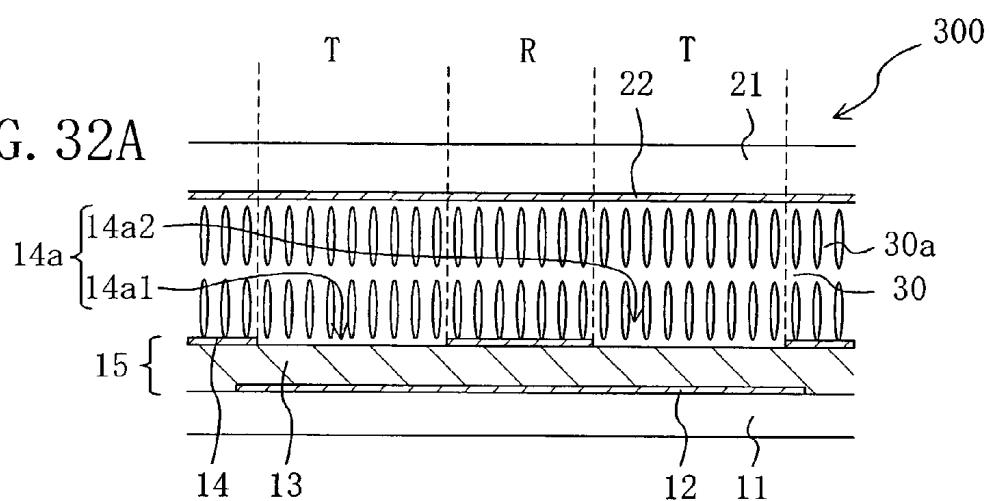


FIG. 32B

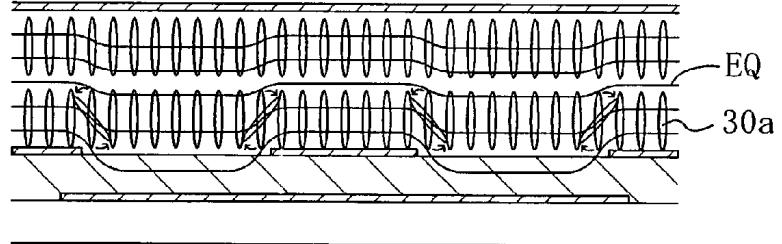


FIG. 32C

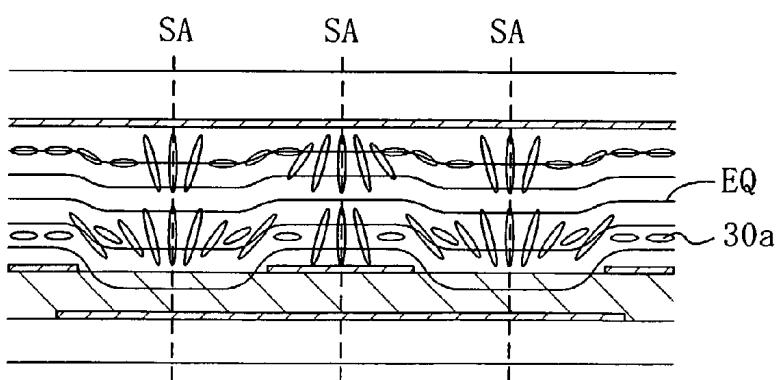


FIG. 33A 400

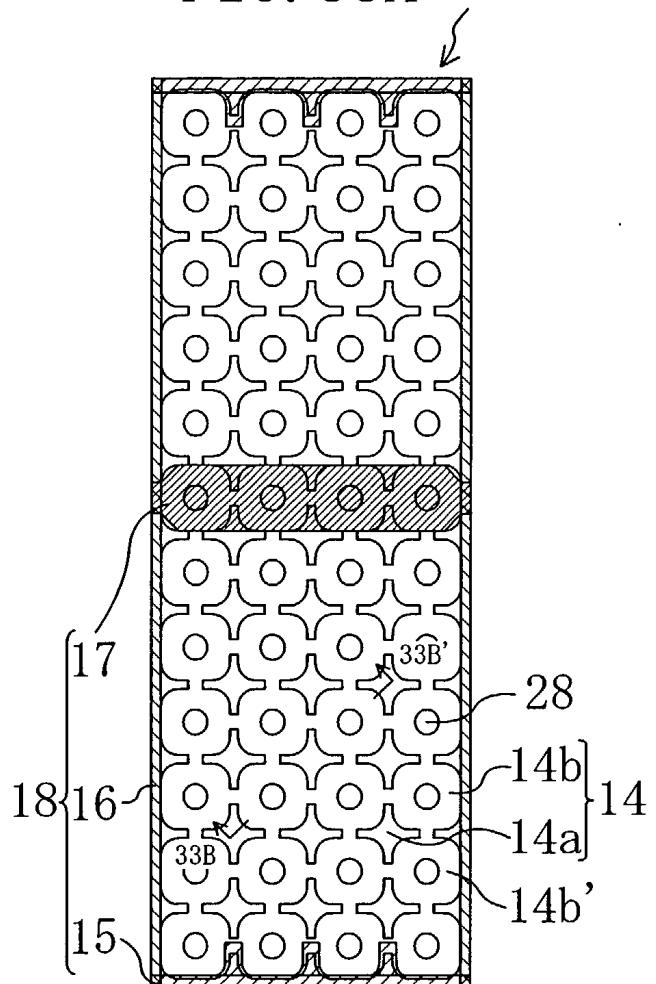


FIG. 33B

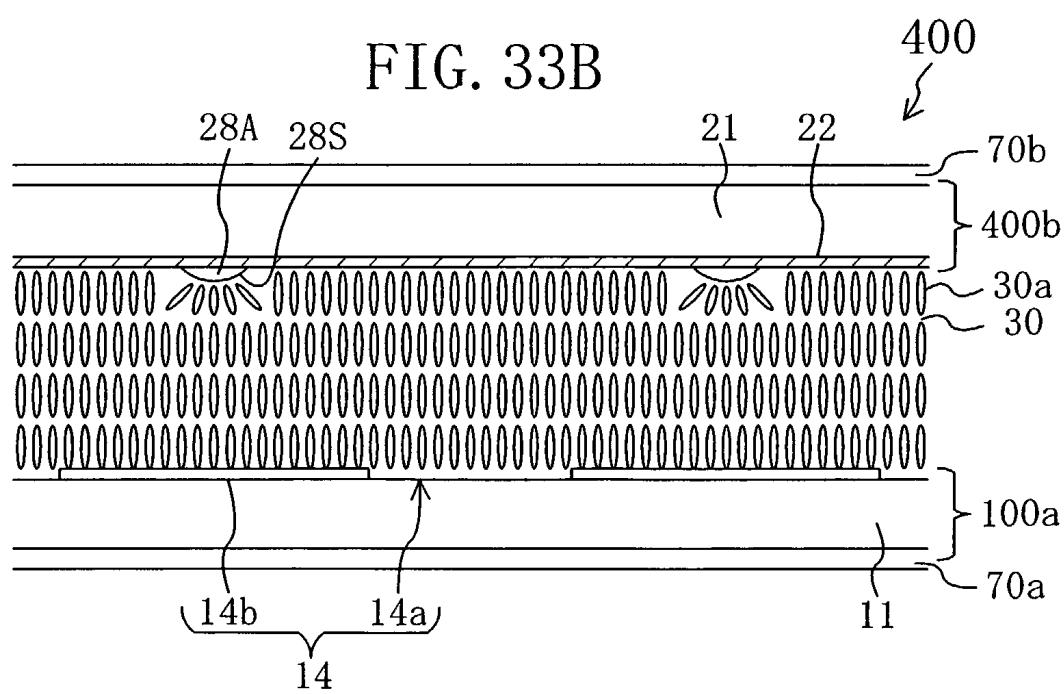


FIG. 34A

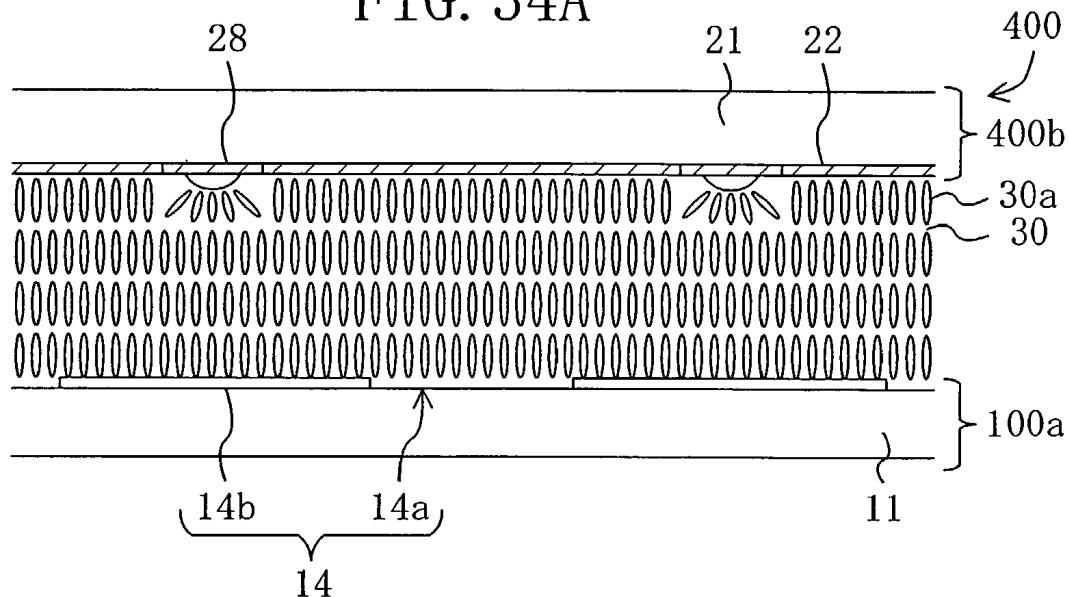


FIG. 34B

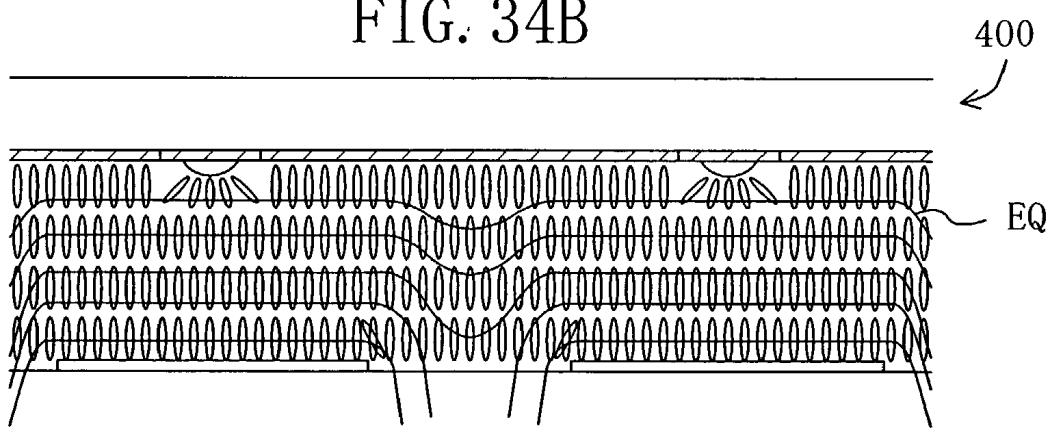


FIG. 34C

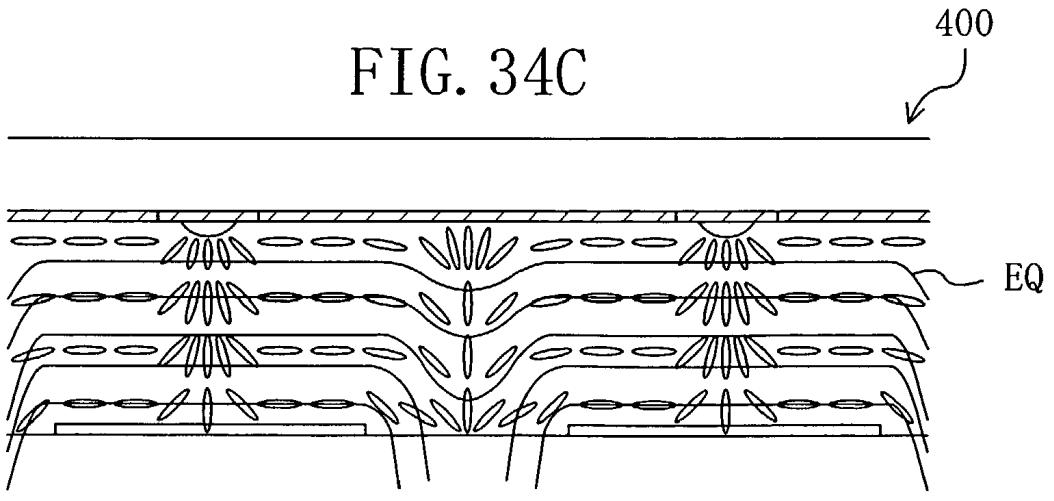


FIG. 35

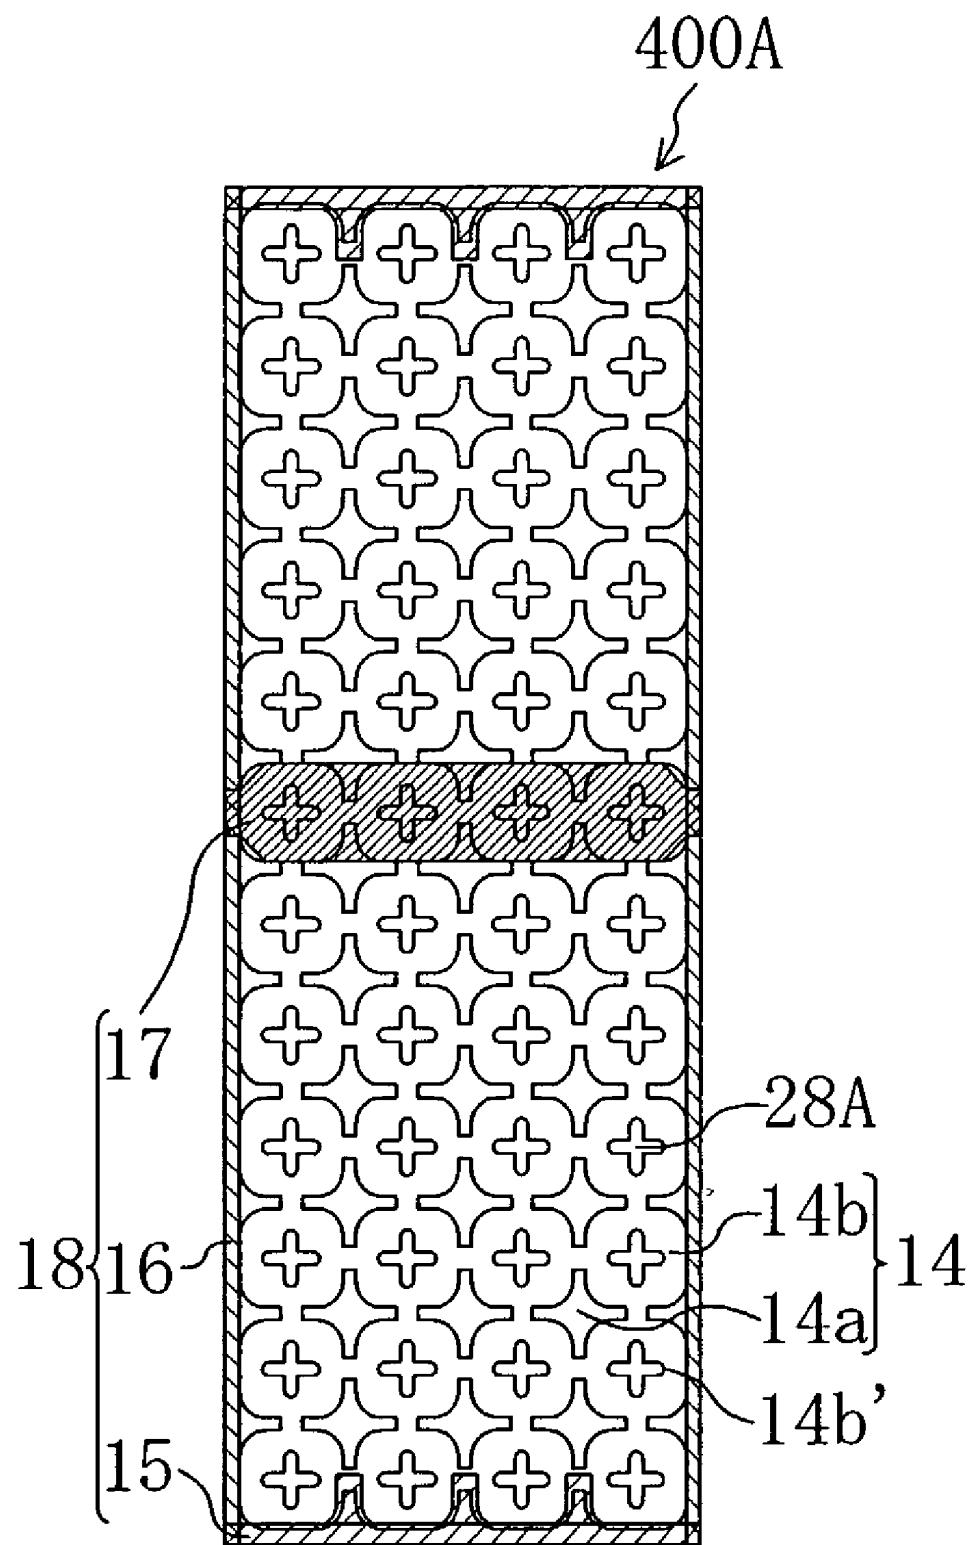


FIG. 36

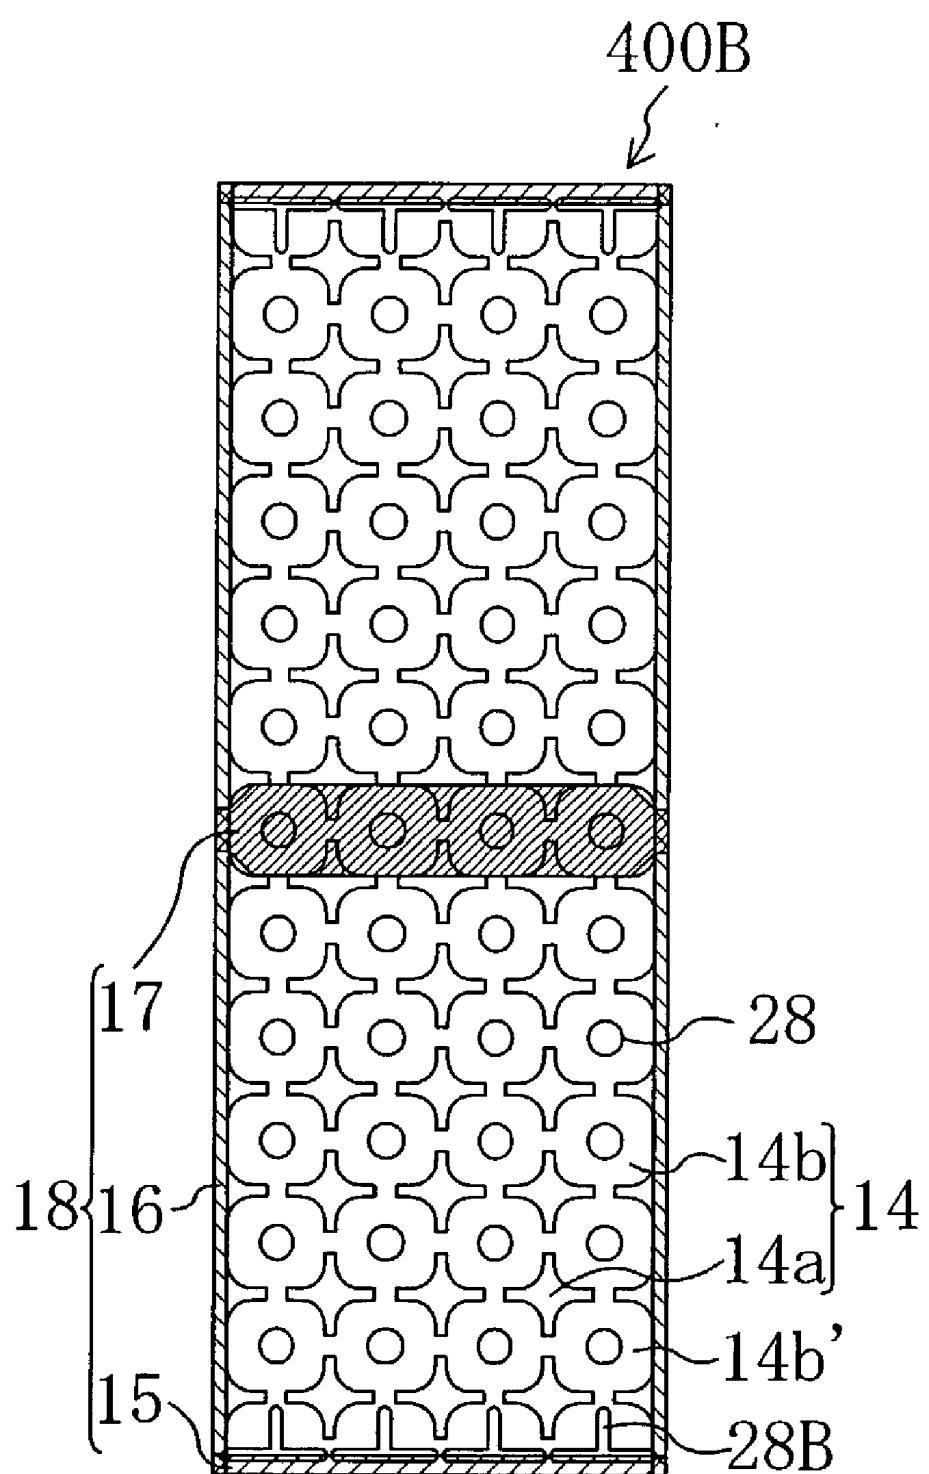


FIG. 37

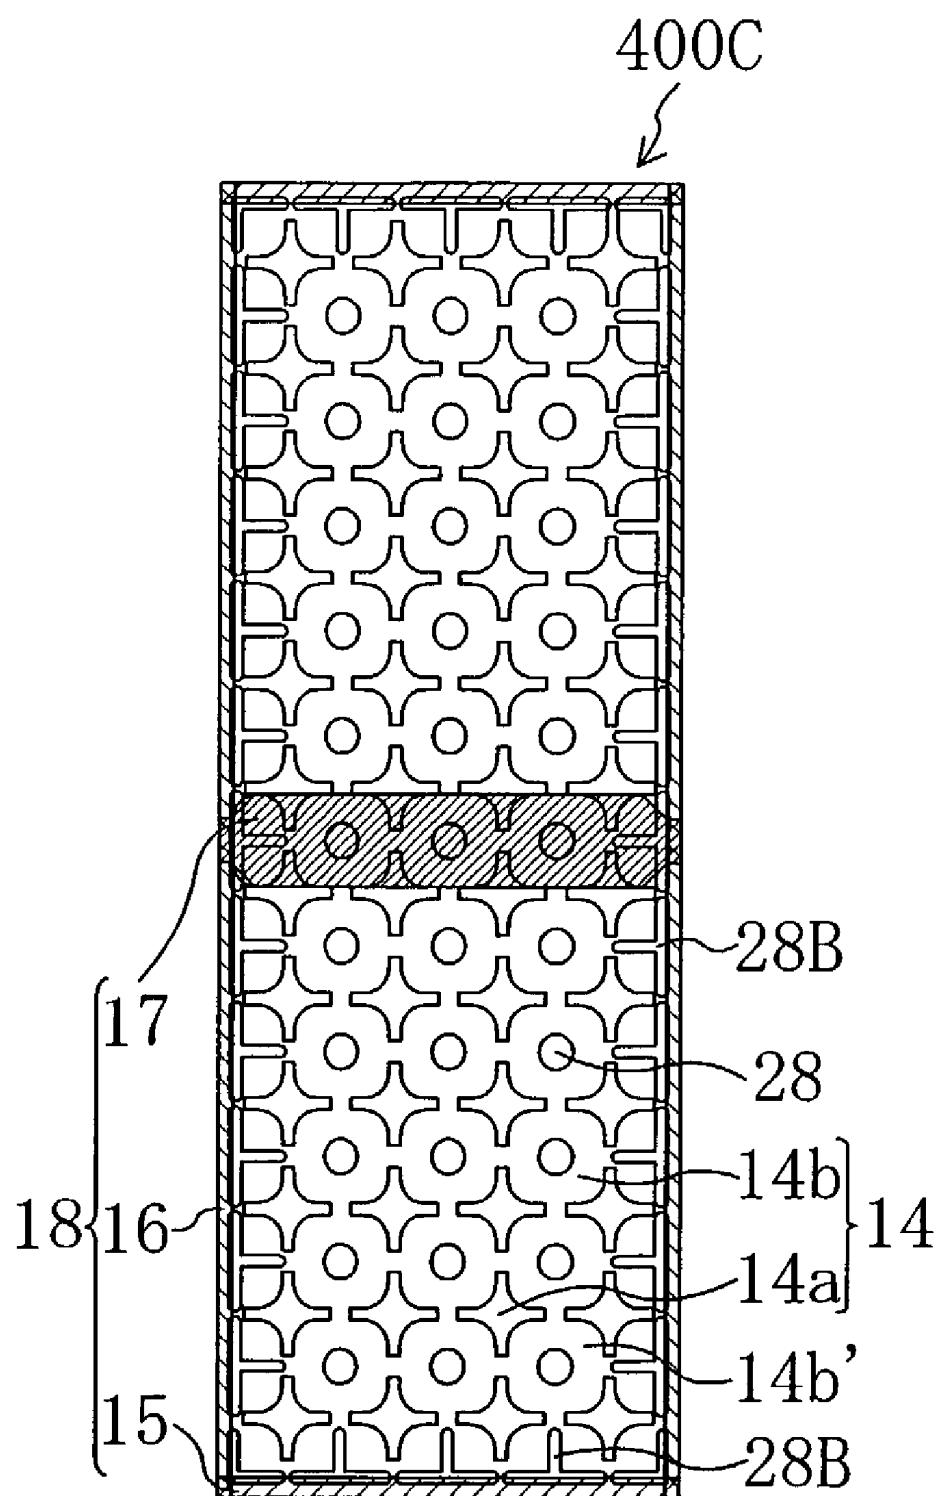


FIG. 38A

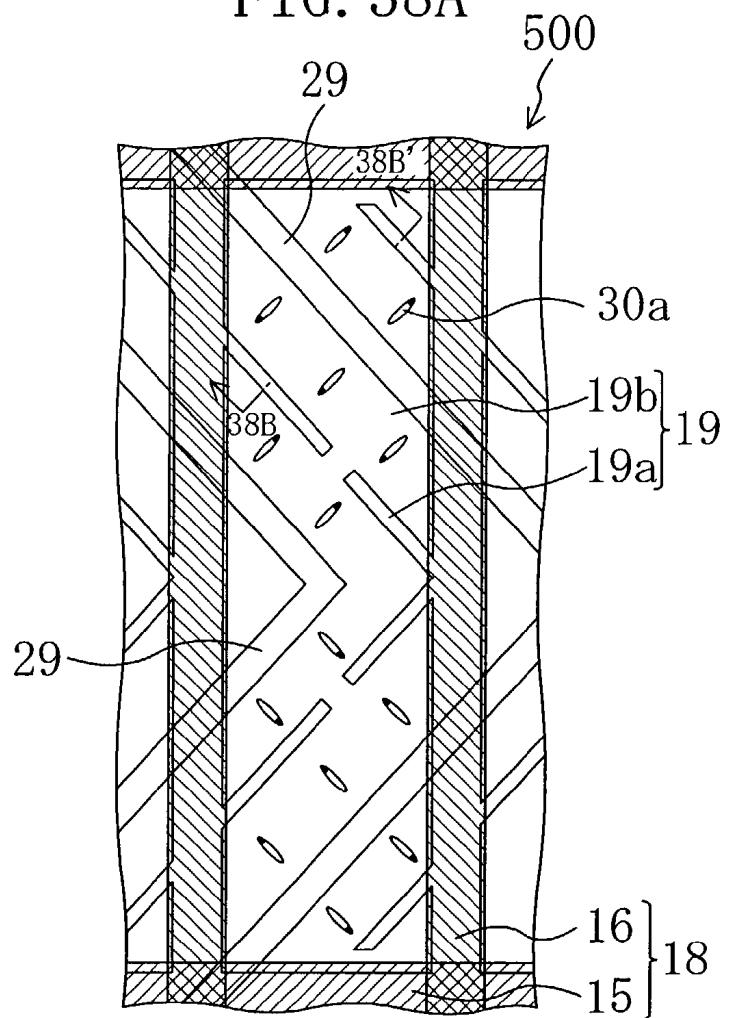


FIG. 38B

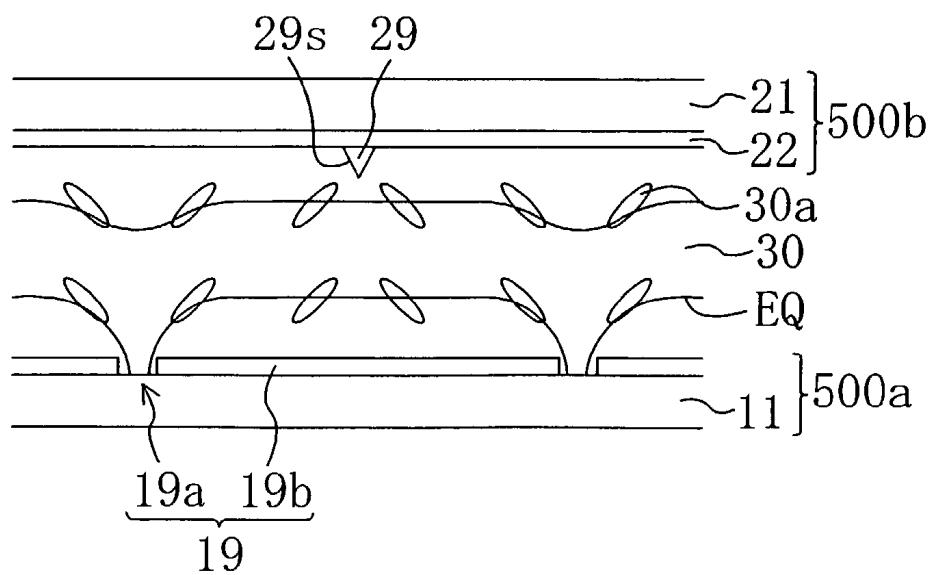


FIG. 39

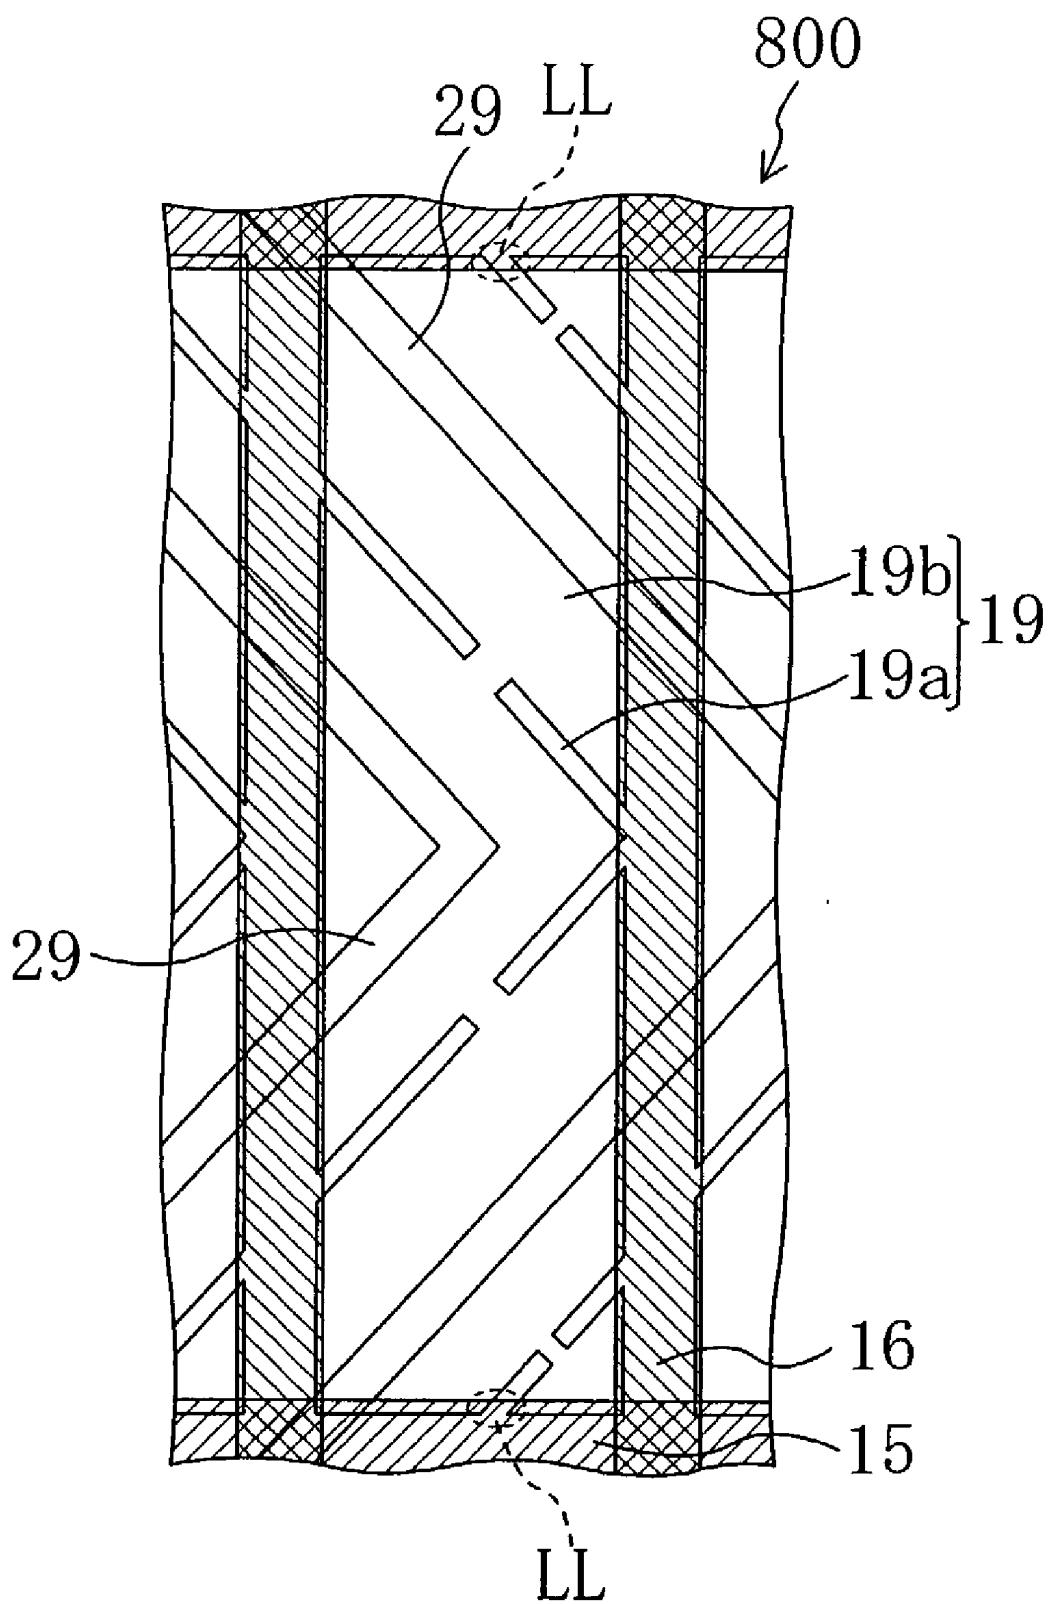


FIG. 40


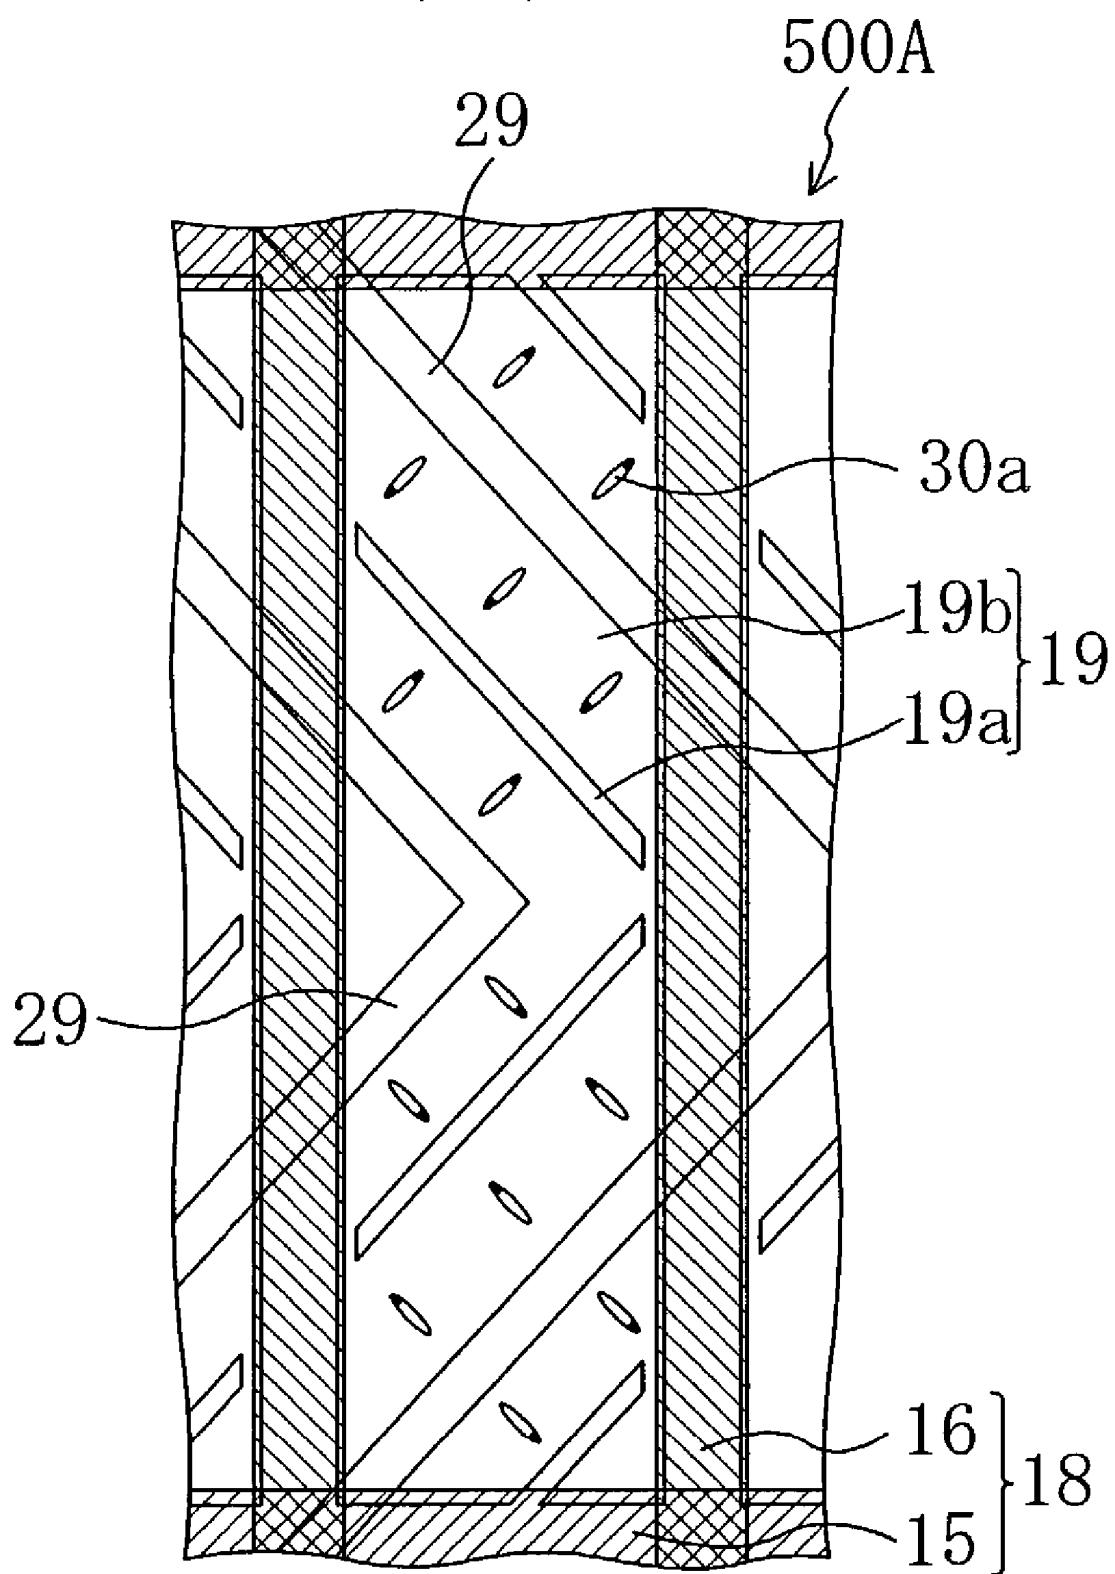


FIG. 41

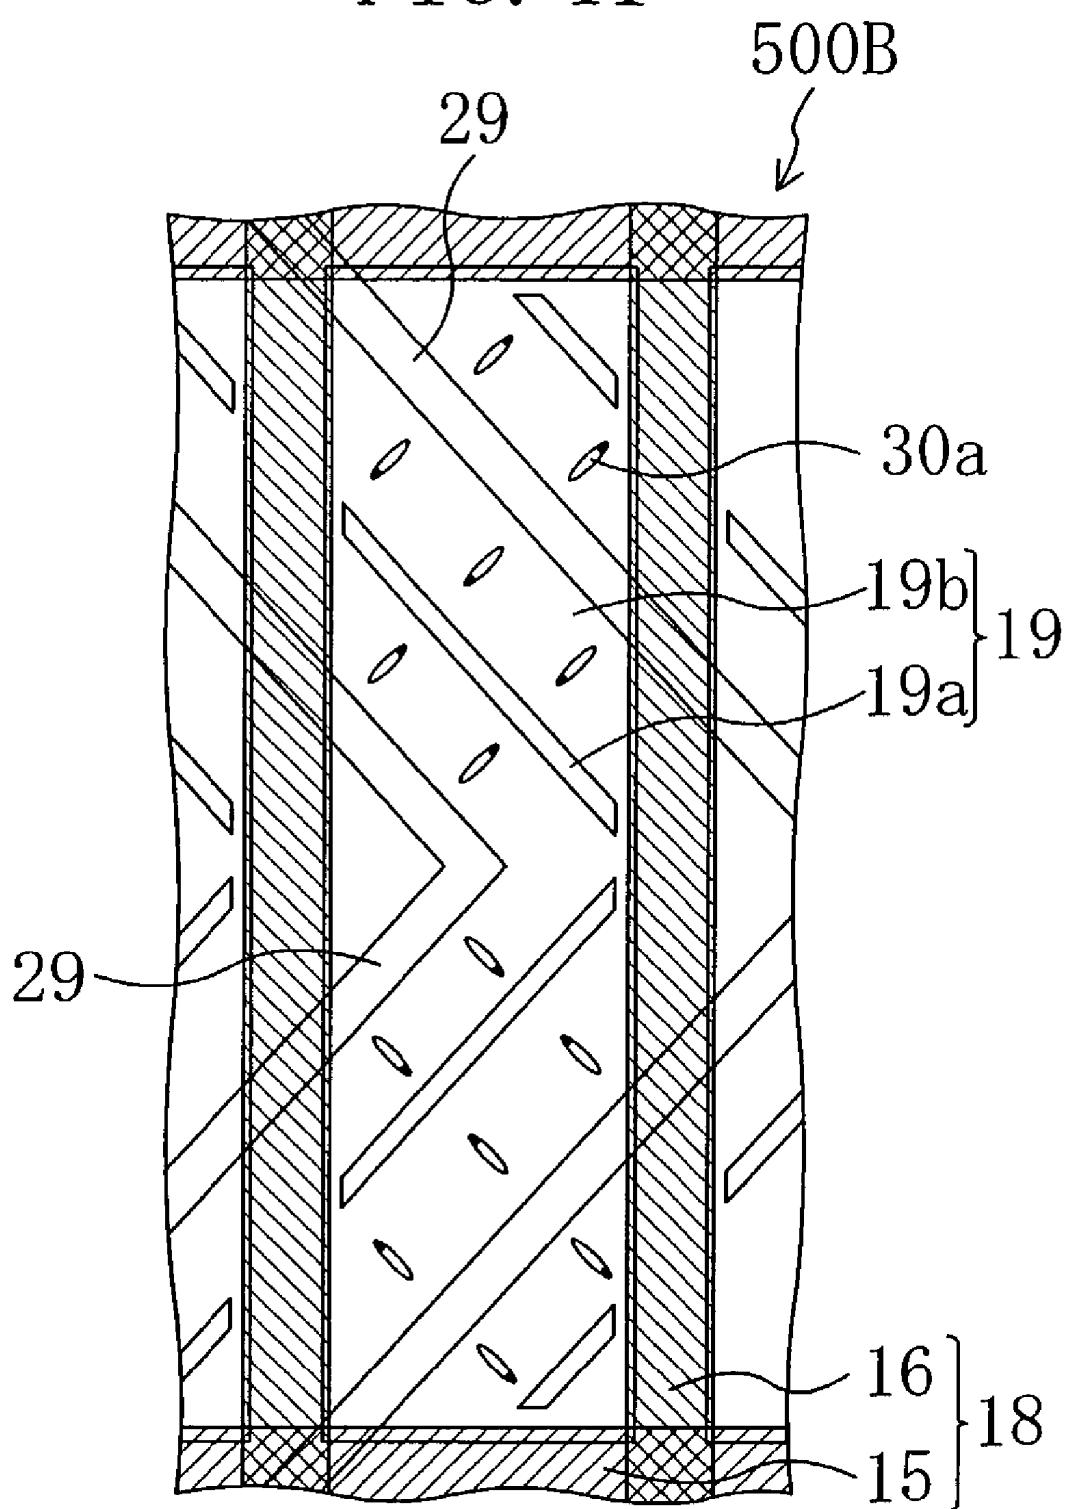

LIQUID CRYSTAL DISPLAY DEVICE

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a liquid crystal display device, and more particularly to a liquid crystal display device having a wide viewing angle characteristic and being capable of producing a high quality display.

[0003] 2. Description of the Background Art

[0004] In recent years, liquid crystal display devices, which are thin and light in weight, are used as personal computer displays and PDA (personal digital assistance) displays. However, conventional twist nematic (TN) type and super twist nematic (STN) type liquid crystal display devices have a narrow viewing angle. Various technical developments have been undertaken to solve the problem.

[0005] A typical technique for improving the viewing angle characteristic of a TN or STN type liquid crystal display device is to add an optical compensation plate thereto. Another approach is to employ a transverse electric field mode in which a horizontal electric field with respect to the substrate plane is applied across the liquid crystal layer. Transverse electric field mode liquid crystal display devices have been attracting public attention and are mass-produced in recent years. Still another technique is to employ a DAP (deformation of vertical aligned phase) mode in which a nematic liquid crystal material having a negative dielectric anisotropy is used as a liquid crystal material and a vertical alignment film is used as an alignment film. This is a type of ECB (electrically controlled birefringence) mode, in which the transmittance is controlled by using the birefringence of liquid crystal molecules.

[0006] While the transverse electric field mode is an effective approach to improve the viewing angle, the production process thereof imposes a significantly lower production margin than that of a normal TN type device, whereby it is difficult to realize stable production of the device. This is because the display brightness or the contrast ratio is significantly influenced by variations in the gap between the substrates or a shift in the direction of the transmission axis (polarization axis) of a polarization plate with respect to the orientation axis of the liquid crystal molecules. It requires further technical developments to be able to precisely control these factors and thus to realize stable production of the device.

[0007] In order to realize a uniform display without display non-uniformity with a DAP mode liquid crystal display device, an alignment control is necessary. An alignment control can be provided by, for example, subjecting the surface of an alignment film to an alignment treatment by rubbing. However, when a vertical alignment film is subjected to a rubbing treatment, rubbing streaks are likely to appear in the displayed image, and it is not suitable for mass-production.

[0008] Another approach proposed in the art for performing an alignment control without a rubbing treatment is to form a slit (opening) in an electrode so as to produce an inclined electric field and to control the orientation direction of the liquid crystal molecules by the inclined electric field (e.g., Japanese Laid-Open Patent Publication Nos. 6-301036

and 2000-47217). However, the present inventors reviewed these publications and found that with the methods disclosed therein, the orientation in regions of the liquid crystal layer corresponding to the openings in the electrode is not defined, whereby the orientation of the liquid crystal molecules is not sufficiently continuous, and it is difficult to achieve a stable orientation across each pixel, resulting in a display with non-uniformity.

[0009] In view of this, an inventive entity that includes some of the present inventors proposed another approach (Japanese Patent Application No. 2000-244648), in which a predetermined electrode structure including openings and a solid portion is formed on one of a pair of substrates opposing each other via a liquid crystal layer therebetween, so that a plurality of liquid crystal domains, each of which takes a radially-inclined orientation, are formed in the openings and the solid portion by inclined electric fields that are produced at the respective edge portions of the openings.

[0010] However, the present inventors have found that the display quality may not be improved sufficiently only by providing an electrode structure as disclosed in this patent application. This is due to an electric field produced in the vicinity of the edge of a bus line (herein, the term "bus line" is used to refer collectively to a group of interconnection lines) exerting an orientation-regulating force that is not matched with the orientation-regulating force exerted by the inclined electric field produced at the edge portion of the opening.

SUMMARY OF THE INVENTION

[0011] The present invention has been made to solve the problem in the prior art, and has an object to provide a liquid crystal display device having a wide viewing angle characteristic and a high display quality.

[0012] A liquid crystal display device of the present invention includes a first substrate, a second substrate, a liquid crystal layer provided between the first substrate and the second substrate, and a plurality of picture element regions for producing a display, wherein: the first substrate includes, on one side thereof that is closer to the liquid crystal layer, a picture element electrode provided for each of the plurality of picture element regions, a switching element electrically connected to the picture element electrode, and a bus line including a gate bus line and a source bus line that are electrically connected to the switching element; the second substrate includes a counter substrate opposing the picture element electrode via the liquid crystal layer; the picture element electrode includes a plurality of openings and a solid portion that includes a plurality of unit solid portions; in each of the plurality of picture element regions, the liquid crystal layer takes a vertical alignment in the absence of an applied voltage between the picture element electrode and the counter electrode, and forms a plurality of liquid crystal domains in the plurality of openings and the solid portion by inclined electric fields produced at respective edge portions of the plurality of openings of the picture element electrode in response to a voltage applied between the picture element electrode and the counter electrode, each of the plurality of liquid crystal domains taking a radially-inclined orientation, and an orientation of each of the plurality of liquid crystal domains changing according to the applied voltage, thereby producing a display; and in each of the plurality of picture

element regions, at least one of the plurality of openings of the picture element electrode that is located along the bus line and located between two adjacent ones of the plurality of unit solid portions overlaps the bus line. Thus, the object set forth above is achieved.

[0013] Another liquid crystal display device of the present invention includes a first substrate, a second substrate, a liquid crystal layer provided between the first substrate and the second substrate, and a plurality of picture element regions for producing a display, wherein: the first substrate includes, on one side thereof that is closer to the liquid crystal layer, a picture element electrode provided for each of the plurality of picture element regions, a switching element electrically connected to the picture element electrode, and a bus line including a gate bus line and a source bus line that are electrically connected to the switching element; the second substrate includes a counter substrate opposing the picture element electrode via the liquid crystal layer; the picture element electrode includes a plurality of openings and a solid portion that includes a plurality of unit solid portions, each of which is surrounded by at least some of the plurality of openings; the liquid crystal layer takes a vertical alignment in the absence of an applied voltage between the picture element electrode and the counter electrode; and in each of the plurality of picture element regions, at least one of the plurality of openings of the picture element electrode that is located along the bus line and located between two adjacent ones of the plurality of unit solid portions overlaps the bus line. Thus, the object set forth above is achieved.

[0014] Preferably, the at least one opening that overlaps the bus line at least includes an opening that is located along the gate bus line.

[0015] Some of the plurality of openings of the picture element electrode that are located along the gate bus line may all overlap the bus line.

[0016] The at least one opening that overlaps the bus line may further include an opening that is located along the source bus line.

[0017] Preferably, at least some of the plurality of openings have substantially the same shape and substantially the same size, and form at least one unit lattice arranged so as to have rotational symmetry.

[0018] Preferably, a shape of each of the at least some of the plurality of openings has rotational symmetry.

[0019] Each of the at least some of the plurality of openings may have a generally circular shape.

[0020] Each of the plurality of unit solid portions may have a generally circular shape.

[0021] Preferably, in each of the plurality of picture element regions, a total area of the plurality of openings of the picture element electrode is smaller than an area of the solid portion of the picture element electrode.

[0022] The liquid crystal display device may further include a protrusion within each of the plurality of openings, the protrusion having the same cross-sectional shape in a plane of the first substrate as that of the plurality of openings, a side surface of the protrusion having an orientation-regulating force of the same direction with respect to liquid

crystal molecules of the liquid crystal layer as a direction of orientation regulation by the inclined electric field.

[0023] Still another liquid crystal display device includes a first substrate, a second substrate, a liquid crystal layer provided between the first substrate and the second substrate, and a plurality of picture element regions for producing a display, wherein: the first substrate includes, on one side thereof that is closer to the liquid crystal layer, a picture element electrode provided for each of the plurality of picture element regions, a switching element electrically connected to the picture element electrode, and a bus line including a gate bus line and a source bus line that are electrically connected to the switching element; the second substrate includes a counter substrate opposing the picture element electrode via the liquid crystal layer; the picture element electrode includes a plurality of openings and a solid portion; in each of the plurality of picture element regions, the liquid crystal layer takes a vertical alignment in the absence of an applied voltage between the picture element electrode and the counter electrode, and an orientation of the liquid crystal layer is regulated by inclined electric fields produced at respective edge portions of the plurality of openings of the picture element electrode in response to a voltage applied between the picture element electrode and the counter electrode; and in each of the plurality of picture element regions, at least one of an edge of the gate bus line and that of the source bus line is covered by the solid portion of the picture element electrode. Thus, the object set forth above is achieved.

[0024] Preferably, in each of the plurality of picture element regions, at least the edge of the gate bus line is covered by the solid portion of the picture element electrode.

[0025] In each of the plurality of picture element regions, the edge of the gate bus line and that of the source bus line may be both covered by the solid portion of the picture element electrode.

[0026] The solid portion of the picture element electrode may include a plurality of unit solid portions; and in each of the plurality of picture element regions, the liquid crystal layer may form a plurality of liquid crystal domains in the plurality of openings and the solid portion by inclined electric fields produced at respective edge portions of the plurality of openings of the picture element electrode in response to a voltage applied between the picture element electrode and the counter electrode, each of the plurality of liquid crystal domains taking a radially-inclined orientation, and an orientation of each of the plurality of liquid crystal domains changing according to the applied voltage, thereby producing a display.

[0027] In each of the plurality of picture element regions, at least one of the plurality of openings of the picture element electrode that is located along the bus line and located between two adjacent ones of the plurality of unit solid portions may overlap the bus line.

[0028] The liquid crystal layer may form a portion of a liquid crystal domain that takes a radially-inclined orientation in a portion of the solid portion that is located along the bus line by the inclined electric field in the presence of an applied voltage between the picture element electrode and the counter electrode.

[0029] Functions of the present invention will now be described.

[0030] In the liquid crystal display device of the present invention, the picture element electrode for applying a voltage across the liquid crystal layer in each picture element region includes a plurality of openings (a portion of the electrode where a conductive film does not exist) and a solid portion (a portion of the electrode other than the openings, i.e., a portion where a conductive film exists). The solid portion includes a plurality of unit solid portions, each of which is substantially surrounded by the openings, and is typically made of a continuous conductive film. The liquid crystal layer takes a vertical orientation in the absence of an applied voltage, whereas in the presence of an applied voltage, a plurality of liquid crystal domains, each of which takes a radially-inclined orientation, are formed by inclined electric fields that are produced at the respective edge portions of the openings of the picture element electrode. Typically, the liquid crystal layer is made of a liquid crystal material having a negative dielectric anisotropy, and the orientation of the liquid crystal layer is controlled by vertical alignment films provided on the opposing sides thereof.

[0031] The liquid crystal domains are formed by the inclined electric fields in regions corresponding to the openings and the solid portion of the picture element electrode, and the orientation of each liquid crystal domain changes according to the applied voltage, thereby producing a display. Since each liquid crystal domain takes an axially symmetrical orientation, there is little viewing angle dependence of the display quality, and thus a wide viewing angle characteristic is realized.

[0032] Moreover, a liquid crystal domain corresponding to an opening and a liquid crystal domain corresponding to a solid portion are both formed by an inclined electric field produced at the edge portion of the opening, whereby these liquid crystal domains are formed adjacent to each other in an alternating pattern, and the orientation of the liquid crystal molecules in one liquid crystal domain and that in another adjacent liquid crystal domain are essentially continuous with each other. Therefore, no disclination line is formed between a liquid crystal domain formed in the opening and another adjacent liquid crystal domain formed in the solid portion, whereby the display quality is not deteriorated and the orientation of the liquid crystal molecules is highly stable.

[0033] In the liquid crystal display device of the present invention, the liquid crystal molecules take a radially-inclined orientation not only in a region corresponding to the solid portion of the picture element electrode but also in a region corresponding to the opening thereof. With such a liquid crystal display device, as compared to the conventional liquid crystal display device described above, the continuity in the orientation of the liquid crystal molecules is higher while a stable orientation is realized, whereby a uniform display without display non-uniformity can be obtained. Particularly, in order to realize a desirable response characteristic (high response speed), the inclined electric field for controlling the orientation of the liquid crystal molecules needs to act upon a large number of liquid crystal molecules. For this purpose, it is necessary to form a large number of openings (edge portions). In the liquid crystal display device of the present invention, a liquid crystal domain having a stable radially-inclined orientation is formed for each opening. Therefore, even if a large number of openings are formed in order to improve the

response characteristic, a decrease in the display quality (occurrence of display non-uniformity) can be suppressed.

[0034] However, the display quality may not be improved sufficiently only by providing an electrode structure as described above, depending on the positional relationship between the openings of the picture element electrode and the edge of the bus line (a group of interconnection lines).

[0035] Since a predetermined signal (voltage) for driving the liquid crystal display device is applied to the bus line of the liquid crystal display device, an electric field is produced between the bus line and the counter electrode. Therefore, an inclined electric field is produced in the vicinity of the edge of the bus line. However, the orientation-regulating force from the inclined electric field is not matched with that from an inclined electric field that is produced at the edge portion of the opening. Therefore, if the liquid crystal domain formed in an opening that is located along the bus line is subject to the orientation-regulating force from the inclined electric field in the vicinity of the edge of the bus line, the orientation of the liquid crystal domain is disturbed, thereby resulting in a distorted radially-inclined orientation. Moreover, since adjacent liquid crystal domains are predisposed to maintain the orientation continuity therebetween, the orientation disturbance influences the orientation of adjacent liquid crystal domains, i.e., the liquid crystal domains of adjacent unit solid portions. Thus, the orientation of the liquid crystal domain of each of the adjacent unit solid portions is disturbed.

[0036] In a liquid crystal domain that takes a distorted radially-inclined orientation due to its disturbed orientation, the orientation is not stable and it easily collapses, whereby it takes a long time before the orientation of such a liquid crystal domain reaches a steady state after a voltage application. Thus, the orientation disturbance as described above leads to a decrease in the response speed (deterioration in the response characteristic).

[0037] Moreover, each liquid crystal domain in a picture element region reaches a steady state with such a distorted radially-inclined orientation, in which the orientation is disturbed, and the disturbed orientation varies from one picture element region to another. Therefore, an after image phenomenon may occur, in which the previously-displayed image remains after an image-switching signal is input. This is because if the orientation of the liquid crystal layer varies among different picture element regions, the transmittance also varies among different picture element regions. Particularly, there is a significant difference in the orientation of the liquid crystal layer between a picture element region that has transitioned to an intermediate gray level display from a white display and a picture element region that has transitioned to an intermediate gray level display from a black display, and the difference in transmittance between such picture element regions is likely to be viewed as an after image phenomenon. This is for the following reason. In a white display, the inclined electric field produced at the edge portion of an opening exerts a relatively strong orientation-regulating force, whereby the orientation of the liquid crystal layer is stable. Therefore, the orientation of the liquid crystal layer is stable even after the transition to an intermediate gray level display. On the other hand, when transitioning from a black display to an intermediate gray level display, the orientation of the liquid crystal layer is likely to

collapse because the orientation-regulating force from the inclined electric field produced at the edge portion of an opening is relatively weak.

[0038] The liquid crystal display device of the present invention is designed so that in each of a plurality of picture element regions, at least one of a plurality of openings that is located along the bus line and located between two adjacent unit solid portions is superposed on the bus line (strictly speaking, a portion of the bus line). Therefore, the edge of a bus line in the vicinity of an opening that is superposed on the bus line is covered by the unit solid portions of the picture element region.

[0039] Therefore, in the vicinity of an opening that is superposed on the bus line, the liquid crystal molecules of the liquid crystal layer are electrically shielded by the unit solid portions of the picture element region from the influence of the inclined electric field produced in the vicinity of the edge of the bus line. Thus, the liquid crystal molecules of the liquid crystal layer are not subject to the orientation-regulating force from the inclined electric field produced in the vicinity of the edge of the bus line, and the orientation thereof is regulated only by the inclined electric field that is produced at the edge portion of the opening. Therefore, in the liquid crystal display device of the present invention, the orientation is not disturbed in the liquid crystal domain formed in an opening that is superposed on a bus line or in the liquid crystal domain formed in a unit solid portion that is adjacent to the opening, whereby the decrease in the response speed (deterioration in the response characteristic) and the occurrence of the after image phenomenon are suppressed.

[0040] In order to suppress the orientation disturbance due to the inclined electric field produced in the vicinity of the edge of the bus line, it is preferred to increase the proportion of the opening that is superposed on the bus line, i.e., to increase the portion of the edge of the bus line to be covered by the unit solid portions of the picture element region. However, in a case where the bus line is made of a light-blocking material, an increase in this proportion may decrease the aperture ratio. Thus, the proportion of the opening that is superposed on the bus line can suitably be determined depending on the application of the liquid crystal display device, etc., in view of the intended response characteristic and aperture ratio.

[0041] The decrease in the response speed and the occurrence of the after image phenomenon can be suppressed effectively by employing an arrangement where the opening that is located between two adjacent unit solid portions and superposed on the bus line at least include the opening that is located along the gate bus line (i.e., an arrangement where among openings that are located along the bus line and located between two adjacent unit solid portions, at least an opening that is located along the gate bus line are superposed on the bus line). This is because a larger voltage is typically applied to the gate bus line than to the source bus line, whereby an inclined electric field produced in the vicinity of the edge of the gate bus line has a greater influence on the liquid crystal molecules than an inclined electric field produced in the vicinity of the edge of the source bus line.

[0042] Moreover, not only the opening that is located between two adjacent unit solid portions, but also other openings that are located along the bus line, may be super-

posed on the bus line. For example, among a plurality of openings of a picture element electrode, all of the openings that are located along a gate bus line may be superposed on the bus line.

[0043] Of course, an alternative arrangement may be employed, e.g., an arrangement where the opening that is located between two adjacent unit solid portions and superposed on the bus line includes the opening that is located along the source bus line.

[0044] Note that although the inclined electric field produced in the vicinity of the edge of the bus line not only causes the decrease in the response speed and the after image phenomenon, as described above, but also causes a decrease in the contrast ratio, the decrease in the contrast ratio can be suppressed as will be described below if the bus line is made of a light-blocking material.

[0045] As described above, an inclined electric field is produced in the vicinity of the edge of the bus line, and the inclined electric field is produced regardless of the presence/absence of the applied voltage across the liquid crystal layer between the picture element electrode and the counter electrode. Therefore, in a liquid crystal display device that produces a display in a normally black mode, if the liquid crystal molecules in the vicinity of the edge of the bus line are inclined, in the absence of an applied voltage, by the orientation-regulating force from the inclined electric field, light leakage may occur, thereby decreasing the contrast ratio. Particularly, since the gate bus line is, most of the time, under the application of a relatively high voltage for holding switching elements OFF, the degree of such light leakage is significant in the vicinity of the edge of the gate bus line.

[0046] In the liquid crystal display device of the present invention, the edge of the bus line near an opening that is superposed on the bus line is covered by the unit solid portions of the picture element electrode, whereby the liquid crystal molecules of the liquid crystal layer are electrically shielded from the influence of the inclined electric field produced in the vicinity of the edge of the bus line. Therefore, the liquid crystal molecules of the liquid crystal layer are not inclined by the orientation-regulating force from the inclined electric field. Although the liquid crystal molecules of the liquid crystal layer in the opening that is superposed on the bus line may be inclined by the electric field produced between the bus line and the counter electrode, the opening that is superposed on the bus line is blocked from light if the bus line is made of a light-blocking material. Therefore, in the liquid crystal display device of the present invention, the occurrence of light leakage is suppressed, thereby suppressing the decrease in the contrast ratio, if the bus line is made of a light-blocking material.

[0047] Moreover, if the bus line is made of a light-blocking material, it is possible to suppress the non-uniformity in the display plane (i.e., a local variation in the contrast ratio), as will be described below, thereby improving the display quality.

[0048] A residual charge is likely to occur in an opening, through which an insulator material is exposed, due to the inclined electric field produced in the vicinity of the edge of the bus line, and if the liquid crystal molecules in the opening that is located along the bus line are inclined due to the influence of the residual charge, it will cause light

leakage. While the degree of the residual charge varies depending on the surface condition of the insulator material, variations in the surface condition of the insulator material occur when printing an alignment film or when injecting a liquid crystal material. Therefore, in a liquid crystal display device, there are variations in the residual charge in the display plane. If the residual charge varies in the display plane, the degree of light leakage also varies in the display plane, thereby causing local variations in the contrast ratio, thus resulting in non-uniformity. Particularly, since a relatively high voltage is applied to the gate bus line, as described above, the gate bus line significantly contributes to the occurrence of the non-uniformity.

[0049] In the liquid crystal display device of the present invention, when the bus line is made of a light-blocking material, the opening that is superposed on the bus line is shaded by the bus line, thereby suppressing the occurrence of the non-uniformity as described above, and thus improving the display quality.

[0050] When at least some of the plurality of openings have substantially the same shape and substantially the same size, and form at least one unit lattice arranged so as to have rotational symmetry, a plurality of liquid crystal domains can be arranged with a high degree of symmetry for each unit lattice, whereby it is possible to improve the viewing angle dependence of the display quality. Moreover, by dividing the entire picture element region into unit lattices, it is possible to stabilize the orientation of the liquid crystal layer across the entire picture element region. For example, openings may be arranged so that the centers of the openings form a square lattice. Note that where each picture element region is divided by an opaque element such as a storage capacitance line, a unit lattice can be arranged for each region contributing to the display.

[0051] When the shape of each of at least some of the plurality of openings (typically those forming a unit lattice) has rotational symmetry, it is possible to increase the stability of the radially-inclined orientation of the liquid crystal domain formed in the opening. For example, the shape of each opening (as viewed in the substrate normal direction) may be a circular shape or a regular polygonal shape (e.g., a square shape). Note that a shape that does not have rotational symmetry (e.g., an elliptical shape) may be employed depending upon the shape (aspect ratio) of the picture element, etc. Moreover, when the shape of a region of the solid portion that is substantially surrounded by the openings ("unit solid portion") has rotational symmetry, it is possible to increase the stability of the radially-inclined orientation of the liquid crystal domain formed in the solid portion. For example, when the openings are arranged in a square lattice pattern, the shape of the opening may be a generally star shape or a cross shape, and the shape of the solid portion may be a generally circular shape, a generally square shape, or the like. Of course, the openings and the solid portion substantially surrounded by the openings may both have a generally square shape.

[0052] In order to stabilize the radially-inclined orientation of the liquid crystal domain formed in the electrode opening, it is preferred that the liquid crystal domain formed in the opening has a generally circular shape. In other words, the shape of the opening may be designed so that the liquid crystal domain formed in the opening has a generally circular shape.

[0053] Of course, in order to stabilize the radially-inclined orientation of the liquid crystal domain formed in the electrode solid portion, it is preferred that the region of the solid portion substantially surrounded by the openings has a generally circular shape. A liquid crystal domain formed in the solid portion, which is made of a continuous conductive film, is formed corresponding to a region of a solid portion (unit solid portion) that is substantially surrounded by a plurality of openings. Therefore, the shape and arrangement of the openings may be determined so that the region of the solid portion (unit solid portion) has a generally circular shape.

[0054] With any of the alternatives described above, it is preferred that the total area of the openings formed in the electrode is smaller than the area of the solid portion in each picture element region. As the area of the solid portion increases, the area of the liquid crystal layer (defined in the plane of the liquid crystal layer as viewed in the substrate normal direction) that is directly influenced by the electric field produced by the electrodes increases, thereby improving the optical characteristics (e.g., the transmittance) with respect to the voltage applied across the liquid crystal layer.

[0055] It is preferred that whether to employ an arrangement where each opening has a generally circular shape or an arrangement where each unit solid portion has a generally circular shape is determined by determining with which arrangement, the area of the solid portion can be made larger. Which arrangement is more preferred is appropriately selected depending upon the pitch of the picture elements. Typically, when the pitch is greater than about 25 μm , it is preferred that the openings are formed so that each solid portion has a generally circular shape. When the pitch is less than or equal to about 25 μm , it is preferred that each opening has a generally circular shape.

[0056] The orientation-regulating force from an inclined electric field produced at the edge portion of an opening formed in an electrode described above is present only in the presence of an applied voltage. Therefore, in the absence of an applied voltage or in the presence of a relatively low voltage, it may not be possible to maintain the radially-inclined orientation of a liquid crystal domain if, for example, a stress is applied on the liquid crystal panel. In order to solve this problem, a liquid crystal display device of one embodiment of the present invention includes, within each electrode opening, a protrusion whose side surface has an orientation-regulating force of the same direction with respect to the liquid crystal molecules of the liquid crystal layer as the direction of orientation regulation by the inclined electric field as described above. It is preferred that the cross-sectional shape of the protrusion in the substrate plane direction is the same as that of the opening, and has rotational symmetry as does the shape of the opening as described above.

[0057] With the liquid crystal display device of the present invention, it is possible to realize a stable radially-inclined orientation only by providing openings in each picture element electrode, and by arranging the openings of each picture element electrode in a predetermined positional relationship with the edge of the bus line. Specifically, the liquid crystal display device of the present invention can be produced by a known production method by modifying a photomask in the step of patterning a conductive film into

picture element electrodes so that openings of an intended shape are formed in an intended arrangement, and by modifying a photomask in the step of patterning the bus line so that the bus line is formed in an intended shape.

[0058] In another liquid crystal display device of the present invention, the edge of at least one of the gate bus line and the source bus line is covered by the solid portion of a picture element electrodes. Therefore, in the vicinity of the bus line whose edge is covered by the solid portion of the picture element electrode, the liquid crystal molecules of the liquid crystal layer are electrically shielded from the influence of the inclined electric field produced in the vicinity of the edge of the bus line. Thus, the liquid crystal molecules of the liquid crystal layer are not subject to the orientation-regulating force from the inclined electric field. Therefore, the occurrence of light leakage is suppressed, thereby suppressing the decrease in the contrast ratio. Moreover, since a region in the vicinity of the edge that is covered by the solid portion of a picture element electrode is covered by the conductive film (solid portion) of the picture element electrode, a residual charge is unlikely to occur, and thus the occurrence of non-uniformity is suppressed. As described above, in this liquid crystal display device of the present invention, the occurrence of light leakage due to an inclined electric field produced in the vicinity of the bus line is suppressed, thereby suppressing the decrease in the contrast ratio, while the occurrence of non-uniformity due to a residual charge in the vicinity of the bus line is suppressed, thereby realizing a high-quality display.

[0059] Since an inclined electric field produced in the vicinity of the edge of the gate bus line has a greater influence on the liquid crystal molecules than an inclined electric field produced in the vicinity of the edge of the source bus line, it is preferred that at least the edge of the gate bus line is covered by the solid portion of the picture element electrode. Moreover, in order to more reliably suppress the influence of an inclined electric field produced in the vicinity of the edge of the bus line, it is preferred that the edge of the gate bus line and that of the source bus line are both covered by the solid portion of the picture element electrode.

[0060] In the liquid crystal display device of the present invention, the decrease in the display quality due to the inclined electric field produced in the vicinity of the edge of the bus line is suppressed. Therefore, the present invention provides a liquid crystal display device having a wide viewing angle characteristic and a high display quality.

[0061] The present invention can suitably be used with an active matrix type liquid crystal display device, and can suitably be used with any of a transmission type liquid crystal display device, a reflection type liquid crystal display device, and a transmission/reflection combination type liquid crystal display device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0062] FIG. 1A and FIG. 1B schematically illustrate a structure of one picture element region of a liquid crystal display device 100 according to an embodiment of the present invention, wherein FIG. 1A is a plan view, and FIG. 1B is a cross-sectional view taken along line 1B-1B' of FIG. 1A.

[0063] FIG. 2A and FIG. 2B illustrate a liquid crystal layer 30 of the liquid crystal display device 100 in the presence of an applied voltage thereacross, wherein FIG. 2A schematically illustrates a state where an orientation has just started to change (initial ON state), and FIG. 2B schematically illustrates a steady state.

[0064] Each of FIG. 3A to FIG. 3D schematically illustrates the relationship between an electric force line and an orientation of a liquid crystal molecule.

[0065] Each of FIG. 4A to FIG. 4C schematically illustrates an orientation of liquid crystal molecules in the liquid crystal display device 100 according to an embodiment of the present invention as viewed in a substrate normal direction.

[0066] FIG. 5A to FIG. 5C schematically illustrate exemplary radially-inclined orientations of liquid crystal molecules.

[0067] FIG. 6A and FIG. 6B are plan views schematically illustrating other picture element electrodes used in the liquid crystal display device according to an embodiment of the present invention.

[0068] FIG. 7A and FIG. 7B are plan views schematically illustrating still other picture element electrodes used in the liquid crystal display device according to an embodiment of the present invention.

[0069] FIG. 8A and FIG. 8B are plan views schematically illustrating still other picture element electrodes used in the liquid crystal display device according to an embodiment of the present invention.

[0070] FIG. 9 is a plan view schematically illustrating still another picture element electrode used in the liquid crystal display device according to an embodiment of the present invention.

[0071] FIG. 10A and FIG. 10B are plan views schematically illustrating still other picture element electrodes used in the liquid crystal display device according to an embodiment of the present invention.

[0072] FIG. 11A schematically illustrates a unit lattice of the pattern illustrated in FIG. 1A, FIG. 11B schematically illustrates a unit lattice of the pattern illustrated in FIG. 9, and FIG. 11C is a graph illustrating the relationship between a pitch p and a solid portion area ratio.

[0073] FIG. 12 is a plan view schematically illustrating a structure of one picture element region of the liquid crystal display device 100 according to an embodiment of the present invention.

[0074] FIG. 13 is a plan view schematically illustrating a structure of one picture element region of a liquid crystal display device 700 in which an opening that is located along the bus line is not superposed on the bus line.

[0075] FIG. 14A and FIG. 14B schematically illustrate an orientation of liquid crystal molecules around an opening that is located along a gate bus line of the liquid crystal display device 700, wherein FIG. 14A is a plan view, and FIG. 14B is a cross-sectional view.

[0076] FIG. 15A is a cross-sectional view taken along line 15A-15A' of FIG. 13, and FIG. 15B is a cross-sectional view taken along line 15B-15B' of FIG. 13.

[0077] FIG. 16A and FIG. 16B schematically illustrate an orientation of liquid crystal molecules around an opening that is located along a gate bus line of the liquid crystal display device 100 according to an embodiment of the present invention, wherein FIG. 16A is a plan view, and FIG. 16B is a cross-sectional view.

[0078] FIG. 17 is a plan view schematically illustrating a structure of one picture element region of a liquid crystal display device 100A according to an embodiment of the present invention.

[0079] FIG. 18 is a plan view schematically illustrating a structure of one picture element region of a liquid crystal display device 100B according to an embodiment of the present invention.

[0080] FIG. 19 is a plan view schematically illustrating a structure of one picture element region of a liquid crystal display device 100C according to an embodiment of the present invention.

[0081] FIG. 20 is a plan view schematically illustrating a structure of one picture element region of a liquid crystal display device 100D according to an embodiment of the present invention.

[0082] FIG. 21A is a plan view schematically illustrating a structure of one picture element region of a liquid crystal display device 100E according to an embodiment of the present invention, and FIG. 21B is an enlarged view illustrating a portion around the gate bus line in FIG. 21A.

[0083] FIG. 22A is a plan view schematically illustrating a structure of one picture element region of a liquid crystal display device 100F according to an embodiment of the present invention, and FIG. 22B is an enlarged view illustrating a portion around the gate bus line in FIG. 22A.

[0084] FIG. 23 is a plan view schematically illustrating a structure of one picture element region of a liquid crystal display device 100G according to an embodiment of the present invention.

[0085] FIG. 24A is a plan view schematically illustrating a structure of one picture element region of a liquid crystal display device 100H according to an embodiment of the present invention, and FIG. 24B is an enlarged view illustrating a portion around the gate bus line in FIG. 24A.

[0086] FIG. 25A is a plan view schematically illustrating a structure of one picture element region of a liquid crystal display device 100I according to an embodiment of the present invention, and FIG. 25B is an enlarged view illustrating a portion around the gate bus line in FIG. 25A.

[0087] FIG. 26A and FIG. 26B schematically illustrate a structure of one picture element region of a liquid crystal display device 200 according to an alternative embodiment of the present invention, wherein FIG. 26A is a plan view, and FIG. 26B is a cross-sectional view taken along line 26B-26B' of FIG. 26A.

[0088] FIG. 27A to FIG. 27D schematically illustrate the relationship between an orientation of liquid crystal molecules 30a and a surface configuration having a vertical alignment layer.

[0089] FIG. 28A and FIG. 28B illustrate a liquid crystal layer 30 of the liquid crystal display device 200 in the

presence of an applied voltage thereacross, wherein FIG. 28A schematically illustrates a state where an orientation has just started to change (initial ON state), and FIG. 28B schematically illustrates a steady state.

[0090] FIG. 29A to FIG. 29C are cross-sectional views schematically illustrating liquid crystal display devices 200A, 200B and 200C, respectively, of an alternative embodiment, having different positional relationships between an opening and a protrusion.

[0091] FIG. 30 is a cross-sectional view schematically illustrating the liquid crystal display device 200 taken along line 30A-30A' of FIG. 26A.

[0092] FIG. 31A and FIG. 31B schematically illustrate a structure of one picture element region of a liquid crystal display device 200D according to an alternative embodiment of the present invention, wherein FIG. 31A is a plan view, and FIG. 31B is a cross-sectional view taken along line 31B-31B' of FIG. 31A.

[0093] FIG. 32A to FIG. 32C are cross-sectional views schematically illustrating one picture element region of a liquid crystal display device 300 having a two-layer electrode, wherein FIG. 32A illustrates a state in the absence of an applied voltage, FIG. 32B illustrates a state where an orientation has just started to change (initial ON state), and FIG. 32C illustrates a steady state.

[0094] FIG. 33A and FIG. 33B are cross-sectional views schematically illustrating one picture element region of a liquid crystal display device 400 having a protrusion on a counter substrate, wherein FIG. 33A is a plan view, and FIG. 33B is a cross-sectional view taken along line 33B-33B' of FIG. 33A.

[0095] FIG. 34A to FIG. 34C are cross-sectional views schematically illustrating one picture element region of the liquid crystal display device 400, wherein FIG. 34A illustrates a state in the absence of an applied voltage, FIG. 34B illustrates a state where an orientation has just started to change (initial ON state), and FIG. 34C illustrates a steady state.

[0096] FIG. 35 is a plan view schematically illustrating a structure of one picture element region of another liquid crystal display device 400A having a protrusion on a counter substrate.

[0097] FIG. 36 is a plan view schematically illustrating a structure of one picture element region of another liquid crystal display device 400B having a protrusion on a counter substrate.

[0098] FIG. 37 is a plan view schematically illustrating a structure of one picture element region of another liquid crystal display device 400C having a protrusion on a counter substrate.

[0099] FIG. 38A and FIG. 38B schematically illustrate a structure of one picture element region of a liquid crystal display device 500 according to another alternative embodiment of the present invention, wherein FIG. 38A is a plan view, and FIG. 38B is a cross-sectional view taken along line 38B-38B' of FIG. 38A.

[0100] FIG. 39 is a plan view schematically illustrating a liquid crystal display device 800, in which a portion of an edge of a gate bus line is not covered by a solid portion of a picture element region.

[0101] FIG. 40 is a plan view schematically illustrating a structure of one picture element region of a liquid crystal display device 500A according to another alternative embodiment of the present invention.

[0102] FIG. 41 is a plan view schematically illustrating a structure of one picture element region of a liquid crystal display device 500B according to another alternative embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0103] Embodiments of the present invention will now be described with reference to the drawings.

[0104] First, the electrode structure of the liquid crystal display device of the present invention and the function thereof will be described. The preferred embodiments of the present invention will be hereinafter described with respect to an active matrix type liquid crystal display device using thin film transistors (TFTs). Moreover, while the preferred embodiments of the present invention will be described with respect to a transmission type liquid crystal display device, the present invention can alternatively be used with a reflection type liquid crystal display device or a transmission/reflection combination type liquid crystal display device.

[0105] Note that in the present specification, a region of a liquid crystal display device corresponding to a "picture element", which is the minimum unit of display, will be referred to as a "picture element region". In a color liquid crystal display device, R, G and B "picture elements" correspond to one "pixel". In an active matrix type liquid crystal display device, a picture element region is defined by a picture element electrode and a counter electrode which opposes the picture element electrode. In an arrangement with a black matrix, strictly speaking, a picture element region is a portion of each region across which a voltage is applied according to the intended display state which corresponds to an opening of the black matrix.

[0106] A structure of one picture element region of a liquid crystal display device 100 according to an embodiment of the present invention will be described with reference to FIG. 1A and FIG. 1B. In the following description, a color filter and a black matrix are omitted for the sake of simplicity. Moreover, in subsequent figures, each element having substantially the same function as the corresponding element in the liquid crystal display device 100 will be denoted by the same reference numeral and will not be further described below. FIG. 1A is a plan view as viewed in the substrate normal direction, and FIG. 1B is a cross-sectional view taken along line 1B-1B' of FIG. 1A. FIG. 1B illustrates a state where no voltage is applied across a liquid crystal layer.

[0107] The liquid crystal display device 100 includes an active matrix substrate (hereinafter referred to as a "TFT substrate") 100a, a counter substrate (referred to also as a "color filter substrate") 100b, and a liquid crystal layer 30 provided between the TFT substrate 100a and the counter substrate 100b. Liquid crystal molecules 30a of the liquid crystal layer 30 have a negative dielectric anisotropy, and are aligned vertical to the surface of the vertical alignment film, as illustrated in FIG. 1B, in the absence of an applied

voltage across the liquid crystal layer 30 by virtue of a vertical alignment film (not shown), as a vertical alignment layer, which is provided on one surface of each of the TFT substrate 100a and the counter substrate 100b that is closer to the liquid crystal layer 30. This state is described as the liquid crystal layer 30 being in a vertical alignment. Note, however, that the liquid crystal molecules 30a of the liquid crystal layer 30 in a vertical alignment may slightly incline from the normal to the surface of the vertical alignment film (the surface of the substrate) depending upon the type of vertical alignment film or the type of liquid crystal material used. Generally, a vertical alignment is defined as a state where the axis of the liquid crystal molecules (referred to also as the "axial orientation") is oriented at an angle of about 85° or more with respect to the surface of the vertical alignment film.

[0108] The TFT substrate 100a of the liquid crystal display device 100 includes a transparent substrate (e.g., a glass substrate) 11 and a picture element electrode 14 provided on the surface of the transparent substrate 11. The counter substrate 100b includes a transparent substrate (e.g., a glass substrate) 21 and a counter electrode 22 provided on the surface of the transparent substrate 21. The orientation of the liquid crystal layer 30 changes for each picture element region according to the voltage applied between the picture element electrode 14 and the counter electrode 22 which are arranged so as to oppose each other via the liquid crystal layer 30. A display is produced by utilizing a phenomenon that the polarization or amount of light passing through the liquid crystal layer 30 changes along with the change in the orientation of the liquid crystal layer 30.

[0109] The picture element electrode 14 of the liquid crystal display device 100 includes a plurality of openings 14a and a solid portion 14b. The opening 14a refers to a portion of the picture element electrode 14 made of a conductive film (e.g., an ITO film) from which the conductive film has been removed, and the solid portion 14b refers to a portion thereof where the conductive film is present (the portion other than the openings 14a). While a plurality of openings 14a are formed for each picture element electrode, the solid portion 14b is basically made of a single continuous conductive film.

[0110] The openings 14a are arranged so that the respective centers thereof form a square lattice, and a unit solid portion 14b' (defined as a portion of the solid portion 14b that is substantially surrounded by four openings 14a whose respective centers are located at the four lattice points that form one unit lattice) has a generally circular shape. Each opening 14a has a generally star shape having four quarter-arc-shaped sides (edges) with a four-fold rotation axis at the center among the four sides. In order to stabilize the orientation across the entire picture element region, the unit lattices preferably exist up to the periphery of the picture element electrode 14. Specifically, a peripheral portion of the picture element electrode 14 is preferably patterned, as illustrated in the figure, into a shape that corresponds to a generally half piece of the opening 14a (in a peripheral portion of the picture element electrode 14 along a side thereof) or into a shape that corresponds to a generally quarter piece of the opening 14a (in a peripheral portion of the picture element electrode 14 at a corner thereof), so that the opening 14a is also provided along the periphery of the picture element electrode 14.

[0111] The openings **14a** located in the central portion of the picture element region have generally the same shape and size. The unit solid portions **14b** located respectively in unit lattices formed by the openings **14a** are generally circular in shape, and have generally the same shape and size. Each unit solid portion **14b** is connected to adjacent unit solid portions **14b**, thereby forming the solid portion **14b** which substantially functions as a single conductive film.

[0112] When a voltage is applied between the picture element electrode **14** having such a structure as described above and the counter electrode **22**, an inclined electric field is produced at the edge portion of each opening **14a**, thereby producing a plurality of liquid crystal domains each having a radially-inclined orientation. The liquid crystal domain is produced in each region corresponding to the opening **14a** and in each region corresponding to the unit solid portion **14b** in a unit lattice.

[0113] While the picture element electrode **14** having a square shape is illustrated herein, the shape of the picture element electrode **14** is not limited to this. A typical shape of the picture element electrode **14** can be approximated to a rectangular shape (including a square and an oblong rectangle), whereby the openings **14a** can be regularly arranged therein in a square lattice pattern. Even when the picture element electrode **14** has a shape other than a rectangular shape, the effects of the present invention can be obtained as long as the openings **14a** are arranged in a regular manner (e.g., in a square lattice pattern as illustrated herein) so that liquid crystal domains are formed in all regions in the picture element region.

[0114] The mechanism by which liquid crystal domains are formed by an inclined electric field as described above will be described with reference to **FIG. 2A** and **FIG. 2B**. Each of **FIG. 2A** and **FIG. 2B** illustrates the liquid crystal layer **30** illustrated in **FIG. 1B** with a voltage being applied thereacross. **FIG. 2A** schematically illustrates a state where the orientation of the liquid crystal molecules **30a** has just started to change (initial ON state) according to the voltage applied across the liquid crystal layer **30**. **FIG. 2B** schematically illustrates a state where the orientation of the liquid crystal molecules **30a** has changed and become steady according to the applied voltage. Curves **EQ** in **FIG. 2A** and **FIG. 2B** denote equipotential lines.

[0115] As illustrated in **FIG. 1A**, when the picture element electrode **14** and the counter electrode **22** are at the same potential (a state where no voltage is applied across the liquid crystal layer **30**), the liquid crystal molecules **30a** in each picture element region are aligned vertical to the surfaces of the substrates **11** and **21**.

[0116] When a voltage is applied across the liquid crystal layer **30**, a potential gradient represented by the equipotential lines **EQ** shown in **FIG. 2A** (perpendicular to the electric force line) is produced. The equipotential lines **EQ** are parallel to the surface of the solid portion **14b** and the counter electrode **22** in the liquid crystal layer **30** located between the solid portion **14b** of the picture element electrode **14** and the counter electrode **22**, and drop in a region corresponding to the opening **14a** of the picture element electrode **14**. An inclined electric field represented by an inclined portion of the equipotential lines **EQ** is produced in the liquid crystal layer **30** above an edge portion **EG** of the

opening **14a** (the peripheral portion of and within the opening **14a** including the boundary thereof).

[0117] A torque acts upon the liquid crystal molecules **30a** having a negative dielectric anisotropy so as to direct the axial orientation of the liquid crystal molecules **30a** to be parallel to the equipotential lines **EQ** (perpendicular to the electric force line). Therefore, the liquid crystal molecules **30a** above the right edge portion **EG** in **FIG. 2A** incline (rotate) clockwise and the liquid crystal molecules **30a** above the left edge portion **EG** incline (rotate) counterclockwise as indicated by arrows in **FIG. 2A**. As a result, the liquid crystal molecules **30a** above the edge portions **EG** are oriented parallel to the corresponding portions of the equipotential lines **EQ**.

[0118] Referring to **FIG. 3A** to **FIG. 3D**, the change in the orientation of the liquid crystal molecules **30a** will now be described in greater detail.

[0119] When an electric field is produced in the liquid crystal layer **30**, a torque acts upon the liquid crystal molecules **30a** having a negative dielectric anisotropy so as to direct the axial orientation thereof to be parallel to an equipotential line **EQ**. As illustrated in **FIG. 3A**, when an electric field represented by an equipotential line **EQ** perpendicular to the axial orientation of the liquid crystal molecule **30a** is produced, either a torque urging the liquid crystal molecule **30a** to incline clockwise or a torque urging the liquid crystal molecule **30a** to incline counterclockwise occurs with the same probability. Therefore, the liquid crystal layer **30** between the pair of parallel plate-shape electrodes opposing each other has some liquid crystal molecules **30a** that are subject to a clockwise torque and some other liquid crystal molecules **30a** that are subject to a counterclockwise torque. As a result, the transition to the intended orientation according to the voltage applied across the liquid crystal layer **30** may not proceed smoothly.

[0120] When an electric field represented by a portion of the equipotential lines **EQ** inclined with respect to the axial orientation of the liquid crystal molecules **30a** (an inclined electric field) is produced at the edge portion **EG** of the opening **14a** of the liquid crystal display device **100** of the present invention, as illustrated in **FIG. 2A**, the liquid crystal molecules **30a** incline in whichever direction (the counterclockwise direction in the illustrated example) that requires less rotation for the liquid crystal molecules **30a** to be parallel to the equipotential line **EQ**, as illustrated in **FIG. 3B**. The liquid crystal molecules **30a** in a region where an electric field represented by an equipotential line **EQ** perpendicular to the axial orientation of the liquid crystal molecules **30a** is produced incline in the same direction as the liquid crystal molecules **30a** located on the inclined portion of the equipotential lines **EQ** so that the orientation thereof is continuous (in conformity) with the orientation of the liquid crystal molecules **30a** located on the inclined portion of the equipotential lines **EQ** as illustrated in **FIG. 3C**. As illustrated in **FIG. 3D**, when an electric field such that the equipotential line **EQ** forms a continuous concave/convex pattern, the liquid crystal molecules **30a** located on a flat portion of the equipotential line **EQ** are oriented so as to conform with the orientation direction defined by the liquid crystal molecules **30a** located on adjacent inclined portions of the equipotential line **EQ**. The phrase "being

located on an equipotential line EQ" as used herein means "being located within an electric field that is represented by the equipotential line EQ".

[0121] The change in the orientation of the liquid crystal molecules **30a**, starting from those that are located on the inclined portion of the equipotential lines EQ, proceeds as described above and reaches a steady state, which is schematically illustrated in **FIG. 2B**. The liquid crystal molecules **30a** located around the central portion of the opening **14a** are influenced substantially equally by the respective orientations of the liquid crystal molecules **30a** at the opposing edge portions EG of the opening **14a**, and therefore retain their orientation perpendicular to the equipotential lines EQ. The liquid crystal molecules **30a** away from the center of the opening **14a** incline by the influence of the orientation of other liquid crystal molecules **30a** at the closer edge portion EG, thereby forming an inclined orientation that is symmetric about the center SA of the opening **14a**. The orientation as viewed in a direction perpendicular to the display plane of the liquid crystal display device **100** (a direction perpendicular to the surfaces of the substrates **11** and **21**) is a state where the liquid crystal molecules **30a** have a radial axial orientation (not shown) about the center of the opening **14a**. In the present specification, such an orientation will be referred to as a "radially-inclined orientation". Moreover, a region of the liquid crystal layer that takes a radially-inclined orientation about a single axis will be referred to as a "liquid crystal domain".

[0122] A liquid crystal domain in which the liquid crystal molecules **30a** take a radially-inclined orientation is formed also in a region corresponding to the unit solid portion **14b'** substantially surrounded by the openings **14a**. The liquid crystal molecules **30a** in a region corresponding to the unit solid portion **14b'** are influenced by the orientation of the liquid crystal molecules **30a** at each edge portion EG of the opening **14a** so as to take a radially-inclined orientation that is symmetric about the center SA of the unit solid portion **14b'** (corresponding to the center of a unit lattice formed by the openings **14a**).

[0123] The radially-inclined orientation in a liquid crystal domain formed in the unit solid portion **14b'** and the radially-inclined orientation formed in the opening **14a** are continuous with each other, and are both in conformity with the orientation of the liquid crystal molecules **30a** at the edge portion EG of the opening **14a**. The liquid crystal molecules **30a** in the liquid crystal domain formed in the opening **14a** are oriented in the shape of a cone that spreads upwardly (toward the substrate **100b**), and the liquid crystal molecules **30a** in the liquid crystal domain formed in the unit solid portion **14b'** are oriented in the shape of a cone that spreads downwardly (toward the substrate **100a**). As described above, the radially-inclined orientation in a liquid crystal domain formed in the opening **14a** and that in a liquid crystal domain formed in the unit solid portion **14b'** are continuous with each other. Therefore, no disclination line (orientation defect) is formed along the boundary therebetween, thereby preventing a decrease in the display quality due to occurrence of a disclination line.

[0124] In order to improve the viewing angle dependence, which is a display quality of a liquid crystal display device, in all azimuth angles, the existence probabilities of the liquid crystal molecules **30a** oriented in various azimuth angle

directions preferably have rotational symmetry, and more preferably have axial symmetry, in each picture element region. In other words, the liquid crystal domain formed across the entire picture element region preferably has rotational symmetry, and more preferably has axial symmetry. Note, however, that rotational symmetry may not be necessary across the entire picture element region, but it may be sufficient that each picture element region in the liquid crystal layer is formed as a collection of a plurality of groups of liquid crystal domains that are arranged so that each group has rotational symmetry (or axial symmetry) (e.g., a plurality of groups of liquid crystal domains, wherein each group of liquid crystal domains are arranged in a square lattice pattern). Therefore, the arrangement of the openings **14a** formed in a picture element region may not need to have rotational symmetry across the entire picture element region, but it may be sufficient that the arrangement can be represented as a collection of a plurality of groups of openings that are arranged so that each group has rotational symmetry (or axial symmetry) (e.g., a plurality of groups of openings, wherein each group of openings are arranged in a square lattice pattern). Of course, this similarly applies to the arrangement of the unit solid portions **14b'** substantially surrounded by the openings **14a**. Moreover, since the shape of each liquid crystal domain preferably has rotational symmetry, and more preferably axial symmetry, the shape of each opening **14a** and each unit solid portion **14b'** preferably has rotational symmetry, and more preferably axial symmetry.

[0125] Note that a sufficient voltage may not be applied across the liquid crystal layer **30** around the central portion of the opening **14a**, whereby the liquid crystal layer **30** around the central portion of the opening **14a** does not contribute to the display. In other words, even if the radially-inclined orientation of the liquid crystal layer **30** around the central portion of the opening **14a** is disturbed to some extent (e.g., even if the central axis is shifted from the center of the opening **14a**), the display quality may not be decreased. Therefore, it may be sufficient that at least the liquid crystal domain formed corresponding to a unit solid portion **14b'** is arranged to have rotational symmetry, and more preferably axial symmetry.

[0126] As described above with reference to **FIG. 2A** and **FIG. 2B**, the picture element electrode **14** of the liquid crystal display device **100** of the present invention includes a plurality of openings **14a** and produces, in the liquid crystal layer **30** in the picture element region, an electric field represented by equipotential lines EQ having inclined portions. The liquid crystal molecules **30a** having a negative dielectric anisotropy in the liquid crystal layer **30**, which are in a vertical alignment in the absence of an applied voltage, change the orientation direction thereof, with the change in the orientation of those liquid crystal molecules **30a** located on the inclined portion of the equipotential lines EQ serving as a trigger. Thus, a liquid crystal domain having a stable radially-inclined orientation is formed in the opening **14a** and in the solid portion **14b**. A display is produced by the change in the orientation of the liquid crystal molecules in the liquid crystal domain according to the voltage applied across the liquid crystal layer.

[0127] The shape (as viewed in the substrate normal direction) and arrangement of the openings **14a** of the

picture element electrode **14** of the liquid crystal display device **100** of the present embodiment will be described.

[0128] The display characteristics of a liquid crystal display device exhibit an azimuth angle dependence due to the orientation (optical anisotropy) of the liquid crystal molecules. In order to reduce the azimuth angle dependence of the display characteristics, it is preferred that the liquid crystal molecules are oriented in all azimuth angles with substantially the same probability. More preferably, the liquid crystal molecules in each picture element region are oriented in all azimuth angles with substantially the same probability. Therefore, the opening **14a** preferably has a shape such that liquid crystal domains are formed in each picture element region so that the liquid crystal molecules **30a** in the picture element region are oriented in all azimuth angles with substantially the same probability. More specifically, the shape of the opening **14a** preferably has rotational symmetry (more preferably symmetry with at least a two-fold rotation axis) about a symmetry axis extending through the center of each opening (in the normal direction). It is also preferred that the plurality of openings **14a** are arranged so as to have rotational symmetry. Moreover, it is preferred that the shape of the unit solid portion **14b'** which is substantially surrounded by these openings also has rotational symmetry. It is also preferred that the unit solid portions **14b'** are arranged so as to have rotational symmetry.

[0129] However, it may not be necessary to arrange the openings **14a** or the unit solid portions **14b'** so as to have rotational symmetry across the entire picture element region. The liquid crystal molecules can be oriented in all azimuth angles with substantially the same probability across the entire picture element region when, for example, a square lattice (having symmetry with a four-fold rotation axis) is used as the minimum unit, and the picture element region is formed by such square lattices, as illustrated in FIG. 1A.

[0130] The orientation of the liquid crystal molecules **30a** when the generally star-shaped openings **14a** having rotational symmetry and the generally circular unit solid portions **14b'** are arranged in a square lattice pattern, as illustrated in FIG. 1A, will be described with reference to FIG. 4A to FIG. 4C.

[0131] Each of FIG. 4A to FIG. 4C schematically illustrates an orientation of the liquid crystal molecules **30a** as viewed in the substrate normal direction. In figures, such as FIG. 4B and FIG. 4C, illustrating the orientation of the liquid crystal molecules **30a** as viewed in the substrate normal direction, a black-spotted end of the liquid crystal molecule **30a** drawn as an ellipse indicates that the liquid crystal molecule **30a** is inclined so that the end is closer than the other end to the substrate on which the picture element electrode **14** having the opening **14a** is provided. This similarly applies to all of the subsequent figures. A single unit lattice (which is formed by four openings **14a**) in the picture element region illustrated in FIG. 1A will be described below. Cross-sectional views taken along the respective diagonals of FIG. 4A to FIG. 4C correspond to FIG. 1B, FIG. 2A and FIG. 2B, respectively, and FIG. 1B, FIG. 2A and FIG. 2B will also be referred to in the following description.

[0132] When the picture element electrode **14** and the counter electrode **22** are at the same potential, i.e., in a state where no voltage is applied across the liquid crystal layer **30**,

the liquid crystal molecules **30a** whose orientation direction is regulated by the vertical alignment layer (not shown) which is provided on one side of each of the TFT substrate **100a** and the counter substrate **100b** that is closer to the liquid crystal layer **30** take a vertical alignment as illustrated in FIG. 4A.

[0133] When an electric field is applied across the liquid crystal layer **30** so as to produce an electric field represented by equipotential lines **EQ** shown in FIG. 2A, a torque acts upon the liquid crystal molecules **30a** having a negative dielectric anisotropy so as to direct the axial orientation thereof to be parallel to the equipotential lines **EQ**. As described above with reference to FIG. 3A and FIG. 3B, for the liquid crystal molecules **30a** under an electric field represented by equipotential lines **EQ** perpendicular to the molecular axis thereof, the direction in which the liquid crystal molecules **30a** are to incline (rotate) is not uniquely defined (FIG. 3A), whereby the orientation change (inclination or rotation) does not easily occur. In contrast, for the liquid crystal molecules **30a** placed under equipotential lines **EQ** inclined with respect to the molecular axis of the liquid crystal molecules **30a**, the direction of inclination (rotation) is uniquely defined, whereby the orientation change easily occurs. Therefore, as illustrated in FIG. 4B, the liquid crystal molecules **30a** start inclining from the edge portion of the opening **14a** where the molecular axis of the liquid crystal molecules **30a** is inclined with respect to the equipotential lines **EQ**. Then, the surrounding liquid crystal molecules **30a** incline so as to conform with the orientation of the already-inclined liquid crystal molecules **30a** at the edge portion of the opening **14a**, as described above with reference to FIG. 3C. Then, the axial orientation of the liquid crystal molecules **30a** becomes stable as illustrated in FIG. 4C (radially-inclined orientation).

[0134] As described above, when the shape of the opening **14a** has rotational symmetry, the liquid crystal molecules **30a** in the picture element region successively incline, starting from the edge portion of the opening **14a** toward the center of the opening **14a** upon application of a voltage. As a result, there is obtained an orientation in which those liquid crystal molecules **30a** around the center of the opening **14a**, where the respective orientation-regulating forces from the liquid crystal molecules **30a** at the edge portions are in equilibrium, remain in a vertical alignment with respect to the substrate plane, while the surrounding liquid crystal molecules **30a** are inclined in a radial pattern about those liquid crystal molecules **30a** around the center of the opening **14a**, with the degree of inclination gradually increasing away from the center of the opening **14a**.

[0135] The liquid crystal molecules **30a** in a region corresponding to the generally circular unit solid portion **14b'** which is surrounded by the four generally star-shaped openings **14a** arranged in a square lattice pattern also incline so as to conform with the orientation of the liquid crystal molecules **30a** which have been inclined by an inclined electric field produced at the edge portion of each opening **14a**. As a result, there is obtained an orientation in which those liquid crystal molecules **30a** around the center of the unit solid portion **14b'**, where the respective orientation-regulating forces from the liquid crystal molecules **30a** at the edge portions are in equilibrium, remain in a vertical alignment with respect to the substrate plane, while the surrounding liquid crystal molecules **30a** are inclined in a radial

pattern about those liquid crystal molecules **30a** around the center of the unit solid portion **14b'**, with the degree of inclination gradually increasing away from the center of the unit solid portion **14b'**.

[0136] As described above, when liquid crystal domains in each of which the liquid crystal molecules **30a** take a radially-inclined orientation are arranged in a square lattice pattern across the entire picture element region, the existence probabilities of the liquid crystal molecules **30a** of the respective axial orientations have rotational symmetry, whereby it is possible to realize a high-quality display without non-uniformity for any viewing angle. In order to reduce the viewing angle dependence of a liquid crystal domain having a radially-inclined orientation, the liquid crystal domain preferably has a high degree of rotational symmetry (preferably with at least a two-fold rotation axis, and more preferably with at least a four-fold rotation axis). Moreover, in order to reduce the viewing angle dependence across the entire picture element region, the plurality of liquid crystal domains provided in the picture element region are preferably arranged in a pattern (e.g., a square lattice pattern) that is a combination of a plurality of unit patterns (e.g., unit lattice patterns) each having a high degree of rotational symmetry (preferably with at least a two-fold rotation axis, and more preferably with at least a four-fold rotation axis).

[0137] For the radially-inclined orientation of the liquid crystal molecules **30a**, a radially-inclined orientation having a counterclockwise or clockwise spiral pattern as illustrated in **FIG. 5B** or **FIG. 5C**, respectively, is more stable than the simple radially-inclined orientation as illustrated in **FIG. 5A**. The spiral orientation is different from a normal twist orientation (in which the orientation direction of the liquid crystal molecules **30a** spirally changes along the thickness of the liquid crystal layer **30**). In the spiral orientation, the orientation direction of the liquid crystal molecules **30a** does not substantially change along the thickness of the liquid crystal layer **30** for a minute region. In other words, the orientation in a cross section (in a plane parallel to the layer plane) at any thickness of the liquid crystal layer **30** is as illustrated in **FIG. 5B** or **FIG. 5C**, with substantially no twist deformation along the thickness of the liquid crystal layer **30**. For a liquid crystal domain as a whole, however, there may be a certain degree of twist deformation.

[0138] When a material obtained by adding a chiral agent to a nematic liquid crystal material having a negative dielectric anisotropy is used, the liquid crystal molecules **30a** take a radially-inclined orientation of a counterclockwise or clockwise spiral pattern about the opening **14a** and the unit solid portion **14b'**, as illustrated in **FIG. 5B** or **FIG. 5C**, respectively, in the presence of an applied voltage. Whether the spiral pattern is counterclockwise or clockwise is determined by the type of chiral agent used. Thus, by controlling the liquid crystal layer **30** in the opening **14a** into a radially-inclined orientation of a spiral pattern in the presence of an applied voltage, the direction of the spiral pattern of the radially-inclined liquid crystal molecules **30a** about other liquid crystal molecules **30a** standing vertical to the substrate plane can be constant in all liquid crystal domains, whereby it is possible to realize a uniform display without display non-uniformity. Since the direction of the spiral pattern around the liquid crystal molecules **30a** stand-

ing vertical to the substrate plane is definite, the response speed upon application of a voltage across the liquid crystal layer **30** is also improved.

[0139] Moreover, when a chiral agent is added, the orientation of the liquid crystal molecules **30a** changes in a spiral pattern along the thickness of the liquid crystal layer **30** as in a normal twist orientation. In an orientation where the orientation of the liquid crystal molecules **30a** does not change in a spiral pattern along the thickness of the liquid crystal layer **30**, the liquid crystal molecules **30a** which are oriented perpendicular or parallel to the polarization axis of the polarization plate do not give a phase difference to the incident light, whereby incident light passing through a region of such an orientation does not contribute to the transmittance. In contrast, in an orientation where the orientation of the liquid crystal molecules **30a** changes in a spiral pattern along the thickness of the liquid crystal layer **30**, the liquid crystal molecules **30a** that are oriented perpendicular or parallel to the polarization axis of the polarization plate also give a phase difference to the incident light, and the optical rotatory power can also be utilized, whereby incident light passing through a region of such an orientation also contributes to the transmittance. Thus, it is possible to obtain a liquid crystal display device capable of producing a bright display.

[0140] **FIG. 1A** illustrates an example in which each opening **14a** has a generally star shape and each unit solid portion **14b'** has a generally circular shape, wherein such openings **14a** and such unit solid portions **14b'** are arranged in a square lattice pattern. However, the shape of the opening **14a**, the shape of the unit solid portion **14b'**, and the arrangement thereof are not limited to those of the example above.

[0141] **FIG. 6A** and **FIG. 6B** are plan views respectively illustrating picture element electrodes **14A** and **14B** having respective openings **14a** and unit solid portions **14b'** of different shapes.

[0142] The openings **14a** and the unit solid portions **14b'** of the picture element electrodes **14A** and **14B** illustrated in **FIG. 6A** and **FIG. 6B**, respectively, are slightly distorted from those of the picture element electrode illustrated in **FIG. 1A**. The openings **14a** and the unit solid portions **14b'** of the picture element electrodes **14A** and **14B** have a two-fold rotation axis (not a four-fold rotation axis) and are regularly arranged so as to form oblong rectangular unit lattices. In both of the picture element electrodes **14A** and **14B**, the opening **14a** has a distorted star shape, and the unit solid portion **14b'** has a generally elliptical shape (a distorted circular shape). Also with the picture element electrodes **14A** and **14B**, it is possible to obtain a liquid crystal display device having a high display quality and a desirable viewing angle characteristic.

[0143] Moreover, picture element electrodes **14C** and **14D** as illustrated in **FIG. 7A** and **FIG. 7B**, respectively, may alternatively be used.

[0144] In the picture element electrodes **14C** and **14D**, generally cross-shaped openings **14a** are arranged in a square lattice pattern so that each unit solid portion **14b'** has a generally square shape. Of course, the patterns of the picture element electrodes **14C** and **14D** may be distorted so that there are oblong rectangular unit lattices. As described

above, it is possible to obtain a liquid crystal display device having a high display quality and a desirable viewing angle characteristic alternatively by regularly arranging the generally rectangular (including a square and oblong rectangle) unit solid portions $14b'$.

[0145] However, the shape of the opening $14a$ and/or the unit solid portion $14b'$ is preferably a circle or an ellipse, rather than a rectangle, so that a radially-inclined orientation is more stable. It is believed that a radially-inclined orientation is more stable with a circular or elliptical opening and/or unit solid portion because the edge of the opening $14a$ is more continuous (smooth), whereby the orientation direction of the liquid crystal molecules $30a$ changes more continuously (smoothly).

[0146] In view of the continuity of the orientation direction of the liquid crystal molecules $30a$ described above, picture element electrodes $14E$ and $14F$ as illustrated in **FIG. 8A** and **FIG. 8B**, respectively, are also desirable. The picture element electrode $14E$ illustrated in **FIG. 8A** is a variation of the picture element electrode 14 illustrated in **FIG. 1A** in which each opening $14a$ is simply comprised of four arcs. The picture element electrode $14F$ illustrated in **FIG. 8B** is a variation of the picture element electrode $14D$ illustrated in **FIG. 7B** in which each side of the opening $14a$ on the unit solid portion $14b'$ is an arc. In both of the picture element electrodes $14E$ and $14F$, the openings $14a$ and the unit solid portions $14b'$ have a four-fold rotation axis and are arranged in a square lattice pattern (having a four-fold rotation axis). Alternatively, the shape of the unit solid portion $14b'$ of the opening $14a$ may be distorted into a shape having a two-fold rotation axis, and such unit solid portions $14b'$ may be arranged so as to form oblong rectangular lattices (having a two-fold rotation axis), as illustrated in **FIG. 6A** and **FIG. 6B**.

[0147] In the examples described above, the openings $14a$ are generally star-shaped or generally cross-shaped, and the unit solid portions $14b'$ are generally circular, generally elliptical, generally square (rectangular), and generally rectangular with rounded corners. Alternatively, the negative-positive relationship between the openings $14a$ and the unit solid portions $14b'$ may be inverted (hereinafter, the inversion of the negative-positive relationship between the openings $14a$ and the unit solid portions $14b'$ will be referred to simply as "inversion"). For example, **FIG. 9** illustrates a picture element electrode $14G$ having a pattern obtained by inverting the negative-positive relationship between the openings $14a$ and the unit solid portions $14b'$ of the picture element electrode 14 illustrated in **FIG. 1A**. The picture element electrode $14G$ having an inverted pattern has substantially the same function as that of the picture element electrode 14 illustrated in **FIG. 1A**. When the opening $14a$ and the unit solid portion $14b'$ both have a generally square shape, as in picture element electrodes $14H$ and $14I$ illustrated in **FIG. 10A** and **FIG. 10B**, respectively, the inverted pattern may be substantially the same as the original pattern.

[0148] Also when the pattern illustrated in **FIG. 1A** is inverted as in the pattern illustrated in **FIG. 9**, it is preferred to form partial pieces (generally half or quarter pieces) of the opening $14a$ so as to form the unit solid portions $14b'$ having rotational symmetry at the edge portion of the picture element electrode 14 . By employing such a pattern, the effect of an inclined electric field can be obtained at the edge

portion of a picture element region as in the central portion of the picture element region, whereby it is possible to realize a stable radially-inclined orientation across the entire picture element region.

[0149] Next, which one of two inverted patterns should be employed will be discussed with respect to the picture element electrode 14 of **FIG. 1A** and the picture element electrode $14G$ illustrated in **FIG. 9** having a pattern obtained by inverting the pattern of the openings $14a$ and the unit solid portions $14b'$ of the picture element electrode 14 .

[0150] With either pattern, the length of the perimeter of each opening $14a$ is the same. Therefore, for the function of producing an inclined electric field, there is no difference between the two patterns. However, the area ratio of the unit solid portion $14b'$ (with respect to the total area of the picture element electrode 14) may differ between the two patterns. In other words, the area of the solid portion $14b$ (the portion where the conductive film exists) for producing an electric field acting upon the liquid crystal molecules of the liquid crystal layer may differ therebetween.

[0151] The voltage applied through a liquid crystal domain formed in the opening $14a$ is lower than the voltage applied through another liquid crystal domain formed in the solid portion $14b$. As a result, in a normally black mode display, for example, the liquid crystal domain formed in the opening $14a$ appears darker. Thus, as the area ratio of the openings $14a$ increases, the display brightness decreases. Therefore, it is preferred that the area ratio of the solid portion $14b$ is high.

[0152] Whether the area ratio of the solid portion $14b$ is higher in the pattern of **FIG. 1A** or in the pattern of **FIG. 9** depends upon the pitch (size) of the unit lattice.

[0153] **FIG. 11A** illustrates a unit lattice of the pattern illustrated in **FIG. 1A**, and **FIG. 11B** illustrates a unit lattice of the pattern illustrated in **FIG. 9** (the opening $14a$ being taken as the center of each lattice). The portions illustrated in **FIG. 9** that serve to connect adjacent unit solid portions $14b'$ together (the branch portions extending in four directions from the circular portion) are omitted in **FIG. 11B**. The length of one side of the square unit lattice (the pitch) is denoted by "p", and the distance between the opening $14a$ or the unit solid portion $14b'$ and a side of the unit lattice (the width of the side space) is denoted by "s".

[0154] Various samples of picture element electrodes 14 having different pitches p and side spaces s were produced so as to examine the stability of the radially-inclined orientation, etc. As a result, it was found that with the picture element electrode 14 having a pattern illustrated in **FIG. 11A** (hereinafter, referred to as the "positive pattern"), the side space s needs to be about $2.75 \mu\text{m}$ or more so as to produce an inclined electric field required to obtain a radially-inclined orientation. It was found that with the picture element electrode 14 having a pattern illustrated in **FIG. 11B** (hereinafter, referred to as the "negative pattern"), the side space s needs to be about $2.25 \mu\text{m}$ or more so as to produce an inclined electric field required to obtain a radially-inclined orientation. For each pattern, the area ratio of the solid portion $14b$ was examined while changing the value of the pitch p with the side space s fixed to its lower limit value above. The results are shown in Table 1 below and in **FIG. 11C**.

TABLE 1

Pitch p (μm)	Solid portion area ratio (%)	
	Positive (FIG. 11A)	Negative (FIG. 11B)
20	41.3	52.9
25	47.8	47.2
30	52.4	43.3
35	55.8	40.4
40	58.4	38.2
45	60.5	36.4
50	62.2	35.0

[0155] As can be seen from Table 1 and **FIG. 11C**, the positive pattern (**FIG. 11A**) has a higher area ratio of the solid portion **14b** when the pitch p is about 25 μm or more, and the negative pattern (**FIG. 11B**) has a higher area ratio of the solid portion **14b** when the pitch p is less than about 25 μm. Therefore, in view of the display brightness and the stability of orientation, the pattern which should be employed changes at the critical pitch p of about 25 μm. For example, when three or fewer unit lattices are provided in the width direction of the picture element electrode **14** having a width of 75 μm, the positive pattern illustrated in **FIG. 11A** is preferred, and when four or more unit lattices are provided, the negative pattern illustrated in **FIG. 11B** is preferred. For patterns other than that illustrated herein, the selection between a positive pattern and a negative pattern can similarly be made so as to obtain the larger area ratio of the solid portion **14b**.

[0156] The number of unit lattices can be determined as follows. The size of each unit lattice is calculated so that one or more (an integer number of) unit lattices are arranged along the width (horizontal or vertical) of the picture element electrode **14**, and the area ratio of the solid portion is calculated for each calculated unit lattice size. Then, the unit lattice size such that the area ratio of the solid portion is maximized is selected. Note that the orientation-regulating force from an inclined electric field decreases, whereby a stable radially-inclined orientation is not easily obtained, when the diameter of the unit solid portion **14b'** (for the positive pattern) or the opening **14a** (for the negative pattern) is less than 15 μm. The lower limit diameter value is for a case where the thickness of the liquid crystal layer **30** is about 3 μm. When the thickness of the liquid crystal layer **30** is less than about 3 μm, a stable radially-inclined orientation can be obtained even when the diameter of the unit solid portion **14b'** and the opening **14a** is less than the lower limit value. When the thickness of the liquid crystal layer **30** is greater than about 3 μm, the lower limit diameter value of the unit solid portion **14b'** and the opening **14a** for obtaining a stable radially-inclined orientation is greater than the lower limit value shown above.

[0157] Note that the stability of the radially-inclined orientation can be increased by forming a protrusion in the opening **14a** as will be described later. The conditions shown above are all given for cases where the protrusion is not formed.

[0158] As described above, it is possible to realize a display with a wide viewing angle by providing an electrode structure that exerts an orientation-regulating force for forming a liquid crystal domain taking a radially-inclined orientation in a picture element region.

[0159] However, the present inventors have found that the display quality may not be improved sufficiently only by providing an electrode structure as described above, depending on the positional relationship between the openings **14a** of the picture element electrode **14** and the edge of a bus line (a group of interconnection lines) provided on the TFT substrate **100a**. In the liquid crystal display device **100** of the present invention, the opening **14a** of the picture element electrode **14** and the edge of the bus line are in a positional relationship as described below, thereby realizing a high-quality display.

[0160] Referring to **FIG. 12**, the positional relationship between the openings **14a** of the picture element electrode **14** and the edge of a bus line **18** of the liquid crystal display device **100** of the present embodiment will now be described. **FIG. 12** is a plan view schematically illustrating a picture element region of the liquid crystal display device **100** of the present embodiment. Note that in subsequent figures, a TFT provided on the TFT substrate **100a** for each picture element region is omitted.

[0161] As illustrated in **FIG. 12**, the TFT substrate **100a** of the liquid crystal display device **100** includes, on the side that is closer to the liquid crystal layer **30**, the picture element electrode **14** provided for each picture element region, a TFT (not shown) as a switching element electrically connected to the picture element electrode **14**, and the bus line **18** including a gate bus line (scanning line) **15** and a source bus line (signal line) **16** that are electrically connected to the TFT. In the present embodiment, the bus line **18** further includes a storage capacitor line **17** for forming a storage capacitor.

[0162] In the present embodiment, at least one of the openings **14a** that are located along the bus line **18** is superposed on the bus line **18** in each picture element region, as illustrated in **FIG. 12**. More specifically, among the openings **14a** that are located along the bus line **18**, the opening **14a** that is located along the gate bus line **15** and located between two adjacent unit solid portions **14b'** is superposed on the bus line **18** (gate bus line **15**). Thus, as viewed from the side of the TFT substrate **100a**, the gate bus line **15** is provided so as to cover the opening **14a** that is located between the adjacent unit solid portions **14b'**. As viewed from the side of the counter substrate **100b**, the unit solid portions **14b'** interposing the opening **14a** therebetween cover the edge of the gate bus line **15**. Herein, the gate bus line **15** is formed with branch portions each extending toward the opening **14a** between adjacent unit solid portions **14b'**, whereby the opening **14a** between adjacent unit solid portions **14b'** is superposed on the gate bus line **15**.

[0163] In the liquid crystal display device **100**, at least one of the openings **14a** that are located along the bus line **18** is superposed on the bus line **18**, as described above, thereby realizing a high-quality display. The reason for this will be described below with reference to **FIG. 13**, **FIG. 14A**, **FIG. 14B**, **FIG. 16A** and **FIG. 16B**, in comparison with a case where the opening **14a** that is located along the bus line **18** is not superposed on the bus line **18**.

[0164] **FIG. 13** is a plan view schematically illustrating a liquid crystal display device **700**, in which the opening **14a** that is located along the bus line **18** is not superposed on the bus line **18**. Moreover, **FIG. 14A** and **FIG. 14B** schematically illustrate the orientation of the liquid crystal molecules

30a around the opening **14a** that is located along the gate bus line **15** in the liquid crystal display device **700**, wherein **FIG. 14A** is a plan view, and **FIG. 14B** is a cross-sectional view taken along line **14B-14B'** of **FIG. 14A**. **FIG. 16A** and **FIG. 16B** schematically illustrate the orientation of the liquid crystal molecules **30a** around the opening **14a** that is located along the gate bus line **15** in the liquid crystal display device **100** of the present embodiment, wherein **FIG. 16A** is a plan view, and **FIG. 16B** is a cross-sectional view taken along line **16B-16B'** of **FIG. 16A**.

[0165] When driving the liquid crystal display device, a predetermined signal (voltage) for driving the liquid crystal display device is applied to the bus line **18** provided on the TFT substrate **100a**, whereby an electric field is produced between the bus line **18** and the counter electrode **22**. Therefore, an inclined electric field is produced in the vicinity of the edge of the bus line **18**. However, the orientation-regulating force from the inclined electric field is not matched with that from an inclined electric field that is produced at the edge portion of the opening **14a**. Therefore, if the liquid crystal domain formed in the opening **14a** that is located along the bus line **18** is subject to the orientation-regulating force from the inclined electric field in the vicinity of the edge of the bus line **18**, the orientation of the liquid crystal domain is disturbed, thereby resulting in a distorted radially-inclined orientation.

[0166] For example, in the liquid crystal display device **700**, in which the opening **14a** that is located along the bus line **18** is not superposed on the bus line **18**, as illustrated in **FIG. 13**, the liquid crystal molecules **30a** around the opening **14a** that is located along the gate bus line **15** are oriented as follows in the presence of an applied voltage. As illustrated in **FIG. 14B**, in the presence of an applied voltage, the liquid crystal molecules **30a** at the edge portion of the opening **14a** are inclined counterclockwise by the inclined electric field produced at the edge portion of the opening **14a**, whereas the liquid crystal molecules **30a** in the vicinity of the edge of the gate bus line **15** are inclined clockwise by the inclined electric field produced in the vicinity of the gate bus line **15**. Therefore, the liquid crystal layer **30** in the opening **14a** forms a liquid crystal domain having a distorted radially-inclined orientation (a squashed circular shape in the illustrated example), as illustrated in **FIG. 14A**.

[0167] Since adjacent liquid crystal domains are predisposed to maintain the orientation continuity therebetween, the orientation disturbance of the liquid crystal domain in the opening **14a** that is located along the bus line **18** influences the orientation of adjacent liquid crystal domains, i.e., the liquid crystal domains formed in adjacent unit solid portions **14b'**. Thus, the orientation of the liquid crystal domain is disturbed also in the adjacent unit solid portions **14b'**.

[0168] In a liquid crystal domain that takes a distorted radially-inclined orientation due to its disturbed orientation, the orientation is not stable and it easily collapses, whereby it takes a long time before the orientation of such a liquid crystal domain reaches a steady state after a voltage application. Thus, the orientation disturbance as described above leads to a decrease in the response speed (deterioration in the response characteristic).

[0169] Moreover, the liquid crystal layer **30** in each picture element region reaches a steady state with such a

distorted radially-inclined orientation, in which the orientation is disturbed, and the disturbed orientation varies from one picture element region to another. Therefore, an after image phenomenon may occur, in which the previously-displayed image remains after an image-switching signal is input. This is because if the orientation of the liquid crystal layer **30** varies among different picture element regions, the transmittance also varies among different picture element regions. Particularly, there is a significant difference in the orientation of the liquid crystal layer **30** between a picture element region that has transitioned to an intermediate gray level display from a white display and a picture element region that has transitioned to an intermediate gray level display from a black display, and the difference in transmittance between such picture element regions is likely to be viewed as an after image phenomenon. This is for the following reason. In a white display, the inclined electric field produced at the edge portion of the opening **14a** exerts a relatively strong orientation-regulating force, whereby the orientation of the liquid crystal layer **30** is stable. Therefore, the orientation of the liquid crystal layer **30** is stable even after the transition to an intermediate gray level display. On the other hand, when transitioning from a black display to an intermediate gray level display, the orientation of the liquid crystal layer **30** is likely to collapse because the orientation-regulating force from the inclined electric field produced at the edge portion of the opening **14a** is relatively weak.

[0170] In contrast, the liquid crystal display device **100** of the present invention is designed so that at least one of the openings **14a** that are located along the bus line **18**, specifically the opening **14a** that is located along the gate bus line **15** and located between two adjacent unit solid portions **14b'**, is superposed on the bus line **18** (gate bus line **15**), as illustrated in **FIG. 12**, whereby the edge of the bus line **18** near the opening **14a** that is superposed on the bus line **18** is covered by the unit solid portions **14b'** of the picture element electrode **14**.

[0171] Therefore, in the vicinity of the opening **14a** that is superposed on the bus line **18**, the liquid crystal molecules **30a** of the liquid crystal layer **30** are electrically shielded by the unit solid portions **14b'** of the picture element region **14** from the influence of the inclined electric field produced in the vicinity of the edge of the bus line **18**. Thus, the liquid crystal molecules **30a** of the liquid crystal layer **30** are not subject to the orientation-regulating force from the inclined electric field produced in the vicinity of the edge of the bus line **18**, and the orientation thereof is regulated only by the inclined electric field that is produced at the edge portion of the opening **14a**.

[0172] Therefore, in the liquid crystal display device **100** of the present invention, the orientation is not disturbed in the liquid crystal domain formed in the opening **14a** that is superposed on the bus line **18** or in the liquid crystal domain formed in the unit solid portion **14b'** that is adjacent to the opening **14a**, whereby the decrease in the response speed (deterioration in the response characteristic) and the occurrence of the after image phenomenon are suppressed, thus realizing a high-quality display.

[0173] Note that although the inclined electric field produced in the vicinity of the edge of the bus line **18** not only causes the decrease in the response speed and the after image phenomenon, as described above, but also causes a decrease

in the contrast ratio, the decrease in the contrast ratio can be suppressed if the bus line 18 is made of a light-blocking material. This will now be described in greater detail.

[0174] As described above, an inclined electric field is produced in the vicinity of the edge of the bus line 18, and the inclined electric field is produced regardless of the presence/absence of the applied voltage across the liquid crystal layer 30 between the picture element electrode 14 and the counter electrode 22. Therefore, in a liquid crystal display device that produces a display in a normally black mode, if the liquid crystal molecules 30a in the vicinity of the edge of the bus line 18 are inclined, in the absence of an applied voltage, by the orientation-regulating force from the inclined electric field, light leakage may occur, thereby decreasing the contrast ratio. Particularly, since the gate bus line 15 is, most of the time, under the application of a relatively high voltage (OFF voltage) for holding TFTs OFF, the degree of such light leakage is significant in the vicinity of the edge of the gate bus line 15.

[0175] In the liquid crystal display device 100 of the present invention, the edge of the bus line 18 near the opening 14a that is superposed on the bus line 18 is covered by the unit solid portions 14b' of the picture element electrode 14, whereby the liquid crystal molecules 30a of the liquid crystal layer 30 are electrically shielded from the influence of the inclined electric field produced in the vicinity of the edge of the bus line 18. Therefore, the liquid crystal molecules 30a of the liquid crystal layer 30 are not inclined by the orientation-regulating force from the inclined electric field. Although the liquid crystal molecules 30a of the liquid crystal layer 30 in the opening 14a that is superposed on the bus line 18 may be inclined by the electric field produced between the bus line 18 and the counter electrode 22, the opening that is superposed on the bus line 18 is blocked from light if the bus line 18 is made of a light-blocking material.

[0176] Therefore, if the bus line 18 is made of a light-blocking material, the decrease in the contrast ratio due to the occurrence of light leakage is suppressed, thereby realizing a display with an even higher quality.

[0177] Moreover, if the bus line 18 is made of a light-blocking material, it is possible to suppress the non-uniformity in the display plane (i.e., a local variation in the contrast ratio), as will be described below, thereby improving the display quality.

[0178] A residual charge is likely to occur in the opening 14a, through which an insulator material is exposed, due to the inclined electric field produced in the vicinity of the edge of the bus line 18, and if the liquid crystal molecules 30a in the opening 14a that is located along the bus line 18 are inclined due to the influence of the residual charge, it will cause light leakage. While the degree of the residual charge varies depending on the surface condition of the insulator material, variations in the surface condition of the insulator material occur when printing an alignment film or when injecting a liquid crystal material. Therefore, in a liquid crystal display device, there are variations in the residual charge in the display plane. If the residual charge varies in the display plane, the degree of light leakage also varies in the display plane, thereby causing local variations in the contrast ratio, thus resulting in non-uniformity. Particularly, since a relatively high voltage is applied to the gate bus line

15, as described above, the gate bus line 15 significantly contributes to the occurrence of the non-uniformity.

[0179] In the liquid crystal display device 100 of the present invention, when the bus line 18 is made of a light-blocking material, the opening 14a that is superposed on the bus line 18 is shaded by the bus line 18, thereby suppressing the occurrence of the non-uniformity as described above, and thus improving the display quality.

[0180] Moreover, in the vicinity of the edge of the gate bus line 15 in the liquid crystal display device 700 illustrated in FIG. 13, there are some regions where the conductive film (solid portion 14b) of the picture element electrode 14 is not formed, as illustrated in FIG. 15A (a cross-sectional view taken along line 15A-15A' of FIG. 13), and some other regions where the conductive film of the picture element electrode 14 is formed, as illustrated in FIG. 15B (a cross-sectional view taken along line 15B-15B' of FIG. 13). Therefore, in a region where the conductive film (solid portion 14b) is not formed in the vicinity of the edge of the gate bus line 15, impurity ions are adsorbed on the surface of the TFT substrate 100a by the electric field due to the gate bus line 15, as illustrated in FIG. 15A, whereby an orientation disturbance occurs due to the charge of the adsorbed impurity ions (hereinafter referred to as "cumulative charge"). Therefore, even if the bus line 18 is made of a light-blocking material, an orientation disturbance occurs due to the cumulative charge, thereby causing light leakage, in each opening portion near the gate bus line 15 (a region LL delimited by a broken line in FIG. 13).

[0181] In contrast, in the liquid crystal display device 100 of the present invention, in an area that is strongly influenced by the electric field due to the gate bus line 15, i.e., an area in the vicinity of the gate bus line 15, there are many regions where the conductive film (solid portion 14b) of the picture element electrode 14 is formed, as the region illustrated in FIG. 15B, thereby suppressing the orientation disturbance due to the cumulative charge, thus suppressing the light leakage.

[0182] Moreover, the impurities, which cause the cumulative charge, are not evenly distributed in the display plane, but are typically localized in a streak-shaped pattern in the display plane. This is because when a liquid crystal material is injected through a plurality of injection ports that are arranged at a predetermined interval, the liquid crystal material flows more slowly in regions between the injection ports than in the other regions, whereby the impurities are localized in such regions.

[0183] Therefore, the degree to which the cumulative charge is formed or lost varies between a streak-shaped region where the impurities are localized (a region with more impurities) and another region (a region with less impurities), whereby the degree of light leakage varies between the streak-shaped region and the other region. As a result, in the liquid crystal display device 700 illustrated in FIG. 13, the streak-shaped region appears to be a "black streak", where the brightness is higher than in the other region, or a "white streak", where the brightness is lower than in the other region, thereby causing display non-uniformity.

[0184] In contrast, the liquid crystal display device 100 of the present invention suppresses the occurrence of the light

leakage, itself, due to the cumulative charge, as described above, thereby suppressing the occurrence of display non-uniformity.

[0185] Note that while the above description has been made with respect to a case where in each picture element region, at least one of the openings **14a** located along the bus line **18** that is located along the gate bus line **15** and located between the unit solid portions **14b'** is superposed on the bus line **18**, the present invention is not limited to this. By employing an arrangement where in each picture element region, at least one of the openings **14a** that are located along the bus line **18** and located between the unit solid portions **14b'** is superposed on the bus line **18**, the orientation disturbance in the liquid crystal domain is suppressed, whereby the decrease in the response speed (deterioration in the response characteristic) and the occurrence of the after image phenomenon are suppressed.

[0186] In order to suppress the orientation disturbance due to an inclined electric field produced in the vicinity of the edge of the bus line **18**, it is preferred to increase the proportion of the opening **14a** that is superposed on the bus line **18**, i.e., to increase the portion of the edge of the bus line **18** to be covered by the unit solid portions **14b'** of the picture element electrode **14**. However, in a case where the bus line **18** is made of a light-blocking material, an increase in this proportion may decrease the aperture ratio. Thus, the proportion of the opening **14a** that is superposed on the bus line **18** can suitably be determined depending on the application of the liquid crystal display device, etc., in view of the intended response characteristic and aperture ratio.

[0187] Of course, not only the opening **14a** that is located between two adjacent unit solid portions **14b'**, but also other openings **14a** that are located along the bus line **18**, may be superposed on the bus line **18**. For example, among the plurality of openings **14a** of the picture element electrode **14**, all of the openings **14a** that are located along the gate bus line **15** may be superposed on the bus line **18**, as in a liquid crystal display device **100A** illustrated in FIG. 17.

[0188] In the liquid crystal display device **100** illustrated in FIG. 12, there is a portion of the opening **14a** that is not superposed on the bus line **18** at the corner of a picture element region (in the vicinity of the intersection between the gate bus line **15** and the source bus line **16**). In contrast, in the liquid crystal display device **100A** illustrated in FIG. 17, the edge of the gate bus line **15** is covered by the unit solid portions **14b'** even at the corner of the picture element region, and all of the openings **14a** that are located along the gate bus line **15** are superposed on the bus line **18**.

[0189] In the liquid crystal display device **100A** illustrated in FIG. 17, a larger portion of the edge of the bus line **18** is covered by the unit solid portions **14b'** of the picture element electrode **14**, thereby providing a greater effect of suppressing the orientation disturbance. Note however that in the arrangement where a portion of the opening **14a** that is at the corner of the picture element region is also superposed on the bus line **18**, as compared with the arrangement illustrated in FIG. 12, the area of the intersection between the gate bus line **15** and the source bus line **16** is larger, whereby the parasitic capacitance may be large. Therefore, while the arrangement illustrated in FIG. 17 may be preferred in order to suppress the orientation disturbance, the arrangement illustrated in FIG. 12 may be preferred in order to reduce the

parasitic capacitance. Of course, the orientation disturbance can be suppressed sufficiently and a sufficiently high display quality can be obtained as long as at least one of the openings **14a** located along the bus line **18** that is located along the gate bus line **15** and located between adjacent unit solid portions **14b'** is superposed on the bus line **18**, as illustrated in FIG. 12.

[0190] Note that while FIG. 12 and FIG. 17 each show a case where the gate bus line **15** includes a branch portion extending toward the opening **14a**, whereby the opening **14a** is superposed on the gate bus line **15**, the present invention is not limited thereto. Alternatively, the width of the gate bus line **15** may be increased so that the opening **14a** that is located along the gate bus line **15** is superposed on the gate bus line **15** (so that the edge of the gate bus line **15** is covered by the unit solid portions **14b'** of the picture element electrode **14**), as in a liquid crystal display device **100B** illustrated in FIG. 18. Note however that when the width of the gate bus line **15** is increased, the overlapping area between the gate bus line **15** and the unit solid portions **14b'** increases, thereby increasing the gate-drain parasitic capacitance, as compared with the arrangements illustrated in FIG. 12 and FIG. 17. Moreover, when the gate bus line **15** is made of a light-blocking material, the aperture ratio decreases, as compared with the arrangements illustrated in FIG. 12 and FIG. 17. Therefore, in order to reduce the parasitic capacitance and to improve the aperture ratio, the arrangements illustrated in FIG. 12 and FIG. 17 are preferred.

[0191] Moreover, when driving the liquid crystal display device **100**, a larger voltage is typically applied to the gate bus line **15** than to the source bus line **16**, whereby the inclined electric field produced in the vicinity of the edge of the gate bus line **15** has a greater influence on the liquid crystal molecules than the inclined electric field produced in the vicinity of the edge of the source bus line **16**.

[0192] Therefore, it is possible to effectively suppress the decrease in the response speed and the occurrence of the after image phenomenon without leading to an unnecessary decrease in the aperture ratio, by employing an arrangement where at least one or all of the openings **14a** located along the bus line that is located along the gate bus line is superposed on the bus line **18** (gate bus line **15**), as in the liquid crystal display devices **100** and **100A** illustrated in FIG. 12 and FIG. 17.

[0193] Of course, it is possible to employ an arrangement where at least one or all of the openings **14a** that are located along the source bus line **16** is superposed on the bus line **18**, or an arrangement where all of the openings **14a** that are located along the gate bus line **15** and the source bus line **16** are superposed on the bus line **18**, as in liquid crystal display devices **100C** and **100D** illustrated in FIG. 19 and FIG. 20. In the liquid crystal display devices **100C** and **100D** illustrated in FIG. 19 and FIG. 20, the source bus line **16** includes branch portions each extending toward the opening **14a**, and not only the opening **14a** that is located along the gate bus line **15** but also the opening **14a** that is located along the source bus line **16** is superposed on the bus line **18**.

[0194] Furthermore, at least one or all of the openings **14a** that is located along the storage capacitor line **17** may be superposed on the bus line **18**, as necessary.

[0195] Note that the present invention is not limited to liquid crystal display devices including the picture element

electrode 14 as illustrated in **FIG. 12**, etc., but the present invention may of course be used with other suitable liquid crystal display devices including the picture element electrode 14 of various other shapes. Various modifications can also be made with respect to the number or the arrangement of the unit solid portions 14b' of the picture element electrode 14. For example, the present invention can suitably be used with a liquid crystal display device having a relatively small number of unit solid portions 14b' in each picture element electrode 14, e.g., a liquid crystal display device in which three unit solid portions 14b' are arranged in each picture element region along the direction in which the source bus line 16 extends.

[0196] The liquid crystal display device 100 as described above may employ the same arrangement as a vertical alignment type liquid crystal display device known in the art, except that the picture element electrode 14 includes the openings 14a and the bus line 18 has a predetermined shape, and may be produced by a known production method.

[0197] Typically, a vertical alignment layer (not shown) is provided on one side of each of the picture element electrode 14 and the counter electrode 22 that is closer to the liquid crystal layer 30 so as to vertically align the liquid crystal molecules having a negative dielectric anisotropy.

[0198] The liquid crystal material may be a nematic liquid crystal material having a negative dielectric anisotropy. A guest-host mode liquid crystal display device can be obtained by adding a dichroic dye to a nematic liquid crystal

orientation in a portion of the solid portion 14b (a portion of the unit solid portion 14b') that is located along the gate bus line 15 in the presence of an applied voltage between the picture element electrode 14 and the counter electrode 22.

[0201] In the liquid crystal display device 100E, the edge of the gate bus line 15 is covered by a portion of the unit solid portion 14b' (having a shape that corresponds to about one half of the unit solid portion 14b') and branch portions electrically connecting these unit solid portions 14b' together, as illustrated in **FIG. 21A** and **FIG. 21B**. Thus, the edge of the gate bus line 15 is covered by the solid portion 14b. Therefore, effects as those of, for example, the liquid crystal display device 100 illustrated in **FIG. 12** can be obtained. Furthermore, in the liquid crystal display device 100E, it is not necessary to form the gate bus line 15 with branch portions or to increase the width of the gate bus line 15, whereby an unnecessary decrease in the aperture ratio does not occur even if the bus line 18 is made of a light-blocking material.

[0202] Table 2 below shows the aperture ratio ("AR") of each of the liquid crystal display device 100E, as illustrated in **FIG. 21A** and **FIG. 21B**, and a liquid crystal display device 100F in which the gate bus line 15 includes branch portions, as illustrated in **FIG. 22A** and **FIG. 22B**. Table 2 also shows the ratio ("AR ratio") of the aperture ratio of the liquid crystal display device 100E with respect to that of the liquid crystal display device 100F.

TABLE 2

	13"		15"		20"		22"	
	AR	AR ratio						
LCD 100F	51.2%	101.2%	57.4%	100.9%	57.9%	100.8%	58.3%	100.9%
LCD 100E	51.8%		58.0%		58.3%		58.8%	

material having a negative dielectric anisotropy. A guest-host mode liquid crystal display device does not require a polarization plate.

[0199] The above description has been made with respect to a case where the bus line 18 is formed in a predetermined shape (e.g., a shape with branch portions as illustrated in **FIG. 12**, etc., or a shape with a large width as illustrated in **FIG. 18**) so that the edge of the bus line 18 is covered by the solid portion 14b (unit solid portions 14b') of the picture element electrode 14. However, the present invention is not limited to this. Alternatively, the edge of the bus line 18 may be covered by the solid portion 14b by arranging the unit solid portions 14b' (or openings 14a) of the picture element electrode 14 in a predetermined arrangement, without changing the shape of the bus line 18.

[0200] For example, the picture element electrode 14 may be formed so that a portion of the unit solid portion 14b' (having a shape that corresponds to about one half of the unit solid portion 14b') are located along the gate bus line 15, as in a liquid crystal display device 100E illustrated in **FIG. 21A** and **FIG. 21B**. In the liquid crystal display device 100E, a portion of the unit solid portion 14b' is located along the gate bus line 15, whereby the liquid crystal layer 30 forms a portion of a liquid crystal domain taking a radially-inclined

[0203] As shown in Table 2, the liquid crystal display device 100E has an aperture ratio that is improved by about 1% (0.8% to 1.2%) for any of 13"-, 15"-, 20"- and 22"-liquid crystal panels. Note that it is needless to say that the values shown in Table 2 are for particular specifications, and even higher aperture ratios can be expected for some specifications of the liquid crystal display device.

[0204] While **FIG. 21A** and **FIG. 21B** illustrate a case where the edge of the gate bus line 15 is covered by the solid portion 14b of the picture element electrode 14, it is preferred that the edge of at least one of the gate bus line 15 and the source bus line 16 is covered by the solid portion 14b of the picture element electrode 14. The unit solid portions 14b' may alternatively be arranged so that the edge of the gate bus line 15 and that of the source bus line 16 are both covered by the solid portion 14b of the picture element electrode 14, as in a liquid crystal display device 100G illustrated in **FIG. 23**. In the liquid crystal display device 100G, a portion of the unit solid portions 14b' (having a shape that corresponds to about one half of the unit solid portion 14b') is located along the source bus line 16, as illustrated in **FIG. 23**, whereby the edge of the source bus line 16 is also covered by the solid

portion **14b** of the picture element electrode **14**. Therefore, it is possible to further improve the effect of suppressing the orientation disturbance.

[0205] As described above, by appropriately setting the arrangement of the unit solid portions **14b'** (or openings **14a**) of the picture element electrode **14**, it is possible to suppress the orientation disturbance without changing the shape of the bus line **18**. FIG. 24A and FIG. 24B, and FIG. 25A and FIG. 25B illustrate alternative liquid crystal display devices **100H** and **100I**, respectively, according to the embodiment of the present invention.

[0206] In each of the liquid crystal display devices **100H** and **100I** the shape of each unit solid portion **14b'** of the picture element electrode **14** is a generally star shape having eight sides (edges) and having a four-fold rotation axis at its center. Moreover, the opening **14a** has a generally rhombus shape.

[0207] In the liquid crystal display device **100H**, the edge of the gate bus line **15** is formed in a zigzag shape so that the edge of the gate bus line **15** is covered by the solid portion **14b** of the picture element electrode **14**, as illustrated in FIG. 24A and FIG. 24B. On the other hand, in the liquid crystal display device **100I**, a portion of the generally star-shaped unit solid portion **14b'** (having a shape that corresponds to about one half of the unit solid portion **14b**) is provided along the gate bus line **15** and along the source bus line **16** so that the edge of the gate bus line **15** and the edge of the source bus line **16** are covered by the solid portion **14b** of the picture element electrode **14**, as illustrated in FIG. 25A and FIG. 25B. Therefore, in the liquid crystal display device **100I**, it is possible to prevent the unnecessary decrease in the aperture ratio.

[0208] Alternative Embodiment

[0209] A structure of one picture element region of a liquid crystal display device **200** according to an alternative embodiment of the present invention will be described with reference to FIG. 26A and FIG. 26B. Moreover, in subsequent figures, each element having substantially the same function as the corresponding element in the liquid crystal display device **100** will be denoted by the same reference numeral and will not be further described below. FIG. 26A is a plan view as viewed in the substrate normal direction, and FIG. 26B is a cross-sectional view taken along line 26B-26B' of FIG. 26A. FIG. 26B illustrates a state where no voltage is applied across a liquid crystal layer.

[0210] As illustrated in FIG. 26A and FIG. 26B, the liquid crystal display device **200** is different from the liquid crystal display device **100** illustrated in FIG. 1A and FIG. 1B in that a TFT substrate **200a** includes a protrusion **40** in the opening **14a** of the picture element electrode **14**. A vertical alignment film (not shown) is provided on the surface of the protrusion **40**.

[0211] The cross section of the protrusion **40** along the plane of the substrate **11** is a generally star-shaped cross section, i.e., the same shape as that of the opening **14a**, as illustrated in FIG. 26A. Note that adjacent protrusions **40** are connected to each other so as to completely surround each unit solid portion **14b'** in a generally circular pattern. The cross section of the protrusion **40** along a plane vertical to the substrate **11** is a trapezoidal shape as illustrated in FIG. 26B. Specifically, the cross section has a top surface

40t parallel to the substrate plane and a side surface **40s** inclined by a taper angle θ ($<90^\circ$) with respect to the substrate plane. Since the vertical alignment film (not shown) is provided so as to cover the protrusion **40**, the side surface **40s** of the protrusion **40** has an orientation-regulating force of the same direction as that of an inclined electric field for the liquid crystal molecules **30a** of the liquid crystal layer **30**, thereby functioning to stabilize the radially-inclined orientation.

[0212] The function of the protrusion **40** will now be described with reference to FIG. 27A to FIG. 27D, FIG. 28A and FIG. 28B.

[0213] First, the relationship between the orientation of the liquid crystal molecules **30a** and the configuration of the surface having a vertical alignment power will be described with reference to FIG. 27A to FIG. 27D.

[0214] As illustrated in FIG. 27A, a liquid crystal molecule **30a** on a horizontal surface is aligned vertical to the surface due to the orientation-regulating force of the surface having a vertical alignment power (typically, the surface of a vertical alignment film). When an electric field represented by an equipotential line **EQ** perpendicular to the axial orientation of the liquid crystal molecule **30a** is applied through the liquid crystal molecule **30a** in a vertical alignment, a torque urging the liquid crystal molecule **30a** to incline clockwise and a torque urging the liquid crystal molecule **30a** to incline counterclockwise act upon the liquid crystal molecule **30a** with the same probability. Therefore, in the liquid crystal layer **30** between a pair of opposing electrodes in a parallel plate arrangement include some liquid crystal molecules **30a** that are subject to the clockwise torque and other liquid crystal molecules **30a** that are subject to the counterclockwise torque. As a result, the transition to the orientation according to the voltage applied across the liquid crystal layer **30** may not proceed smoothly.

[0215] When an electric field represented by a horizontal equipotential line **EQ** is applied through a liquid crystal molecule **30a** vertically aligned to an inclined surface, as illustrated in FIG. 27B, the liquid crystal molecule **30a** inclines in whichever direction (the clockwise direction in the illustrated example) that requires less inclination for the liquid crystal molecule **30a** to be parallel to the equipotential line **EQ**. Then, as illustrated in FIG. 27C, other adjacent liquid crystal molecules **30a** aligned vertical to a horizontal surface incline in the same direction (the clockwise direction) as the liquid crystal molecule **30a** located on the inclined surface so that the orientation thereof is continuous (in conformity) with the orientation of the liquid crystal molecule **30a** aligned vertical to the inclined surface.

[0216] As illustrated in FIG. 27D, for a surface with concave/convex portions whose cross section includes a series of trapezoids, the liquid crystal molecules **30a** on the top surface and those on the bottom surface are oriented so as to conform with the orientation direction regulated by other liquid crystal molecules **30a** on the inclined portions of the surface.

[0217] In the liquid crystal display device **200**, the direction of the orientation-regulating force exerted by the configuration (protrusions) of the surface is aligned with the direction of the orientation-regulating force exerted by an inclined electric field, thereby stabilizing the radially-inclined orientation.

[0218] FIG. 28A and FIG. 28B each illustrate a state in the presence of an applied voltage across the liquid crystal layer 30 shown in FIG. 26B. FIG. 28A schematically illustrates a state where the orientation of the liquid crystal molecules 30a has just started to change (initial ON state) according to the voltage applied across the liquid crystal layer 30. FIG. 28B schematically illustrates a state where the orientation of the liquid crystal molecules 30a has changed and become steady according to the applied voltage. In FIG. 28A and FIG. 28B, curves EQ denote equipotential lines.

[0219] When the picture element electrode 14 and the counter electrode 22 are at the same potential (i.e., in a state where no voltage is applied across the liquid crystal layer 30), the liquid crystal molecules 30a in each picture element region are aligned vertical to the surfaces of the substrates 11 and 21 as illustrated in FIG. 26B. The liquid crystal molecules 30a in contact with the vertical alignment film (not shown) on the side surface 40s of the protrusion 40 are aligned vertical to the side surface 40s, and the liquid crystal molecules 30a in the vicinity of the side surface 40s take an inclined orientation as illustrated due to the interaction (the nature as an elastic continuum) with the surrounding liquid crystal molecules 30a.

[0220] When a voltage is applied across the liquid crystal layer 30, a potential gradient represented by equipotential lines EQ shown in FIG. 28A is produced. The equipotential lines EQ are parallel to the surfaces of the solid portion 14b and the counter electrode 22 in a region of the liquid crystal layer 30 located between the solid portion 14b of the picture element electrode 14 and the counter electrode 22, and drop in a region corresponding to the opening 14a of the picture element electrode 14, thereby producing an inclined electric field represented by the inclined portion of the equipotential lines EQ in each region of the liquid crystal layer 30 above an edge portion (the peripheral portion of and within the opening 14a including the boundary thereof) EG of the opening 14a.

[0221] Due to the inclined electric field, the liquid crystal molecules 30a above the right edge portion EG in FIG. 28A incline (rotate) clockwise and the liquid crystal molecules 30a above the left edge portion EG incline (rotate) counterclockwise as indicated by arrows in FIG. 28A, as described above, so as to be parallel to the equipotential lines EQ. The direction of the orientation-regulating force exerted by the inclined electric field is the same as that of the orientation-regulating force exerted by the side surface 40s located at each edge portion EG.

[0222] As described above, the change in the orientation starts from the liquid crystal molecules 30a located on the inclined portion of the equipotential lines EQ, and reaches a steady state of the orientation schematically illustrated in FIG. 28B. The liquid crystal molecules 30a around the central portion of the opening 14a, i.e., around the central portion of the top surface 40t of the protrusion 40, are substantially equally influenced by the respective orientations of the liquid crystal molecules 30a at the opposing edge portions EG of the opening 14a, and therefore retain their orientation perpendicular to the equipotential lines EQ. The liquid crystal molecules 30a away from the center of the opening 14a (the top surface 40t of the protrusion 40) incline by the influence of the orientation of other liquid crystal

molecules 30a at the closer edge portion EG, thereby forming an inclined orientation that is symmetric about the center SA of the opening 14a (the top surface 40t of the protrusion 40). An inclined orientation symmetric about the center SA of the unit solid portion 14b' is formed also in the region corresponding to the unit solid portion 14b' which is substantially surrounded by the openings 14a and the protrusions 40.

[0223] As described above, in the liquid crystal display device 200, as in the liquid crystal display device 100, liquid crystal domains each having a radially-inclined orientation are formed corresponding to the openings 14a and the unit solid portions 14b'. Since the protrusions 40 are provided so as to completely surround each unit solid portion 14b' in a generally circular pattern, each liquid crystal domain is formed corresponding to the generally circular region surrounded by the protrusions 40. Moreover, the side surface of the protrusion 40 provided in the opening 14a functions to incline the liquid crystal molecules 30a in the vicinity of the edge portion EG of the opening 14a in the same direction as the direction of the orientation-regulating force exerted by the inclined electric field, thereby stabilizing the radially-inclined orientation.

[0224] Of course, the orientation-regulating force exerted by the inclined electric field only acts in the presence of an applied voltage, and the strength thereof depends upon the strength of the electric field (the level of the applied voltage). Therefore, when the electric field strength is small (i.e., when the applied voltage is low), the orientation-regulating force exerted by the inclined electric field is weak, in which case the radially-inclined orientation may collapse due to floating of the liquid crystal material when a stress is applied to the liquid crystal panel. Once the radially-inclined orientation collapses, it is not restored until application of a voltage sufficient to produce an inclined electric field that exerts a sufficiently strong orientation-regulating force. On the other hand, the orientation-regulating force from the side surface 40s of the protrusion 40 is exerted regardless of the applied voltage, and is very strong as it is known in the art as the "anchoring effect" of the alignment film. Therefore, even when floating of the liquid crystal material occurs and the radially-inclined orientation once collapses, the liquid crystal molecules 30a in the vicinity of the side surface 40s of the protrusion 40 retain the same orientation direction as that of the radially-inclined orientation. Therefore, the radially-inclined orientation is easily restored once the floating of the liquid crystal material stops.

[0225] Thus, the liquid crystal display device 200 has an additional advantage of being strong against a stress in addition to the advantages of the liquid crystal display device 100. Therefore, the liquid crystal display device 200 can be suitably used in apparatuses that are often subject to a stress, such as PCs that are often carried around and PDAs.

[0226] When the protrusion 40 is made of a dielectric material having a high transparency, there is obtained an advantage of improving the contribution to the display of a liquid crystal domain that is formed in a region corresponding to the opening 14a. When the protrusion 40 is made of an opaque dielectric material, there is obtained an advantage that it is possible to prevent light leakage caused by the retardation of the liquid crystal molecules 30a that are in an inclined orientation due to the side surface 40s of the

protrusion **40**. Whether to employ a transparent dielectric material or an opaque dielectric material can be determined in view of the application of the liquid crystal display device, for example. In either case, the use of a photosensitive resin provides an advantage that the step of patterning the protrusions **40** corresponding to the openings **14a** can be simplified. In order to obtain a sufficient orientation-regulating force, the height of the protrusion **40** is preferably in the range of about 0.5 μm to about 2 μm , when the thickness of the liquid crystal layer **30** is about 3 μm . Typically, the height of the protrusion **40** is preferably in the range of about $\frac{1}{6}$ to about $\frac{2}{3}$ of the thickness of the liquid crystal layer **30**.

[0227] As described above, the liquid crystal display device **200** includes the protrusion **40** in the opening **14a** of the picture element electrode **14**, and the side surface **40s** of the protrusion **40** exerts an orientation-regulating force in the same direction as that of the orientation-regulating force exerted by an inclined electric field for the liquid crystal molecules **30a** of the liquid crystal layer **30**. Preferred conditions for the side surface **40s** to exert an orientation-regulating force of the same direction as that of the orientation-regulating force exerted by the inclined electric field will now be described with reference to FIG. 29A to FIG. 29C.

[0228] FIG. 29A to FIG. 29C schematically illustrate cross-sectional views of liquid crystal display devices **200A**, **200B** and **200C**, respectively. FIG. 29A to FIG. 29C correspond to FIG. 28A. The liquid crystal display devices **200A**, **200B** and **200C** all have a protrusion in the opening **14a**, but differ from the liquid crystal display device **200** in terms of the positional relationship between the entire protrusion **40** as a single structure and the corresponding opening **14a**.

[0229] In the liquid crystal display device **200** described above, the entire protrusion **40** as a structure is formed in the opening **14a**, and the bottom surface of the protrusion **40** is smaller than the opening **14a**, as illustrated in FIG. 28A. In the liquid crystal display device **200A** illustrated in FIG. 29A, the bottom surface of a protrusion **40A** is aligned with the opening **14a**. In the liquid crystal display device **200B** illustrated in FIG. 29B, the bottom surface of a protrusion **40B** is greater than the opening **14a** so as to cover a portion of the solid portion (conductive film) **14b** surrounding the opening **14a**. The solid portion **14b** is not formed on the side surface **40s** of any of the protrusions **40**, **40A** and **40B**. As a result, the equipotential lines **EQ** are substantially flat over the solid portion **4b** and drop into the opening **14a**, as illustrated in the respective figures. Therefore, as the protrusion **40** of the liquid crystal display device **200**, the side surface **40s** of the protrusion **40A** of the liquid crystal display device **200A** and that of the protrusion **40B** of the liquid crystal display device **200B** both exert an orientation-regulating force of the same direction as that of the orientation-regulating force exerted by the inclined electric field, thereby stabilizing the radially-inclined orientation.

[0230] In contrast, in the liquid crystal display device **200C** illustrated in FIG. 29C, the bottom surface of a protrusion **40C** is greater than the opening **14a**, and a portion of the solid portion **14b** extending into a region above the opening **14a** is formed on the side surface **40s** of the protrusion **40C**. Due to the influence of the portion of the solid portion **14b** formed on the side surface **40s**, a ridge

portion is created in the equipotential lines **EQ**. The ridge portion of the equipotential lines **EQ** has a gradient opposite to that of the other portion of the equipotential lines **EQ** dropping into the opening **14a**. This indicates that an inclined electric field has been produced whose direction is opposite to that of an inclined electric field for orienting the liquid crystal molecules **30a** into a radially-inclined orientation. Therefore, in order for the side surface **40s** to have an orientation-regulating force of the same direction as that of the orientation-regulating force exerted by the inclined electric field, it is preferred that the solid portion (conductive film) **14b** is not formed on the side surface **40s**.

[0231] Next, a cross-sectional structure of the protrusion **40** taken along line **30A-30A'** of FIG. 26A will be described with reference to FIG. 30.

[0232] Since the protrusions **40** illustrated in FIG. 26A are formed so as to completely surround each unit solid portion **14b'** in a generally circular pattern, as described above, the portions serving to connect adjacent unit solid portions **14b'** together (the branch portions extending in four directions from the circular portion) are formed on the protrusion **40** as illustrated in FIG. 30. Therefore, in the step of depositing the conductive film to be the solid portions **14b** of the picture element electrode **14**, there is a considerable possibility that disconnection may occur on the protrusion **40** or delamination may occur in an after-treatment of the production process.

[0233] In view of this, in a liquid crystal display device **200D** illustrated in FIG. 31A and FIG. 31B, protrusions **40D** independent of one another are formed so that each of the protrusions **40D** is completely included within the opening **14a** so that the conductive film to be the solid portion **14b** is formed on the flat surface of the substrate **11**, thereby eliminating the possibility of disconnection or delamination. Although the protrusions **40D** do not completely surround each unit solid portion **14b'** in a generally circular pattern, a generally circular liquid crystal domain corresponding to each unit solid portion **14b'** is formed, and the radially-inclined orientation of the unit solid portion **14b'** is stabilized as in the above-described examples.

[0234] The effect of stabilizing the radially-inclined orientation which is obtained by forming the protrusion **40** in the opening **14a** is not limited to the pattern of the opening **14a** described above, but may similarly be applied to any of the patterns of the opening **14a** described above to obtain effects as those described above. In order for the protrusion **40** to sufficiently exert the effect of stabilizing the orientation against a stress, it is preferred that the pattern of the protrusion **40** (the pattern as viewed in the substrate normal direction) covers as much area as possible of the liquid crystal layer **30**. Therefore, for example, a greater orientation stabilizing effect of the protrusion **40** can be obtained with the positive pattern with circular unit solid portions **14b'** than with the negative pattern with circular openings **14a**.

[0235] With the electrode structure described above where openings are provided in the picture element electrode, a sufficient voltage may not be applied across the liquid crystal layer in a region corresponding to the opening and a sufficient retardation change may not be obtained, thereby decreasing the light efficiency. In view of this, a dielectric layer may be provided on one side of the picture element

electrode with openings (an upper electrode) that is away from the liquid crystal layer, with an additional electrode (a lower electrode) being provided via the dielectric layer so as to at least partially oppose the openings of the picture element electrode (i.e., a two-layer electrode may be employed). In this way, it is possible to apply a sufficient voltage across the liquid crystal layer corresponding to the opening, thereby improving the light efficiency and/or the response characteristic.

[0236] Each of **FIG. 32A** to **FIG. 32C** schematically illustrates a cross-sectional structure of one picture element region of a liquid crystal display device **300** having a picture element electrode **15** (a two-layer electrode) including a lower electrode **12**, an upper electrode **14**, and a dielectric layer **13** provided therebetween. The upper electrode **14** of the picture element electrode **15** is substantially equivalent to the picture element electrode **14** described above, and includes openings and a solid portion having any of the various shapes described above and arranged in any of the various patterns described above. The function of the picture element electrode **15** having a two-layer structure will now be described.

[0237] The picture element electrode **15** of the liquid crystal display device **300** includes a plurality of openings **14a** (including **14a1** and **14a2**). **FIG. 32A** schematically illustrates an orientation of the liquid crystal molecules **30a** in the liquid crystal layer **30** in the absence of an applied voltage (OFF state). **FIG. 32B** schematically illustrates a state where the orientation of the liquid crystal molecules **30a** has just started to change (initial ON state) according to the voltage applied across the liquid crystal layer **30**. **FIG. 32C** schematically illustrates a state where the orientation of the liquid crystal molecules **30a** has changed and become steady according to the applied voltage. In **FIG. 32A** to **FIG. 32C**, the lower electrode **12**, which is provided so as to oppose the openings **14a1** and **14a2** via the dielectric layer **13**, overlaps both of the openings **14a1** and **14a2** and also extends in a region between the openings **14a1** and **14a2** (a region where the upper electrode **14** exists). However, the arrangement of the lower electrode **12** is not limited to this, but the arrangement may alternatively be such that the area of the lower electrode **12**=the area of the opening **14a**, or the area of the lower electrode **12**<the area of the opening **14a**, for each of the openings **14a1** and **14a2**. Thus, the structure of the lower electrode **12** is not limited to any particular structure as long as the lower electrode **12** opposes at least a portion of the opening **14a** via the dielectric layer **13**. However, when the lower electrode **12** is provided within the opening **14a**, there is a region (gap region) in which neither the lower electrode **12** nor the upper electrode **14** is present in a plane as viewed in the direction normal to the substrate **11**. A sufficient voltage may not be applied across the liquid crystal layer **30** in the region opposing the gap region. Therefore, in order to stabilize the orientation of the liquid crystal layer **30**, it is preferred that the width of the gap region is sufficiently reduced. Typically, it is preferred that the width of the gap region does not exceed about 4 μ m. Moreover, the lower electrode **12** that is provided at a position such that it opposes the region where the conductive layer of the upper electrode **14** exists via the dielectric layer **13** has substantially no influence on the electric field applied across the liquid crystal layer **30**. Therefore, such a lower electrode **12** may or may not be patterned.

[0238] As illustrated in **FIG. 32A**, when the picture element electrode **15** and the counter electrode **22** are at the same potential (a state where no voltage is applied across the liquid crystal layer **30**), the liquid crystal molecules **30a** in the picture element region are aligned vertical to the surfaces of the substrates **11** and **21**. Herein, it is assumed that the upper electrode **14** and the lower electrode **12** of the picture element electrode **15** are at the same potential for the sake of simplicity.

[0239] When a voltage is applied across the liquid crystal layer **30**, a potential gradient represented by equipotential lines **EQ** shown in **FIG. 32B** is produced. A uniform potential gradient represented by equipotential lines **EQ** parallel to the surfaces of the upper electrode **14** and the counter electrode **22** is produced in the liquid crystal layer **30** in a region between the upper electrode **14** of the picture element electrode **15** and the counter electrode **22**. A potential gradient according to the potential difference between the lower electrode **12** and the counter electrode **22** is produced in regions of the liquid crystal layer **30** located above the openings **14a1** and **14a2** of the upper electrode **14**. The potential gradient produced in the liquid crystal layer **30** is influenced by a voltage drop due to the dielectric layer **13**, whereby the equipotential lines **EQ** in the liquid crystal layer **30** drop in regions corresponding to the openings **14a1** and **14a2** (creating a plurality of “troughs” in the equipotential lines **EQ**). Since the lower electrode **12** is provided in a region opposing the openings **14a1** and **14a2** via the dielectric layer **13**, the liquid crystal layer **30** around the respective central portions of the openings **14a1** and **14a2** also has a potential gradient that is represented by a portion of the equipotential lines **EQ** parallel to the plane of the upper electrode **14** and the counter electrode **22** (“the bottom of the trough” of the equipotential lines **EQ**). An inclined electric field represented by an inclined portion of the equipotential lines **EQ** is produced in the liquid crystal layer **30** above an edge portion **EG** of each of the openings **14a1** and **14a2** (the peripheral portion of and within the opening including the boundary thereof).

[0240] As is clear from a comparison between **FIG. 32B** and **FIG. 2A**, since the liquid crystal display device **300** has the lower electrode **12**, a sufficient electric field can act also upon the liquid crystal molecules in the liquid crystal domain formed in a region corresponding to the opening **14a**.

[0241] A torque acts upon the liquid crystal molecules **30a** having a negative dielectric anisotropy so as to direct the axial orientation of the liquid crystal molecules **30a** to be parallel to the equipotential lines **EQ**. Therefore, the liquid crystal molecules **30a** above the right edge portion **EG** in **FIG. 32B** incline (rotate) clockwise and the liquid crystal molecules **30a** above the left edge portion **EG** incline (rotate) counterclockwise as indicated by arrows in **FIG. 32B**. As a result, the liquid crystal molecules **30a** above the edge portions **EG** are oriented parallel to the corresponding portions of the equipotential lines **EQ**.

[0242] When an electric field represented by a portion of the equipotential lines **EQ** inclined with respect to the axial orientation of the liquid crystal molecules **30a** (an inclined electric field) is produced at the edge portions **EG** of the openings **14a1** and **14a2** of the liquid crystal display device **300**, as illustrated in **FIG. 32B**, the liquid crystal molecules

30a incline in whichever direction (the counterclockwise direction in the illustrated example) that requires less rotation for the liquid crystal molecules **30a** to be parallel to the equipotential line **EQ**, as illustrated in **FIG. 3B**. The liquid crystal molecules **30a** in a region where an electric field represented by an equipotential line **EQ** perpendicular to the axial orientation of the liquid crystal molecules **30a** is produced incline in the same direction as the liquid crystal molecules **30a** located on the inclined portion of the equipotential lines **EQ** so that the orientation thereof is continuous (in conformity) with the orientation of the liquid crystal molecules **30a** located on the inclined portion of the equipotential lines **EQ** as illustrated in **FIG. 3C**.

[0243] The change in the orientation of the liquid crystal molecules **30a**, starting from those that are located on the inclined portion of the equipotential lines **EQ**, proceeds as described above and reaches a steady state, i.e., an inclined orientation (radially-inclined orientation) that is symmetric about the center **SA** of each of the openings **14a1** and **14a2**, as schematically illustrated in **FIG. 3C**. The liquid crystal molecules **30a** in a region of the upper electrode **14** located between the two adjacent openings **14a1** and **14a2** also take an inclined orientation so that the orientation thereof is continuous (in conformity) with the orientation of the liquid crystal molecules **30a** at the edge portions of the openings **14a1** and **14a2**. The liquid crystal molecules **30a** in the middle between the edge of the opening **14a1** and the edge of the opening **14a2** are subject to substantially the same influence from the liquid crystal molecules **30a** at the respective edge portions, and thus remain in a vertical alignment as the liquid crystal molecules **30a** located around the central portion of each of the openings **14a1** and **14a2**. As a result, the liquid crystal layer above the upper electrode **14** between the adjacent two openings **14a1** and **14a2** also takes a radially-inclined orientation. Note that the inclination direction of the liquid crystal molecules differs between the radially-inclined orientation of the liquid crystal layer in each of the openings **14a1** and **14a2** and that of the liquid crystal layer between the openings **14a1** and **14a2**. Observation of the orientation around the liquid crystal molecule **30a** at the center of each region having the radially-inclined orientation illustrated in **FIG. 3C** shows that the liquid crystal molecules **30a** in the regions of the openings **14a1** and **14a2** are inclined so as to form a cone that spreads toward the counter electrode, whereas the liquid crystal molecules **30a** in the region between the openings are inclined so as to form a cone that spreads toward the upper electrode **14**. Since both of these radially-inclined orientations are formed so as to conform with the inclined orientation of the liquid crystal molecules **30a** at an edge portion, the two radially-inclined orientations are continuous with each other.

[0244] As described above, when a voltage is applied across the liquid crystal layer **30**, the liquid crystal molecules **30a** incline, starting from those above the respective edge portions **EG** of the openings **14a1** and **14a2** provided in the upper electrode **14**. Then, the liquid crystal molecules **30a** in the surrounding regions incline so as to conform with the inclined orientation of the liquid crystal molecules **30a** above the edge portion **EG**. Thus, a radially-inclined orientation is formed. Therefore, as the number of openings **14a** to be provided in each picture element region increases, the number of liquid crystal molecules **30a** that initially start inclining in response to an applied electric field also

increases, thereby reducing the amount of time that is required to achieve the radially-inclined orientation across the entire picture element region. Thus, by increasing the number of openings **14a** to be provided in the picture element electrode **15** for each picture element region, it is possible to improve the response speed of a liquid crystal display device. Moreover, by employing a two-layer electrode including the upper electrode **14** and the lower electrode **12** as the picture element electrode **15**, a sufficient electric field can act also upon the liquid crystal molecules in a region corresponding to the opening **14a**, thereby improving the response characteristic of the liquid crystal display device.

[0245] Moreover, the orientation of a liquid crystal domain that takes a radially-inclined orientation can be further stabilized by providing a protrusion on the counter substrate for orienting the liquid crystal molecules into a radially-inclined orientation in cooperation with the orientation-regulating structure (the electrode structure with openings therein as described above) of the TFT substrate.

[0246] **FIG. 33A** and **FIG. 33B** illustrate a liquid crystal display device **400** including protrusions **28** provided on a counter substrate **400b**. **FIG. 33A** is a plan view, and **FIG. 33B** is a cross-sectional view taken along line **33B-33B'** of **FIG. 33A**.

[0247] The liquid crystal display device **400** includes the TFT substrate **100a** having the picture element electrode **14** in which the openings **14a** are formed, and the counter substrate **400b** having the protrusions **28** that are protruding toward the liquid crystal layer **30**. Note that the TFT substrate **100a** is not limited to the illustrated arrangement, but may alternatively be any of the various arrangements described above.

[0248] Each protrusion **28** provided on the counter substrate **400b** has a side surface **28s** that is inclined with respect to the substrate plane of the counter substrate **400b** (the substrate plane of the transparent substrate **11**), and the protrusion **28** is formed on the counter electrode **22** in the illustrated example.

[0249] The surface of each protrusion **28** has a vertical alignment power (typically, a vertical alignment film (not shown) is formed so as to cover the protrusion **28**), and the liquid crystal molecules **30a** are aligned substantially vertical to the side surface **28s** due to the anchoring effect thereof, as illustrated in **FIG. 33B**. Therefore, the liquid crystal molecules **30a** around the protrusion **28** are in a radially-inclined orientation about the protrusion **28**. Thus, the protrusion **28** orients the liquid crystal molecules **30a** into a radially-inclined orientation by virtue of the configuration of the surface thereof (with a vertical alignment power).

[0250] Moreover, the protrusion **28** is provided in a region opposing the solid portion **14b** of the picture element electrode **14** and, more specifically, is provided so as to oppose the central portion of the unit solid portion **14b'**. With such an arrangement of the protrusions **28**, the inclination direction of the liquid crystal molecules due to the protrusion **28** is aligned with the orientation direction of the radially-inclined orientation of a liquid crystal domain that is formed in a region corresponding to the unit solid portion **14b'** of the picture element electrode **14** by the orientation-regulating structure. Since the protrusion **28** exerts an ori-

entation-regulating force regardless of the presence/absence of an applied voltage, a stable radially-inclined orientation can be obtained at any gray level, and a desirable resistance to a stress is also provided.

[0251] As described above, in the liquid crystal display device **400**, the direction of the radially-inclined orientation formed by the orientation-regulating structure is aligned with the direction of the radially-inclined orientation formed by the protrusion **28**, thereby stabilizing the radially-inclined orientation, in the presence of an applied voltage across the liquid crystal layer **30**, i.e., in the presence of an applied voltage between the picture element electrode **14** and the counter electrode **22**. This is schematically shown in **FIG. 34A** to **FIG. 34C**. **FIG. 34A** illustrates a state in the absence of an applied voltage, **FIG. 34B** illustrates a state where the orientation has just started to change (initial ON state) after application of a voltage, and **FIG. 34C** schematically illustrates a steady state during the voltage application.

[0252] As illustrated in **FIG. 34A**, the orientation-regulating force exerted by the protrusion **28** acts upon the liquid crystal molecules **30a** in the vicinity thereof even in the absence of an applied voltage, thereby forming a radially-inclined orientation.

[0253] When voltage application begins, an electric field represented by equipotential lines **EQ** shown in **FIG. 34B** is produced (by the orientation-regulating structure), and a liquid crystal domain in which the liquid crystal molecules **30a** are in a radially-inclined orientation is formed in each region corresponding to the opening **14a** and each region corresponding to the solid portion **14b**, and the liquid crystal layer **30** reaches a steady state as illustrated in **FIG. 34C**. The inclination direction of the liquid crystal molecules **30a** in each liquid crystal domain formed in a region corresponding to the solid portion **14b** coincides with the direction in which the liquid crystal molecules **30a** are inclined by the orientation-regulating force exerted by the protrusion **28** which is provided in a corresponding region.

[0254] When a stress is applied upon the liquid crystal display device **400** which is in a steady state, the radially-inclined orientation of the liquid crystal layer **30** once collapses, but upon removal of the stress, the radially-inclined orientation is restored because of the orientation-regulating forces from the orientation-regulating structure and the protrusion **28** acting upon the liquid crystal molecules **30a**. Therefore, the occurrence of an after image due to a stress is suppressed.

[0255] Note that the orientation-regulating force from the protrusion **28** does not have to be strong because it is only required to have an effect of stabilizing a radially-inclined orientation formed by the orientation-regulating structure and fixing the central axis position thereof. For example, a sufficient orientation-regulating force is obtained by forming the protrusion **28** with a diameter of about 15 μm and a height (thickness) of about 1 μm for the unit solid portion **14b'** having a diameter of about 30 μm to about 50 μm .

[0256] While the material of the protrusion **28** is not limited to any particular material, the protrusion **28** can easily be formed by using a dielectric material such as a resin. Moreover, it is preferred to use a resin material that deforms by heat, in which case it is possible to easily form the protrusion **28** having a slightly-humped cross section as

illustrated in **FIG. 33B** through a heat treatment after patterning. The protrusion **28** having a slightly-humped cross section (along the normal to the substrate plane) with a vertex as illustrated in the figure provides a desirable effect of fixing the central position of the radially-inclined orientation. Of course, the protrusion may alternatively have a top surface.

[0257] Moreover, while **FIG. 33A** illustrates the protrusion **28** whose cross section (along the substrate plane of the counter substrate **400b**) is in a generally circular shape, the cross-sectional shape of the protrusion **28** is not limited thereto, and the protrusion **28** may alternatively have a generally rectangular cross section or a generally cross-shaped cross section. In order to reduce the viewing angle dependence, the protrusion **28** preferably has a cross-sectional shape having a high degree of rotational symmetry.

[0258] **FIG. 35** illustrates a liquid crystal display device **400A** including protrusions **28A** having a generally cross-shaped cross section. The liquid crystal display device **400A** has substantially the same structure as that of the liquid crystal display device **400** illustrated in **FIG. 33A** and **FIG. 33B** except that the protrusions **28A** have a generally cross-shaped cross section.

[0259] As compared with a protrusion having a generally circular cross section and having about the same area, the protrusion **28A** having a generally cross-shaped cross section has a larger inclined side surface that exerts an orientation-regulating force on the liquid crystal molecules **30a**, and is capable of exerting the orientation-regulating force over a larger area in a liquid crystal domain. Therefore, it is possible to more effectively exert a greater orientation-regulating force on the liquid crystal molecules **30a**. Thus, the liquid crystal display device **400A** including the protrusion **28A** having a generally cross-shaped cross section has a further stabilized orientation and an improved response speed to voltage application.

[0260] Of course, it is possible to employ an arrangement where protrusions of different cross-sectional shapes (along the substrate plane) are present on the counter substrate. For example, protrusions having a greater orientation-regulating force (e.g., the protrusions **28A** having a generally cross-shaped cross section illustrated in **FIG. 35**) may be provided for improving the orientation-regulating force in regions where an unnecessary electric field that adversely influences the display is likely to occur (e.g., in the vicinity of the bus line), while providing protrusions having a different cross-sectional shape in other regions.

[0261] **FIG. 36** and **FIG. 37** illustrate liquid crystal display devices **400B** and **400C**, respectively, including protrusions of different cross-sectional shapes on the counter substrate **400b**.

[0262] The TFT substrate of the liquid crystal display device **400B** illustrated in **FIG. 36** includes the picture element electrode **14** in which a portion of the unit solid portion **14b'** (having a shape that corresponds to about one half of the unit solid portion **14b'**) is located along the gate bus line **15**, as in the liquid crystal display device **100E** illustrated in **FIG. 21A** and **FIG. 21B**. The counter substrate of the liquid crystal display device **400B** includes a protrusion **28B** having a generally T-shaped cross section in each region corresponding to a portion of the unit solid portion

14b' that is located along the gate bus line **15**, and includes the protrusion **28** having a generally circular cross section in each region corresponding to the unit solid portion **14b'**.

[0263] The direction in which the liquid crystal molecules **30a** are inclined by the generally T-shaped protrusion **28B** is aligned with the orientation direction of the radially-inclined orientation of a portion of a liquid crystal domain that is formed corresponding to the portion of the unit solid portion **14b'** (having a shape that corresponds to about one half of the unit solid portion **14b'**) located along the gate bus line **15**. The generally T-shaped protrusion **28B** provided corresponding to the portion of the unit solid portion **14b'** (having a shape that corresponds to about one half of the unit solid portion **14b'**) is capable of effectively exerting a greater orientation-regulating force on the liquid crystal molecules **30a** for the same reason as the generally cross-shaped protrusion **28A** provided in each region corresponding to the unit solid portion **14b'**.

[0264] Therefore, in the liquid crystal display device **400B** in which the protrusions **28B** having a great orientation-regulating force are located along the gate bus line **15**, it is possible to effectively regulate the orientation of the liquid crystal molecules **30a** located along the gate bus line **15** whose orientation is likely to be disturbed.

[0265] The TFT substrate of the liquid crystal display device **400C** illustrated in **FIG. 37** includes the picture element electrode **14** in which a portion of the unit solid portion **14b'** (having a shape that corresponds to about one half of the unit solid portion **14b'**) is located along the gate bus line **15** and the source bus line **16**, as in the liquid crystal display device **100G** illustrated in **FIG. 23**. The counter substrate of the liquid crystal display device **400C** includes the protrusion **28B** having a generally T-shaped cross section in each region corresponding to the portion of the unit solid portion **14b'** that is located along the gate bus line **15** and the source bus line **16**, and includes the protrusion **28** having a generally circular cross section in each region corresponding to the unit solid portion **14b'**.

[0266] In the liquid crystal display device **400C** in which the protrusions **28B** having a great orientation-regulating force are located along the gate bus line **15** and the source bus line **16**, it is possible to effectively regulate the orientation of the liquid crystal molecules **30a** that are located along the gate bus line **15** and those that are located along the source bus line **16**.

[0267] Arrangement of Polarization Plate and Phase Plate

[0268] A so-called "vertical alignment type liquid crystal display device", including a liquid crystal layer in which liquid crystal molecules having a negative dielectric anisotropy are vertically aligned in the absence of an applied voltage, is capable of displaying an image in various display modes. For example, a vertical alignment type liquid crystal display device may be used in an optical rotation mode or in a display mode that is a combination of an optical rotation mode and a birefringence mode, in addition to a birefringence mode in which an image is displayed by controlling the birefringence of the liquid crystal layer with an electric field. It is possible to obtain a birefringence-mode liquid crystal display device by providing a pair of polarization plates on the outer side (the side away from the liquid crystal layer **30**) of the pair of substrates (e.g., the TFT substrate and

the counter substrate) of any of the liquid crystal display devices described above. Moreover, a phase difference compensator (typically a phase plate) may be provided as necessary. Furthermore, a liquid crystal display device with a high brightness can be obtained also by using generally circularly-polarized light.

[0269] Another Alternative Embodiment

[0270] The decrease in the display quality due to the inclined electric field produced in the vicinity of the edge of the bus line occurs not only in liquid crystal display devices having an orientation-regulating structure (an electrode structure having unit solid portions and openings) for forming a liquid crystal domain that takes a radially-inclined orientation, but occurs in liquid crystal display devices in general that include a vertical alignment type liquid crystal layer, which takes a vertical alignment in the absence of an applied voltage, and that regulate the orientation by using an electrode structure having openings therein.

[0271] With the present invention, it is possible to improve the display quality in liquid crystal display devices in general that include a vertical alignment type liquid crystal layer and that regulate the orientation by using an electrode structure having openings therein.

[0272] A structure of a liquid crystal display device **500** according to another alternative embodiment of the present invention will be described with reference to **FIG. 38A** and **FIG. 38B**. **FIG. 38A** is a plan view as viewed in the substrate normal direction, and **FIG. 38B** is a cross-sectional view taken along line **38B-38B'** of **FIG. 38A**. **FIG. 38A** and **FIG. 38B** illustrate a state where a voltage is applied across the liquid crystal layer.

[0273] The liquid crystal display device **500** includes an active matrix substrate (hereinafter referred to as a "TFT substrate") **500a**, a counter substrate (referred to also as a "color filter substrate") **500b**, and the liquid crystal layer **30** provided between the TFT substrate **500a** and the counter substrate **500b**.

[0274] The liquid crystal molecules **30a** of the liquid crystal layer **30** have a negative dielectric anisotropy, and are aligned vertical to the surface of the vertical alignment film in the absence of an applied voltage across the liquid crystal layer **30** by virtue of a vertical alignment film (not shown), as a vertical alignment layer, which is provided on one surface of each of the TFT substrate **500a** and the counter substrate **500b** that is closer to the liquid crystal layer **30**.

[0275] The TFT substrate **500a** of the liquid crystal display device **500** includes the transparent substrate (e.g., a glass substrate) **11** and a picture element electrode **19** provided on the surface of the transparent substrate **11**. The counter substrate **500b** includes the transparent substrate (e.g., a glass substrate) **21** and the counter electrode **22** provided on the surface of the transparent substrate **21**. The orientation of the liquid crystal layer **30** changes for each picture element region according to the voltage applied between the picture element electrode **19** and the counter electrode **22** which are arranged so as to oppose each other via the liquid crystal layer **30**. A display is produced by utilizing a phenomenon that the polarization or amount of light passing through the liquid crystal layer **30** changes along with the change in the orientation of the liquid crystal layer **30**.

[0276] The picture element electrode 19 of the TFT substrate 500a includes a plurality of openings 19a and a solid portion 19b. The opening 19a refers to a portion of the picture element electrode 19 made of a conductive film (e.g., an ITO film) from which the conductive film has been removed, and the solid portion 19b refers to a portion thereof where the conductive film is present (the portion other than the openings 19a). While a plurality of openings 19a are formed for each picture element electrode, the solid portion 19b is basically made of a single continuous conductive film.

[0277] In the present embodiment, each opening 19a has a slit shape (i.e., a shape having a significantly small width with respect to its length (the width being the dimension in the direction perpendicular to the length)). Each of the openings 19a has a side that extends in a direction at 45° with respect to the long side and the short side of the picture element region (the column and row directions of the matrix pattern arrangement). Moreover, the direction in which the side extends in the upper half of the picture element region is different by 90° from that in the lower half of the picture element region.

[0278] When a voltage is applied between the picture element electrode 19 and the counter electrode 22, an inclined electric field represented by an inclined portion of the equipotential lines EQ is produced in the liquid crystal layer 30 above the edge portion of the opening 19a of the picture element electrode 19 (the peripheral portion of and within the opening 19a including the boundary thereof). Therefore, the liquid crystal molecules 30a having a negative dielectric anisotropy, which are in a vertical alignment in the absence of an applied voltage, are inclined to be along the inclination direction of the inclined electric field produced at the edge portion of the opening 19a. Thus, when a voltage is applied between the picture element electrode 19 and the counter electrode 22, the orientation of the liquid crystal layer 30 is regulated by the inclined electric field produced at the edge portion of each of the openings 19a of the picture element electrode 19.

[0279] In the liquid crystal display device 500, the orientation of the liquid crystal layer 30 is regulated by the inclined electric field produced at the edge portion of the opening 19a, whereby the liquid crystal molecules 30a in the picture element region are oriented in four different azimuth directions at an angle of an integer multiple of 90° with one another. In other words, in the liquid crystal display device 500, the picture element region has a multi-domain orientation. Therefore, the liquid crystal display device 500 has a desirable viewing angle characteristic.

[0280] Moreover, the counter substrate 500b of the liquid crystal display device 500 includes protrusions 29 on one surface thereof that is closer to the liquid crystal layer 30. Each protrusion 29 has an inclined side surface 29s and is formed in a zigzag pattern (or a ">"-shaped pattern) as viewed in the substrate normal direction. The direction in which the inclined side surface 29s extends coincides with the direction in which the side of the opening 19a extends, and the protrusion 29 is provided so as to be located substantially in the middle of two openings 19a that are arranged adjacent to each other in the width direction thereof.

[0281] The surface of the protrusion 29 has a vertical alignment power (typically, a vertical alignment film (not

shown) is formed so as to cover the protrusion 29), and the liquid crystal molecules 30a are aligned substantially vertical to the side surface 29s due to the anchoring effect thereof. When a voltage is applied across the liquid crystal layer 30 being in such a state, other liquid crystal molecules 30a around the protrusion 29 incline so as to conform with the inclined orientation of the liquid crystal molecules 30a on the inclined side surface 29s due to the anchoring effect of the inclined side surface 29s of the protrusion 29.

[0282] Since the direction of the orientation regulation by the inclined electric field produced at the edge portion of the opening 19a of the picture element electrode 19 is aligned with the direction of the orientation regulation by the protrusion 29, the protrusion 29 further stabilizes the orientation of the liquid crystal layer, which is brought into a multi-domain orientation by the inclined electric field in the presence of an applied voltage.

[0283] The TFT substrate 500a of the liquid crystal display device 500 includes a TFT (not shown) as a switching element electrically connected to the picture element electrode 19, and the bus line 18 including the gate bus line (scanning line) 15 and the source bus line (signal line) 16 that are electrically connected to the TFT.

[0284] In the present embodiment, the opening 19a of the picture element electrode 19 is formed so as not to run across the edge of the gate bus line 15, and the edge of the gate bus line 15 is covered by the solid portion 19b of the picture element electrode 19, as illustrated in FIG. 38A. Therefore, a high-quality display is realized. The reason for this will be described with reference to FIG. 38A, FIG. 38B and FIG. 39. FIG. 39 is a plan view schematically illustrating a liquid crystal display device 800 in which a portion of the edge of the gate bus line 15 is not covered by the solid portion 19b of the picture element electrode 19.

[0285] An inclined electric field is produced in the vicinity of the edge of the bus line 18, and the inclined electric field is produced regardless of the presence/absence of the applied voltage across the liquid crystal layer 30 between the picture element electrode 19 and the counter electrode 22. Therefore, in a liquid crystal display device that produces a display in a normally black mode, if the liquid crystal molecules 30a in the vicinity of the edge of the bus line 18 are inclined, in the absence of an applied voltage, by the orientation-regulating force from the inclined electric field, light leakage may occur, thereby decreasing the contrast ratio. Particularly, since the gate bus line 15 is, most of the time, under the application of a relatively high voltage (OFF voltage) for holding TFTs OFF, the degree of such light leakage is significant in the vicinity of the edge of the gate bus line 15.

[0286] In the liquid crystal display device 800, the picture element electrode 19 includes openings 19a that are formed so as to run across the edge of the gate bus line 15, and thus a portion of the edge of the gate bus line 15 is not covered by the solid portion 19b of the picture element electrode 19, as illustrated in FIG. 39. Therefore, around the portion of the edge of the gate bus line 15 that is not covered by the solid portion 19b (i.e., in a region LL delimited by a broken line in FIG. 39), the liquid crystal molecules 30a are inclined by the inclined electric field produced in the vicinity of the edge of the gate bus line 15, whereby light leakage occurs.

[0287] Moreover, a residual charge is likely to occur in the opening 19a, through which an insulator material is

exposed, due to the inclined electric field produced in the vicinity of the edge of the bus line 18, and if the liquid crystal molecules 30a in the opening 19a that is located along the bus line 18 are inclined due to the influence of the residual charge, it will cause light leakage. While the degree of the residual charge varies depending on the surface condition of the insulator material, variations in the surface condition of the insulator material occur when printing an alignment film or when injecting a liquid crystal material. Therefore, in a liquid crystal display device, there are variations in the residual charge in the display plane. If the residual charge varies in the display plane, the degree of light leakage also varies in the display plane, thereby causing local variations in the contrast ratio, thus resulting in non-uniformity. Particularly, since a relatively high voltage is applied to the gate bus line 15, as described above, the gate bus line 15 significantly contributes to the occurrence of the non-uniformity.

[0288] In the liquid crystal display device 800, the picture element electrode 19 includes openings 19a that are formed so as to run across the edge of the gate bus line 15, and thus a portion of the edge of the gate bus line 15 is not covered by the solid portion 19b of the picture element electrode 19, as illustrated in FIG. 39. Therefore, there is a region that is not covered by the conductive film (solid portion 19b) of the picture element electrode 19 in the vicinity of the edge of the gate bus line 15, whereby light leakage occurs due to a residual charge in such a region, thus causing display non-uniformity.

[0289] In contrast, in the liquid crystal display device 500 of the present embodiment, the openings 19a of the picture element electrode 19 are formed so as not to run across the edge of the gate bus line 15, and the edge of the gate bus line 15 is covered by the solid portion 19b of the picture element electrode 19. Therefore, the liquid crystal molecules 30a of the liquid crystal layer 30 are electrically shielded from the influence of the inclined electric field produced in the vicinity of the edge of the bus line 18. Thus, the liquid crystal molecules 30a of the liquid crystal layer 30 are not inclined by the orientation-regulating force from the inclined electric field. Therefore, the occurrence of light leakage is suppressed, thereby suppressing the decrease in the contrast ratio. Moreover, in the liquid crystal display device 500, the edge of the gate bus line 15 is covered by the solid portion 19b of the picture element electrode 19, and the region in the vicinity of the edge of the gate bus line 15 is covered by the conductive film (solid portion 19b) of the picture element electrode 19, whereby a residual charge is unlikely to occur, and thus the occurrence of non-uniformity is suppressed. As described above, in the liquid crystal display device 500, the occurrence of light leakage due to the inclined electric field produced in the vicinity of the gate bus line 15 is suppressed, thereby suppressing the decrease in the contrast ratio, while the occurrence of non-uniformity due to a residual charge in the vicinity of the gate bus line 15 is suppressed, thereby realizing a high-quality display.

[0290] Note that while the present embodiment has been described above with respect to a case where the edge of the gate bus line 15 is covered by the solid portion 19b in the picture element electrode 19, it is possible to alternatively employ an arrangement where the edge of the source bus line 16 is covered by the solid portion 19b of the picture element electrode 19 as in a liquid crystal display device

500A illustrated in FIG. 40. It is possible to improve the display quality by covering at least one of the edge of the gate bus line 15 and that of the source bus line 16 with the solid portion 19b of the picture element electrode 19. Since the inclined electric field produced in the vicinity of the edge of the gate bus line 15 typically has a greater influence on the liquid crystal molecules than the inclined electric field produced in the vicinity of the edge of the source bus line 16, it is preferred that at least the edge of the gate bus line 15 is covered by the solid portion 19b of the picture element electrode 19. Moreover, in order to more reliably suppress the influence of the inclined electric field produced in the vicinity of the edge of the bus line 18, it is preferred that both the edge of the gate bus line 15 and that of the source bus line 16 are covered by the solid portion 19b of the picture element electrode 19, as in the liquid crystal display device 500B illustrated in FIG. 41.

[0291] While the present invention has been described in preferred embodiments, it will be apparent to those skilled in the art that the disclosed invention may be modified in numerous ways and may assume many embodiments other than those specifically set out and described above. Accordingly, it is intended by the appended claims to cover all modifications of the invention that fall within the true spirit and scope of the invention.

What is claimed is:

1. A liquid crystal display device, comprising a first substrate, a second substrate, a liquid crystal layer provided between the first substrate and the second substrate, and a plurality of picture element regions for producing a display, wherein:

the first substrate includes, on one side thereof that is closer to the liquid crystal layer, a picture element electrode provided for each of the plurality of picture element regions, a switching element electrically connected to the picture element electrode, and a bus line including a gate bus line and a source bus line that are electrically connected to the switching element;

the second substrate includes a counter substrate opposing the picture element electrode via the liquid crystal layer;

the picture element electrode includes a plurality of openings and a solid portion that includes a plurality of unit solid portions;

in each of the plurality of picture element regions, the liquid crystal layer takes a vertical alignment in the absence of an applied voltage between the picture element electrode and the counter electrode, and forms a plurality of liquid crystal domains in the plurality of openings and the solid portion by inclined electric fields produced at respective edge portions of the plurality of openings of the picture element electrode in response to a voltage applied between the picture element electrode and the counter electrode, each of the plurality of liquid crystal domains taking a radially-inclined orientation, and an orientation of each of the plurality of liquid crystal domains changing according to the applied voltage, thereby producing a display; and

in each of the plurality of picture element regions, at least one of the plurality of openings of the picture element electrode that is located along the bus line and located

between two adjacent ones of the plurality of unit solid portions overlaps the bus line.

2. The liquid crystal display device of claim 1, wherein the at least one opening that overlaps the bus line at least includes an opening that is located along the gate bus line.

3. The liquid crystal display device of claim 2, wherein some of the plurality of openings of the picture element electrode that are located along the gate bus line all overlap the bus line.

4. The liquid crystal display device of claim 2, wherein the at least one opening that overlaps the bus line further includes an opening that is located along the source bus line.

5. The liquid crystal display device of claim 3, wherein the at least one opening that overlaps the bus line further includes an opening that is located along the source bus line.

6. A liquid crystal display device, comprising a first substrate, a second substrate, a liquid crystal layer provided between the first substrate and the second substrate, and a plurality of picture element regions for producing a display, wherein:

the first substrate includes, on one side thereof that is closer to the liquid crystal layer, a picture element electrode provided for each of the plurality of picture element regions, a switching element electrically connected to the picture element electrode, and a bus line including a gate bus line and a source bus line that are electrically connected to the switching element;

the second substrate includes a counter substrate opposing the picture element electrode via the liquid crystal layer;

the picture element electrode includes a plurality of openings and a solid portion that includes a plurality of unit solid portions, each of which is surrounded by at least some of the plurality of openings;

the liquid crystal layer takes a vertical alignment in the absence of an applied voltage between the picture element electrode and the counter electrode; and

in each of the plurality of picture element regions, at least one of the plurality of openings of the picture element electrode that is located along the bus line and located between two adjacent ones of the plurality of unit solid portions overlaps the bus line.

7. The liquid crystal display device of claim 6, wherein the at least one opening that overlaps the bus line at least includes an opening that is located along the gate bus line.

8. The liquid crystal display device of claim 7, wherein some of the plurality of openings of the picture element electrode that are located along the gate bus line all overlap the bus line.

9. The liquid crystal display device of claim 7, wherein the at least one opening that overlaps the bus line further includes an opening that is located along the source bus line.

10. The liquid crystal display device of claim 8, wherein the at least one opening that overlaps the bus line further includes an opening that is located along the source bus line.

11. A liquid crystal display device, comprising a first substrate, a second substrate, a liquid crystal layer provided between the first substrate and the second substrate, and a plurality of picture element regions for producing a display, wherein:

the first substrate includes, on one side thereof that is closer to the liquid crystal layer, a picture element electrode provided for each of the plurality of picture element regions, a switching element electrically connected to the picture element electrode, and a bus line including a gate bus line and a source bus line that are electrically connected to the switching element;

the second substrate includes a counter substrate opposing the picture element electrode via the liquid crystal layer;

the picture element electrode includes a plurality of openings and a solid portion;

in each of the plurality of picture element regions, the liquid crystal layer takes a vertical alignment in the absence of an applied voltage between the picture element electrode and the counter electrode, and an orientation of the liquid crystal layer is regulated by an inclined electric field that is produced at an edge portion of each of the plurality of openings of the picture element electrode in the presence of an applied voltage between the picture element electrode and the counter electrode; and

in each of the plurality of picture element regions, at least one of an edge of the gate bus line and that of the source bus line is covered by the solid portion of the picture element electrode.

12. The liquid crystal display device of claim 11, wherein in each of the plurality of picture element regions, at least the edge of the gate bus line is covered by the solid portion of the picture element electrode.

13. The liquid crystal display device of claim 11, wherein: the solid portion of the picture element electrode includes a plurality of unit solid portions; and

in each of the plurality of picture element regions, the liquid crystal layer forms a plurality of liquid crystal domains in the plurality of openings and the solid portion by inclined electric fields produced at respective edge portions of the plurality of openings of the picture element electrode in response to a voltage applied between the picture element electrode and the counter electrode, each of the plurality of liquid crystal domains taking a radially-inclined orientation, and an orientation of each of the plurality of liquid crystal domains changing according to the applied voltage, thereby producing a display.

14. The liquid crystal display device of claim 12, wherein: the solid portion of the picture element electrode includes a plurality of unit solid portions; and

in each of the plurality of picture element regions, the liquid crystal layer forms a plurality of liquid crystal domains in the plurality of openings and the solid portion by inclined electric fields produced at respective edge portions of the plurality of openings of the picture element electrode in response to a voltage applied between the picture element electrode and the counter electrode, each of the plurality of liquid crystal domains taking a radially-inclined orientation, and an orientation of each of the plurality of liquid crystal domains changing according to the applied voltage, thereby producing a display.

15. The liquid crystal display device of claim 13, wherein in each of the plurality of picture element regions, at least one of the plurality of openings of the picture element electrode that is located along the bus line and located between two adjacent ones of the plurality of unit solid portions overlaps the bus line.

16. The liquid crystal display device of claim 13, wherein the liquid crystal layer forms a portion of a liquid crystal

domain that takes a radially-inclined orientation in a portion of the solid portion that is located along the bus line by the inclined electric field in the presence of an applied voltage between the picture element electrode and the counter electrode.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US20030107695A1	公开(公告)日	2003-06-12
申请号	US10/307432	申请日	2002-12-02
[标]申请(专利权)人(译)	久保MASUMI 荻岛KIYOSHI OCHI TAKASHI 渡边KEIZOH		
申请(专利权)人(译)	久保MASUMI 荻岛KIYOSHI OCHI TAKASHI 渡边KEIZOH		
当前申请(专利权)人(译)	久保MASUMI 荻岛KIYOSHI OCHI TAKASHI 渡边KEIZOH		
[标]发明人	KUBO MASUMI OGISHIMA KIYOSHI OCHI TAKASHI WATANABE KEIZOH		
发明人	KUBO, MASUMI OGISHIMA, KIYOSHI OCHI, TAKASHI WATANABE, KEIZOH		
IPC分类号	G02F1/1333 G02F1/1337 G02F1/1343 G02F1/139		
CPC分类号	G02F1/133707 G02F1/1393 G02F1/134309		
优先权	2002282664 2002-09-27 JP 2001366092 2001-11-30 JP		
其他公开文献	US6965422		
外部链接	Espacenet USPTO		

摘要(译)

第一基板在其一侧上包括更靠近液晶层的图像元件电极，开关元件和总线。第二基板包括与像素电极相对的对电极。像素电极包括多个开口和包括多个单元实心部分的实心部分。在每个像素区域中，液晶层在没有施加电压的情况下进行垂直对准，并且在多个开口和实心部分中形成多个液晶畴，每个液晶畴呈径向倾斜取向。通过响应于施加的电压在像素电极的多个开口的各个边缘部分处产生的倾斜电场。在每个像素区域中，像素电极的多个开口中的至少一个开口位于总线上，所述开口沿着总线位于多个单元实心部分中的两个相邻的单元实心部分之间。

