



(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2004/0095342 A1**

Lee et al.

(43) **Pub. Date:**

**May 20, 2004**

(54) **CIRCUIT FOR GENERATING DRIVING VOLTAGES AND LIQUID CRYSTAL DISPLAY USING THE SAME**

**Publication Classification**

(51) **Int. Cl.<sup>7</sup>** ..... **G09G 5/00**  
(52) **U.S. Cl.** ..... **345/211**

(76) **Inventors:** Eun-Sang Lee, Seoul (KR);  
Kwang-Sae Lee, Seoul (KR);  
Won-Seok Ma, Seongnam-city (KR)

(57) **ABSTRACT**

A liquid crystal display is provided, which includes: a liquid crystal panel including a plurality of gate lines, a plurality of data lines, and a plurality of pixels including switching elements connected to the gate lines and the data lines, liquid crystal capacitors and storage capacitors connected to the switching elements; a gate driver for supplying gate voltages for driving the switching elements to the gate lines; a data driver for supplying gray voltages corresponding to applied data signals to the data lines; and a driving voltage generator for boosting a voltage according to a booster clock signal and for generating the gate voltages and a common voltage based on the boosted voltage, and the booster clock signal is synchronized with the common voltage.

Correspondence Address:  
**CANTOR COLBURN, LLP**  
**55 GRIFFIN ROAD SOUTH**  
**BLOOMFIELD, CT 06002**

(21) **Appl. No.:** 10/659,076

(22) **Filed:** Sep. 10, 2003

(30) **Foreign Application Priority Data**

Sep. 12, 2002 (KR) ..... 2002-55349

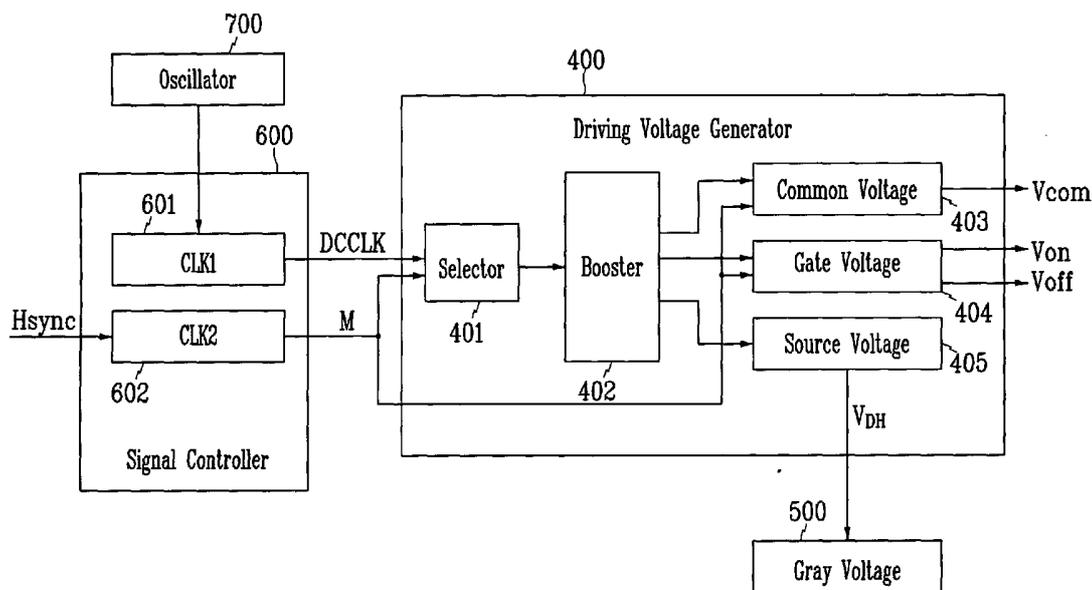


FIG. 1

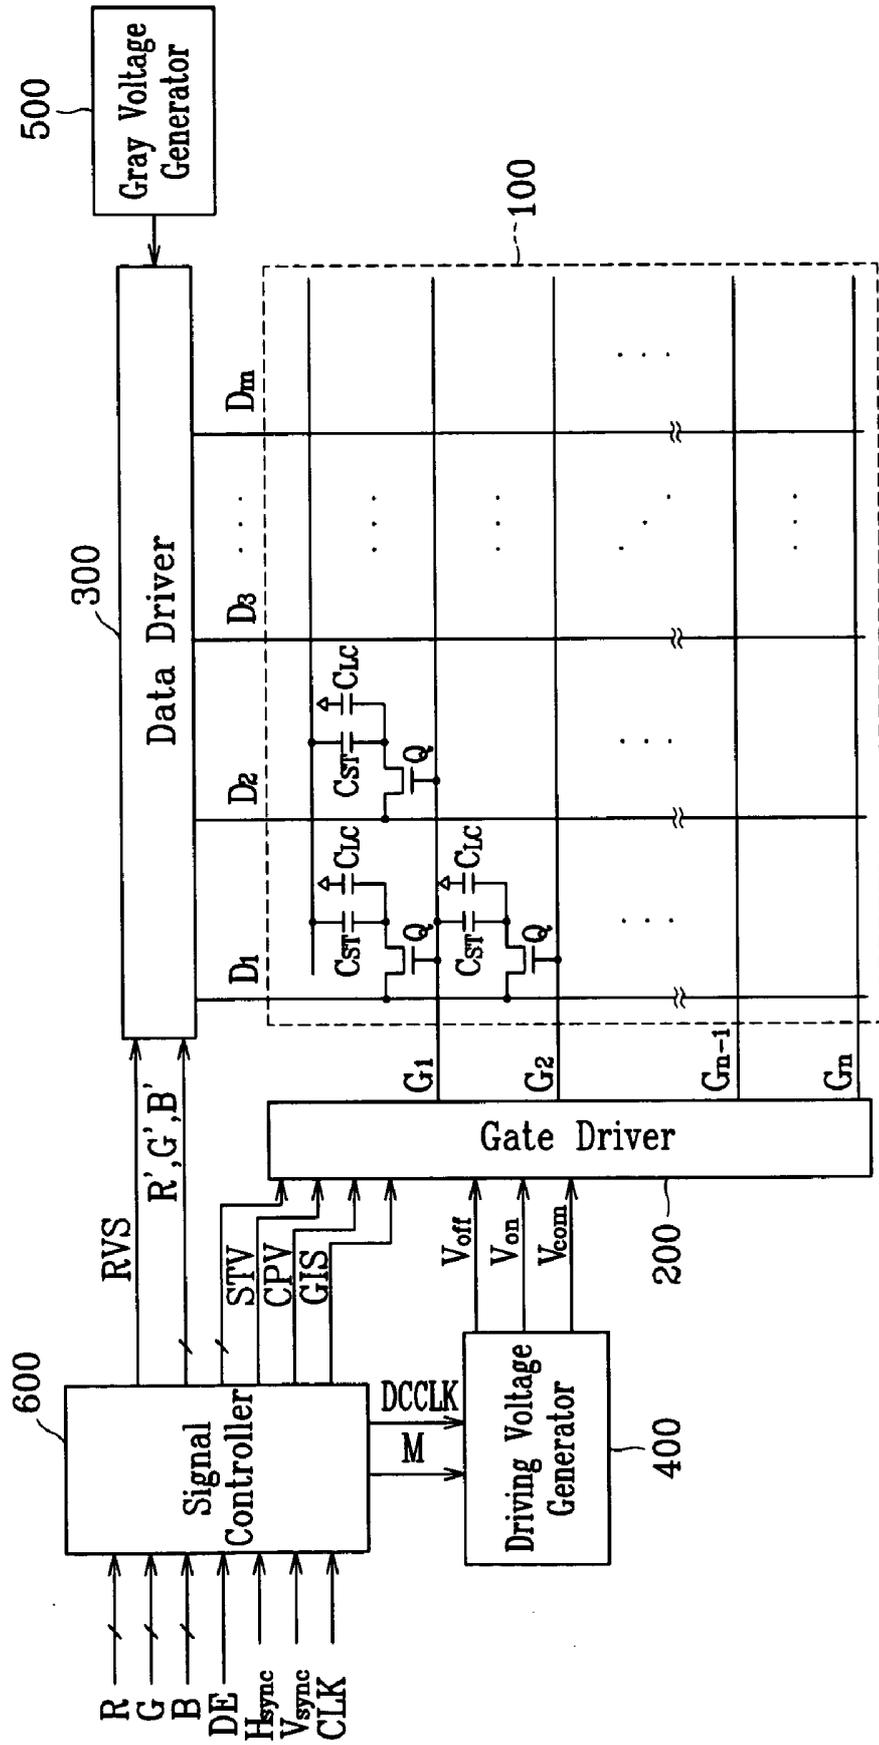


FIG. 2

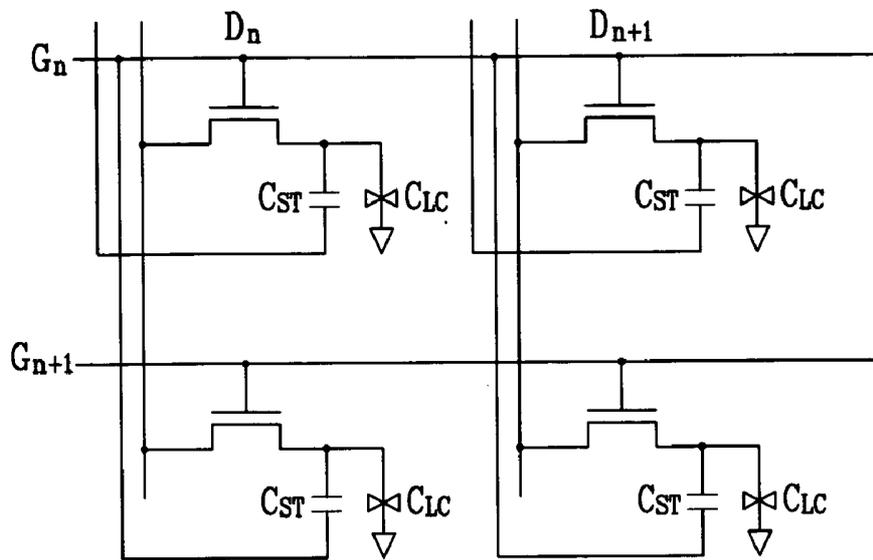


FIG. 3

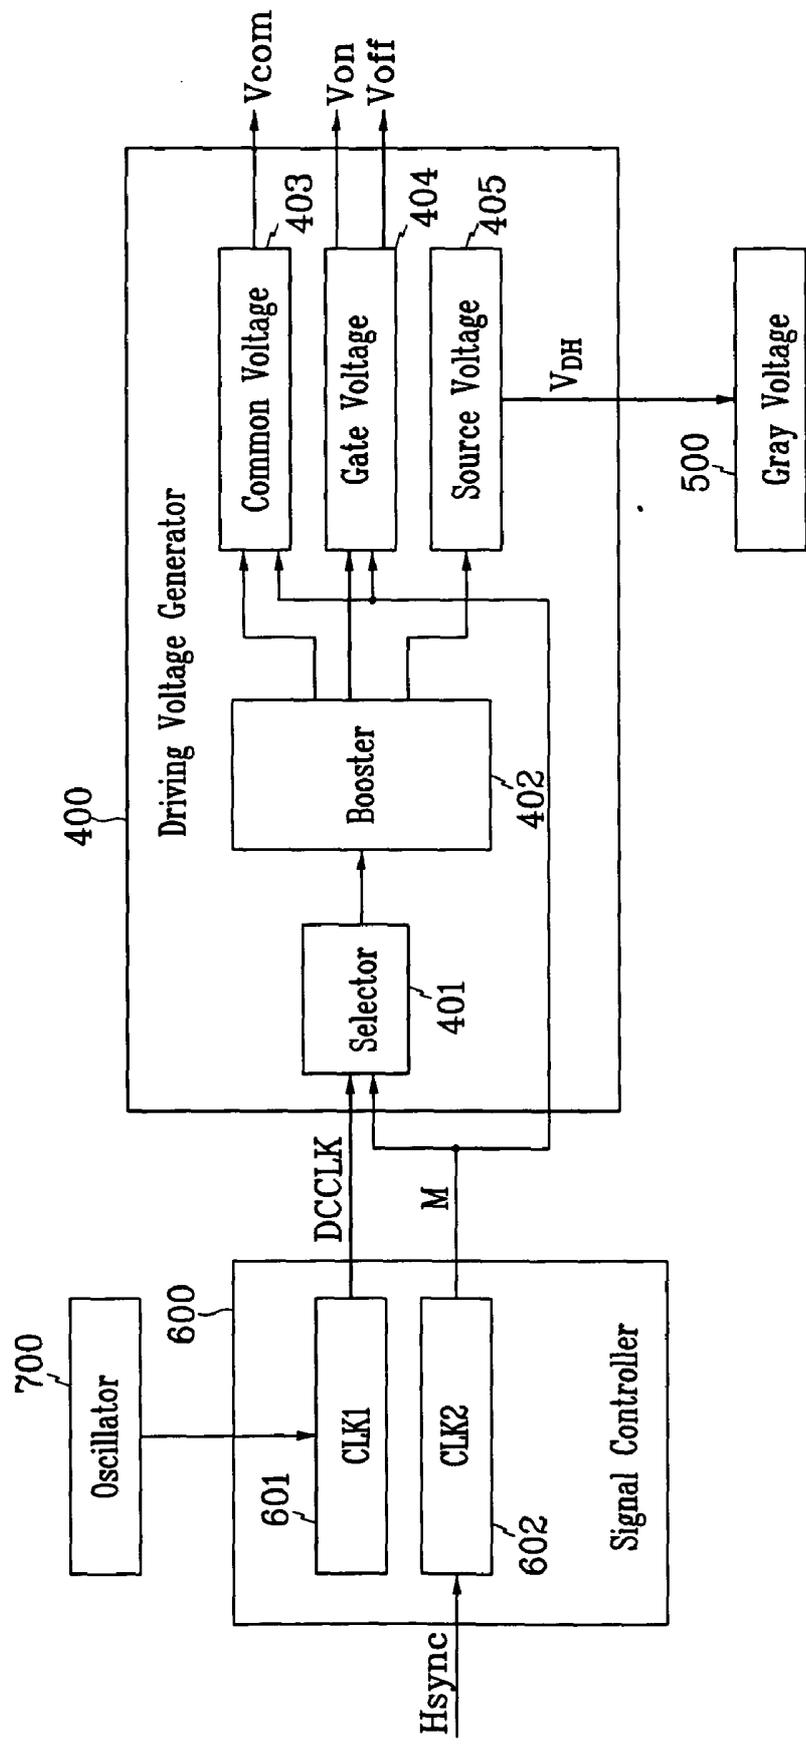


FIG. 4

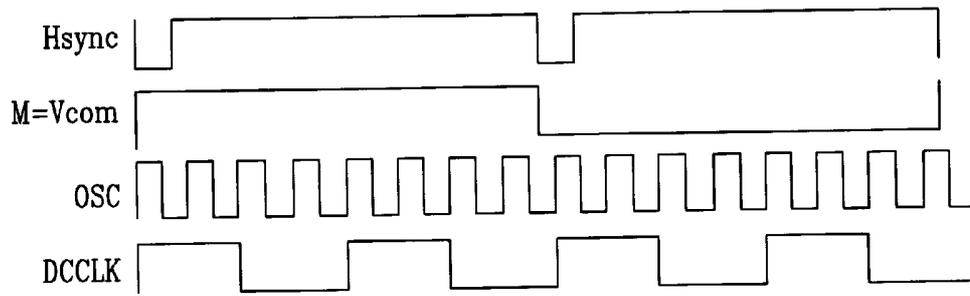


FIG. 5

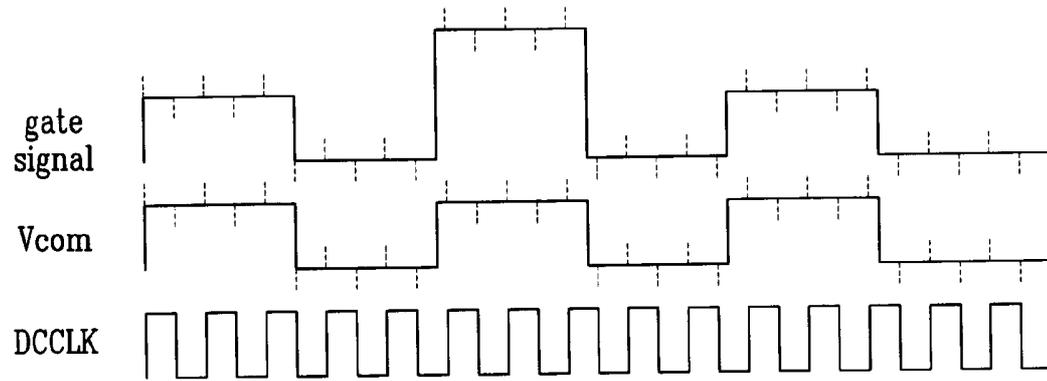


FIG. 6


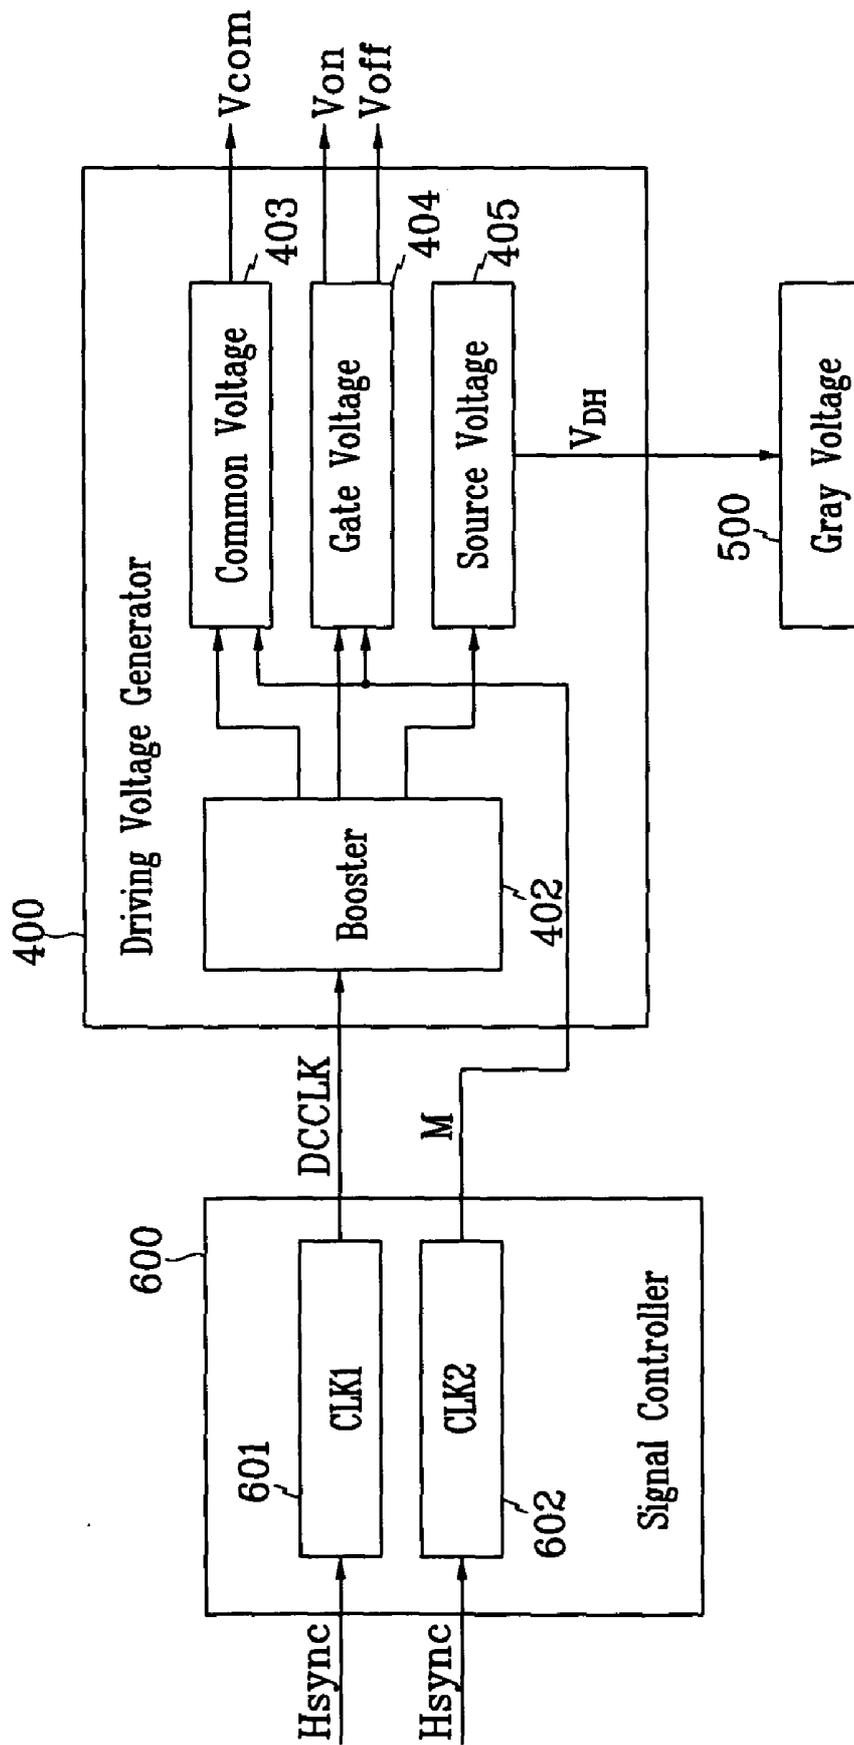


FIG. 7

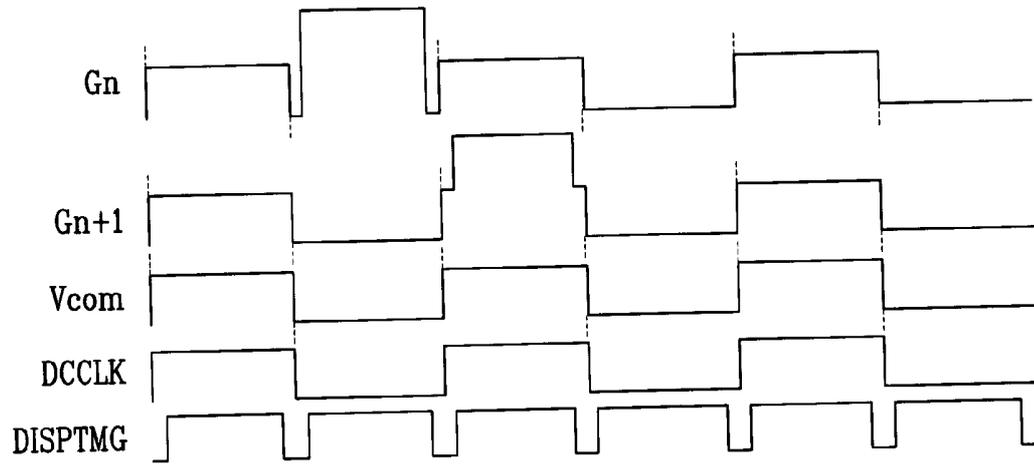

## CIRCUIT FOR GENERATING DRIVING VOLTAGES AND LIQUID CRYSTAL DISPLAY USING THE SAME

### BACKGROUND OF THE INVENTION

[0001] (a) Field of the Invention

[0002] The present invention relates to a liquid crystal display, and more particularly, to a driving voltage generation circuit and a liquid crystal display using the same.

[0003] (b) Description of Related Art

[0004] A conventional liquid crystal display ("LCD") includes two display panels and a liquid crystal layer having dielectric anisotropy, which is interposed between the two display panels. The LCD obtains intended image by applying electric field and controlling the intensity of the electric field to adjust the transmittance of light passing through the liquid crystal layer. The LCD is representative for portable flat panel displays ("FPDs"), and the most popular one among those LCDs is a TFT-LCD using a thin film transistor ("TFT") as a switching element.

[0005] On a display panel on which TFTs are formed, a plurality of gate lines and data lines are formed in horizontal and vertical directions, respectively, and pixel electrodes connected to those gate lines and data lines via the TFTs are formed.

[0006] To apply image data to each pixel in such TFT-LCD, a timing controller receives image data from an image signal source (for example, computer, TV, etc.) and outputs image data to a data driver IC while outputting a driving signal to a gate driver IC in time to a prescribed timing. The gate driver IC applies a gate-on voltage, which is a scan signal, to a gate line to make the TFTs connected to the gate line turn on in order, and the data driver IC simultaneously supplies an analog signal (more specifically, a gray voltage) corresponding to the image data to each data line for the pixel line corresponding to the gate line. Then, the image signal provided to the data line is applied to each pixel via the TFT turned on. At this time, image data are applied to all pixel lines by applying gate-on voltage to all gate lines in order during one frame period to display the image of one frame.

[0007] Methods for maintaining the data voltage applied to each pixel in such LCD include an independent driving method and a previous gate driving method. The independent driving method is a method to charge the storage capacitance formed in each pixel based on the difference between the pixel voltage applied to the pixel electrode and the common voltage  $V_{com}$ . The previous gate driving method is a method to charge the storage capacitance based on voltage difference between the pixel voltage applied to the pixel electrode and the gate voltage.

[0008] The previous gate driving method has advantages that amount of capacitance is larger than that of the independent driving method and that the pixel aperture ratio is larger than that of the independent driving method because separate wiring for charging storage capacitance is not required due to its panel structure. However, since the gate voltage as well as the pixel voltage and common voltage influences to the image display in the previous gate driving method, it is difficult to control the gamma curve. In

addition, flicker is occurred according to the gate voltage delay due to the RC delay on the gate wiring. Moreover, the display quality becomes deteriorated due to the noise included in the voltage supplied to each pixel.

### SUMMARY OF THE INVENTION

[0009] Therefore, a motivation of the present invention is to resolve the problems of the conventional art and to improve image quality of the liquid crystal display operated based on previous gate driving method.

[0010] Especially, a motivation of the present invention is to remove noise generated due to frequency interference between signals.

[0011] To achieve these and other objects, a driving voltage generator circuit for a liquid crystal display according to the present invention comprises: a booster for boosting a voltage according to a first applied clock signal and outputting it; a common voltage generator for generating a common voltage based on the boosted voltage according to a second applied clock signal; and a gate voltage generator for generating gate voltages including a gate-on voltage and a gate-off voltage based on the boosted voltage according to the second clock signal, and the first clock signal is synchronized with the common voltage. In this case, it is preferable that the first and second clock signals are synchronized with an externally applied horizontal synchronization signal.

[0012] A liquid crystal display according to another aspect of the present invention comprises: a liquid crystal panel including a plurality of gate lines and data lines formed in row and column directions, respectively, and a plurality of pixels each of which has a switching element connected to the gate line and data line on the area defined by the crossing of the gate lines and data lines, each pixel further comprising a liquid crystal capacitor and a storage capacitor connected to the switching element, the liquid crystal capacitor being connected to the output terminal of the switching element and the common voltage, and the storage capacitor being connected to the output terminal of the switching element and the previous gate line; a gate driver for supplying a gate voltage for driving the switching element to the gate line; a data driver for supplying a corresponding gray voltage according to an applied data signal to the data line; and a driving voltage generator for boosting a voltage according to a booster clock signal and for generating the gate voltage and a common voltage based on the boosted voltage, and the booster clock signal is synchronized with the common voltage.

[0013] Additionally, the liquid crystal display of the present invention may further comprise a timing controller including: a first clock generator for generating a first clock signal by frequency division of a voltage from an external device; and a second clock generator for generating a second clock signal synchronized with a horizontal synchronization signal from an external device.

[0014] In this case, the driving voltage generator may include: a selector for selecting one from the first clock signal and the second clock signal and outputting the selected signal as a booster clock signal; a booster for boosting a voltage according to the booster clock signal and outputting it; a common voltage generator for generating a

common voltage based on the boosted voltage based on the second clock signal; and a gate voltage generator for generating gate voltages including a gate-on voltage and a gate-off voltage based on the boosted voltage according to the second clock signal, and it is preferable that the selector selects the second clock signal as the booster clock signal.

[0015] On the other hand, the liquid crystal display according to the aspects of the present invention can further comprise a timing controller including: a first clock generator for generating a first clock signal synchronized with a horizontal synchronization signal from an external device; and a second clock generator for generating a first clock signal synchronized with a horizontal synchronization signal from an external device.

[0016] In this case, the driving voltage generator includes: a booster for boosting a voltage according to the first clock signal and outputting it; a common voltage generator for generating a common voltage based on the boosted voltage according to the second clock signal; and a gate voltage generator for generating gate voltages including a gate-on voltage and a gate-off voltage based on the boosted voltage according to the second clock signal.

[0017] On the other hand, the driving voltage generator according to the above aspects may further include a data driving voltage generator for generating a data driving voltage for generating the gray voltage based on the boosted voltage.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a block diagram of an LCD according to an embodiment of the present invention;

[0019] FIG. 2 is an equivalent circuit diagram of a pixel according to an embodiment of the present invention;

[0020] FIG. 3 is a block diagram of a driving voltage generator according to the first embodiment of the present invention;

[0021] FIG. 4 is a waveform diagram of signals used in a driving voltage generator according to the first embodiment of the present invention;

[0022] FIG. 5 shows an example case in which noise is generated due to frequency interference between signals shown in FIG. 4;

[0023] FIG. 6 is a structure diagram of a driving voltage generator according to the second embodiment of the present invention; and

[0024] FIG. 7 is an operational waveform diagram of a driving voltage generator according to the second embodiment of the present invention.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0025] The present invention now will be described in more detail hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. However, this invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

[0026] FIG. 1 shows a structure of an LCD according to an embodiment of the present invention, and FIG. 2 shows a structure of the pixel shown in FIG. 1 in more detail.

[0027] As shown in FIG. 1, the LCD according to an embodiment of the present invention includes a liquid crystal panel 100, a gate driver 200 and a data driver 300 connected thereto, a driving voltage generator 400 connected to the gate driver 200, a gray voltage generator 500 connected to the data driver 300, and a timing controller 600 for controlling these elements.

[0028] In the viewpoint of an equivalent circuit, the liquid crystal display includes, as shown in FIGS. 1 and 2, a plurality of signal lines G1-Gn and D1-Dm and a plurality of pixels connected thereto, and each pixel includes a switching element Q connected to the signal lines G1-Gn and D1-Dm and a liquid crystal capacitor Clc and a storage capacitor Cst both of which are connected to the switching element Q. The signal lines G1-Gn and D1-Dm include a plurality of gate lines (or scanning signal lines) G1-Gn extended in row direction for transmitting scanning signals or gate signals, and a plurality of data lines D1-Dm extended in column direction for transmitting image signals or data signals. The switching element Q is a tri-terminal element having a control terminal connected to the gate line G1-Gn, an input terminal connected to the data line D1-Dm, and an output terminal connected to one terminal of the liquid crystal capacitor Clc and one terminal of the storage capacitor Cst.

[0029] Especially, since the LCD according to an embodiment of the present invention is a previous gate driving type, as shown in FIG. 2, the liquid crystal capacitor Clc is connected to the output terminal of the switching element Q and the common voltage Vcom (or it can be called as reference voltage). The other terminal of the storage capacitor Cst is connected to a gate line placed just above (hereinafter "previous gate line").

[0030] In the liquid crystal panel having such structure, if a gate-on voltage Von is applied to the present gate line Gn and the switching element is turned on, the gray voltage supplied to the data line is applied to the pixel electrode via the switching element Q. Then, electric field corresponding to the difference between the pixel voltage applied to the pixel electrode and the common voltage Vcom is applied to the liquid crystal (it is shown as the liquid crystal capacitor Clc as an equivalent circuit in FIGS. 1 and 2) to make light transmitted in a transmittance corresponding to the intensity of the electric field. At this time, a voltage corresponding to the difference between a gate-off voltage applied to the previous gate line Gn-1 and the pixel voltage applied to the pixel electrode is charged to the storage capacitor Cst, and it is used auxiliary to maintain the pixel voltage for one frame period according to the driving of the present gate line.

[0031] On the other hand, the driving voltage generator 400 generates a gate-on voltage Von which turns on the switching element Q, a gate-off voltage Voff which turns off the switching element Q, the common voltage Vcom, and a data driving voltage VDH for generating gamma voltage. Especially, according to an embodiment of the present invention, appropriate voltage is generated and supplied to the gate driver 200 and the gray voltage generator 500 to prevent noise generation.

[0032] The gray voltage generator **500** generates a gray voltage based on the data driving voltage VDH from the driving voltage generator **400** and provides it to the data driver **300**.

[0033] The gate driver **200** is also called as the scan driver and connected to the gate lines G1 through Gn of the liquid crystal panel **100**, and it applies a gate signal made of a combination of the gate-on voltage Von and the gate-off voltage Voff from the driving voltage generator to the gate lines G1 through Gn.

[0034] The data driver **300** is also called as the source driver and connected to the data lines D1 through Dm of the liquid crystal panel assembly **300**, and it selects a gray voltage from the gray voltage generator **500** and applies it to the data lines D1 through Dm as a data signal.

[0035] The timing controller **600** generates control signals for controlling the operation of the gate driver **200**, the data driver **300**, the driving voltage generator **400**, etc. and supplies appropriate control signal to the gate driver **200**, the data driver **300**, and the driving voltage generator **400**.

[0036] The control signal outputted from the timing controller **600** to the gate driver **200** includes a vertical start signal STV for commanding the start of the appliance of the gate-on voltage to apply the gate-on voltage to the gate line, a gate clock signal CPV to apply the gate-on voltage to each gate line in order, and a gate-on enable signal OE to enable the output of the gate driver **200**, and so forth.

[0037] The control signals outputted from the timing controller **600** to the data driver **300** includes a horizontal start signal Hstart for commanding to input the digital data signal [R(0:N), G(0:N), B(0:N)] received from an external image source (for example, graphic controller, etc.) to the data driver **300**, a signal for commanding the appliance of the data signal transformed to the analog signal in the data driver **300** to the panel (hereinafter "LOAD" signal), a horizontal clock signal HCLK for data shift in the data driver **300**, and so forth.

[0038] Also, the control signals outputted from the timing controller **600** to the driving voltage generator **400** includes the first clock signal DCCLK for boosting, the second clock signal for generating the gate-on voltage Von and the gate-off voltage Voff and the common voltage Vcom, and so forth.

[0039] First, the driving voltage generator for generating a plurality of voltages based on the first and second clock signals applied from the timing controller in the LCD having such a configuration will be described in detail.

[0040] FIG. 3 shows a configuration of a driving voltage generator according to a first embodiment of the present invention.

[0041] As shown in FIG. 3, a driving voltage generator **400** according to the first embodiment of the present invention includes a selector **401** for selecting one from a first clock signal DCCLK and a second clock signal M applied from the timing controller **600** and outputting the selected signal, a booster **402** for boosting a voltage according to the selected clock signal and outputting the boosted voltage, a common voltage generator **403** for generating a common voltage Vcom based on the boosted voltage, a gate voltage generator **404** for generating a gate-on voltage and a gate-off

voltage based on the boosted voltage, and a data driving voltage generator **405** for generating a data driving voltage VDH for generating gray voltages based on the boosted voltage. Here, the booster **402** boosts the applied voltage using a charge pumping technique, but the scope of the present invention is not confined to the use of a specific method. Detailed description about the charge pumping is omitted here because it is already a well-known art.

[0042] The timing controller **600** connected to the driving voltage generator **400** includes a first clock generator **601** for generating the first clock signal DCCLK and a second clock generator **602** for supplying the second clock signal M, and an oscillator **700** is connected to the first clock generator **601**. The timing generator **600** has not only the above listed elements, but further has a plurality of elements for processing and generating various control signals for driving the LCD and for processing inputted image data, and so forth. The functions and elements for performing such functions are already known; therefore detailed description is omitted here.

[0043] The first clock generator **601** of the timing controller **600** performs frequency division of an oscillating voltage provided from the oscillator **700** and generates the first clock signal DCCLK, and the second clock generator **602** generates the second clock signal M synchronized with a horizontal synchronization signal Hsync applied from an external image source that is not shown in the figures. FIG. 4 shows waveform of each signal.

[0044] The first and the second clock signals DCCLK and M generated as described above are provided to the driving voltage generator **400**, the first clock signal DCCLK is used as a signal for voltage boosting of the booster **402** (booster clock signal), and the second clock signal M is used as a signal for common voltage generation of the common voltage generator **403**.

[0045] On the other hand, since the frequency of the first clock signal DCCLK and the display frequency are different from each other, interference occurs between them.

[0046] More specifically, as shown in FIG. 4, while the first clock signal DCCLK is a signal which is frequency-divided from the output voltage of the oscillator **700**, the second clock signal M is a signal synchronized with the horizontal synchronization signal Hsync. Therefore, frequencies and phases of the first clock signal DCCLK and the second clock signal M are different from each other. Since the common voltage Vcom is generated according to the second clock signal M, frequencies and phases of the first clock signal DCCLK and the common voltage Vcom are different from each other in consequence.

[0047] Generally, if frequencies and phases of two signals are different from each other, frequency interference is generated between the two signals. More specifically, there can be four possible relations between two signals: (a) both frequencies and phases are same; (b) frequencies are different and phases are same; (c) frequencies are same and phases are different; and (d) both frequencies and phases are different. The ideal relation is (a), and no noise is generated in this case. In case of (b), since phases are same, wave noise is not generated, but noise such as flicker is generated. In case of (c), wave noise in the form of low frequency is generated. However, in case of (d), since both frequencies

and phases are different, wave noise is generated severely and it has the form of high frequency rather than low frequency.

[0048] Therefore, since the common voltage  $V_{com}$  which swings in a constant period for line inversion and the first clock signal DCCLK according to an embodiment of the present invention are different from each other both in frequencies and phases, noises of high frequency component such as wave noise are generated in the common voltage  $V_{com}$ . In addition, since the gate voltage generator 404 generates the gate voltages according to the second clock signal, frequencies and phases of the first clock signal DCCLK and the gate voltages become different to generate noise of high frequency component in the gate voltages.

[0049] FIG. 5 shows waveforms of each voltage indicating the status that noise is generated due to frequency interference.

[0050] Since the LCD according to an embodiment of the present invention uses previous gate driving method, the previous gate line is connected to the storage capacitor  $C_{st}$  of the present pixel. Therefore, as shown in FIG. 5, if the common voltage and gate voltage contain noises of high frequency, it influences to the storage capacitor  $C_{st}$  when displaying an image to make the quality of the displayed image worse seriously.

[0051] Therefore, to remove such noises, according to the present invention, the first clock signal DCCLK and the second clock signal  $M$  are inputted to the selector 401 of the driving voltage generator 400 as inputs and the second clock signal  $M$  is selected to be provided to the booster 402 instead that the selector 401 of the driving voltage generator 400 provides the first clock signal DCCLK to the booster 402 in the embodiment of the present invention. That is, the clock signal for generating the common voltage and gate voltage is selected as the booster clock signal.

[0052] Accordingly, the booster 402 boosts the voltage and outputs it according to the second clock signal  $M$ , and the common voltage generator 403 generates the common voltage  $V_{com}$  based on the booster voltage applied according to the second clock signal  $M$ . As a result, the clock signals for boosting and the common voltage are synchronized with each other; therefore, the above-described frequency interference is not generated. Moreover, it is possible that the gate voltage generator 404 generates the gate voltages based on the booster voltage applied according to the second clock signal  $M$  to make the gate voltages not to contain noise.

[0053] Since frequency interference between signals which influence to each other is not generated, noise is not generated and image deterioration can be prevented.

[0054] On the other hand, frequency interference can be prevented without using the selector different from the above-described first embodiment.

[0055] FIG. 6 shows the structure of a driving voltage generator according to a second embodiment of the present invention. Here, the same reference numerals are given to the elements performing the same functions as those in the first embodiment, and detailed description about those elements will be omitted.

[0056] As shown in FIG. 6, a driving voltage generator 400 according to the second embodiment of the present invention includes a booster 402 for boosting a voltage and outputting it according to a first clock signal DCCLK applied from a timing controller 600, a common voltage generator 403 for generating a common voltage  $V_{com}$  based on the boosted voltage according to an applied second clock signal  $M$ , a gate voltage generator 404 for generating a gate-on voltage  $V_{on}$  and a gate-off voltage  $V_{off}$ , and a data driving voltage generator 405 for generating a data driving voltage  $V_{DH}$ .

[0057] Like the first embodiment, the timing controller 600 which provides the first and the second clock signals to the driving voltage generator 400 includes a first clock generator 601 and a second clock generator 602, but the first clock generator 601 is not connected to any oscillator.

[0058] Now, the operation of the driving voltage generator according to the second embodiment of the present invention having the above-described configuration is described.

[0059] The first clock generator 601 of the timing controller 600 generates the first clock signal DCCLK, and the second clock generator 602 generates the second clock  $M$ , in synchronization with a horizontal synchronization signal  $H_{sync}$  applied from an external image source not shown in the figure. That is, as described in the explanation of the first embodiment, since interference is generated due to the differences of frequencies and phases of the first clock signal DCCLK and the common voltage  $V_{com}$ , the first clock generator 601 generates the first clock signal DCCLK synchronized with the horizontal synchronization signal  $H_{sync}$  to make the first clock signal DCCLK synchronized with the common voltage in the timing controller 600 of the second embodiment of the present invention. Therefore, the first clock signal DCCLK and the second clock signal  $M$  are synchronized with each other.

[0060] The first and second clock signals DCCLK and  $M$ , which are synchronized with each other, are provided to the driving voltage generator 400, the first clock signal DCCLK is inputted to the booster 402, and the second clock signal  $M$  is inputted to the common voltage generator 403 and the gate voltage generator 404, respectively.

[0061] The common voltage generator 403 generates the common voltage  $V_{com}$  based on the boosted voltage applied according to the second clock signal  $M$ . In result, the clock signal for boosting and the common voltage  $V_{com}$  are synchronized with each other such that the above-described frequency interference is not generated. On the other hand, the gate voltage generator 404 generates the gate-on voltage  $V_{on}$  and the gate-off voltage  $V_{off}$  according to the second clock signal  $M$  and provides them to the gate driver 200.

[0062] FIG. 7 shows waveforms of the signals according to the second embodiment of the present invention. As shown in FIG. 7, according to the embodiment of the present invention, periods and phases of the first clock signal DCCLK and the common voltage  $V_{com}$  are same. At this time, high frequency component influences to the gate signals and the common voltage at the rising edge and the falling edge of the first clock signal DCCLK. However, high frequency noise is not generated substantially in the gate voltage and the common voltage  $V_{com}$  in the section DISPTMG when the image is displayed by application of

the data voltage and gate-on voltage to each pixel, but in the low part of the above section DISTIMG. Therefore, although noise is generated, it does not influence image display.

[0063] The common voltage Vcom and the gate-on voltage Von and gate-off voltage Voff generated by the driving voltage generator 400 which synchronize the first clock signal DCCLK for voltage boosting with the common voltage Vcom according to the above-described first and second embodiments are provided to the gate driver 200, and RGB data processed in the timing controller 600 are provided to the data driver 300.

[0064] The data driver 300 converts the applied RGB image data applied in synchronization with a horizontal start signal Hstart into corresponding gray voltages, respectively, and applies them to the source electrodes of the switching elements of the liquid crystal panel 100, i.e., the TFTs according to the applied load signal. The gate driver 200 applies the gate-on voltage Von to the gate electrodes of the TFTs in synchronization with a gate clock signal CPV outputted from the timing controller 600. In result, the data voltages applied to the source electrodes are charged to the pixel electrodes.

[0065] Therefore, orientation of the liquid crystal changes according to the voltage difference between the data voltage supplied to each pixel electrode and the common voltage, and accordingly the transmittance of light changes to display the intended image.

[0066] While the present invention has been described in detail with reference to the preferred embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

[0067] As described above, according to the present invention, interference generated due to the difference between the frequency of the signal for generating driving voltage and the display frequency is removed to prevent image deterioration due to noise generation in the LCD of previous gate driving method. Accordingly, image quality of the LCD is improved.

What is claimed is:

1. A driving voltage generator circuit for a liquid crystal display comprising:

- a booster for boosting a voltage according to a first applied clock signal and outputting the boosted voltage;
- a common voltage generator for generating a common voltage based on the boosted voltage according to a second applied clock signal; and
- a gate voltage generator for generating gate voltages including a gate-on voltage and a gate-off voltage based on the boosted voltage according to the second clock signal

wherein the first clock signal is synchronized with the common voltage.

2. A driving voltage generator circuit of claim 1, wherein the first and second clock signals are synchronized with a horizontal synchronization signal from an external device.

3. A liquid crystal display comprising:

a liquid crystal panel including a plurality of gate lines extending in a row direction, a plurality of data lines extending in a column direction, and a plurality of pixels including switching elements connected to the gate lines and the data lines on areas defined by intersections of the gate lines and the data lines, liquid crystal capacitors connected between outputs of the switching elements and a common voltage, and storage capacitors connected between the outputs of the switching elements and previous gate lines;

a gate driver for supplying gate voltages for driving the switching elements to the gate lines;

a data driver for supplying gray voltages corresponding to applied data signals to the data lines; and

a driving voltage generator for boosting a voltage according to a booster clock signal and for generating the gate voltages and the common voltage based on the boosted voltage,

wherein the booster clock signal is synchronized with the common voltage.

4. The liquid crystal display of claim 3, further comprising a timing controller including: a first clock generator for generating a first clock signal by frequency division of a voltage from an external device; and a second clock generator for generating a second clock signal synchronized with a horizontal synchronization signal from an external device.

5. The liquid crystal display of claim 4, wherein the driving voltage generator comprises:

a selector for selecting one from the first clock signal and the second clock signal and outputting the selected signal as the booster clock signal;

a booster for boosting a voltage according to the booster clock signal and outputting the boosted voltage;

a common voltage generator for generating the common voltage based on the boosted voltage according to the second clock signal; and

a gate voltage generator for generating the gate voltages including a gate-on voltage and a gate-off voltage based on the boosted voltage according to the second clock signal.

6. The liquid crystal display of claim 5, wherein the selector selects the second clock signal as the booster clock signal.

7. The liquid crystal display of claim 5, wherein the driving voltage generator further comprises a data driving voltage generator for generating a data driving voltage for generating the gray voltages based on the boosted voltage.

8. The liquid crystal display of claim 3, further comprising a timing controller including: a first clock generator for generating a first clock signal synchronized with a horizontal synchronization signal from an external device; and a second clock generator for generating a first clock signal synchronized with the horizontal synchronization signal from an external device.

9. The liquid crystal display of claim 8, wherein the driving voltage generator comprises:

- a booster for boosting a voltage according to the first clock signal and outputting the boosted voltage;
- a common voltage generator for generating the common voltage based on the boosted voltage according to the second clock signal; and
- a gate voltage generator for generating the gate voltages including a gate-on voltage and a gate-off voltage based on the boosted voltage according to the second clock signal.

**10.** The liquid crystal display of claim 9, wherein the driving voltage generator further comprises a data driving voltage generator for generating a data driving voltage for generating the gray voltages based on the boosted voltage.

**11.** The liquid crystal display of claim 3, wherein the common voltage swings in a predetermined period.

**12.** The liquid crystal display of claim 3, wherein the driving voltage generator boosts voltage using charge pumping based on the applied booster clock signal.

\* \* \* \* \*

专利名称(译)	用于产生驱动电压的电路和使用该电路的液晶显示器		
公开(公告)号	<a href="#">US20040095342A1</a>	公开(公告)日	2004-05-20
申请号	US10/659076	申请日	2003-09-10
[标]申请(专利权)人(译)	李恩桑 李光SAE MA WON SEOK		
申请(专利权)人(译)	李恩桑 李光-SAE MA WON 硕		
当前申请(专利权)人(译)	李恩桑 李光-SAE MA WON 硕		
[标]发明人	LEE EUN SANG LEE KWANG SAE MA WON SEOK		
发明人	LEE, EUN-SANG LEE, KWANG-SAE MA, WON-SEOK		
IPC分类号	G09G3/36 G09G5/00		
CPC分类号	G09G3/3655 G09G3/3696 G09G2320/0276 G09G2320/0209 G09G2310/0289		
优先权	1020020055349 2002-09-12 KR		
其他公开文献	US7184011		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

一种液晶显示器，包括：液晶面板，包括多条栅极线，多条数据线，以及多个像素，包括连接到栅极线和数据线的开关元件，液晶电容器和存储器电容器连接到开关元件；栅极驱动器，用于提供栅极电压，用于驱动开关元件到栅极线；数据驱动器，用于将与施加的数据信号对应的灰度电压提供给数据线；驱动电压发生器，用于根据升压器时钟信号升压电压，并基于升压电压产生栅极电压和公共电压，并且升压器时钟信号与公共电压同步。

