



US 20070057883A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2007/0057883 A1**
(43) **Pub. Date: Mar. 15, 2007**(54) **DISPLAY DEVICE AND CONTROL METHOD THEREOF**(75) Inventors: **Jae-hyun Cho**, Seoul (KR); **Cheol-woo Park**, Suwon-si (KR); **Ho-yong Jung**, Suwon-si (KR); **Sung-jin Hong**, Seoul (KR)Correspondence Address:
MACPHERSON KWOK CHEN & HEID LLP
2033 GATEWAY PLACE
SUITE 400
SAN JOSE, CA 95110 (US)(73) Assignee: **Samsung Electronics Co., Ltd.**(21) Appl. No.: **11/520,401**(22) Filed: **Sep. 12, 2006**(30) **Foreign Application Priority Data**

Sep. 12, 2005 (KR)..... 2005-0084610

Publication Classification(51) **Int. Cl.**
G09G 3/36 (2006.01)(52) **U.S. Cl.** **345/88**(57) **ABSTRACT**

A liquid crystal display device employing the color sequential display method includes multiple, different color light sources. An image data arranging circuit sorts image data input from an external source for each frame according to color and arranges the sorted image data into a plurality of sub-frames. A data driver applies the arranged image data for each color to the liquid crystal panel sequentially according to the sub-frames.

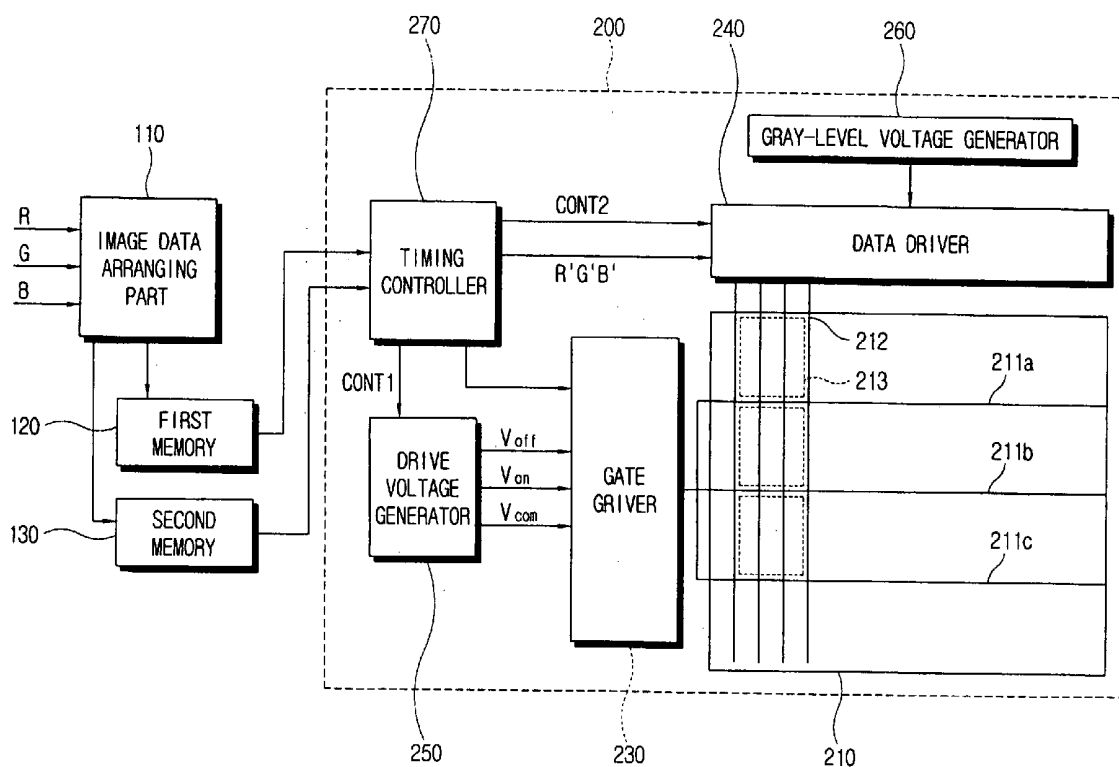


FIG. 1


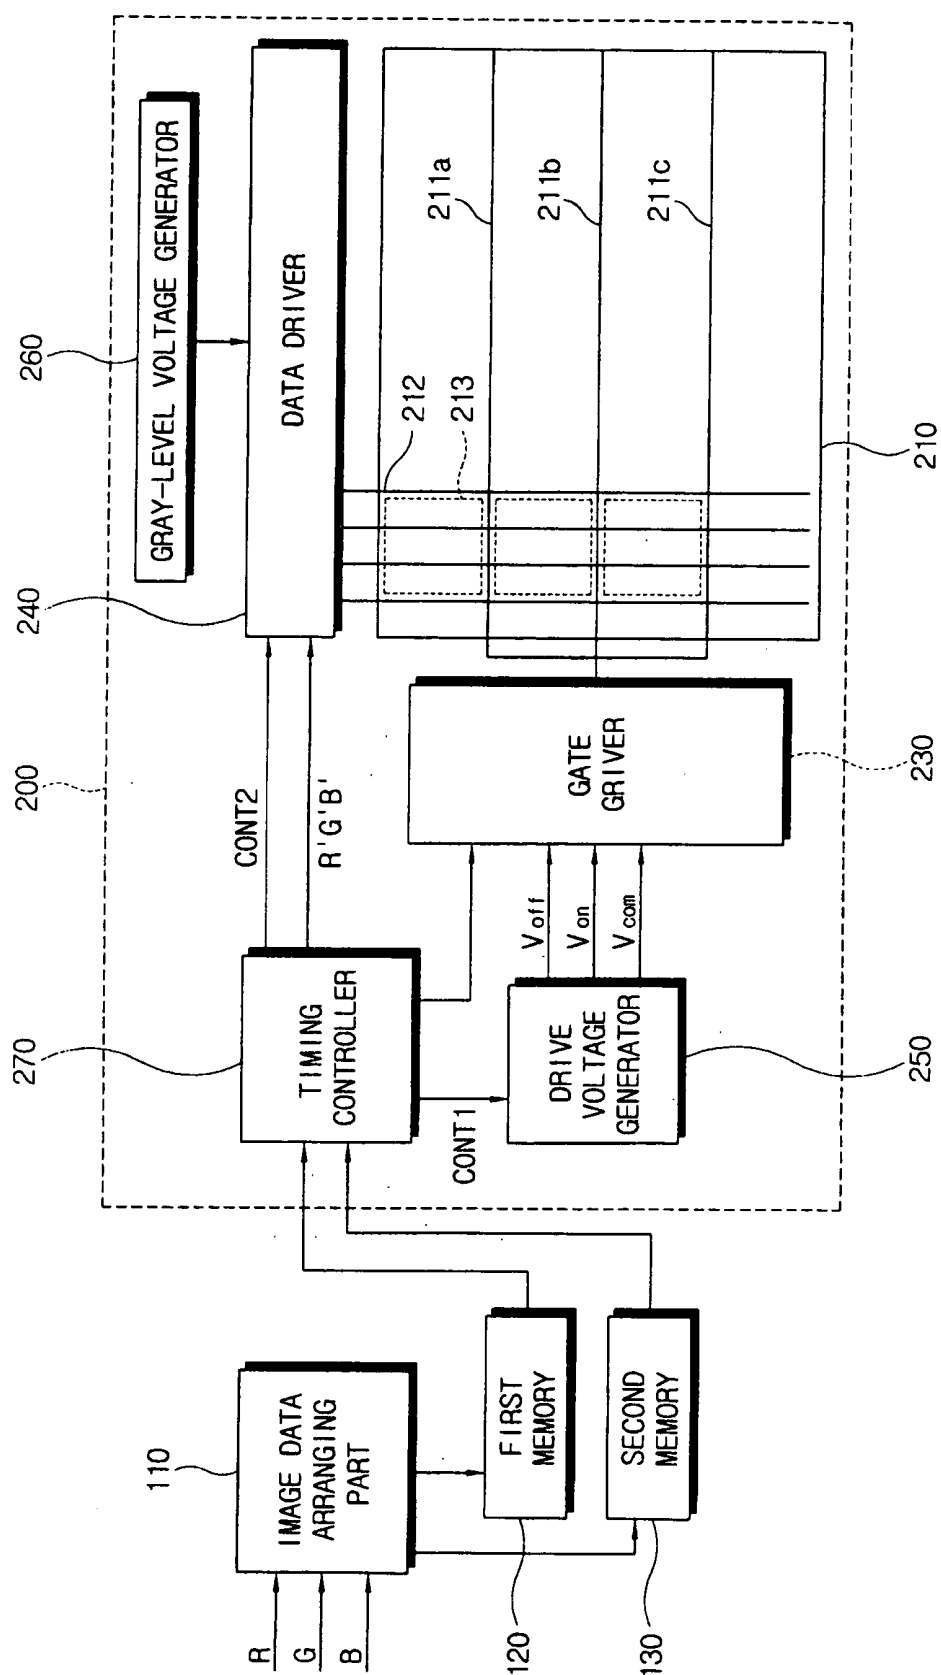


FIG. 2

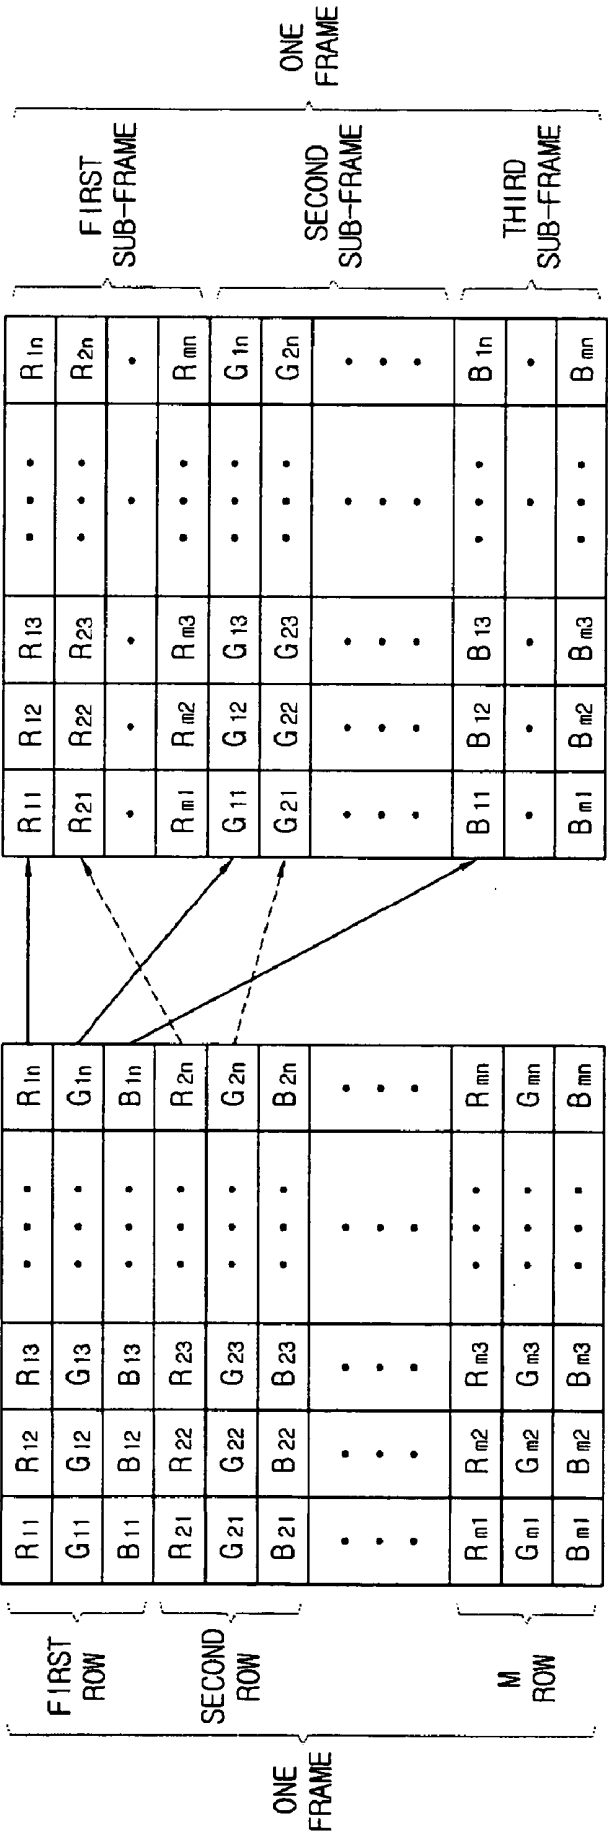

< I >

< II >

FIG. 3


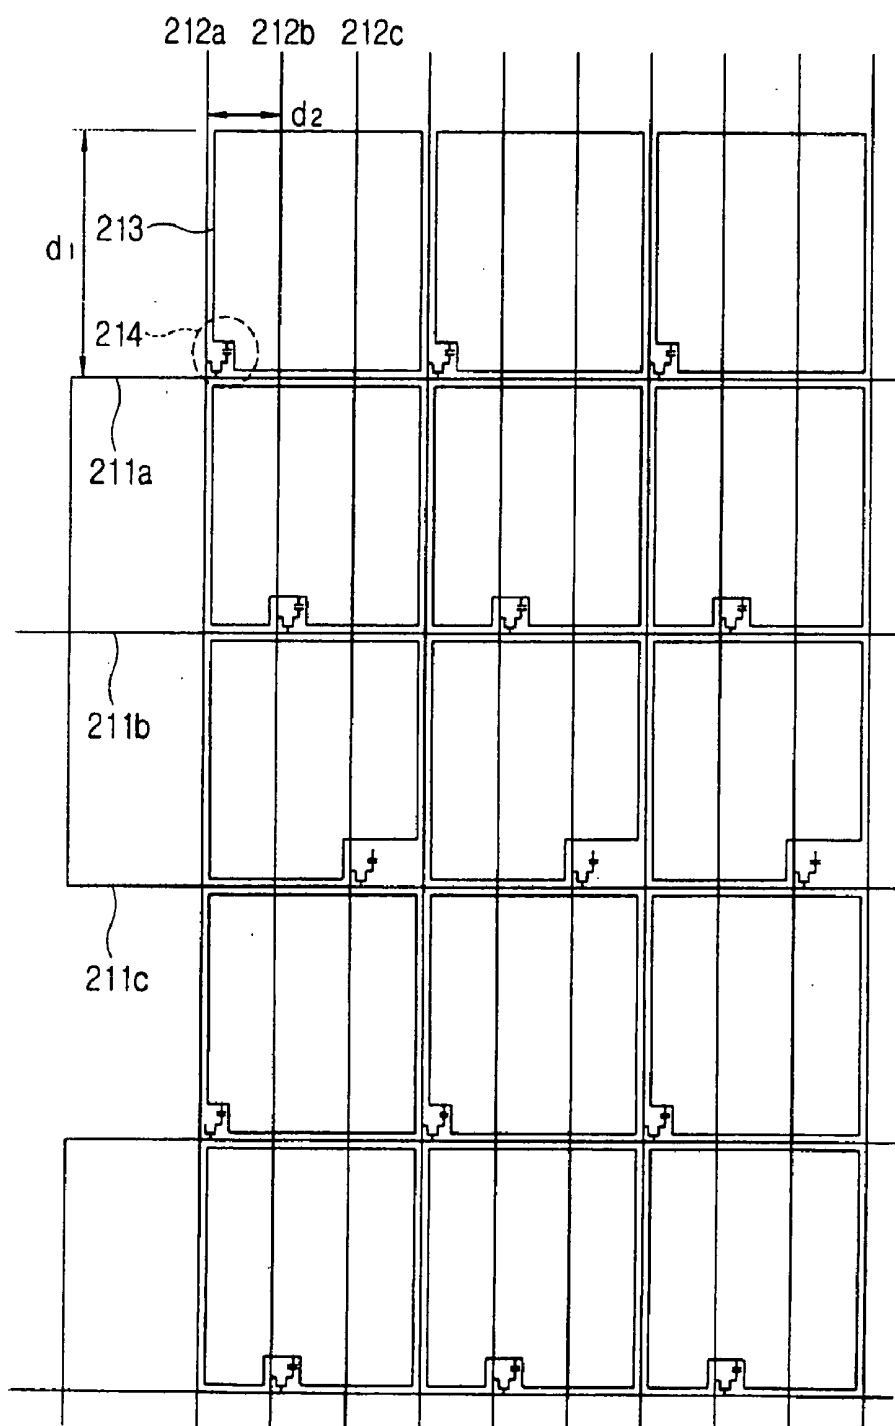


FIG. 4

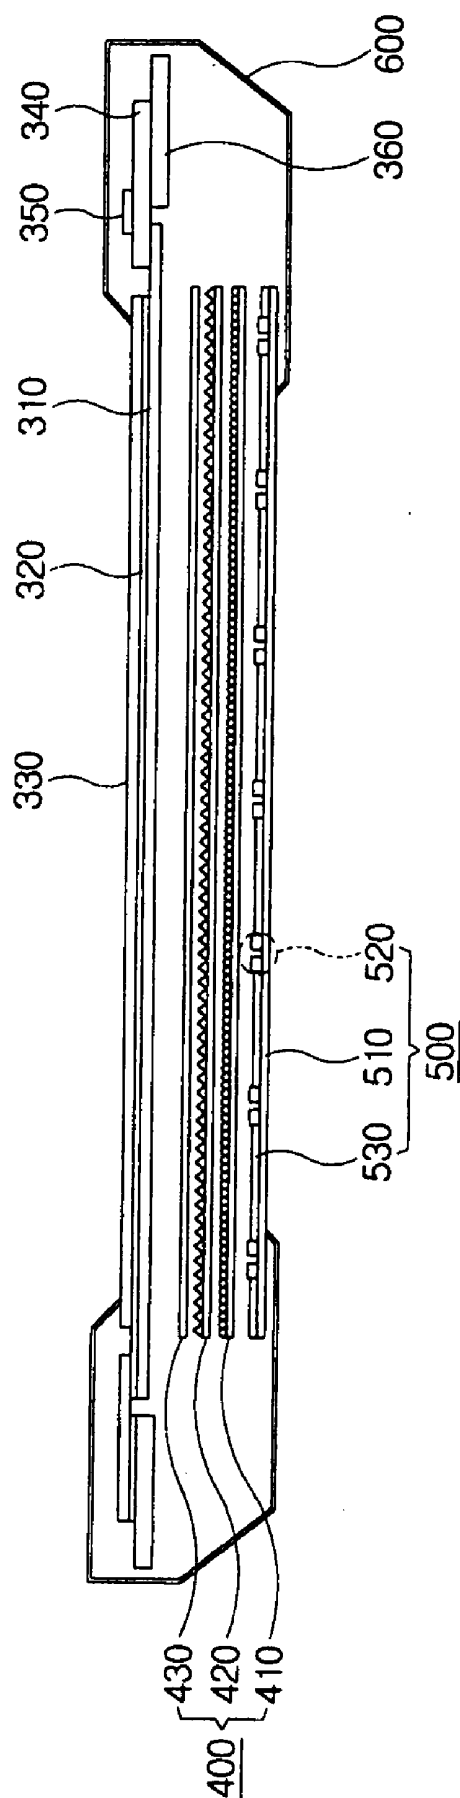

DISPLAY DEVICE AND CONTROL METHOD THEREOF

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority from Korean Patent Application No. 2005-0084610, filed on Sep. 12, 2005, in the Korean Intellectual Property Office, the disclosure of which are incorporated herein by reference.

FIELD OF INVENTION

[0002] The present invention relates to a display device and a control method therefor and, more particularly, to a display device based on the field sequential color (FSC) method or the color sequential display (CSD) method.

DESCRIPTION OF THE RELATED ART

[0003] The popular liquid crystal display (LCD) includes a liquid crystal panel having a thin film transistor (TFT) substrate on which thin film transistors are formed and a color filter substrate on which a color filter layer is formed. A liquid crystal layer is interposed between the TFT substrate and the color filter substrate. A color filter layer formed on the color filter substrate is comprised of the three primary colors red (R), green (G) and blue (B). The color filter substrate controls the amount of white light transmitted to the RGB color filter layer and mixes the RGB colors to display a required color.

[0004] Instead of using a white light source and color filter substrate, it would be possible to use a field sequential color (FSC) method or a color sequential display (CSD) method that uses three-color light sources that are capable of obtaining images of full color by activating independent light sources for each of the RGB colors sequentially and periodically at each conventional pixel. A color signal corresponding to the each conventional pixel is applied synchronously with the activation of the light sources.

[0005] Since a pixel is not divided into three sub-pixels in these methods, there are advantages that aperture ratio and yield can be readily improved and that the number of driving circuits needed for each sub-pixel can be lowered.

[0006] However, the conventional method of data conversion to the display device is not appropriate for implementation of the CSD method. For example, the conventional data method applies RGB image data line by line because only a single light source is provided. When three light sources are available transmitting RGB image data to each pixel will not appropriately reproduce the image.

SUMMARY OF THE INVENTION

[0007] Accordingly, it is an aspect of the present invention to provide a display device and control method thereof, which is capable of adopting a color sequential display method with a minimum change in image data. In accordance with the invention an image data arranging circuit is provided which, for each frame, sorts the input image data input according to color and arranges the sorted image data sequentially according to the color to form a plurality of sub-frames, one for each light source. A memory unit stores the sub-frames constituting each frame. It is an aspect of the illustrative embodiment that the same gate signal is applied

to the pixels of at least two, and preferably, three rows. The data driver which applies the arranged image data for each color to the pixels sequentially according to the sub-frames.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The above and/or other aspects and advantages of the present invention will become more apparent from a reading of the ensuing description when read together with the drawing, in which:

[0009] FIG. 1 illustrates a block diagram of a display device in accordance with an embodiment of the present invention;

[0010] FIG. 2 offers two tables for illustrating an image data arrangement in accordance with the embodiment of the present invention;

[0011] FIG. 3 shows a plan view of pixels in accordance with the embodiment of the present invention; and

[0012] FIG. 4 depicts a cross-sectional view of the display device in accordance with the embodiment of the present invention.

DETAILED DESCRIPTION

[0013] As shown in FIG. 1, a display device in accordance with the present embodiment includes an image data arranging circuit 110, a pair of memories 120, 130 and a liquid crystal module 200. The liquid crystal module 200 has a liquid crystal panel 210 and a driving circuit for driving the liquid crystal panel 210, which is provided with a gate driver 230, a data driver 240, a drive voltage generator 250, a gray-level voltage generator 260 and a timing controller 270.

[0014] Signal lines 211, 212 and pixels 213 which are formed on the liquid crystal panel 210 will be described in detail with reference to FIG. 3. Liquid crystal panel 210 is provided with a plurality of data lines 212a, 212b, 212c and gate lines 211 that intersect the data lines to form the pixels 213 arranged into a matrix array. Thin film transistors 214 are disposed at the points of intersection of gate lines 211 and data lines 212. Further, control signals and image data are applied to the gate lines 211 and data lines 212 through the gate driver 230 and data driver 240, respectively.

[0015] In the present invention, referring to FIGS. 1 and 3, pixel 213 means one square defined by three data lines 212a, 212b, 212c and one gate line 211 and refers to a dot displaying one color. The pixel electrode ITO means a physically transparent electrode constituting the pixel 213. During one gate-on time, gate driver 230 applies one gate signal to the three gate lines 211a, 211b, 211c that are connected to each other at one end. When the gate signal is applied to the three gate lines 211a, 211b, 211c connected to each other at their one ends, the gate-on time is three times longer than that of the prior art. Since the period of time when the data signal is applied to pixels 213 is longer by the extended gate-on time, the pixel charging rate is improved. Further, since the number of the gate lines 211 to which the gate signals are applied is reduced to one third of the number of the prior art, the number of gate pads and the number of the gate driver 230 can also be reduced by one third. In the present embodiment, although the number of the gate lines 211 connected to each other at their one ends is three, that is just

an example and can be more than three. Further, as the size of the display device becomes greater and the applied frequency becomes higher, demand for improving the low pixel charging rate caused by a short gate-on time will increase. Thus, the present invention, in which one gate signal is applied to a plurality of the gate lines simultaneously, is also applicable to impulsive driving display devices generating a black screen as well as color sequential display (CSD) ones, since the gate lines should be driven two times more rapidly than the number of repetition of a frame shown to a user.

[0016] Data lines **212** intersect with the gate lines **211** to form pixels **213** arranged in a matrix array, and data lines **212a**, **212b**, **212c** are connected respectively to each pixel **213** which receives the same gate signal. The pixel **213** is a square with four sides of length $d1$. Two of the three data lines (**212b** and **212c**) pass through pixel **213** one-third the length $d1$ away from the right and the left side of the pixel, respectively. The remaining one, i.e., data line **212a**, is disposed at the side of the pixel **213**. The three data lines **212a**, **212b**, **212c** divide one side of the pixel **213** into three parts each of length $d2$.

[0017] Neighboring pixels in the same column (i.e., the direction of data lines **212**) are connected to the three gate lines **211a**, **211b**, **211c**, respectively. Thus, the same gate signal is applied to the pixels **213** disposed in three adjacent rows. The thin film transistors **214** disposed at the intersection points of the three gate lines **211a**, **211b**, **211c** and the three data lines **212a**, **212b**, **212c** are connected to the pixels **213** so that the same data signal is not applied to more than one neighboring pixel in the column. The data signal from the first data line **212a** is applied to the pixel **213** driven by the first gate line **211a** of the first row, the data signal from the second data line **212b** is applied to the pixel **213** driven by the second gate line **211b** of the second row, and the data signal from the third data line **212c** is applied to the pixel **213** driven by the third gate line **211c** of the third row. Thus, different data signals are applied to the pixels **213** of adjacent rows.

[0018] The number of data lines **212** prepared for the each pixel **213** corresponds to the number of the rows of the pixels **213** neighboring each other in the extension direction of data lines **212** and receiving the same gate signal, i.e., the number of the gate lines **211** connected to each other at their one ends. Thus, the number of data lines **212** prepared for the each pixel **213** is increased if the number of the gate lines **211** connected to each other at their one ends is increased. As aforementioned, more than three gate lines **211** can be connected to each other at their one ends.

[0019] Thin film transistor **214** applies the gate signal input by gate line **211** and the data signal input through data line **212** to pixel **213**. As shown in FIG. 3, the thin film transistors **214** neighboring each other in a column direction are connected to the different data lines **212a**, **212b**, **212c**, respectively.

[0020] Image data arranging circuit **110** sorts and arranges image data corresponding to one frame input from an external source according to the color. Arranged image data are alternately stored in first memory **120** and second memory **130**. Image data are applied on a line by line basis along the extension direction of gate lines **211** to display an image. One frame is constituted by the image data for the

pixels of rows equal to the number of the gate lines **211**. The image data arranging circuit **110** sorts and arranges the RGB image data mixed in each pixel row according to color.

[0021] The arrangement of the image data will now be described more in detail with reference to FIG. 2. In FIG. 2, a first table I illustrates the image data sorted according to color. In the prior art, when a pixel for representing one color is defined as a dot, three sub-pixels form one dot. Therefore, to display $n \times m$ dots constituting one frame, the image data corresponding to $3 \times n \times m$ sub-pixels are input to the image data arranging circuit **110**. The image data arranging circuit **110** sorts $3n$ image data corresponding to one row according to the RGB color. As shown in the drawing, the RGB image data corresponding to a first row are sorted into n image data for each color. The input m -row image data are sorted into $3m$ -row image data by the image data arranging circuit **110**. Since the input color of the image data is three, i.e., red (R), green (G) and blue (B), the image data are sorted into $3m$ -row image data. If the input color of the image data is four or six, the image data is sorted into $4m$ or $6m$ -row image data.

[0022] The thus sorted image data are stored in the first memory **120** or the second memory **130** sequentially according to the color as in table II shown in FIG. 2. As shown in the drawing, the RGB image data corresponding to the first row are stored at a beginning point and two trisection points of the entire memory **120** or **130**. The image data corresponding to a second row are stored sequentially in the next row of the image data of each color corresponding to the first row.

[0023] As described above, the one frame is arranged into three sub-frames which are formed of the total RGB image data for three colors, respectively. The number of the sub-frames is identical to the number of input colors of the image data, which is identical to the number of colors of lights supplied from a light source. The image data arranging circuit **110** sorts the image data input thereto to form as many sub-frames as the number of the colors of the lights supplied from the light source during one frame. When the image data of a specific color is applied to the liquid crystal panel **210**, a light corresponding to the color of the image data is supplied synchronously.

[0024] The image data for frames are alternately stored in memory **120** and memory **130**. While the image data sorted and arranged in the image data arranging circuit **110** are stored in the first memory **120**, the image data stored in the second memory **130** are applied to the liquid crystal panel **210**. This means that after the image data corresponding to one frame are applied to the liquid crystal panel **210** completely, the image data stored in the other memory and corresponding to a different frame begins to be read. Therefore, since the processing of the image data is not performed while one frame is formed in the liquid crystal panel **210**, the images are displayed without stopping.

[0025] Further, if only one memory is used, the data processing speed should be over two times faster than that of the present invention since the image data should be sorted and arranged while, at the same time, being applied to the liquid crystal panel **210**. In a case where the data processing speed of the image data arranging circuit **110** does not keep up with that speed, there may occur a problem that the image data are not applied to the liquid crystal panel

210 adequately, so two memories **120**, **130** are employed. Therefore, the number of the memories is not limited to two, and can be varied according to the amount of data constituting one frame, the processing speed of the image data arranging circuit **110** or the like.

[0026] Gate driver **230**, called a scan driver, is connected to the gate lines **211** to apply thereto gate signals constituted by a combination of gate-on voltages V_{on} and gate-off voltages V_{off} from the drive voltage generator **250**.

[0027] Data driver **240**, called a source driver, receives gray-level voltages from the gray-level voltage generator **260**, and selects some of the gray-level voltages according to control of the timing controller **270** to apply RGB image data voltages to data lines **212**. A plurality of gate driver integrated circuits (IC's) or data driver integrated circuits (IC's) may be attached to the liquid crystal panel **210** through a tape carrier package (TCP) after being surface mounted thereon or directly attached on a glass substrate according to chip on glass mounting. Alternatively, circuits performing the functions of these (IC's) can be directly surface mounted on the liquid crystal panel **210**.

[0028] Drive voltage generator **250** generates the gate-on voltage V_{on} for turning on the thin film transistor **214**, the gate-off voltage V_{off} for turning off the thin film transistor **214**, and a common voltage V_{com} applied to a common electrode (not shown).

[0029] Gray-level voltage generator **260** generates a plurality of the gray-level voltages relating to brightness of the display device. The timing controller **270** generates control signals for controlling performance of the gate driver **230**, data driver **240**, the drive voltage generator **250** and the gray-level voltage generator **260** to supply them to the gate driver **230**, data driver **240** and the drive voltage generator **250**, respectively. Timing controller **270** is supplied from an external graphic controller (not shown) with RGB three-color image data R, G, B and input control signals for controlling display thereof, such as vertical synchronizing signals, horizontal synchronizing signals, main clock signals and data enable signals.

[0030] Timing controller **270** transmits the gate control signals **CONT1** to the gate driver **230** and the drive voltage generator **250** according to the input control signals, and transmits image data R', G', B' converted in the image data arranging circuit **110** and data control signal **CONT2** to data driver **240**. Gate control signal **CONT1** includes a vertical synchronization start signal for indicating start of output of a gate-on pulse (gate-on voltage interval), a gate clock signal for controlling an output timing of the gate-on pulse and a gate-on enable signal for limiting a width of the gate-on pulse. Data control signal **CONT2** includes a horizontal synchronization start signal for indicating start of input of the image data R', G', B', and a load signal for applying corresponding voltages to data lines **212**. First, gray-level voltage generator **260** supplies to data driver **240** the gray-level voltages having voltage values determined according to voltage selection control signals.

[0031] Gate driver **230** sequentially applies the gate-on voltages V_{on} to the gate lines **211** according to the gate control signals **CONT1** to turn on the thin film transistors **214** connected to the gate lines **211**. The single gate-on/off signal is applied to the three gate lines **211**. At the same time,

data driver **240** receives the image data R', G', B' corresponding to the pixels **213** connected to the thin film transistors **214** turned-on by data control signals **CONT2**. Data driver **240** selects the gray-level voltages corresponding to the individual image data R', G', B' among the gray-level voltages from the gray-level voltage generator **260** and converts the image data R', G', B' into corresponding voltages.

[0032] Although the three data lines **212** are disposed at the one pixel **213** in accordance with the present embodiment, the three data lines **212** are connected to the different pixels **213** neighboring each other in the extension direction (column direction) of data lines **212**. When the one gate signal is applied, the thin film transistors **214** connected to the three gate lines **211** are turned on. Therefore, data image corresponding to three rows are applied at once. That is, the image data corresponding to three rows shown in the table II of FIG. 2 are applied to the liquid crystal panel **210** simultaneously, and the first (or R) sub-frame, the second (or G) sub-frame and the third (or B) sub-frame of the image data corresponding to the one frame are applied in that order. While the image data corresponding to the one frame are being applied, the light source supplies a light of a color corresponding to each of the sub-frames. In other words, the light source supplies to the liquid crystal panel **210** lights of different colors sequentially with a period of one frame.

[0033] The data signal supplied to data lines **212** are applied to the corresponding pixels **213** through the turned-on thin film transistors **214**. Like this manner, the gate-on voltages are applied sequentially to all the gate lines **211** during the one frame, so that the data signals are applied to all the pixels **213**.

[0034] Referring to FIG. 4, there is illustrated a cross-sectional view of a liquid crystal display device in accordance with the present embodiment. As shown in the drawing, the display device includes a liquid crystal panel having a first substrate **310**, a second substrate **330** and a liquid crystal layer **320** injected between both the substrates **310**, **330**, a light source **500** disposed on a rear surface of the liquid crystal panel to supply light thereto, a light control member **400** and an outer frame **600** for supporting and housing the liquid crystal panel and the light source **500**.

[0035] The liquid crystal panel includes the first substrate **310** on which the pixels **213** and the thin film transistors **214** shown in FIG. 2 are formed, the second substrate **330** facing the first substrate **310** and having a black matrix, a white filter and a common electrode, a sealant combining both the substrates **310**, **330** while forming a cell gap therebetween, and the liquid crystal layer **320** disposed between both the substrates **310**, **330** and the sealant. The liquid crystal panel forms a screen by adjusting alignment of the liquid crystal layer **320**, but since it is a non-light-emitting device, a light source, such as a light emitting diode (LED) **520** disposed on its rear surface, supplies light thereto.

[0036] At one side portion of the first substrate **310**, a driving circuit for applying driving signals is provided. The driving circuit includes a flexible printed circuit board **340**, a driving chip **350** mounted on the flexible printed circuit board **340**, and a printed circuit board **360** connected to an outer end portion of the flexible printed circuit board **340**. The driving circuit shown in the drawing is of a chip on film (COF) method, and may be of a tape carrier package (TCP),

COG (chip on glass) or other publicly known methods. Further, the driving circuit may be formed on the first substrate **310** during a circuit formation process.

[0037] The light control member **400** may include a diffusion plate **410**, a prism film **420** and a protective film **430**.

[0038] The diffusion plate **410** is constituted by a base plate and a coating layer with spherical beads formed on the base plate. The diffusion plate **410** diffuses light supplied from the light emitting diodes **520** to render brightness uniform. The prism film **420** is provided with triangular column-shaped prisms formed on its upper surface with a predetermined alignment. The prism film **420** serves to collect light diffused in the diffusion plate **410** in a direction perpendicular to a disposition plane of the liquid crystal panel thereabove. It is usual to employ the two prism films **420**, which are disposed such that the micro prisms formed on each of the prism films **420** form a predetermined angle with each other. Most of the light which has passed through the prism film **420** propagates vertically to present a uniform brightness distribution. A reflective polarizing film may be used together with the prism film **420**, if necessary. It may be possible to use the reflective polarizing film alone without the prism film **420**.

[0039] The protective film **430** disposed uppermost protects the prism film **420** vulnerable to scratches. A reflection plate **530** is provided on a portion of a LED circuit board **510** on which the light emitting diodes **520** are not mounted. On the reflection plate **530**, LED-accommodating holes corresponding to the disposition of the light emitting diodes **520** are formed. Most parts of the light emitting diodes **520** including a chip (not shown) generating light are disposed higher than the reflection plate **530**. The reflection plate **530** serves to diffuse the light incident on its lower surface to supply it to the diffusion plate **410**. The reflection plate **530** may be made of polyethylene terephthalate (PET) or polycarbonate (PC), and may be coated with silver or aluminum. Further, the reflection plate **530** may be formed to be somewhat thicker not to be generated creases by the strong heat produced by the light emitting diodes **520**.

[0040] Light emitting diodes **520** are mounted on the LED circuit board **510**, and disposed over the entire rear surface of the liquid crystal panel. The light emitting diode **520** is constituted by a combination of a red LED, a blue LED and a Green LED emitting three color lights, and supplies the three color lights to the liquid crystal panel sequentially with a period of one frame. The colors of lights supplied by the light emitting diode **520** may be cyan, magenta and yellow, or may be other combination including them.

[0041] Light source **500** may be a direct type in which light is supplied below the liquid crystal panel as in the liquid crystal panel in accordance with the present embodiment. An edge type one supplying light from sides of the liquid crystal panel may also be applicable. As described above, in accordance with the present invention, there is provided a display device and control method thereof, which is capable of adopting a color sequential display method with a minimum change in the image data.

[0042] Although a few exemplary embodiments of the present invention have been shown and described, it will be

appreciated by those skilled in the art that changes may be made in these embodiments without departing from the principles and spirit of the invention, the scope of which is defined in the appended claims and their equivalents.

What is claimed is:

1. A display device comprising:

a liquid crystal panel;

an image data arranging circuit which sorts image data being input from an external source and corresponding to one frame according to color and arranges the sorted image data sequentially according to the color to form a plurality of sub-frames;

a data driver which applies the arranged image data for the each color to the liquid crystal panel sequentially according to the sub-frames; and

a light source which supplies lights of at least two colors different from each other to the liquid crystal panel sequentially with a period of the one frame.

2. The display device according to claim 1, further comprising a memory which stores sequentially the sub-frames constituting the one frame.

3. The display device according to claim 2, wherein the memory is provided with a pair, and the image data corresponding to the one frame are stored alternately in the pair of memories.

4. The display device of claim 1, wherein the number of the sub-frames is identical to the number of colors of the light supplied by the light source.

5. The display device of claim 1, wherein the number of the sub-frames is three.

6. The display device of claim 1, wherein the light source supplies a red light, a green light and a blue light.

7. The display device of claim 1, wherein the liquid crystal panel includes:

a plurality of pixels arranged in a matrix array;

a plurality of gate lines which applies a same gate signal to the pixels disposed in at least two rows;

a plurality of data lines formed to intersect with the gate lines;

thin film transistors formed at intersection points of the gate lines and the data line.

8. The display device of claim 7, wherein the gate lines which supply the same gate signal to the pixels are connected to each other.

9. The display device of claim 7, wherein the number of the rows of the pixels to which the same gate signal is applied is three.

10. The display device of claim 7, wherein the data lines are provided in plural at the one pixel.

11. The display device of claim 10, wherein the number of the data lines is identical to the number of the pixels to which the same gate signal is applied.

12. The display device of claim 10, wherein the pixels neighboring each other in an extension direction of the data lines, to which the same gate signal is applied, are connected to the data lines different from each other.

13. A display device comprising:

a plurality of pixels arranged in a matrix array;

a plurality of gate lines which apply a same gate signal to the pixels disposed in at least two rows;

a plurality of data lines formed to intersect with the gate lines;

an image data arranging circuit which sorts image data being input from an external source and corresponding to one frame according to color and arranges the sorted image data sequentially according to the color to form a plurality of sub-frames; and

a data driver which applies the arranged image data for the each color to the pixels sequentially according to the sub-frames;

a light source which supplies lights of at least two colors different from each other to the liquid crystal display sequentially with a period of the one frame.

14. The display device of claim 13, wherein the gate lines which apply the same gate signal to the pixels are connected to each other.

15. A control method of a display device comprising:

sorting image data according to color, the image data being input from an external source and corresponding to one frame;

arranging and storing the sorted image data sequentially according to the color; and

supplying lights of colors different from each other sequentially with a period of the one frame while applying the stored image data to a liquid crystal panel sequentially according to the color.

* * * * *

专利名称(译)	显示装置及其控制方法		
公开(公告)号	US20070057883A1	公开(公告)日	2007-03-15
申请号	US11/520401	申请日	2006-09-12
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	CHO JAE HYUN PARK CHEOL WOO JUNG HO YONG HONG SUNG JIN		
发明人	CHO, JAE-HYUN PARK, CHEOL-WOO JUNG, HO-YONG HONG, SUNG-JIN		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3648 G09G2360/18 G09G2310/0235 G09G2310/0205		
优先权	1020050084610 2005-09-12 KR		
其他公开文献	US7928970		
外部链接	Espacenet USPTO		

摘要(译)

采用彩色顺序显示方法的液晶显示装置包括多个不同颜色的光源。图像数据排列电路根据颜色对从每个帧的外部源输入的图像数据进行排序，并将排序的图像数据排列成多个子帧。数据驱动器根据子帧顺序地将每种颜色的排列图像数据应用于液晶面板。

