




US 20110299006A1

(19) **United States**(12) **Patent Application Publication**
Cheng et al.(10) **Pub. No.: US 2011/0299006 A1**(43) **Pub. Date: Dec. 8, 2011**(54) **FLAT PANEL DISPLAY AND METHOD FOR
ASSEMBLING THE FLAT PANEL DISPLAY**(52) **U.S. Cl. 349/58**(76) Inventors: **I-Chen Cheng**, Taipei County
(TW); **Hung-Tse Wang**, Taipei
County (TW)(21) Appl. No.: **12/949,740**(22) Filed: **Nov. 18, 2010**(30) **Foreign Application Priority Data**

Jun. 8, 2010 (TW) 099118558

Publication Classification(51) **Int. Cl.**
G02F 1/1333 (2006.01)(57) **ABSTRACT**

A front frame of a flat panel display having positioning structure allows a LCD cell to be positioned and mounted thereon along an assembly direction. A restraining frame may be further incorporated for positioning and spacing purposes for each component of the display. Optical films, a light guide component, a backlight unit, and a reflector of the flat panel display are then mounted in a row along the assembly direction on the restraining frame or the front frame, where the backlight unit and/or the reflector may be fixed to a back cover of the backlight module in advance. Finally, a speaker, wiring of the display, circuit boards, and a board cover are assembled to the front frame and the back cover.

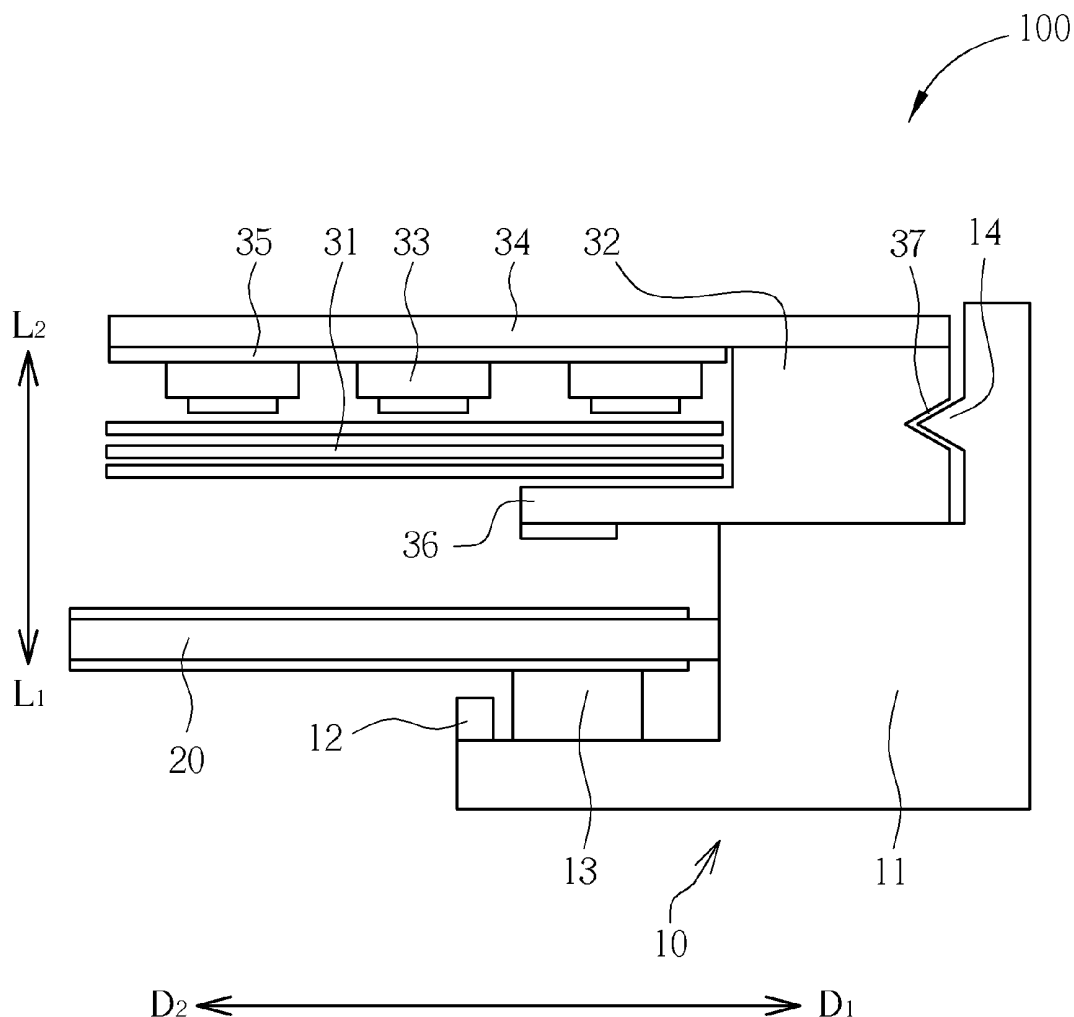

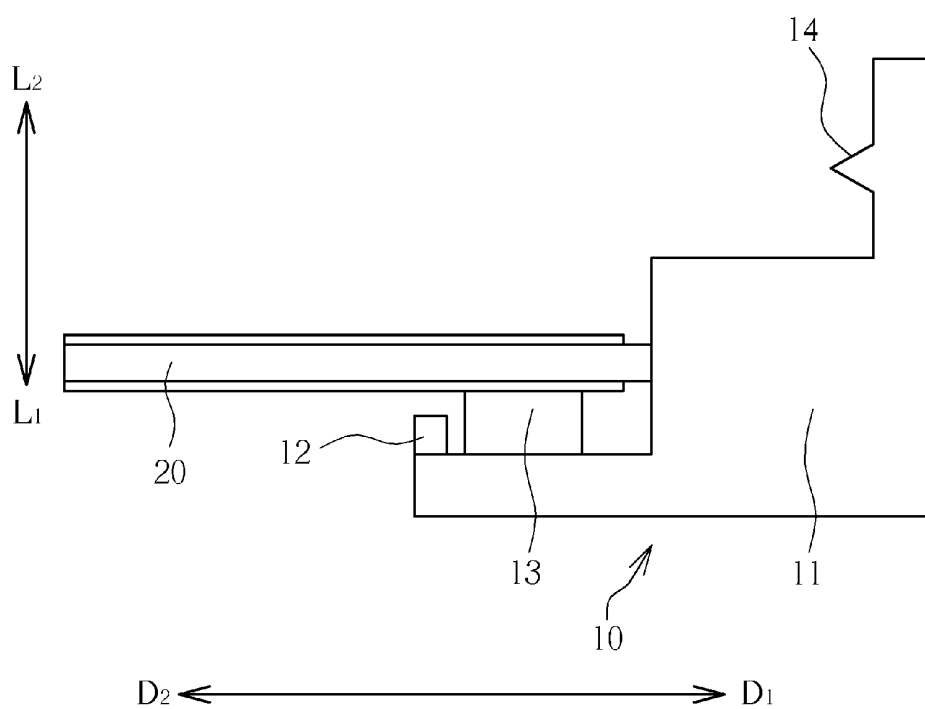


FIG. 1

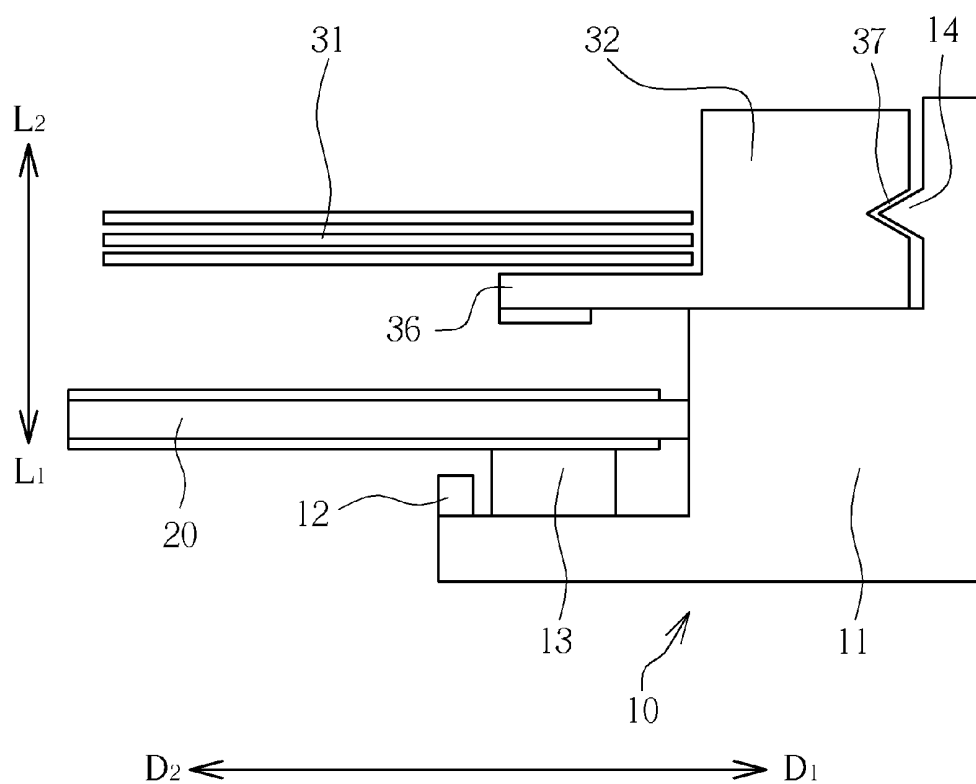


FIG. 2

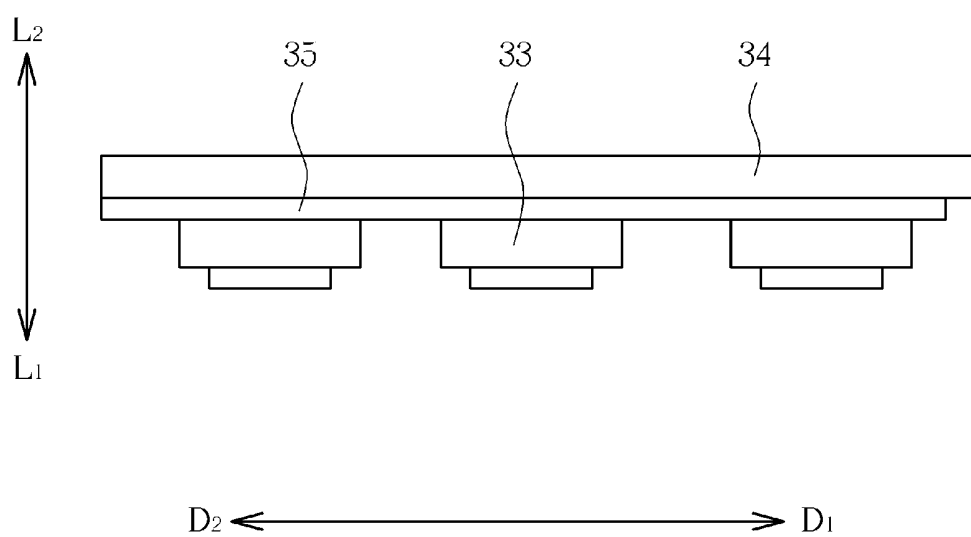


FIG. 3

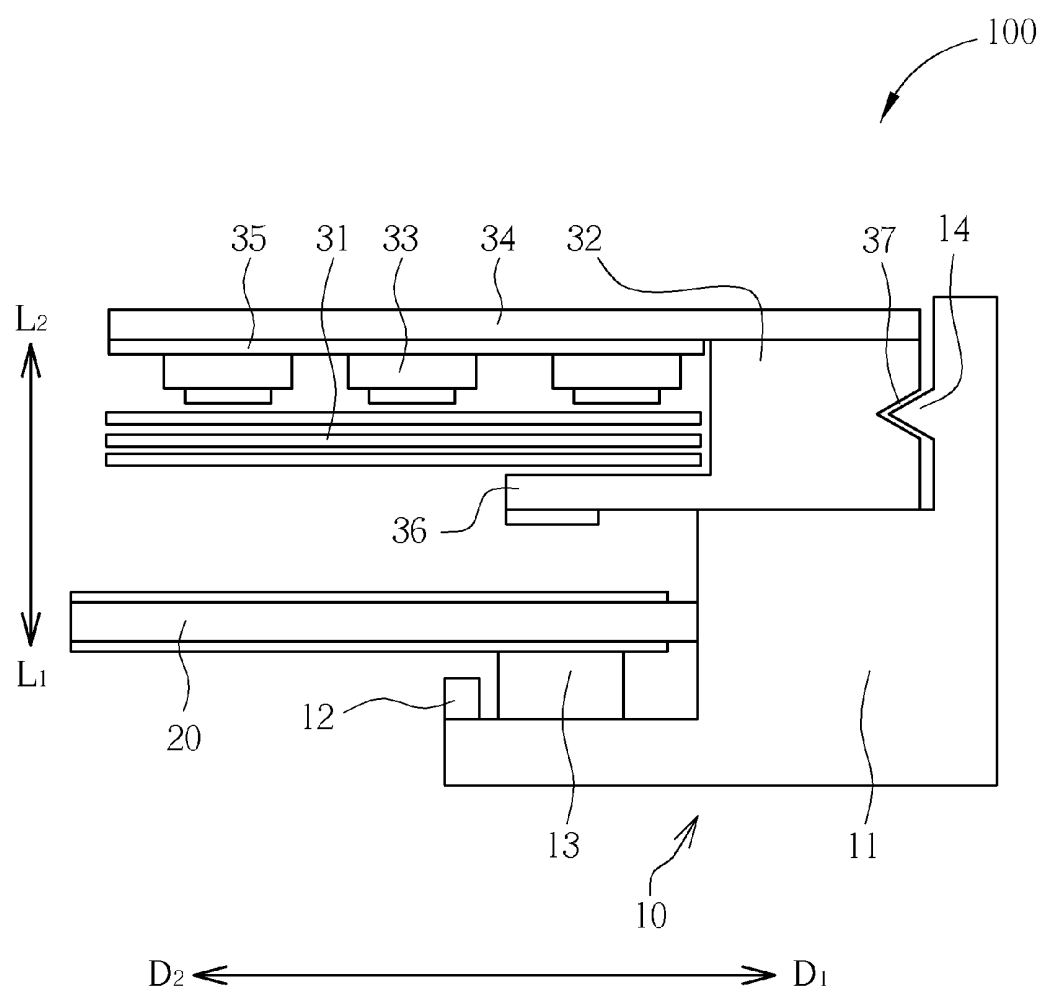


FIG. 4

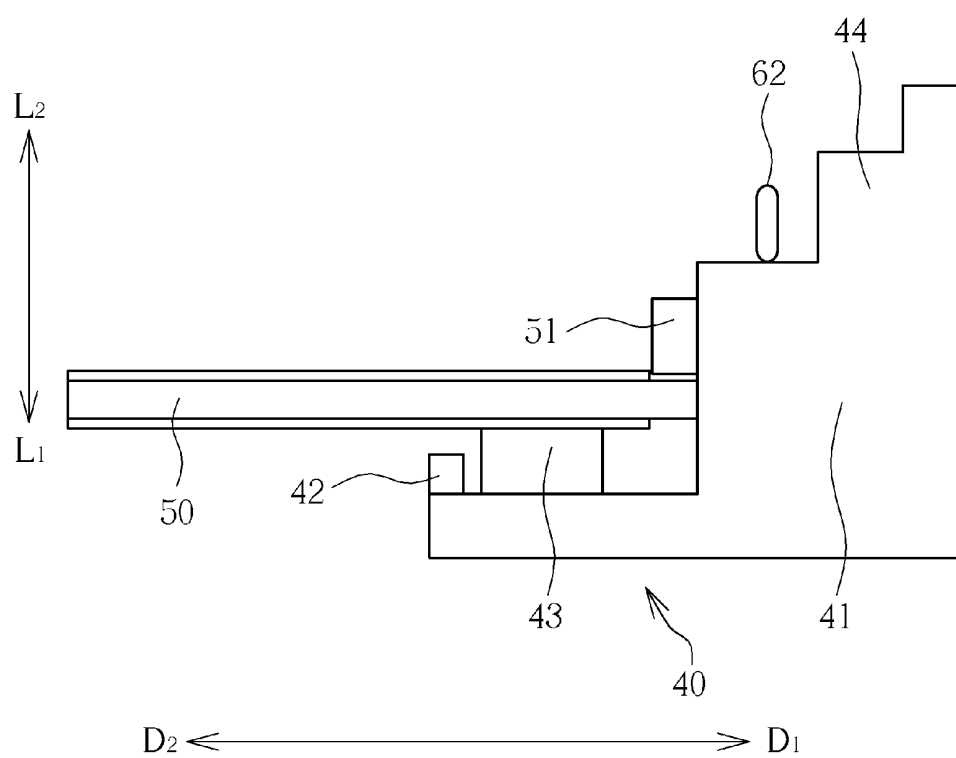


FIG. 5

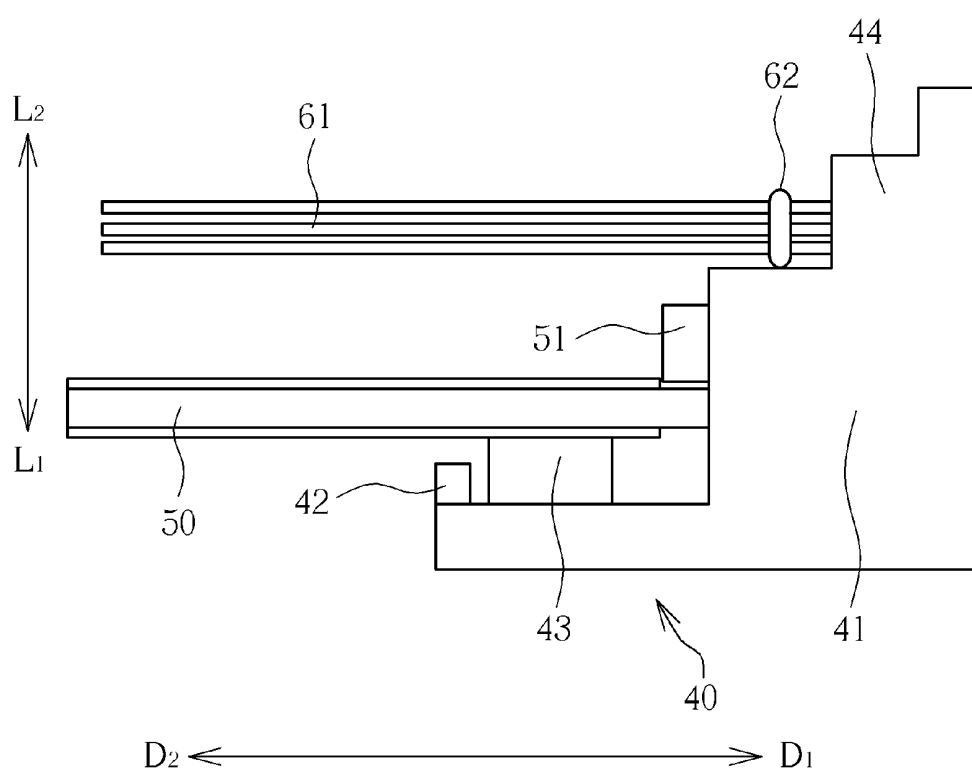


FIG. 6

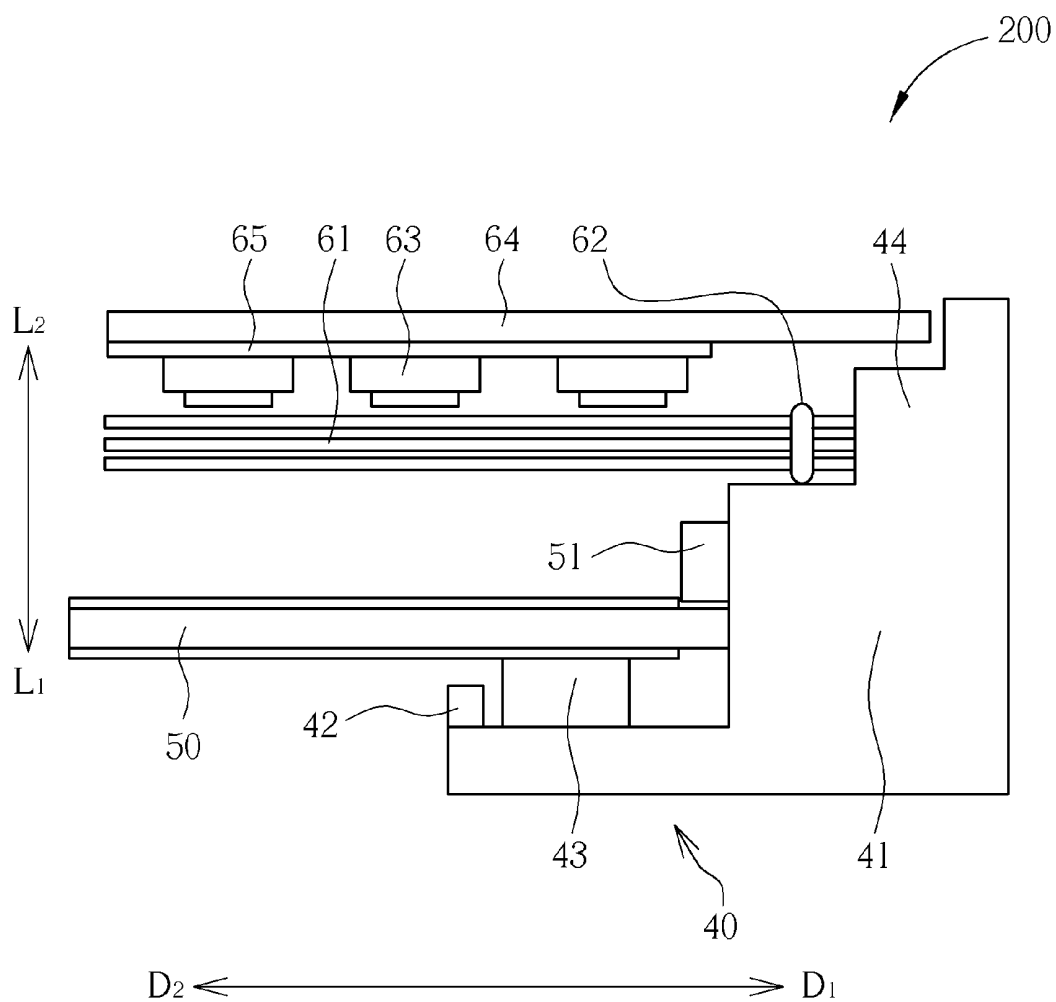


FIG. 7

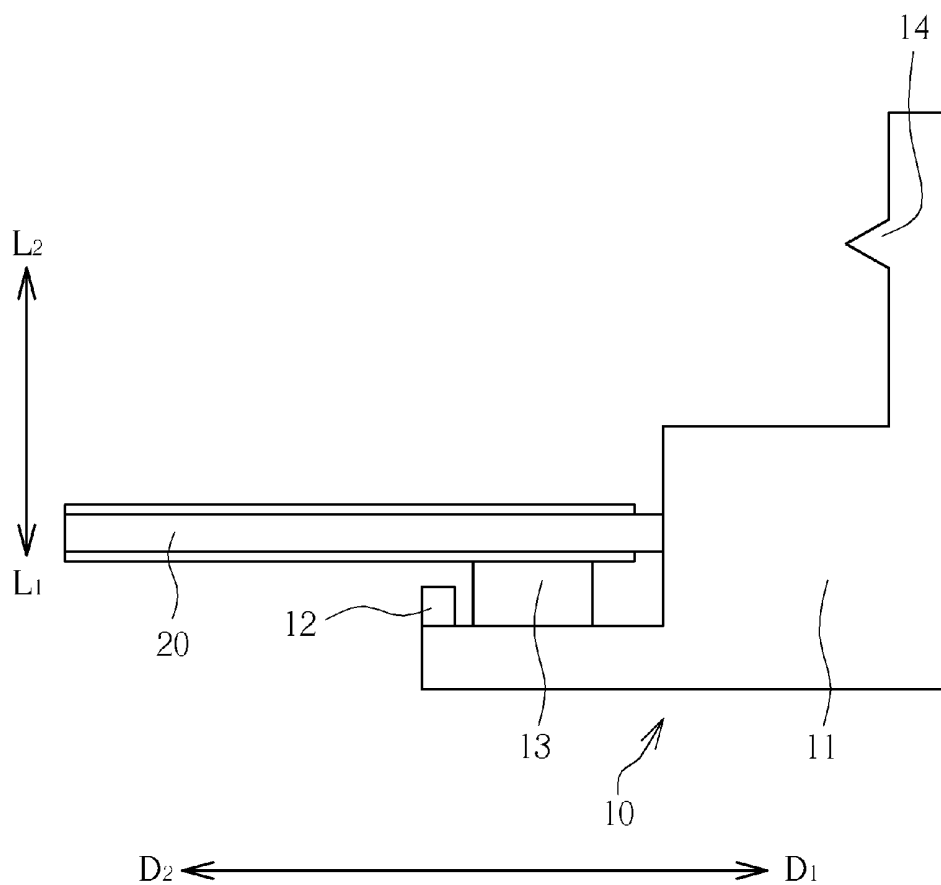


FIG. 8

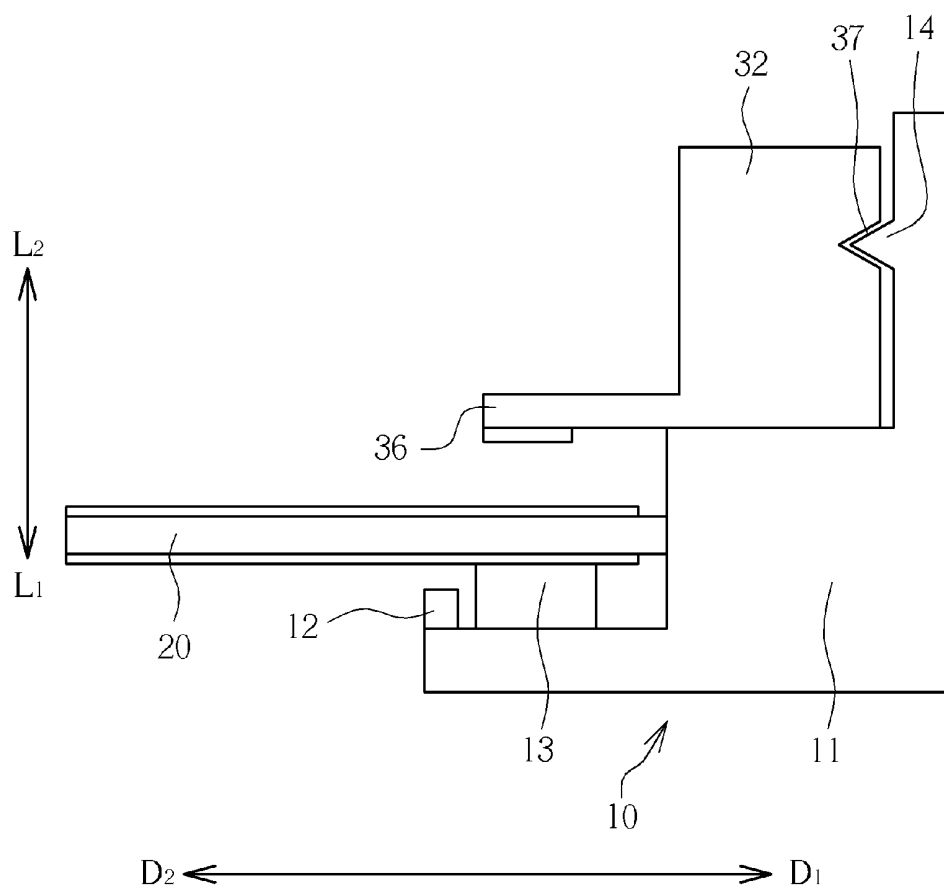


FIG. 9

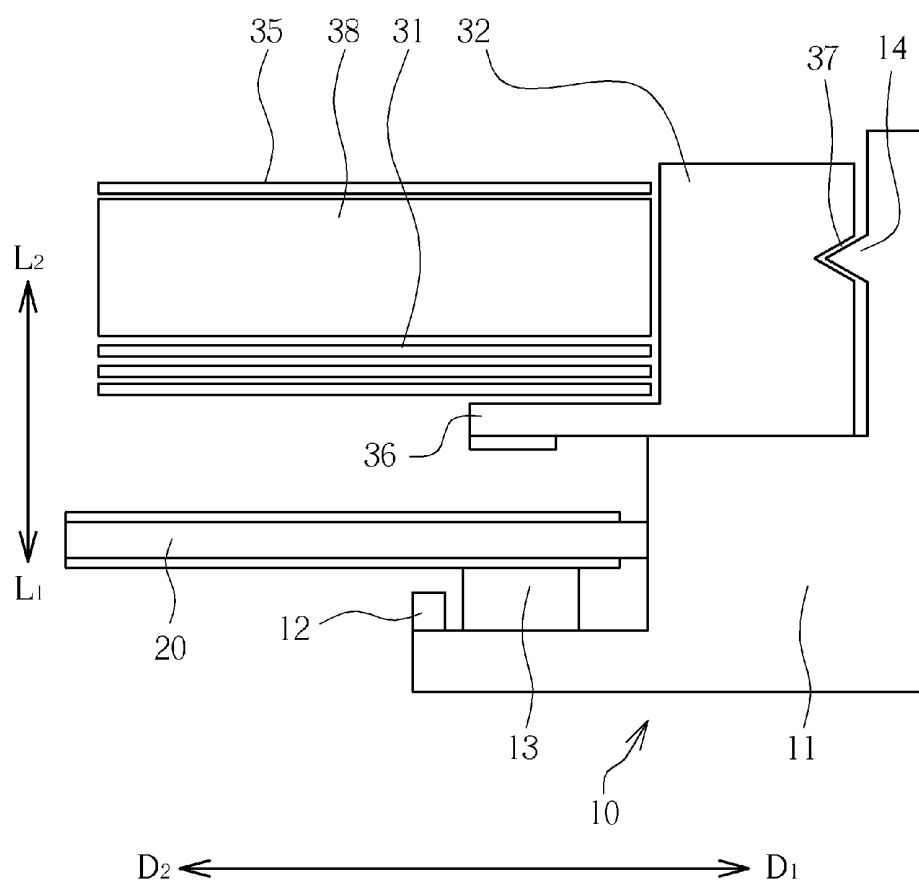


FIG. 10

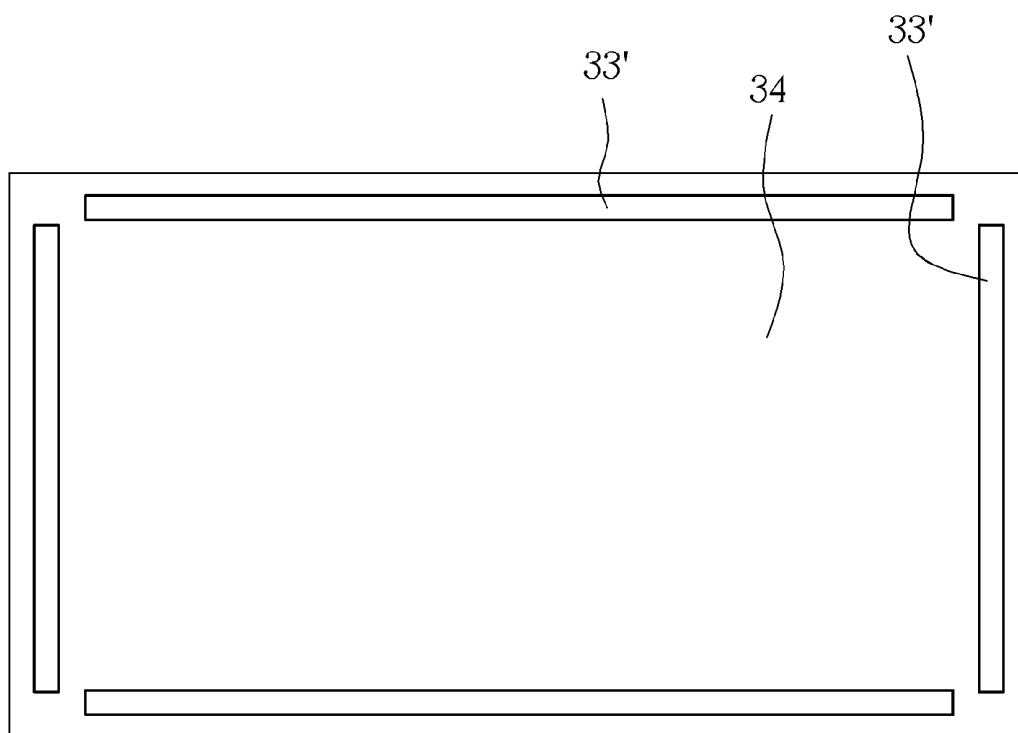


FIG. 11

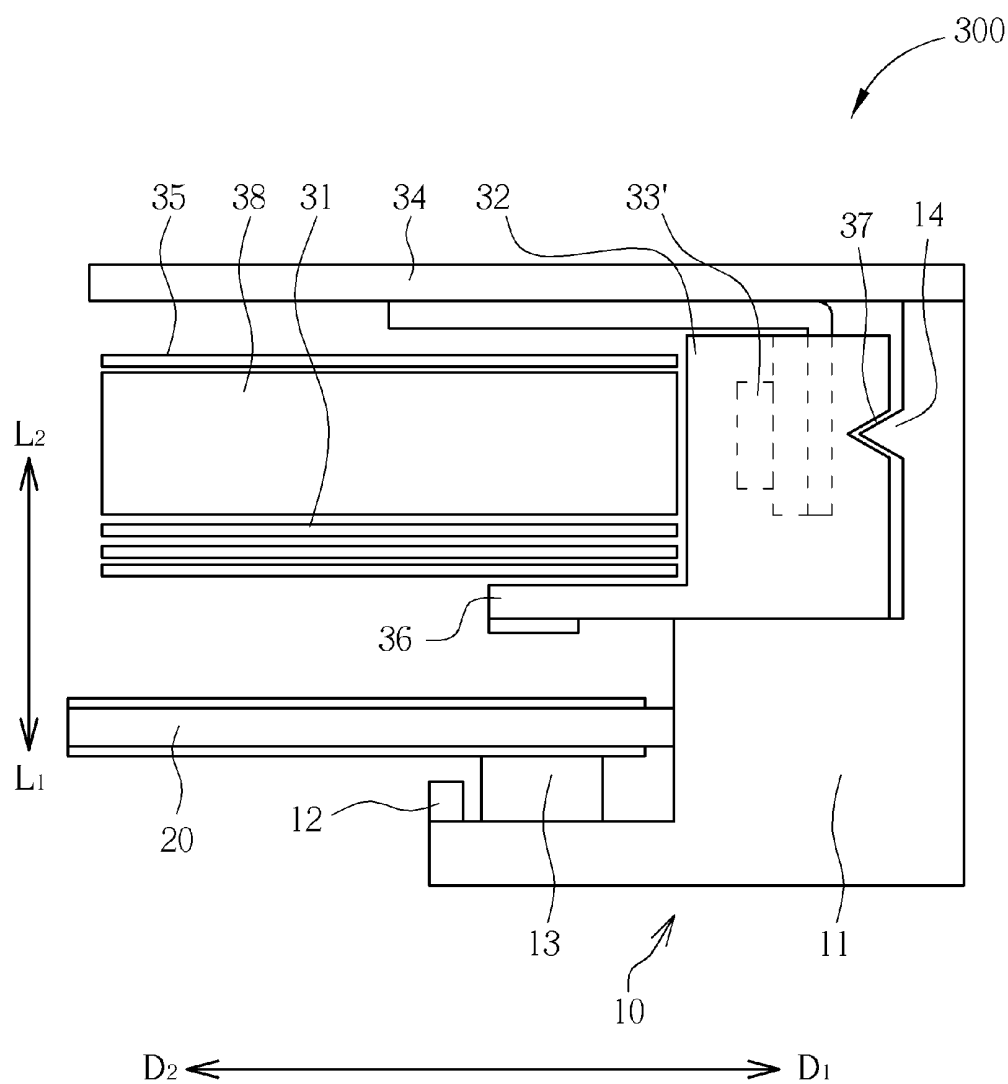


FIG. 12

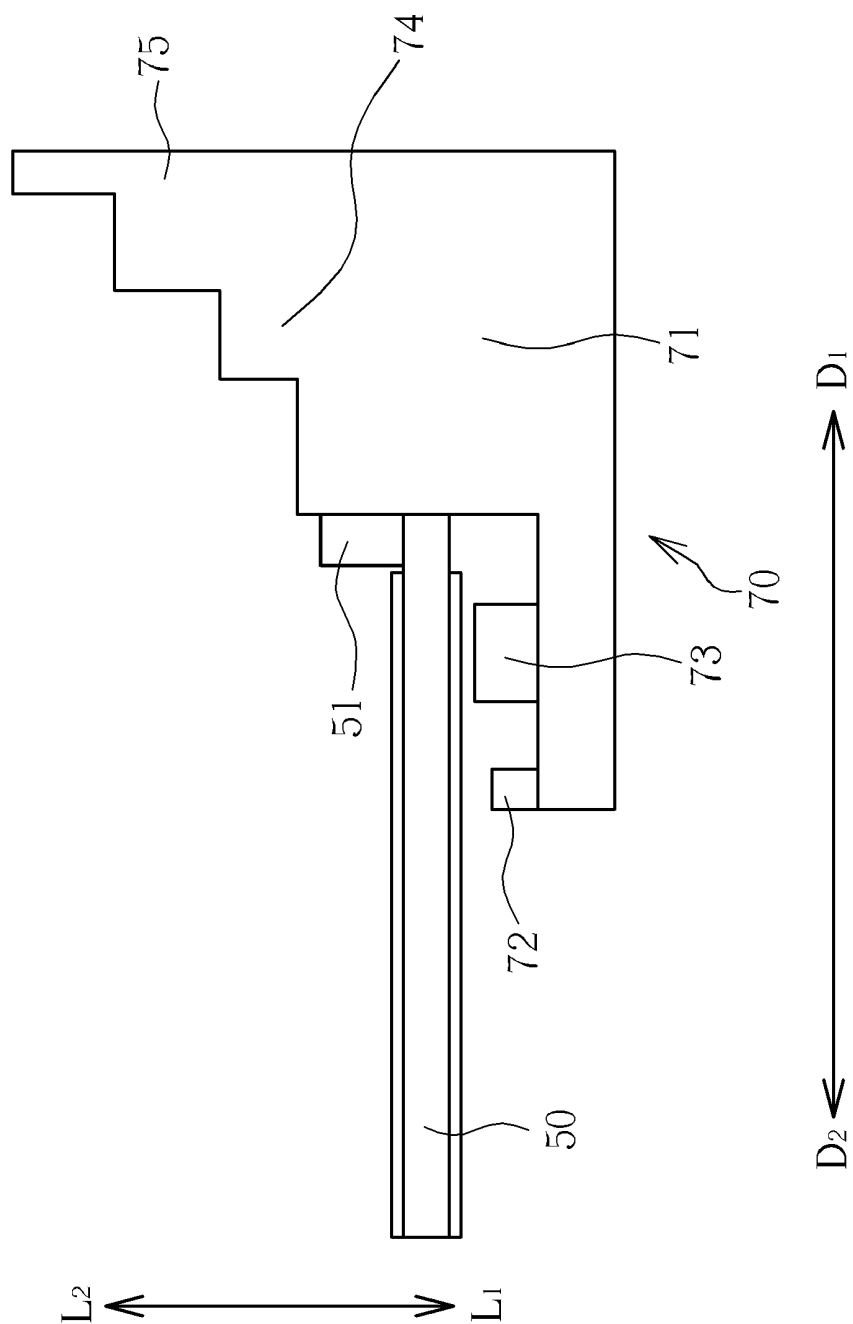


FIG. 13

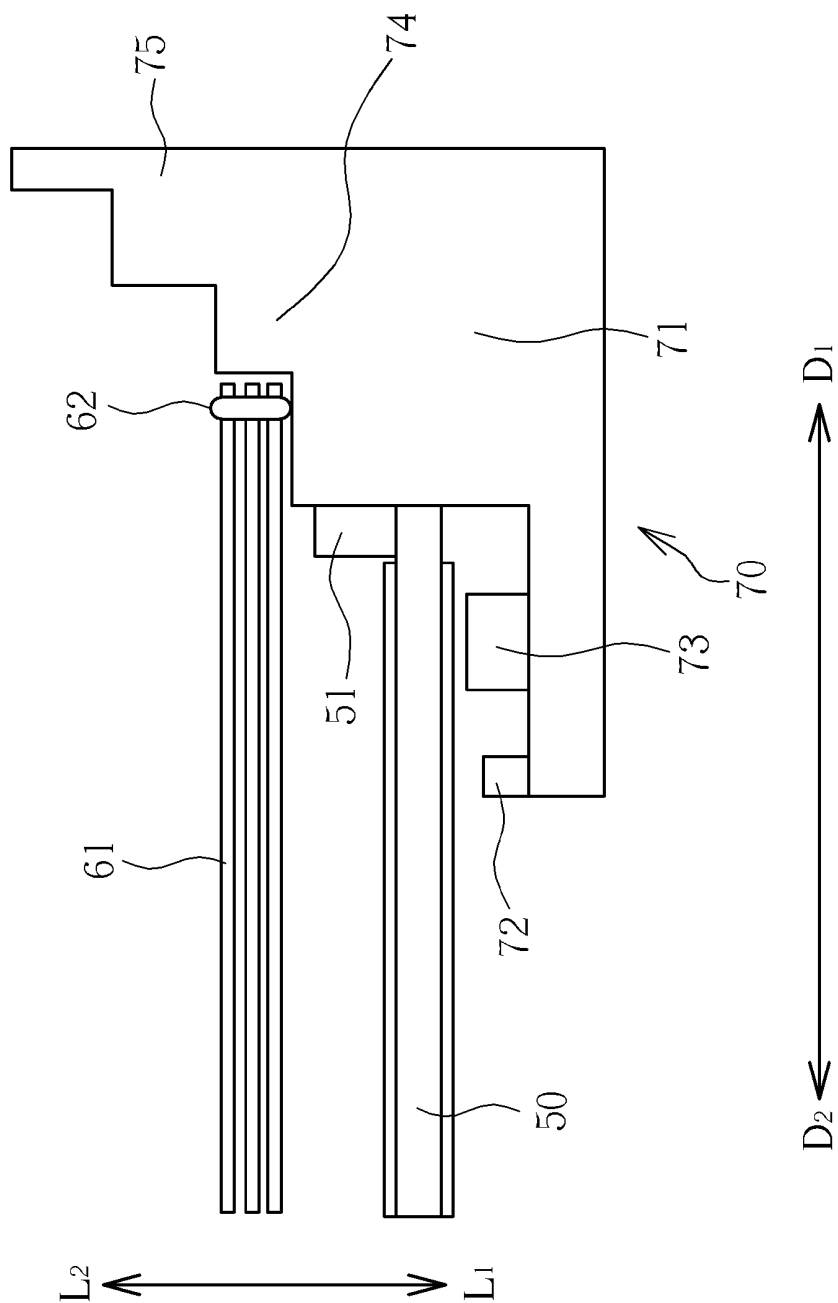


FIG. 14

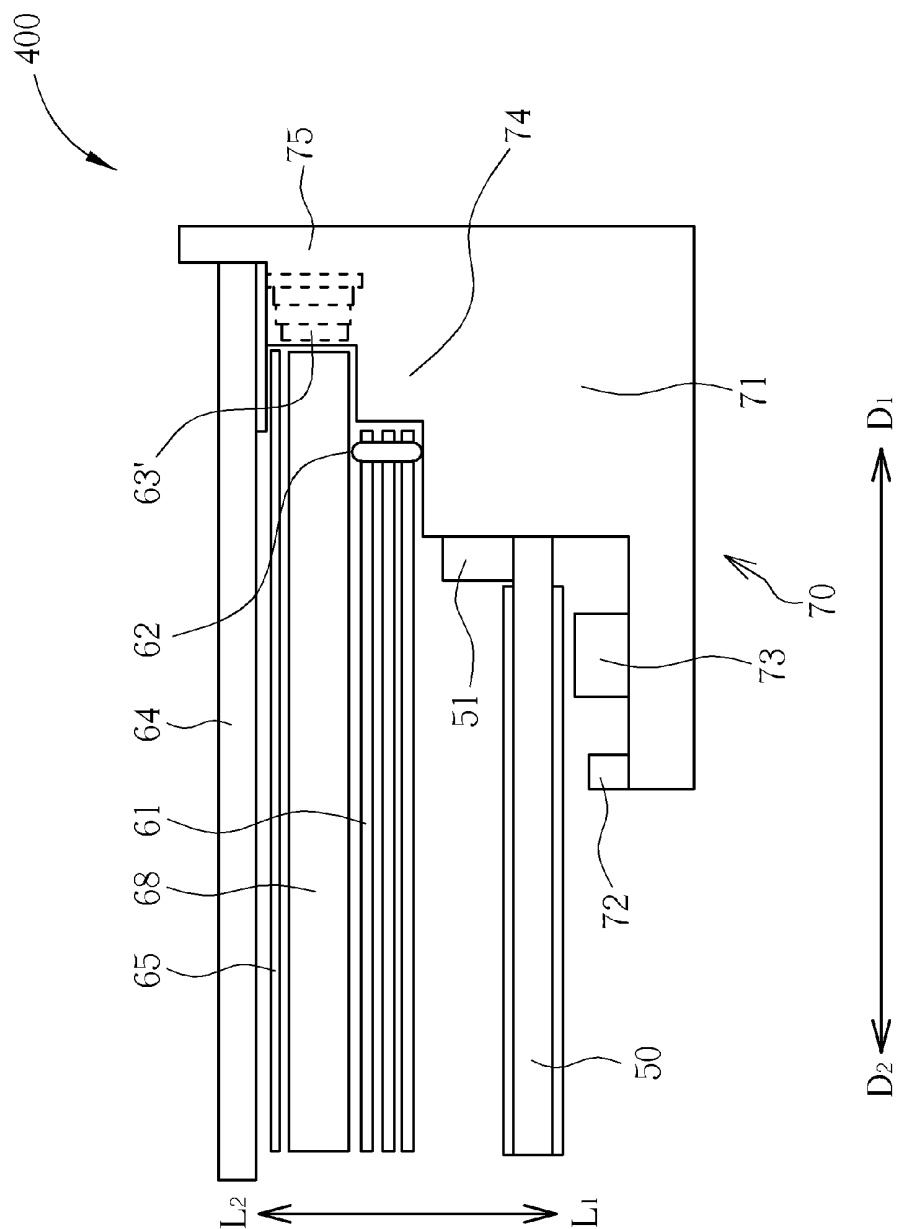


FIG. 15

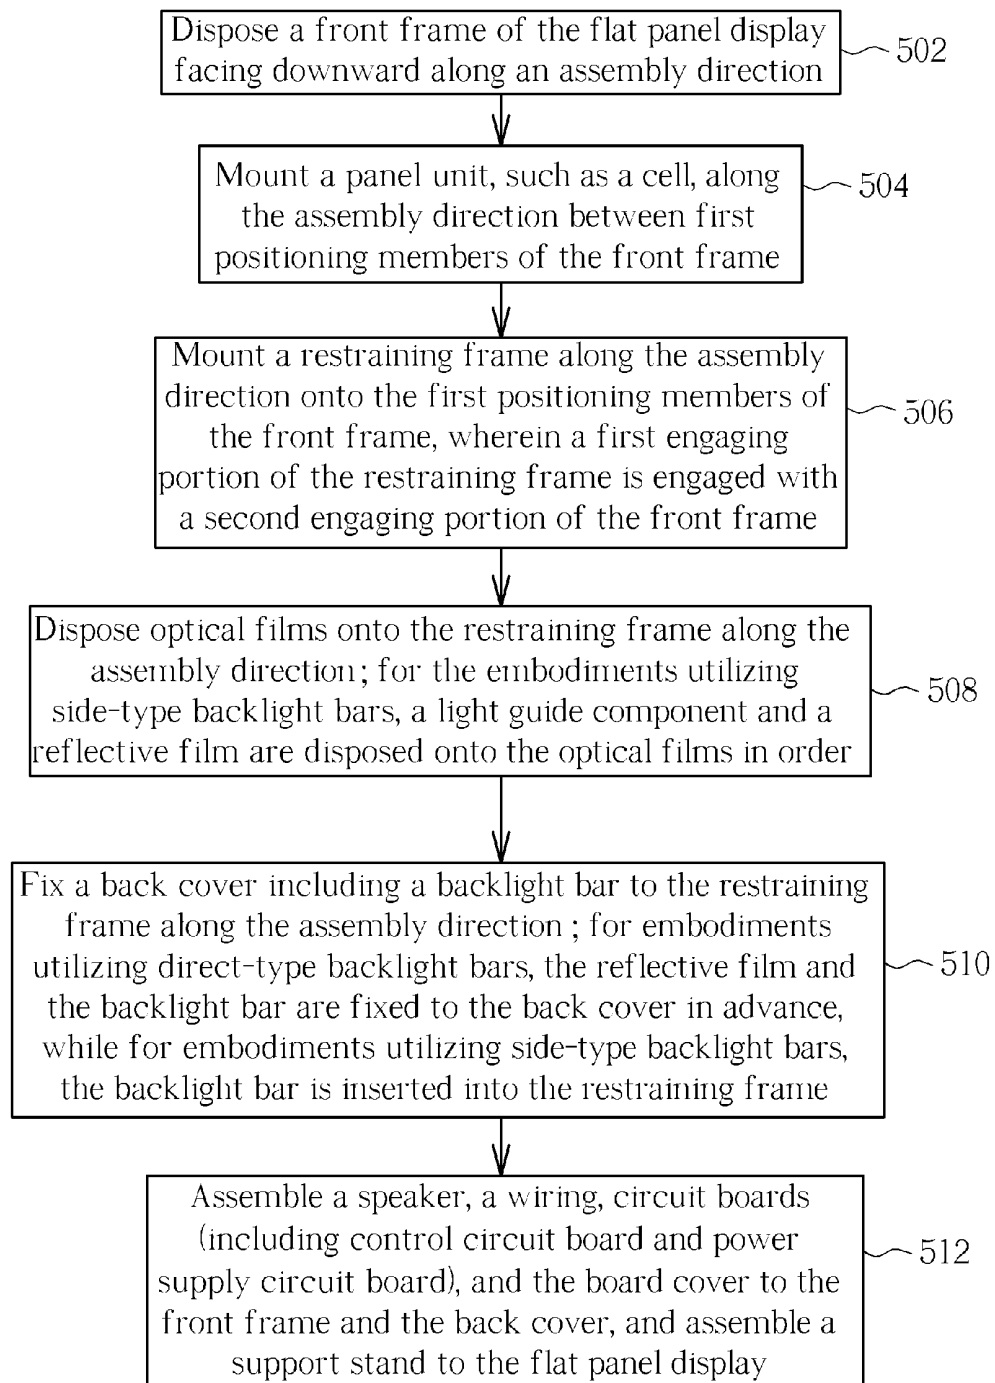


FIG. 16

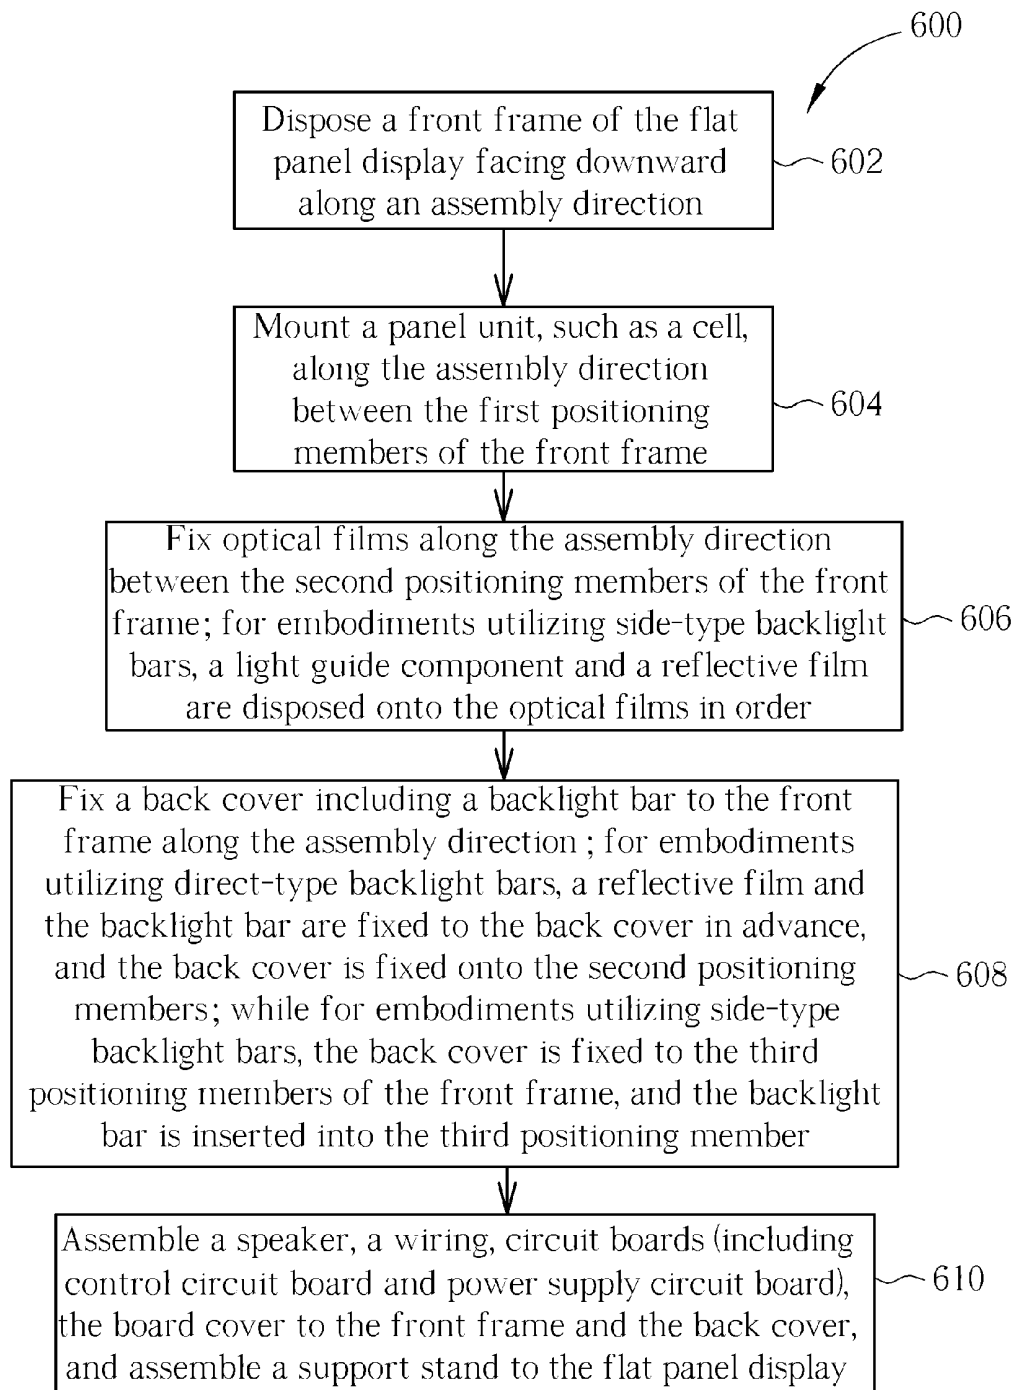


FIG. 17

FLAT PANEL DISPLAY AND METHOD FOR ASSEMBLING THE FLAT PANEL DISPLAY

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The invention relates to a flat panel display and a method for assembling the flat panel display, and more particularly, to a flat panel display with all its components assembled along a single direction and a method for assembling the flat panel display.

[0003] 2. Description of the Prior Art

[0004] Modern assembly process of a flat panel display includes three stages. The first stage is assembling a backlight unit, the second stage is assembling a liquid crystal module (LCM) unit, and the final stage is assembling the entire flat panel display. After the backlight component is assembled with other components, such as optical films or light guide components, to form the backlight unit in the backlight unit plant, the backlight unit is then sent to the panel plant and assembled into the LCM unit. Due to the demand of the assembly, a liquid crystal cell is added on the backlight unit under the condition that the display side faces upwards, where there are many positioning structures for positioning the liquid crystal cell configured on a rubber frame or a front frame of the backlight unit. Afterwards, the metal front frame is fixed to the LCM unit, and then the semi-finished LCM unit is turned upside down so a back cover can be fixed thereon to finish the second stage. In the flat panel display plant, the display side of the finished LCM unit is turned upward again, so the LCM unit and a front frame of the flat panel display can be assembled. Afterwards, the semi-finished flat panel display is turned upside down again, so a board and a back cover of the flat panel display are fixed to the back cover of the LCM unit. Finally, a support stand is assembled thereon to finish the entire flat panel display.

[0005] During the above-mentioned assembly process, the flat panel display is required to be turned over again and again. Since the trend of flat panel display is toward to large-size, the conventional assembly process will need more manpower and the difficulties of assembly will be increased. Besides, the conventional three-stage assembly process of the flat panel displays takes too much time and results in a bottleneck of man-hour productivity. Therefore, an important research topic of the flat panel display assembly process is how to integrate the aforesaid three stages and avoid turning the flat panel display over in order to shorten the production line, improve the production efficiency, and simplify the components required by the flat panel display to lower the production costs.

SUMMARY OF THE INVENTION

[0006] The present invention provides a flat panel display. The flat panel display includes a front frame, a panel unit, a restraining frame, a plurality of optical films, a backlight unit, and a back cover. The front frame includes a first positioning member. The panel unit is mounted along an assembly direction into the front frame and fixed by the first positioning member. The restraining frame is mounted along the assembly direction onto the first positioning member of the front frame. The plurality of optical films is disposed along the assembly direction onto the restraining frame. The backlight

unit is fixed to the back cover. The back cover and the backlight unit are fixed to the restraining frame along the assembly direction.

[0007] The present invention also provides a flat panel display. The flat panel display includes a front frame, a panel unit, a plurality of optical films, a backlight unit, and a back cover. The front frame includes a first positioning member and a second positioning member. The first positioning member and the second positioning member are arranged along an assembly direction. The panel unit is mounted along the assembly direction into the front frame and fixed by the first positioning member. The plurality of optical films is fixed along the assembly direction to the second positioning member of the front frame. The backlight unit is fixed to the back cover. The back cover and the backlight unit are fixed to the front frame along the assembly direction.

[0008] The present invention also provides a method for assembling a flat panel display. The method includes steps of: mounting a panel unit into a front frame along an assembly direction; mounting a restraining frame onto the first positioning member of the front frame along the assembly direction; disposing a plurality of optical films onto the restraining frame; and fixing a back cover comprising a backlight unit to the restraining frame along the assembly direction.

[0009] The present invention also provides a method for assembling a flat panel display. The method includes steps of: mounting a panel unit into a front frame along an assembly direction; fixing a plurality of optical films into a second positioning member of the front frame along the assembly direction; and fixing a back cover comprising a backlight unit to the front frame along the assembly direction. The first positioning member and the second positioning member are arranged along the assembly direction.

[0010] These and other objectives of the present invention will no doubt become obvious to those of ordinary skill in the art after reading the following detailed description of the preferred embodiment that is illustrated in the various figures and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 to FIG. 4 are schematic diagrams of side sectional view of a first embodiment of a flat panel display of the present invention and an assembly process thereof.

[0012] FIG. 5 to FIG. 7 are schematic diagrams of side sectional view of a second embodiment of a flat panel display of the present invention and an assembly process thereof.

[0013] FIG. 8 to FIG. 12 are schematic diagrams of side sectional view of a third embodiment of a flat panel display of the present invention and an assembly process thereof.

[0014] FIG. 13 to FIG. 15 are schematic diagrams of side sectional view of a fourth embodiment of a flat panel display of the present invention and an assembly process thereof.

[0015] FIG. 16 and FIG. 17 are flow charts of the methods for assembling the flat panel display according to the present invention.

DETAILED DESCRIPTION

[0016] Please refer to FIG. 1 to FIG. 4, FIG. 1 to FIG. 4 are schematic diagrams of side sectional view of a first embodiment of a flat panel display 100 of the present invention and an assembly process thereof. As shown in FIG. 1 to FIG. 4, the present invention provides specific structures of flat panel display 100 and an improved assembly process to integrate

the aforesaid three stages and avoid to turn the flat panel display 100 over in order to shorten the production line and improve the production efficiency. As shown in FIG. 4, the display surface, which is the panel unit 20 in FIG. 4, of the flat panel display 100 faces downward (i.e. L_1 direction in FIG. 4) for assembly. The flat panel display 100 includes a front frame 10, the panel unit 20, such as the cell, a restraining frame 32, a plurality of optical films 31, a backlight unit 33, a reflective film 35, a back cover 34, a speaker, a wiring, and circuit boards (including control circuit board and power supply circuit board), and so on. The speaker, the wiring, and the circuit boards (and a board cover) are not shown in FIG. 4, and the assembly of them is well known in the art, so it is not necessary to describe in detail here.

[0017] From FIG. 1 to FIG. 4, all components of the flat panel display 100 are assembled downward sequentially along an assembly direction (the L_1 direction). And the steps of the assembly process are simplified so the production efficiency could be improved. As shown in FIG. 1, the front frame 10 is facing downward and disposed firstly. The inner side of the front frame 10 has a first positioning member 11. The first positioning member 11 can be any positioning structure, such as a block extending from the inner side of the front frame 10, or a positioning bolt, a screw, a latch, and so on, which is fixed on the front frame 10. It should be noted that the FIG. 1 (and each figure of all embodiments) shows just one side of the flat panel display 100, and the opposing side of the flat panel display 100 with the same structure is not shown. The first positioning member 11 forms a span opening along a horizontal direction, which is the D_1D_2 direction in FIG. 1 to FIG. 4, for accommodating the panel unit 20. The panel unit 20 is mounted along the L_1 direction into the front frame 10 and fixed by the first positioning member 11, as shown in FIG. 1. A cushion pad 13 is disposed between the panel unit 20 and the front frame 10 (preferably attached on the front frame 10 or the panel unit 20 in advance). When the panel unit 20 is mounted along the L_1 direction into the front frame 10, the cushion pad 13 provides a cushion function to prevent damages of the panel unit 20 from hitting the front frame 10. The front frame 10 further includes a shade pad 12 to prevent lights leaking from the side of the display, so as to improve the output quality.

[0018] As shown in FIG. 2, the restraining frame 32 is then mounted along the L_1 direction onto the front frame 10, wherein the restraining frame 32 is specifically mounted onto the first positioning member 11 in this embodiment. Since the span opening formed by the restraining frame 32 along the horizontal direction is larger than the span opening formed by the first positioning member 11, the restraining frame 32 can be disposed on the first positioning member 11 and a certain distance away from the underlying panel unit 20. The restraining frame 32 has first engaging portions 37 at its four sides, which are slots in this embodiment, wherein the first engaging portions 37 are utilized to engage with second engaging portions 14, which are hooks in this embodiment, located at corresponding positions of the front frame 10 such that the restraining frame 32 can be mounted and fixed onto the front frame 10. Once the restraining frame 32 is mounted onto the front frame 10, it provides sufficient support for components stacking thereon and also provides the necessary space to the optical mechanism. The plurality of optical films 31 are then disposed along the L_1 direction onto arms 36 of the restraining frame 32.

[0019] As shown in FIG. 3, a backlight unit 33, which is a direct-type light emitting diode herein, and the reflective film 35 are fixed to the back cover 34 in advance. As shown in FIG. 4, the back cover 34 with the backlight unit 33 and the reflective film 35 is then fixed to the restraining frame 32 along the L_1 direction. Finally, the speaker, the wiring, and the circuit boards (with the board cover), which are not shown in the figures, are attached to the front frame 10 and the back cover 34 along the very same direction, i.e., the L_1 direction when the display surface of the panel unit 20 keeps facing downward, so as to complete the assembly processes of the flat panel display 100.

[0020] Please refer to FIG. 5 to FIG. 7. FIG. 5 to FIG. 7 are schematic diagrams of side sectional view of a second embodiment of a flat panel display 200 in the present invention and an assembly process thereof. The FIG. 5 to FIG. 7 discloses an alternative design of the front frame in the flat panel displays with the direct-type backlight units and the assembly method thereof. As shown in FIG. 5, the first positioning member 41 of the front frame 40, the panel unit 50, the cushion pad 43, and the shade pad 42 of the flat panel display 200 are similar to the first embodiment mentioned above. The front frame 40 further has a second positioning member 44 at its inner sides, as shown in the figures. The first positioning member 41 and the second positioning member 44 are arranged as step-shaped along the L_2 direction, the opposite direction of the assembly direction L_1 . A span opening between the second positioning members 44 of opposing sides along a horizontal direction, the D_1D_2 direction, is larger than the span opening of the first positioning members 41. Therefore, optical films 61 can be directly disposed between the second positioning members 44 along the L_1 direction as shown in FIG. 6. Since the optical films 61 are disposed onto the first positioning member 41, the necessary space of the optical mechanism is provided between the optical films 61 and the panel unit 50. A cushion pad 51 is disposed between the panel unit 50 and the optical films 61. The two cushion pads 43, 51 are respectively disposed on two sides of the panel unit 50 to provide the panel unit 50 with an efficient protection from damage. The optical films 61 are fixed onto the first positioning member 41 by a fixing member 62.

[0021] As shown in FIG. 7, a back cover 64, a reflective film 65, and a backlight unit 63, similar to the first embodiment, are assembled in advance, and then the back cover 64 is fixed to the front frame 40 along the L_1 direction, which is specifically fixed onto the second positioning member 44 of the front frame 40 in this embodiment.

[0022] Please refer to the FIG. 8 to FIG. 12, which are schematic diagrams of side sectional view of a third embodiment of a flat panel display 300 in the present invention and an assembly process thereof. A side-type backlight unit utilized in the flat panel display 300 is shown in the third embodiment, which is different from the direct-type backlight units in the above-mentioned embodiments. Components and assembly stages shown in FIG. 8 and FIG. 9 are similar to the first embodiment and thus they are not described in detail here. As shown in FIG. 10, after the optical films 31 are disposed along the L_1 direction onto the arm 36, a light guide component 38 working with the side-type backlight unit 33' and the reflective film 35 are disposed along the L_1 direction onto the plurality of optical films 31 sequentially. Then the side-type backlight unit 33' is fixed to the back cover 34. In this embodiment, the side-type backlight unit 33' is a side-light type light

emitting diode, which can be disposed on the back cover **34** in a way to emit lights from one side, two opposite sides, or four sides as shown in FIG. **11** (FIG. **11** is a diagram of the back cover **34** fixed with the backlight unit **33'**). As shown in FIG. **12**, the back cover **34** is fixed to the restraining frame **32**, or to the front frame **10** directly. In this assembly stage, the backlight unit **33'** is inserted into a proper opening of the restraining frame **32** for side-type light source configuration.

[0023] Please refer to FIG. **13** to FIG. **15**, FIG. **13** to FIG. **15** are schematic diagrams of side sectional view of a fourth embodiment in the present invention and an assembly process thereof. The flat panel display **400** of the fourth embodiment also has side-type backlight units. The front frame **70** including the first positioning member **71** and the second positioning member **74**, the panel unit **50**, two cushion pads **51**, **73**, the shade pad **72**, and the optical films **61**, of the flat panel display **400**, and the assembly process thereof, as shown in FIG. **13** and FIG. **14**, are similar to the aforesaid second embodiment, therefore they are not necessary to be described in detail here. The front frame **70** of the fourth embodiment further includes a third positioning member **75**. The first positioning member **71**, the second positioning member **74**, and the third positioning member **75** can be any positioning structure, such as a block extending from the inner sides of the front frame **70**, or a positioning bolt, a screw, a latch, and so on, which are arranged in different positions fixed on the front frame **70** along the L_1L_2 direction. In this embodiment, the first positioning member **71**, the second positioning member **74**, and the third positioning member **75** are arranged as step-shaped along the L_2 direction opposite to the L_1 direction. A span opening between the third positioning members **75** on the opposing sides of the front frame **70** along the horizontal direction, the D_1D_2 direction, is larger than the span opening between the second positioning members **74**. As shown in FIG. **15**, a light guide component **68** and a reflective film **65** are disposed in order along the L_1 direction onto the optical films **61**. FIG. **15** further shows that the light guide component **68** and the reflective film **65** are disposed onto the second positioning member **74** or in other words, between the third positioning members **75**. Therefore, a proper distance between the light guide component **68**, the reflective film **65**, and the plurality of optical films **61** are provided for the optical mechanism. Then, the back cover **34** is fixed to the front frame **70**, or more specifically, to the third positioning member **75** in this embodiment. In this assembly stage, the backlight unit **63'** is directly inserted into a proper opening of the third positioning member **75** for side-type light source configuration.

[0024] Please refer to FIG. **16** and FIG. **17**, which are flow charts of the methods for assembly the flat panel display in the present invention. In FIG. **16**, the method **500** includes the following steps:

[0025] Step **502**: dispose a front frame of the flat panel display facing downward along an assembly direction;

[0026] Step **504**: mount a panel unit, such as a cell, along the assembly direction between first positioning members of the front frame;

[0027] Step **506**: mount a restraining frame along the assembly direction onto the first positioning members of the front frame, wherein a first engaging portion of the restraining frame is engaged with a second engaging portion of the front frame;

[0028] Step **508**: dispose optical films onto the restraining frame along the assembly direction; for the embodiments

utilizing side-type backlight units, a light guide component and a reflective film are disposed onto the optical films in order;

[0029] Step **510**: fix a back cover including a backlight unit to the restraining frame along the assembly direction; for embodiments utilizing direct-type backlight units, the reflective film and the backlight unit are fixed to the back cover in advance, while for embodiments utilizing side-type backlight units, the backlight unit is inserted into the restraining frame;

[0030] Step **512**: assemble a speaker, a wiring, circuit boards (including control circuit board and power supply circuit board), and the board cover to the front frame and the back cover, and assemble a support stand to the flat panel display.

[0031] In FIG. **17**, the method **600** includes the following steps:

[0032] Step **602**: dispose a front frame of the flat panel display facing downward along an assembly direction;

[0033] Step **604**: mount a panel unit, such as a cell, along the assembly direction between the first positioning members of the front frame;

[0034] Step **606**: fix optical films along the assembly direction between the second positioning members of the front frame; for embodiments utilizing side-type backlight units, a light guide component and a reflective film are disposed onto the optical films in order;

[0035] Step **608**: fix a back cover including a backlight unit to the front frame along the assembly direction; for embodiments utilizing direct-type backlight units, a reflective film and the backlight unit are fixed to the back cover in advance, and the back cover is fixed onto the second positioning members; while for embodiments utilizing side-type backlight units, the back cover is fixed to the third positioning members of the front frame, and the backlight unit is inserted into the third positioning member;

[0036] Step **610**: assemble a speaker, a wiring, circuit boards (including control circuit board and power supply circuit board), the board cover to the front frame and the back cover, and assemble a support stand to the flat panel display.

[0037] The method for assembling the flat panel display and the structure of the flat panel display disclosed in the present invention can avoid the repeated turning steps required in the conventional assembly process of LCM unit and remove a metal frame for fixing the LCM unit. Thus the production costs can be lowered, and the total thickness of the flat panel display is further minimized due to the reduction of the components. The front frame of the flat panel display having positioning structures allows the LCD panel unit to be positioned and mounted thereon along an assembly direction, and the restraining frame may be further incorporated in the flat panel display. Thus the necessary space for positioning and optical mechanism of the LCD panel unit can be retained. The optical films, the light guide component, the backlight unit, and the reflective film of the flat panel display are then mounted sequentially along the assembly direction on the restraining frame or the front frame, wherein the backlight unit and/or the reflective film could also be fixed to the back cover of the backlight module in advance. Finally, the speaker, the wiring of the display, the circuit boards, and the board cover are assembled to the front frame and the back cover, and the support stand is assembled to the flat panel display.

[0038] Those skilled in the art will readily observe that numerous modifications and alterations of the device and method may be made while retaining the teachings of the invention.

What is claimed is:

1. A flat panel display, comprising:
a front frame comprising a first positioning member;
a panel unit attached to the first positioning member of the front frame;
a restraining frame mounted onto the first positioning member of the front frame;
a plurality of optical films disposed onto the restraining frame;
a backlight unit; and
a back cover, the backlight unit fixed to the back cover, the back cover and the backlight unit fixed to the restraining frame;
wherein the front frame, the panel unit, the restraining frame, the plurality of optical films, and the back cover are assembled along a direction.
2. The flat panel display of claim 1, wherein the restraining frame comprises a first engaging portion, the front frame comprises a second engaging portion for engaging the first engaging portion to mount the restraining frame onto the first positioning member of the front frame.
3. The flat panel display of claim 1, wherein the backlight unit is a direct-type light emitting diode, and the flat panel display further comprises a reflector fixed to the back cover with the backlight unit.
4. The flat panel display of claim 1, further comprising a light guide component and a reflector for being disposed on the plurality of optical films.
5. The flat panel display of claim 4, wherein the backlight unit is a side-light type light emitting diode, and the backlight unit is inserted into the restraining frame.
6. The flat panel display of claim 1, further comprising a cushion pad disposed between the panel unit and the front frame.
7. A flat panel display, comprising:
a front frame comprising a first positioning member and a second positioning member, the first positioning member and the second positioning member arranged along a direction;
a panel unit mounted along the direction into the first positioning member of the front frame;
a plurality of optical films fixed along the direction to the second positioning member of the front frame;
a backlight unit; and
a back cover, the backlight unit fixed to the back cover, the back cover and the backlight unit fixed to the front frame along the direction.
8. The flat panel display of claim 7, wherein a span of the second positioning member of the front frame along a horizontal direction is larger than a span of the first positioning member.
9. The flat panel display of claim 7, wherein the backlight unit is a direct-type light emitting diode, and the flat panel display further comprises a reflector fixed to the back cover with the backlight unit.
10. The flat panel display of claim 7, further comprising a light guide component and a reflector for being disposed on the plurality of optical films along the direction.
11. The flat panel display of claim 10, wherein the backlight unit is a side-light type light emitting diode, the front

frame comprises a third positioning member, the first positioning member, the second positioning member and the third positioning member are arranged along the direction, a span of the third positioning member along a horizontal direction is larger than a span of the second positioning member, the back cover is fixed to the third positioning member of the front frame, and the backlight unit is inserted into the third positioning member.

12. The flat panel display of claim 7, further comprising two cushion pads respectively disposed along the direction at two sides of the panel unit.

13. A method for assembling a flat panel display, the method comprising steps of:

- mounting a panel unit into a first positioning member of a front frame along a direction;
- mounting a restraining frame onto the first positioning member of the front frame along the direction;
- disposing a plurality of optical films onto the restraining frame; and
- fixing a back cover comprising a backlight unit to the restraining frame along the direction.

14. The method of claim 13, wherein the step of mounting the restraining frame onto the first positioning member of the front frame along the direction further comprises: engaging a first engaging portion of the restraining frame with a second engaging portion of the front frame to mount the restraining frame onto the first positioning member of the front frame along the direction.

15. The method of claim 13 further comprising step of: fixing a reflector and the backlight unit to the back cover.

16. The method of claim 13 further comprising step of: disposing a light guide component and a reflector onto a plurality of optical films along the direction.

17. The method of claim 16 further comprising step of: fixing the backlight unit to the back cover.

18. The method of claim 16, wherein the step of fixing a back cover comprising a backlight unit to the front frame along the direction further comprises: inserting the backlight unit into the restraining frame.

19. The method of claim 13 further comprising step of: disposing a cushion pad between the panel unit and the front frame.

20. A method for assembling a flat panel display, the method comprising:

- mounting a panel unit into a first positioning member of a front frame along a direction;
 - fixing a plurality of optical films into a second positioning member of the front frame along the direction; and
 - fixing a back cover comprising a backlight unit to the front frame along the direction;
- wherein the first positioning member and the second positioning member are arranged along the direction.

21. The method of claim 20 further comprising step of: fixing a reflector and the backlight unit to the back cover.

22. The method of claim 20 further comprising step of: disposing a light guide component and a reflector onto a plurality of optical films along the direction.

23. The method of claim 22 further comprising step of: fixing the backlight unit to the back cover.

24. The method of claim 22, wherein the step of fixing a back cover comprising a backlight unit to the second positioning member along the direction comprises:

- fixing the back cover to the third positioning member of the front frame; and

inserting the backlight unit into the third positioning member;
wherein the first positioning member, the second positioning member, and the third positioning member are arranged along the direction.

25. The method of claim **20** further comprising step of:
disposing cushion pads respectively at two sides of the panel unit along the direction.

* * * * *

专利名称(译)	平板显示器和用于组装平板显示器的方法		
公开(公告)号	US20110299006A1	公开(公告)日	2011-12-08
申请号	US12/949740	申请日	2010-11-18
[标]申请(专利权)人(译)	程陈我 王守红TSE		
申请(专利权)人(译)	程I-CHEN 王守红-TSE		
当前申请(专利权)人(译)	瑞轩科技有限公司		
[标]发明人	CHENG I CHEN WANG HUNG TSE		
发明人	CHENG, I-CHEN WANG, HUNG-TSE		
IPC分类号	G02F1/1333		
CPC分类号	G02B6/0086 G02F2001/133322 G02F2001/133317 G02F2001/133314 F21V21/00 G02F1/133308 Y10T29/49826 G02F2001/133325		
优先权	099118558 2010-06-08 TW		
其他公开文献	US8659716		
外部链接	Espacenet USPTO		

摘要(译)

具有定位结构的平板显示器的前框架允许LCD单元沿组装方向定位和安装在其上。可以进一步结合限制框架以用于显示器的每个部件的定位和间隔目的。然后，在约束框架或前框架上沿着组装方向将光学膜，光导组件，背光单元和平板显示器的反射器安装成一排，其中背光单元和/或反射器可以是预先固定在背光模块的后盖上。最后，扬声器，显示器的布线，电路板和板盖组装到前框架和后盖上。

