



(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2004/0061821 A1**

Takeda et al.

(43) **Pub. Date:**

Apr. 1, 2004

(54) **LIQUID CRYSTAL DISPLAY DEVICE AND LIQUID CRYSTAL ORIENTATION METHOD**

Related U.S. Application Data

(75) Inventors: **Arihiro Takeda**, Kawasaki (JP);
Shingo Kataoka, Kawasaki (JP);
Tsuyoshi Kamada, Yonago (JP);
Kazuya Ueda, Kawasaki (JP);
Takahiro Sasaki, Kawasaki (JP)

(62) Division of application No. 10/047,216, filed on Jan. 14, 2002.

(30) **Foreign Application Priority Data**

Feb. 6, 2001 (JP) 2001-029814

Publication Classification

(51) **Int. Cl.⁷** **G02F 1/1337**
(52) **U.S. Cl.** **349/123**

Correspondence Address
Patrick G. Burns, Esq.
GREER, BURNS & CRAIN, LTD.
Suite 2500
300 South Wacker Dr.
Chicago, IL 60606 (US)

(57) **ABSTRACT**

A slit pattern, which is an orientation control element extending in an oblique direction relative to an edge of a pixel electrode on a surface of a TFT substrate, is formed in the pixel electrode to extend in a substantially parallel direction to an extending direction of a bank-shaped pattern. Furthermore, as an orientation control element, fine slit patterns (concave portions in the pixel electrode) are formed locally in a part near the edge of the pixel electrode except in the pixel electrode to extend in an oblique direction relative to an extending direction of the edge.

(73) Assignees: **Fujitsu Limited**, Kawasaki-shi (JP);
FUJITSU DISPLAY TECHNOLOGIES CORPORATION, Kawasaki-shi (JP)

(21) Appl. No.: **10/664,729**

(22) Filed: **Sep. 18, 2003**


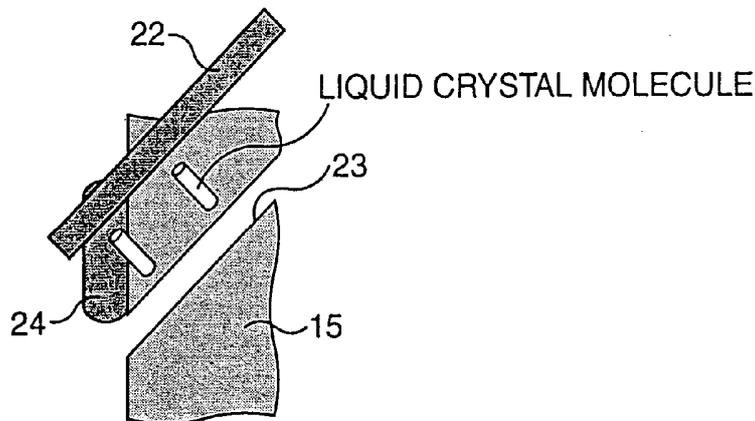


FIG. 1

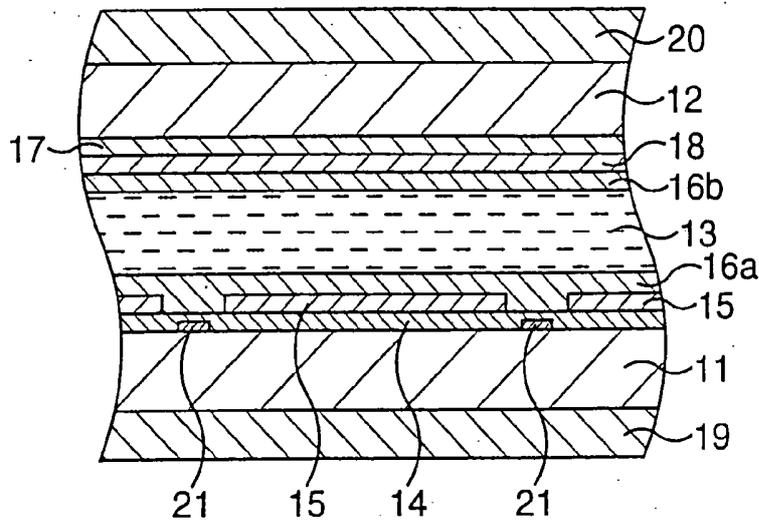


FIG. 2A

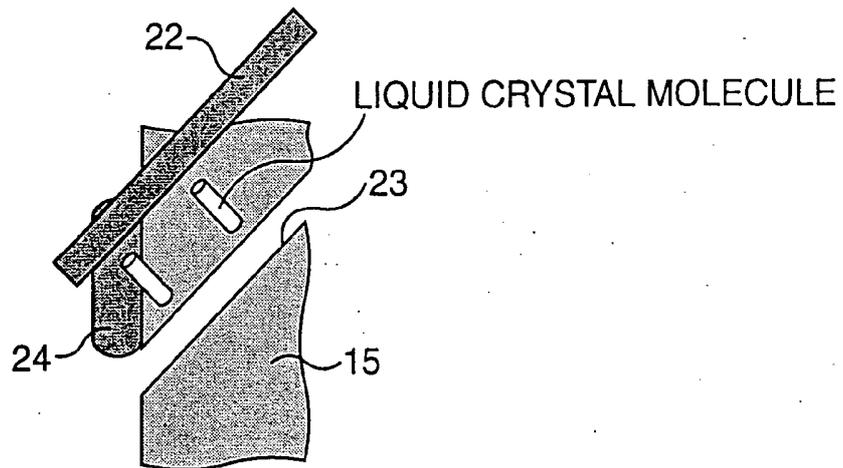


FIG. 2B

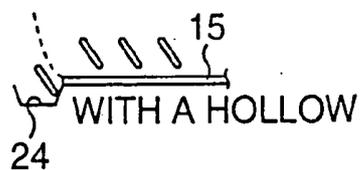


FIG. 2C



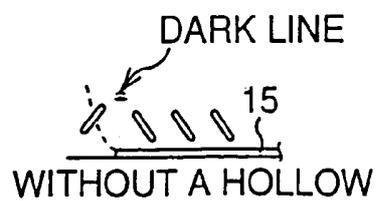


FIG. 3A

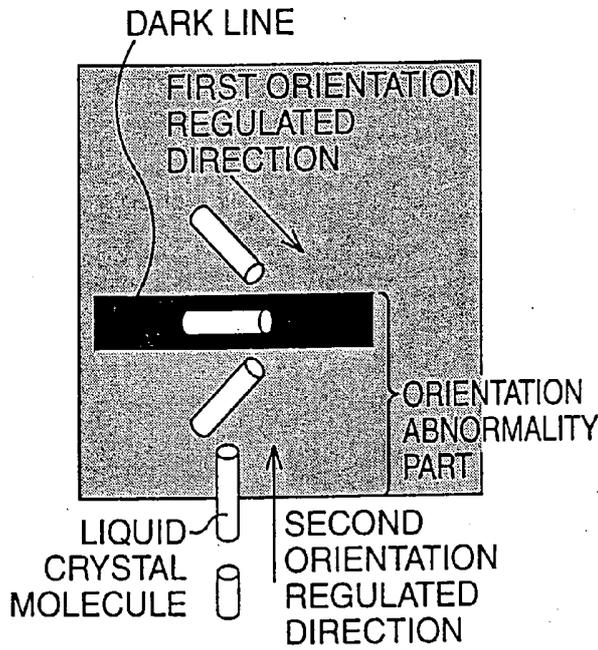


CONVENTIONAL

FIG. 3B

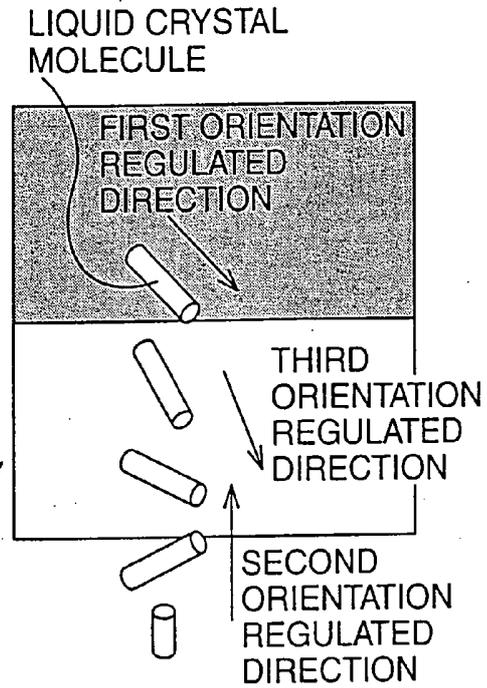

GIVE A THIRD REGULATING FORCE

FIG. 3C

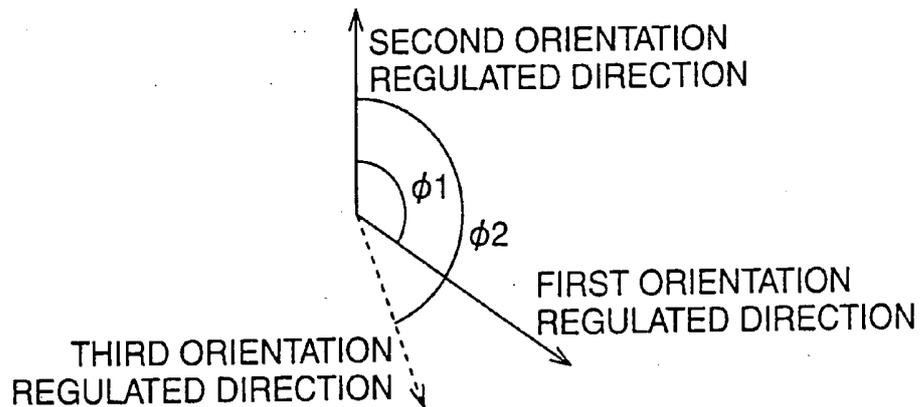

RELATION BETWEEN DIRECTIONS OF ALIGNING FORCE AND ANGLES

FIG. 4

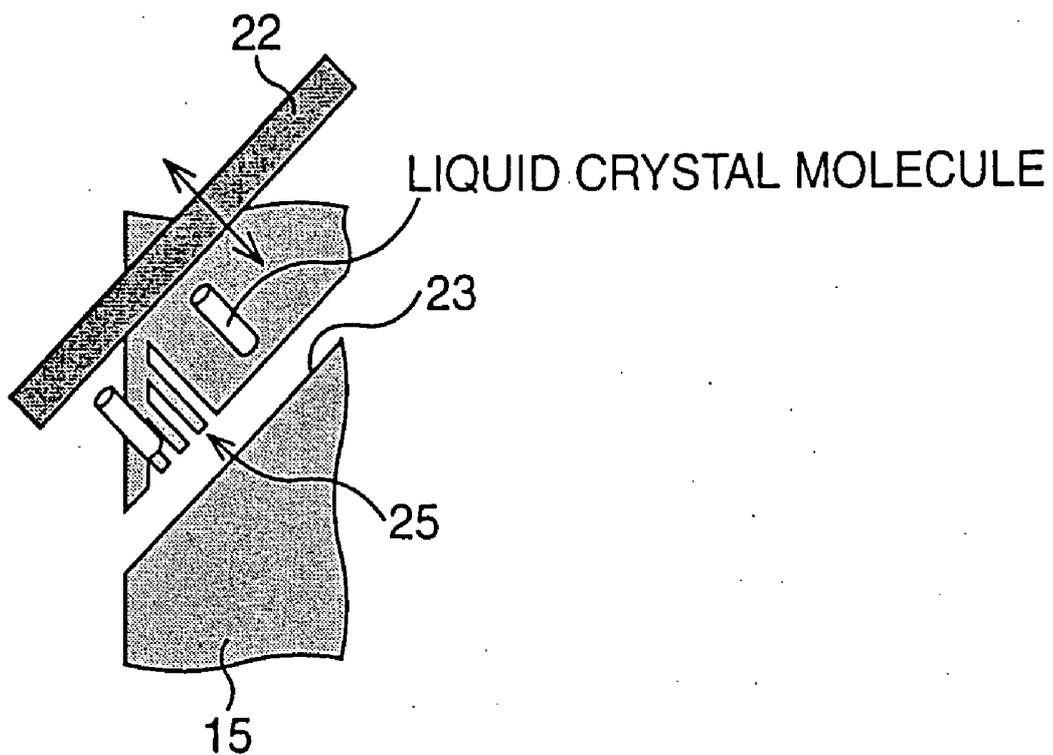


FIG. 5



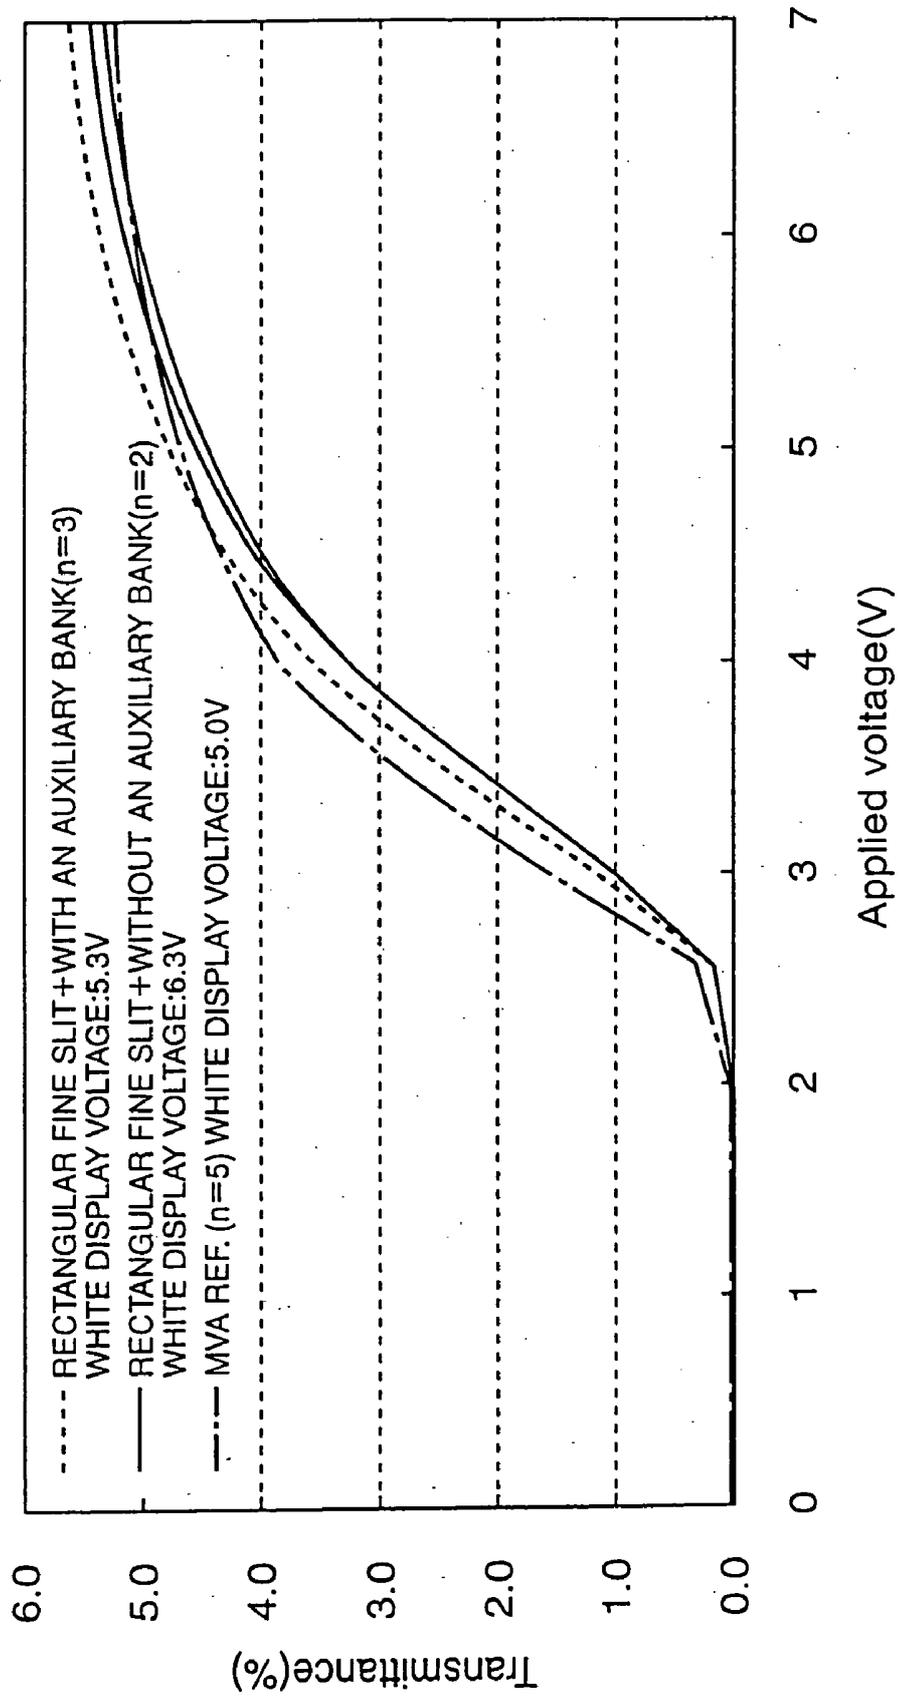


FIG. 6A

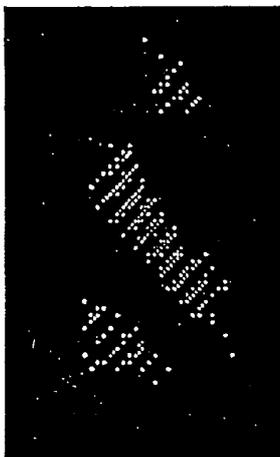


APPLIED
VOLTAGE : 3V

FIG. 6B

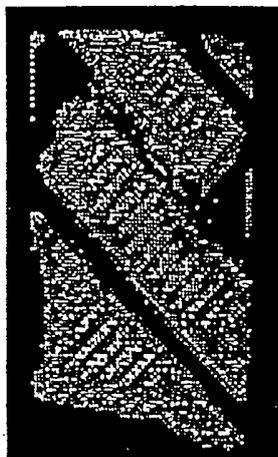


APPLIED
VOLTAGE : 4V

FIG. 6C

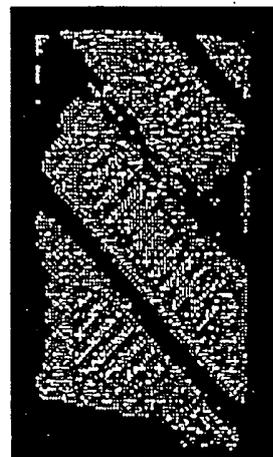


APPLIED
VOLTAGE : 5V

FIG. 6D

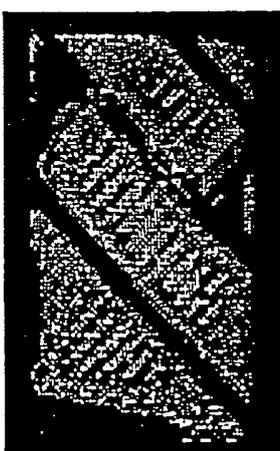


APPLIED
VOLTAGE : 6V

FIG. 6E

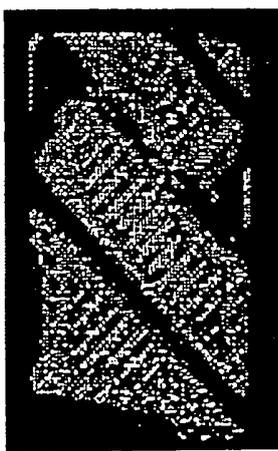

APPLIED
VOLTAGE : 7V

FIG. 6F

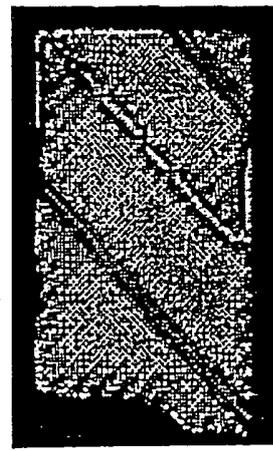

APPLIED
VOLTAGE : 8V

FIG. 7

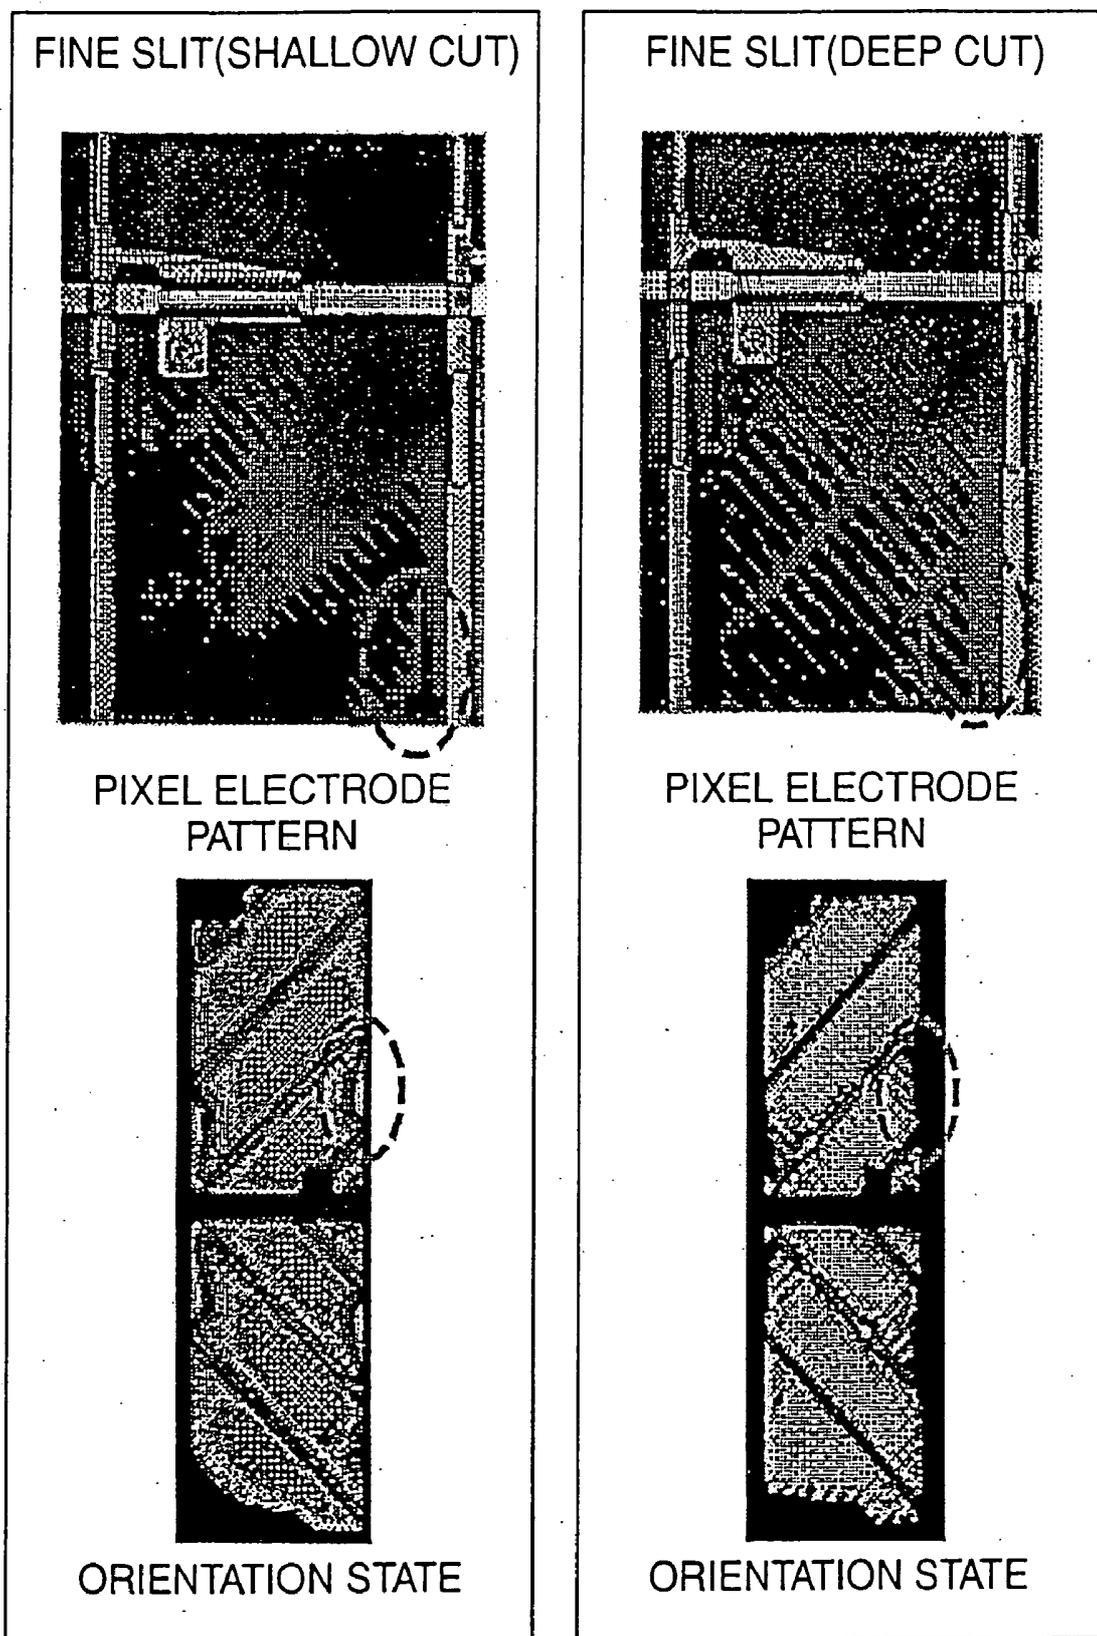


FIG. 8

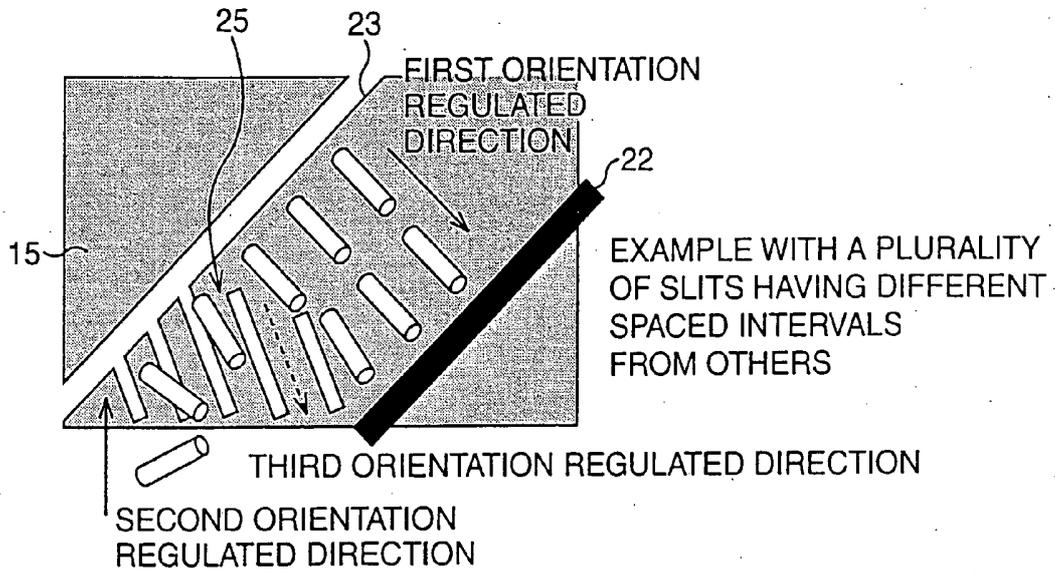


FIG. 9

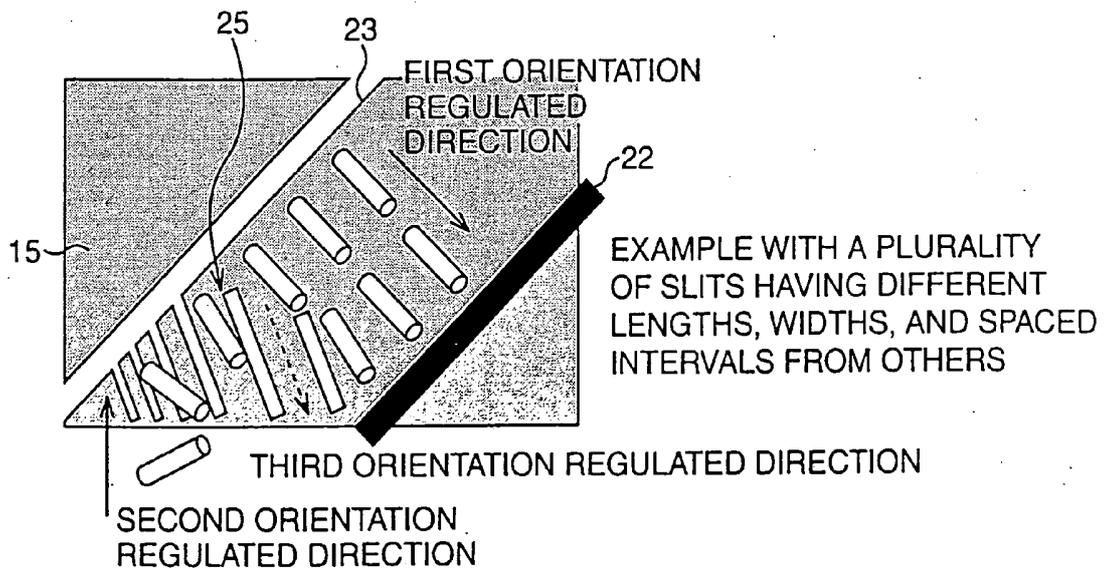


FIG. 10

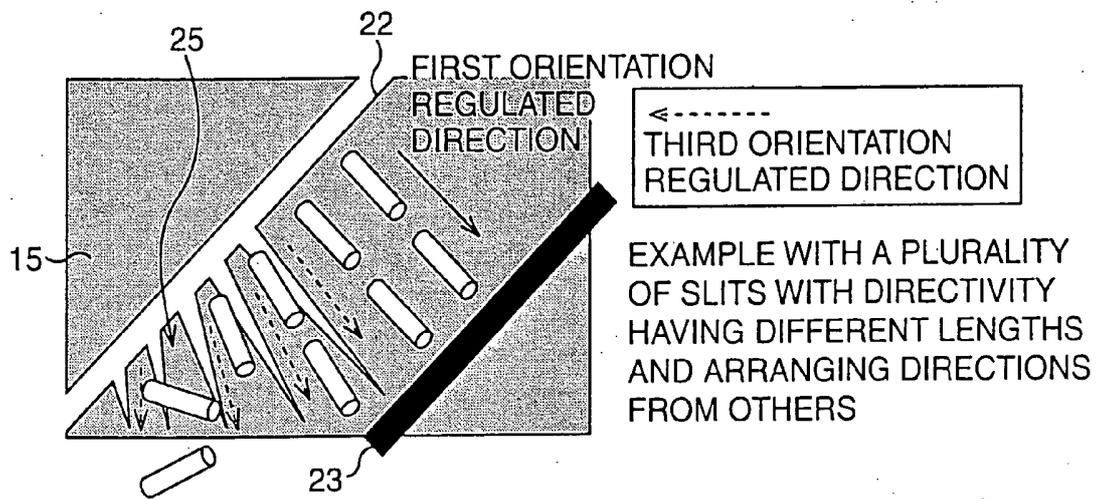


FIG. 11

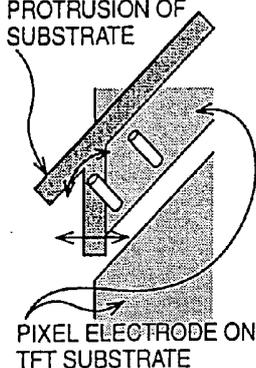


	①WITH AN AUXILIARY BANK	②WITHOUT AN AUXILIARY BANK	③CHANGE THE DIRECTION OF AN AUXILIARY BANK
STRUCTURE	 <p>PROTRUSION OF SUBSTRATE</p> <p>PIXEL ELECTRODE ON TFT SUBSTRATE</p>	 <p>DARK LINE</p>	
TRANSMITTANCE	1	0.9	0.95
MISALIGNMENT MARGIN	x	o	Δ
FEATURES	<ul style="list-style-type: none"> • LIQUID CRYSTAL ORIENTATION OF A PIXEL EDGE CHANGES GREATLY DUE TO DEVIATION AMONG EACH SHOT AND IN PASTING (A LARGE DEGREE OF TRANSMITTANCE CHANGE) • NO DARK LINE ON A PIXEL EDGE (A LARGE DEGREE OF IMPROVEMENT IN TRANSMITTANCE) 	<ul style="list-style-type: none"> • LIQUID CRYSTAL ORIENTATION OF A PIXEL EDGE CHANGES DUE TO DEVIATION AMONG EACH SHOT AND IN PASTING (TO A SMALL DEGREE) • OCCURRENCE OF ONE DARK LINE ON A PIXEL EDGE (A LARGE DEGREE OF DECREASE IN TRANSMITTANCE) 	<ul style="list-style-type: none"> • LIQUID CRYSTAL ORIENTATION OF A PIXEL EDGE CHANGES DUE TO DEVIATION AMONG EACH SHOT AND IN PASTING • NO DARK LINE ON A PIXEL EDGE

FIG. 12

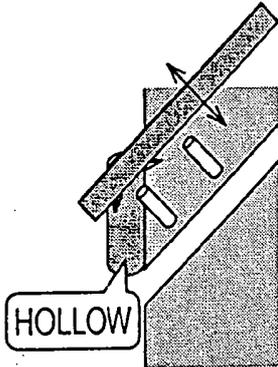
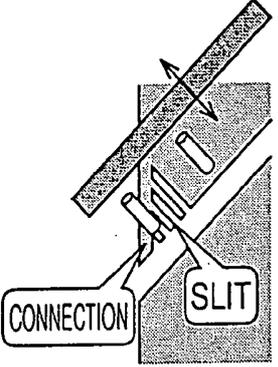
	④ HOLLOW IN A PIXEL EDGE	⑤ FINE SLITS + CONNECTION AT THE END
STRUCTURE		
TRANSMITTANCE	0.92	0.95
MISALIGNMENT MARGIN	○	◎
FEATURES	<ul style="list-style-type: none"> · LIQUID CRYSTAL ORIENTATION OF A PIXEL EDGE CHANGES DUE TO DEVIATION AMONG EACH SHOT AND IN PASTING (WITH A MARGIN) · NO DARK LINE ON A PIXEL EDGE 	<ul style="list-style-type: none"> · LIQUID CRYSTAL ORIENTATION DOES NOT CHANGE EASILY DUE TO DEVIATION AMONG EACH SHOT AND IN PASTING (WITH THE LARGEST MARGIN) · NO DARK LINE AT A PIXEL EDGE (TRANSMITTANCE UNDER IMPROVEMENT) · TRANSMITTANCE IS IMPROVED GREATLY AT A DRIVING VOLTAGE OF 6V OR HIGHER (EQUAL TO ①)

FIG. 13

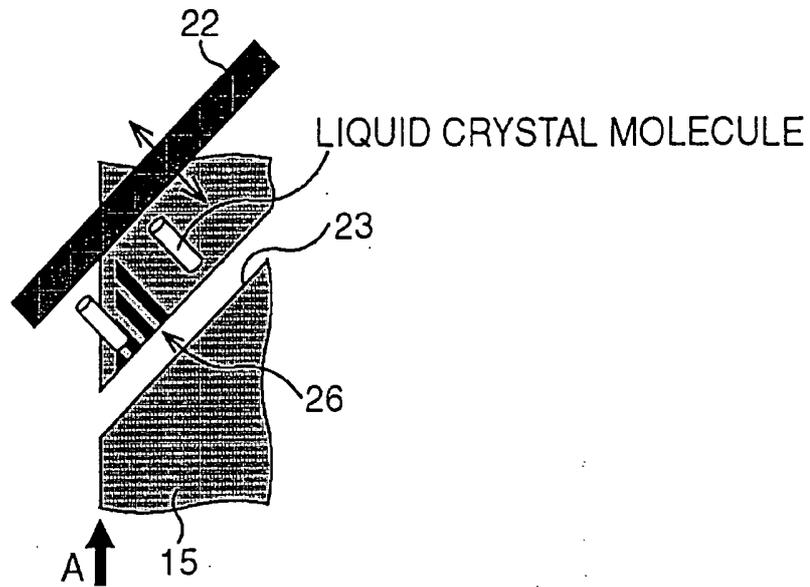


FIG. 14A

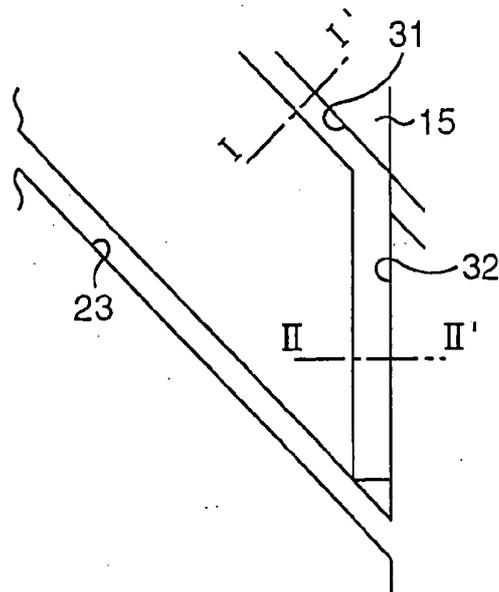


FIG. 14B

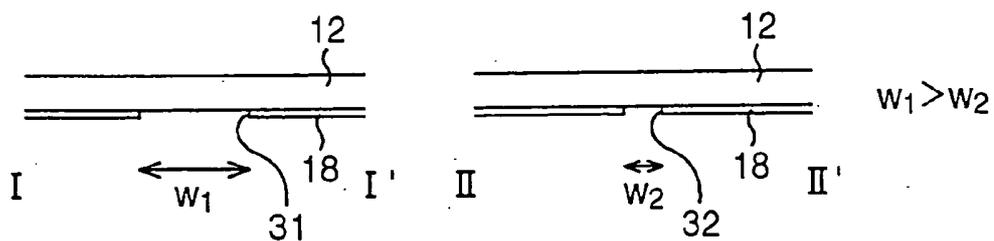


FIG. 15A

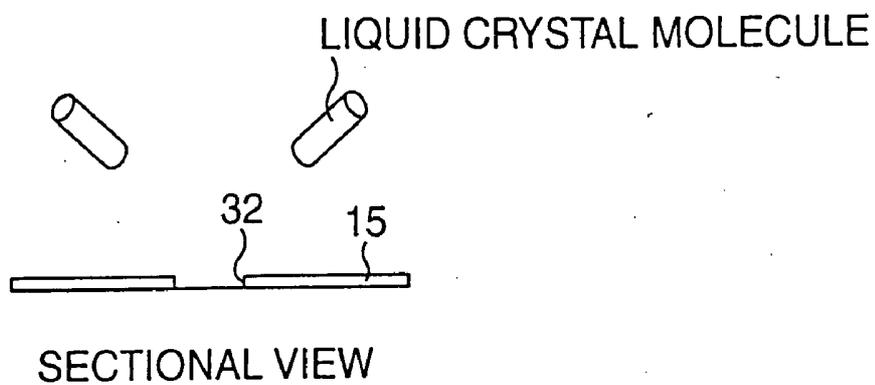


FIG. 15B

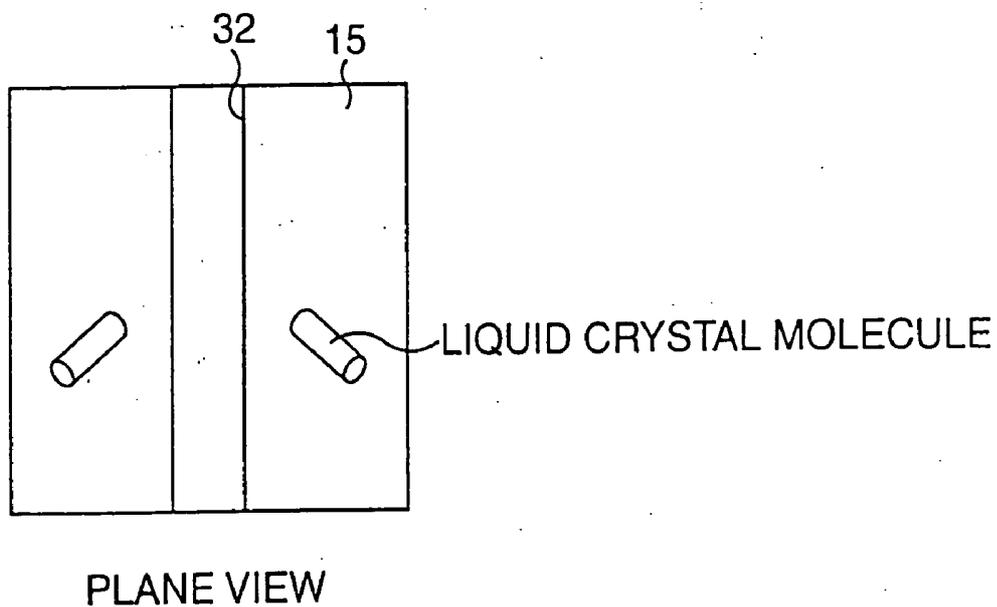


FIG. 16A

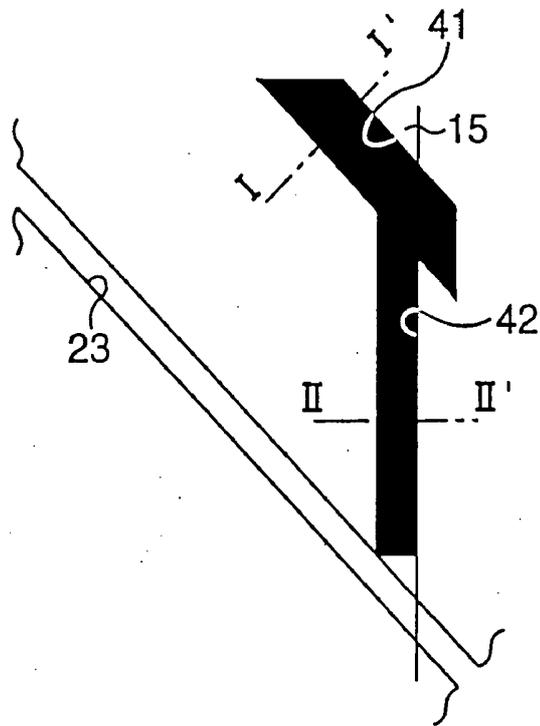


FIG. 16B

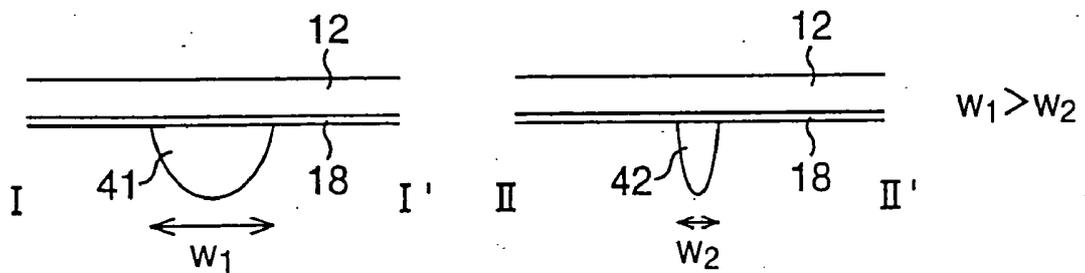


FIG. 17A

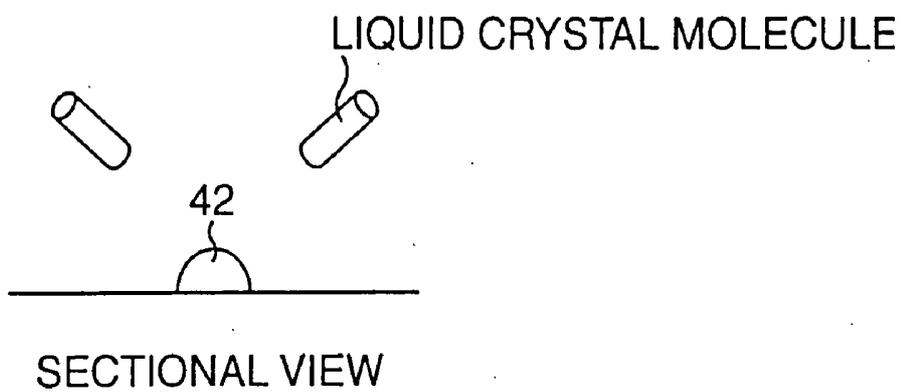


FIG. 17B



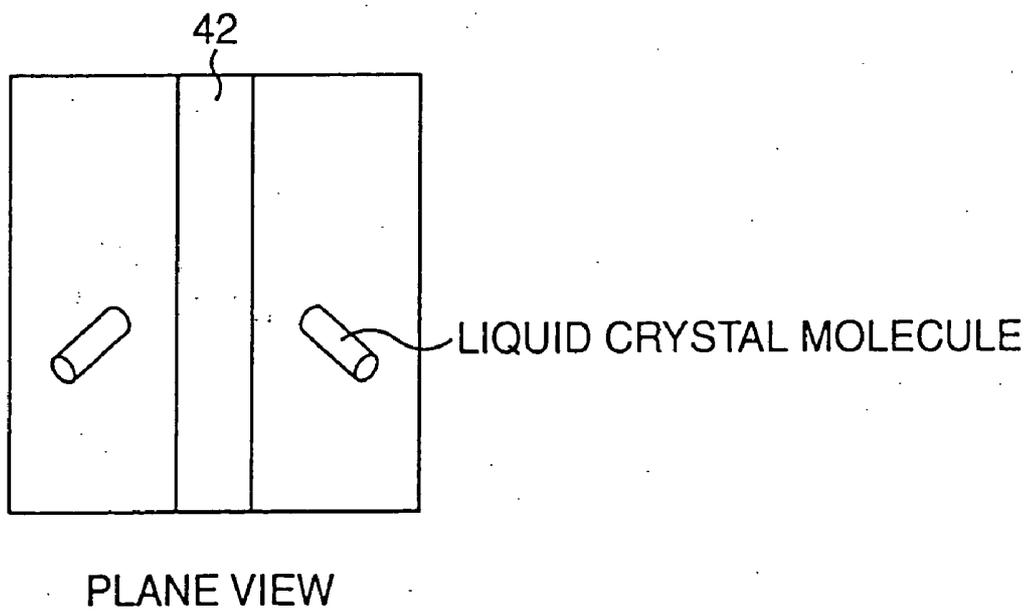


FIG. 18A

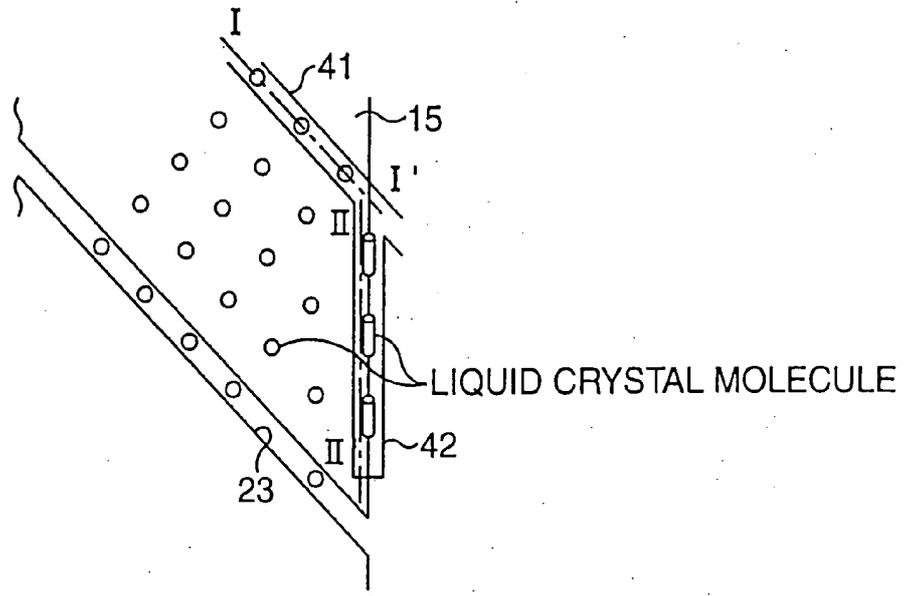


PLANE VIEW

FIG. 18B

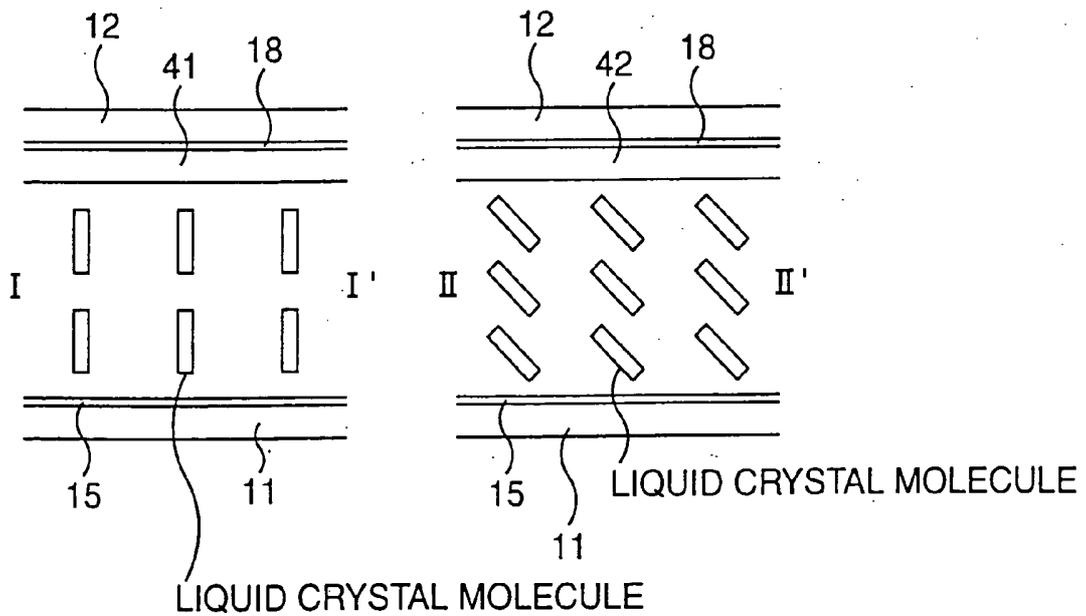


SECTIONAL VIEW

FIG. 19A

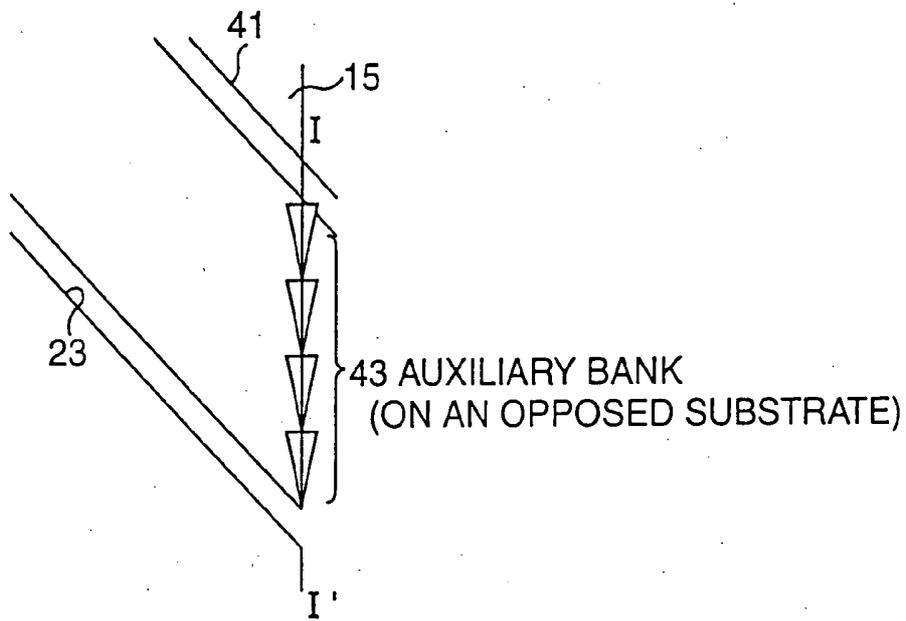


PLANE VIEW

FIG. 19B

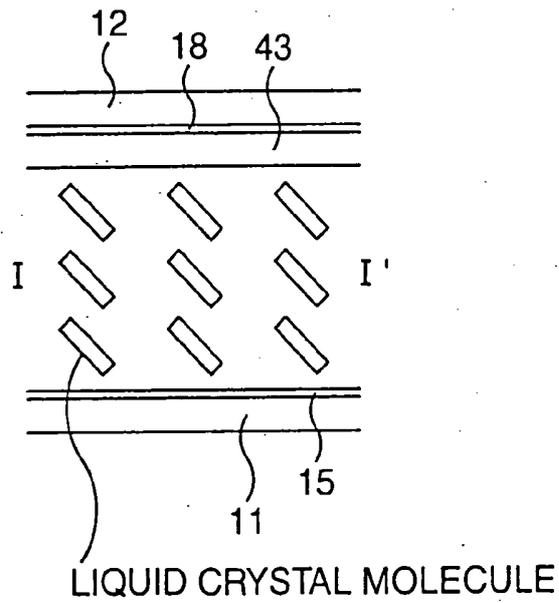


SECTIONAL VIEW

FIG. 20A

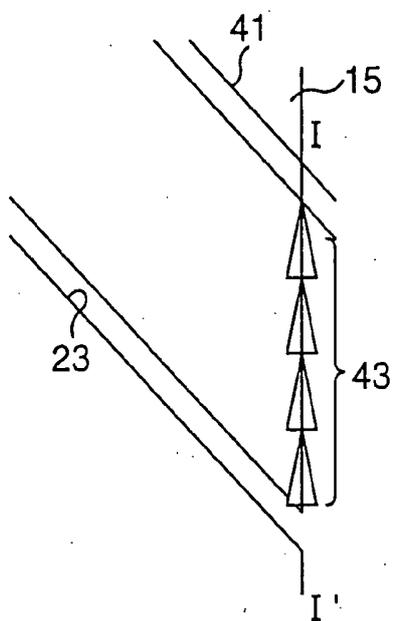

PLANE VIEW

FIG. 20B

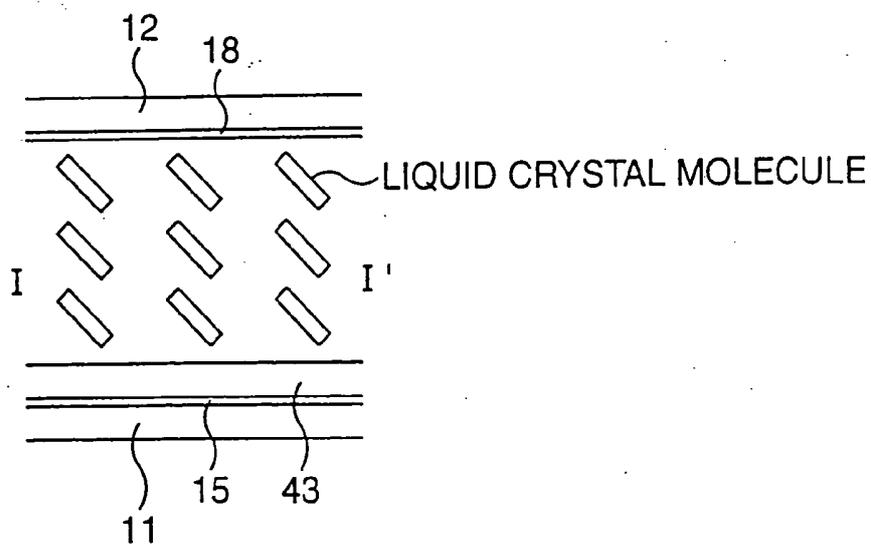

SECTIONAL VIEW

FIG. 21A

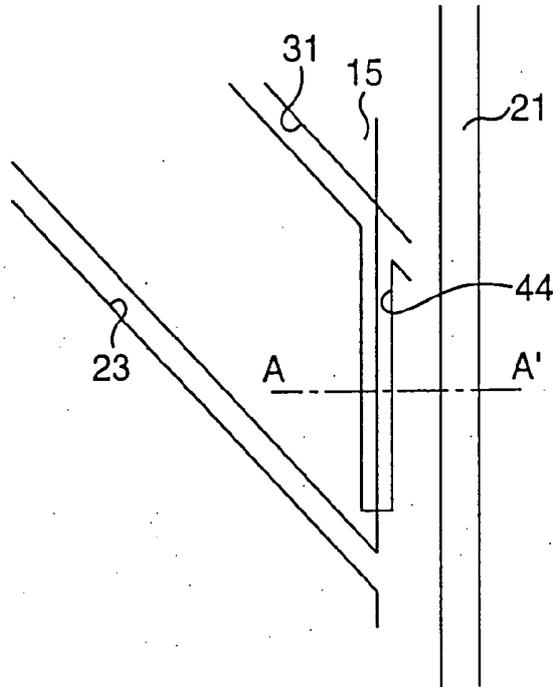


FIG. 21B

A REGION WITH NO ELECTRODE
ON BOTH OF THE SUBSTRATES


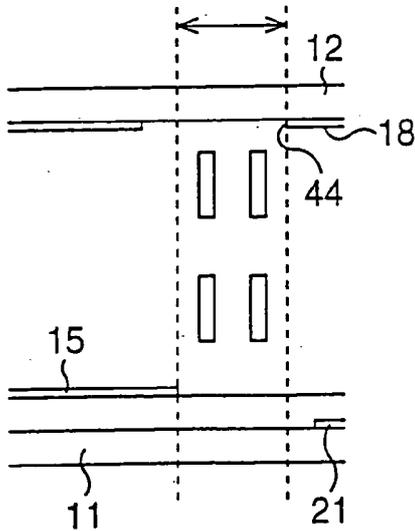


FIG. 22

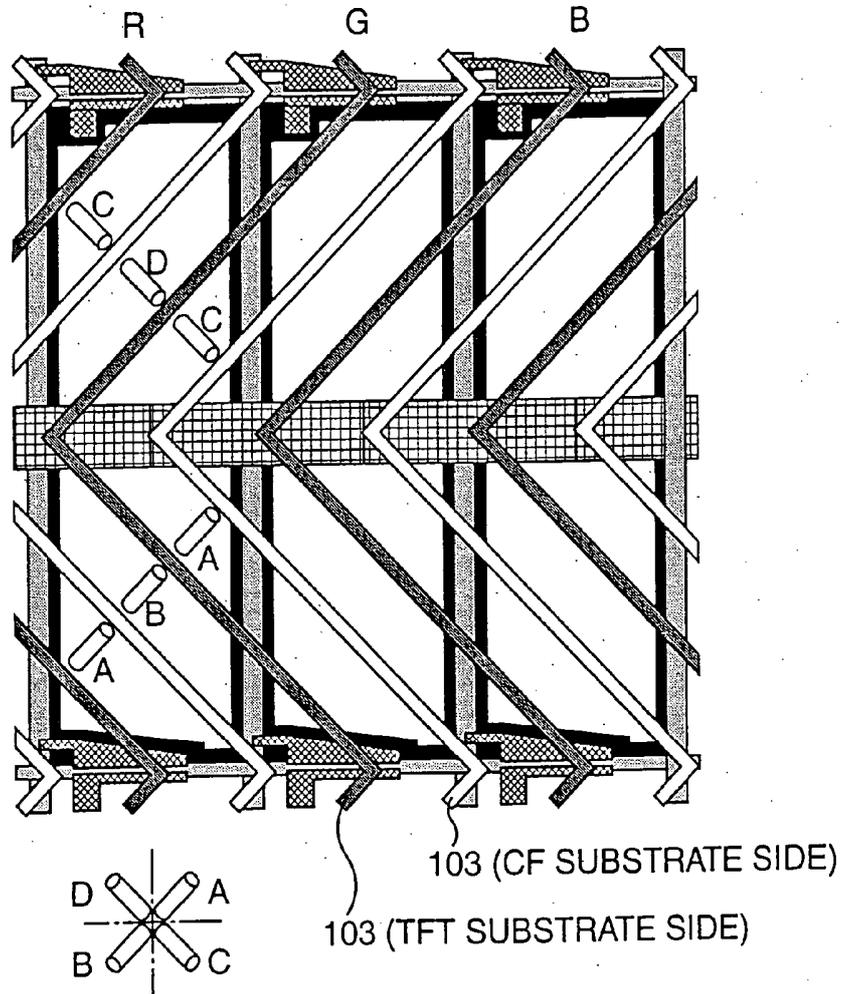

ALIGNMENT DIRECTION OF
THE LIQUID CRYSTAL MOLECULE

PIXEL STRUCTURE OF AN MVA LIQUID CRYSTAL DISPLAY (ONE PIXEL)

FIG. 23A

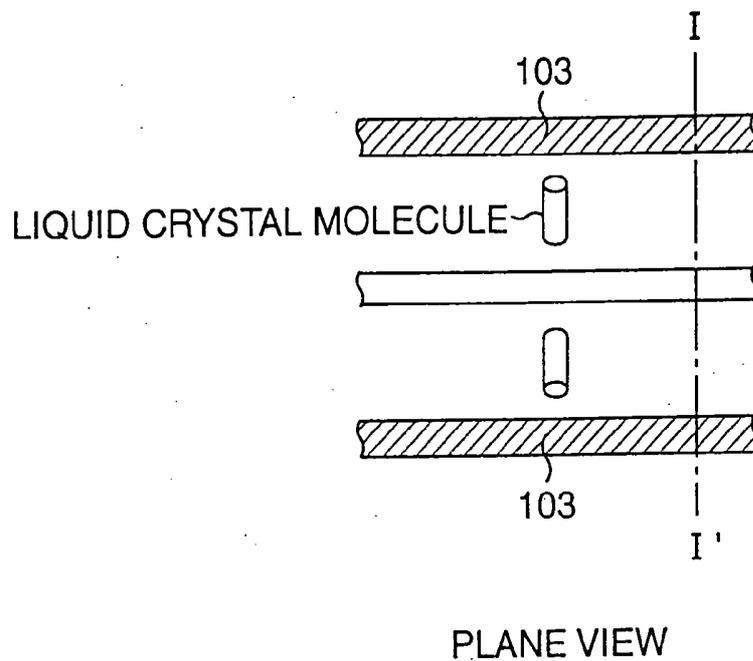


FIG. 23B

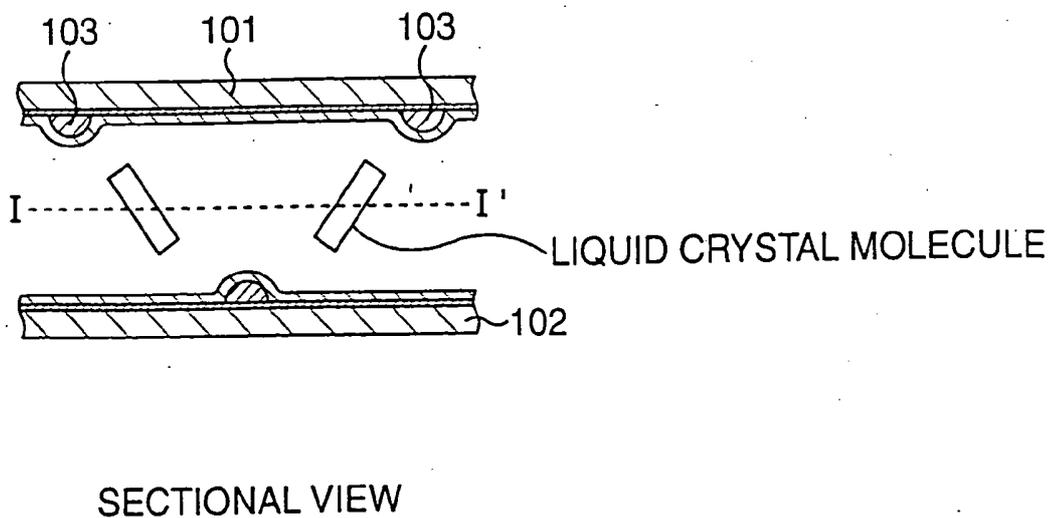


FIG. 24A

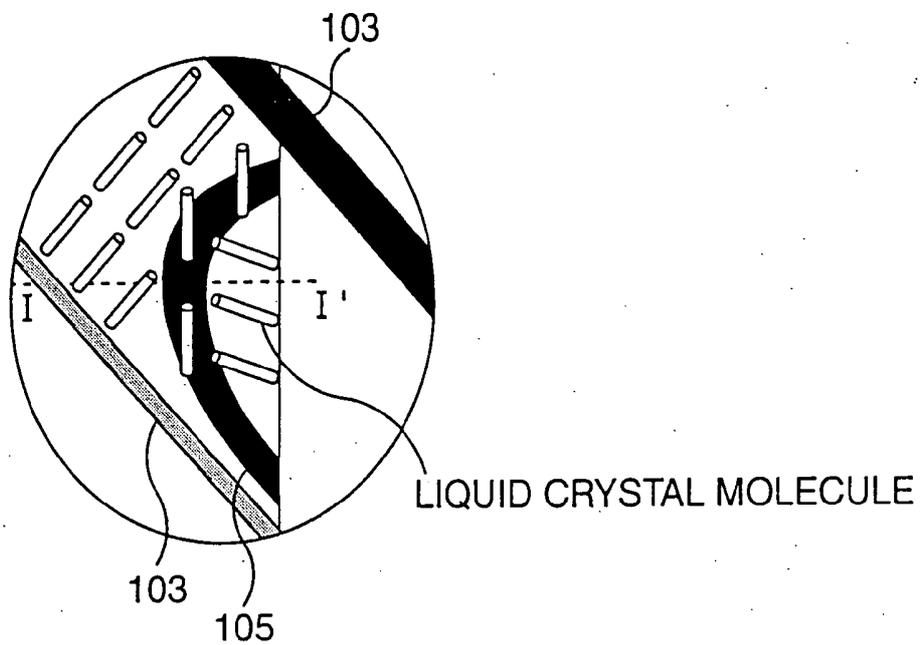


FIG. 24B


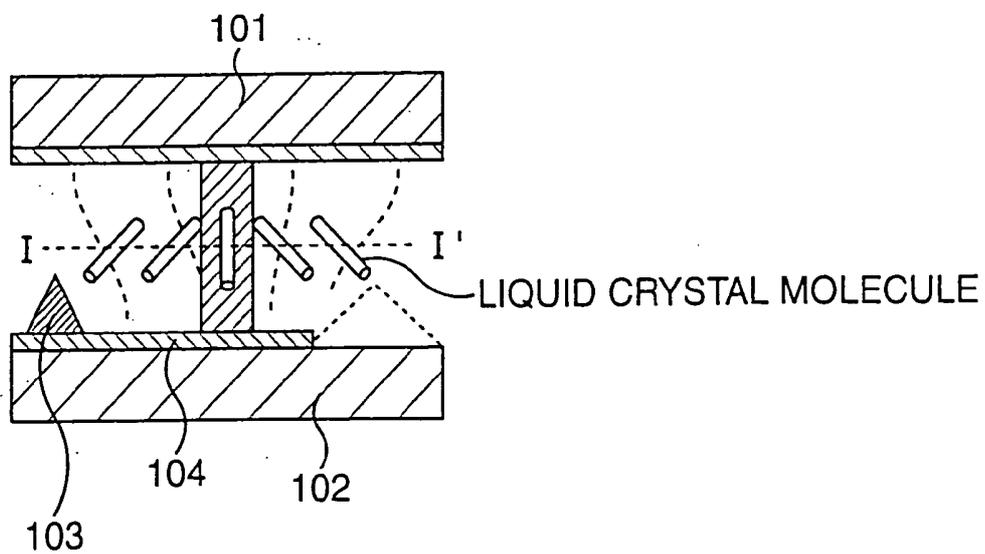


FIG. 25A

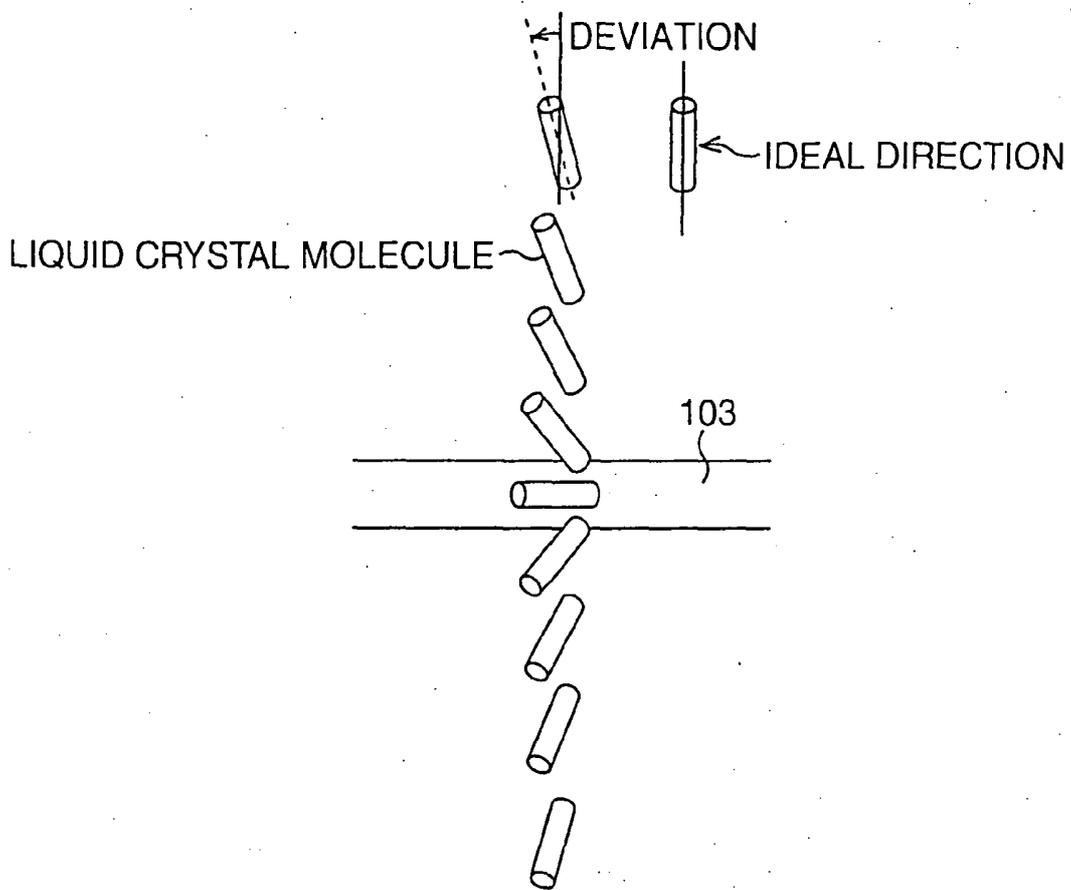

ALIGNMENT DIRECTION OF THE LIQUID CRYSTAL MOLECULE

FIG. 25B

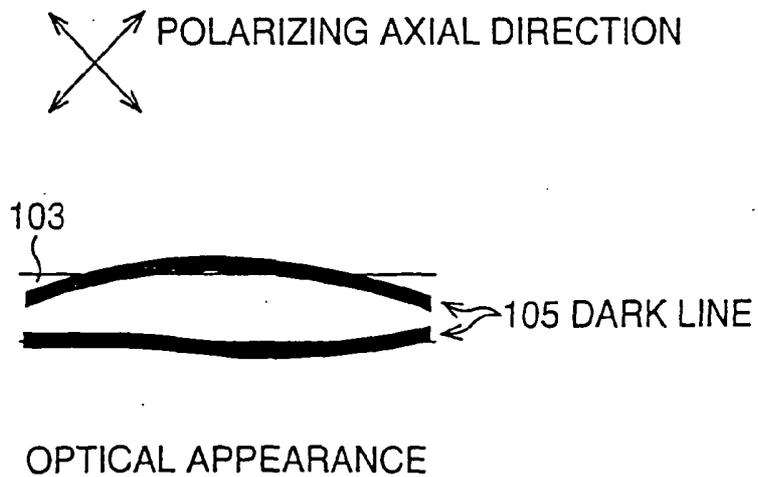


FIG. 26A

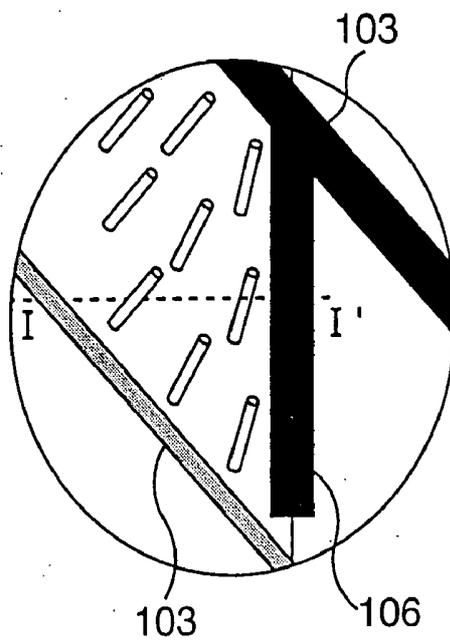


FIG. 26B

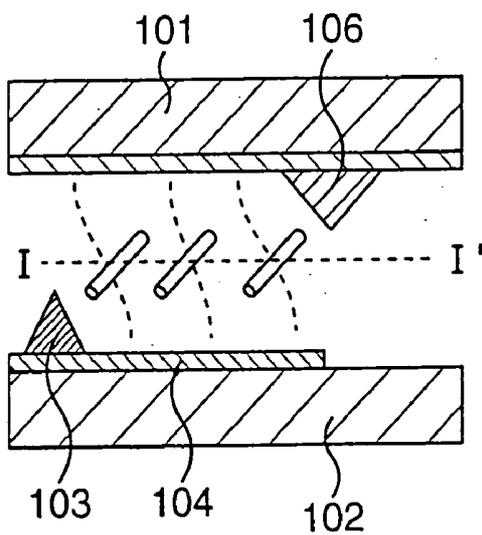


FIG. 27A

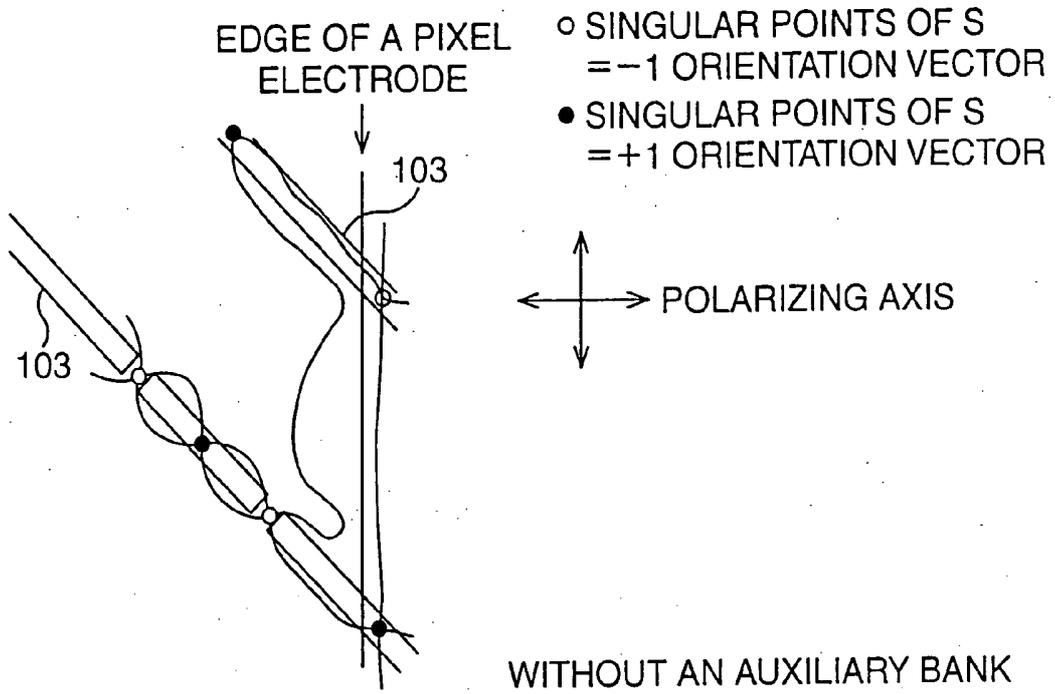


FIG. 27B

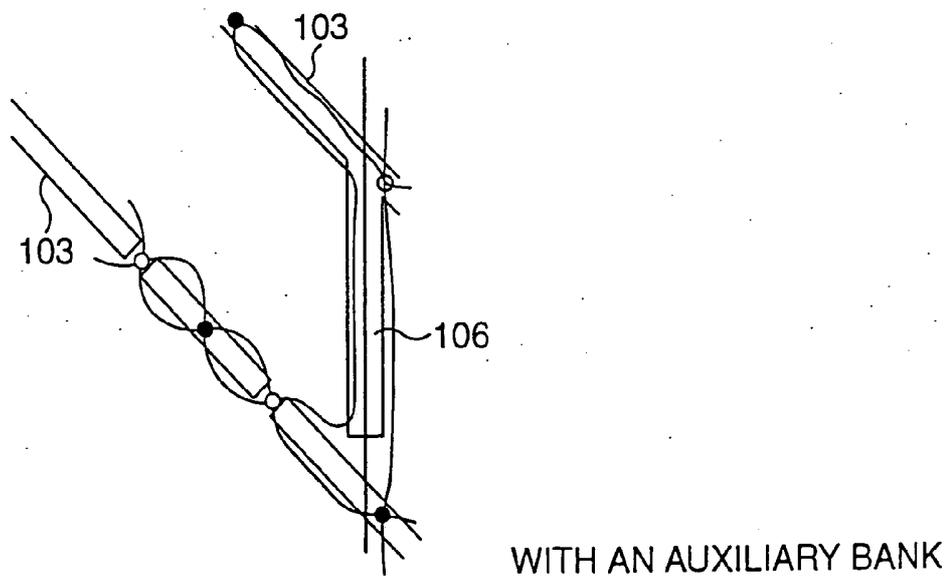


FIG. 28

STRENGTH OF
SINGULAR POINTS OF
ORIENTATION VECTOR

● S=+1

○ S=-1

OBSERVED WITH A TFT
SUBSTRATE ON
A LOWER SIDE AND
A CF SUBSTRATE ON
AN UPPER SIDE



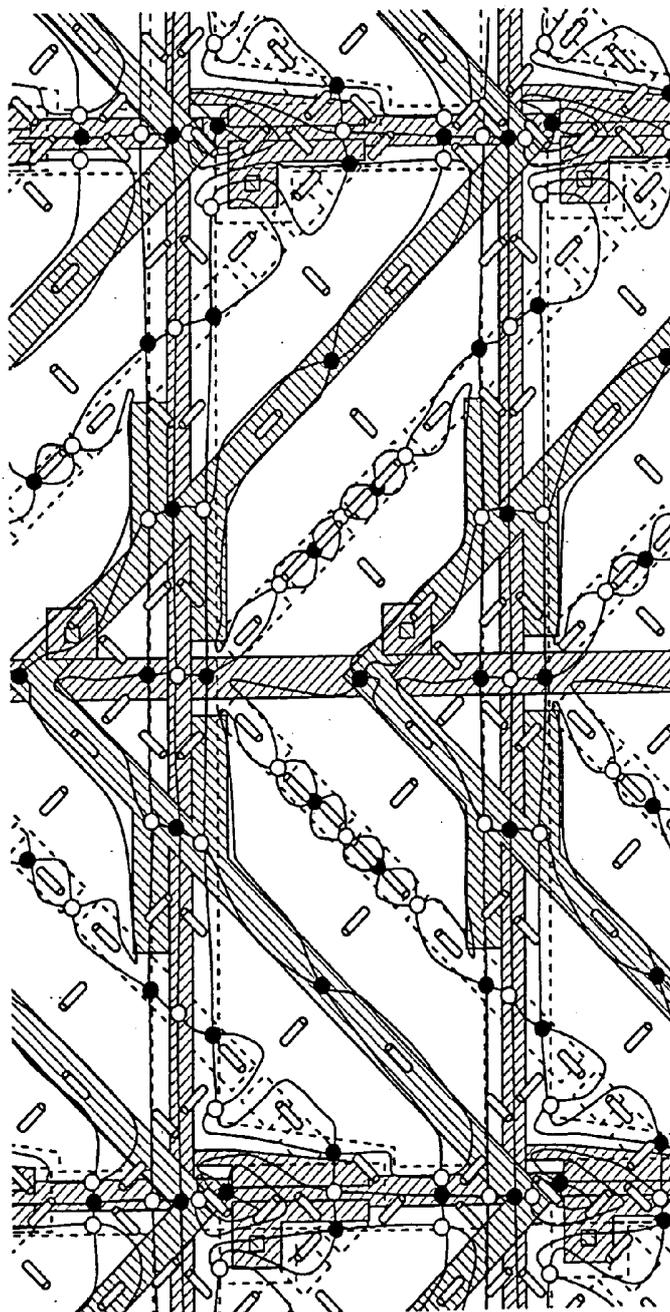


FIG. 29A

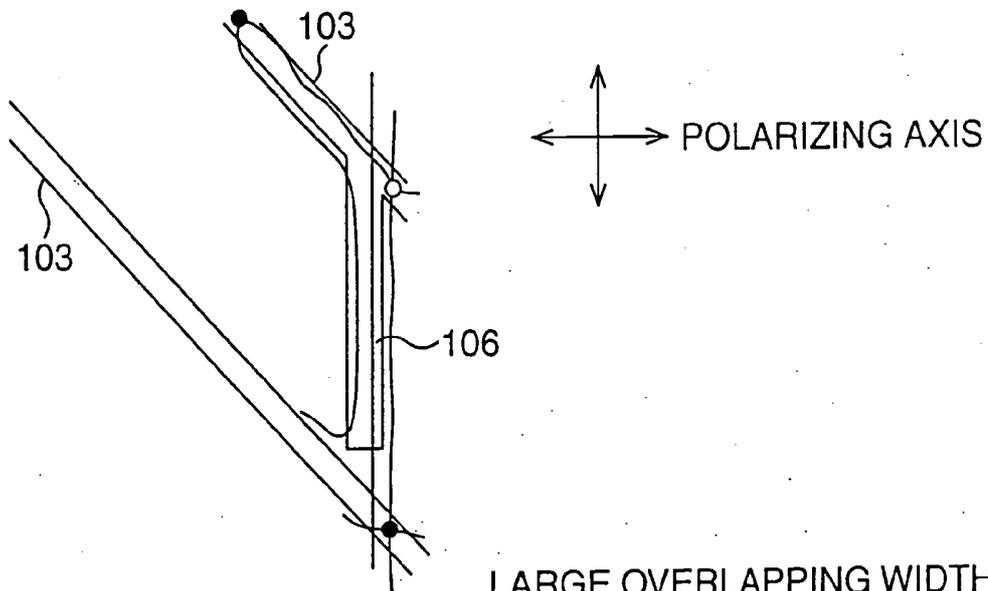



LARGE OVERLAPPING WIDTH OF AN AUXILIARY PROTRUSION AND A PIXEL EDGE

FIG. 29B

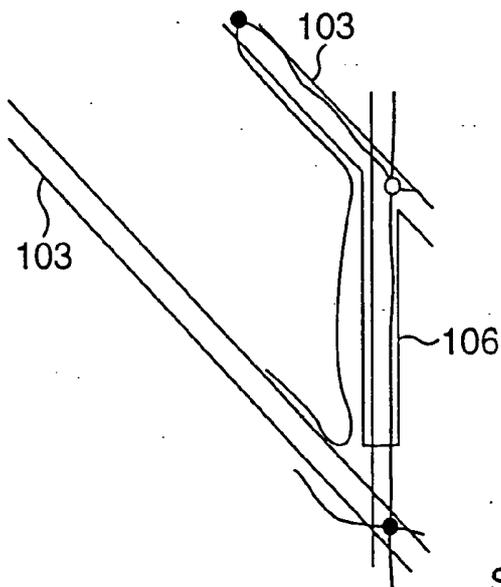

SMALL OVERLAPPING WIDTH OF AN AUXILIARY PROTRUSION AND A PIXEL EDGE

FIG. 30

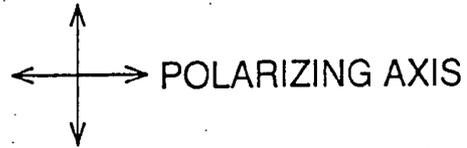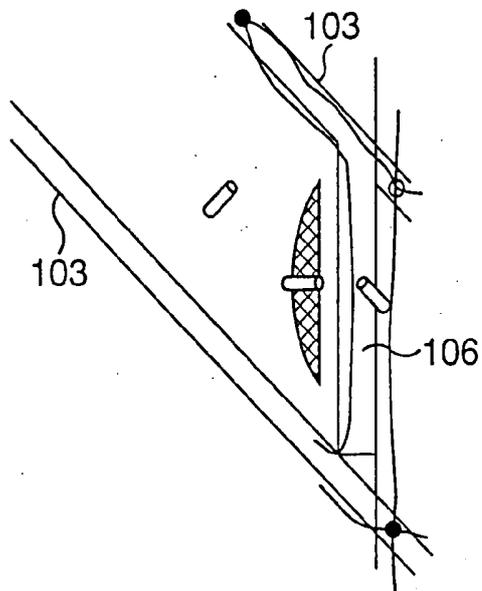

LARGE OVERLAPPING WIDTH OF AN AUXILIARY BANK AND A PIXEL (LARGER THAN THAT OF UPPER CASES SHOWN IN FIG.7)

LIQUID CRYSTAL DISPLAY DEVICE AND LIQUID CRYSTAL ORIENTATION METHOD

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is based upon and claims priority of Japanese Patent Application No. 2001-029814, filed on Feb. 6, 2001, the contents being incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] Field of the Invention

[0003] The present invention relates to liquid crystal display devices in which a first substrate having a pixel electrode and an active element and a second substrate having an opposed electrode have a liquid crystal layer interposed therebetween with each of the electrodes thereof facing each other and also relates to liquid crystal orientation methods.

[0004] 2. Description of the Related Art

[0005] Conventionally, a liquid crystal display device in a TN mode in which liquid crystal material with a positive dielectric anisotropy is put in a dark state and is oriented to be in a horizontal direction relative to a substrate surface and twisted 90° between opposed substrates is widely used as a liquid crystal display (LCD) using an active matrix.

[0006] However, the TN mode has a disadvantage that it is inferior in its viewing angle characteristic and various studies have been made to improve the viewing angle characteristic thereof. As a method substituting for the TN mode, an MVA (Multi-domain Vertical Alignment) system in which liquid crystal material with a negative dielectric anisotropy is vertically oriented and liquid crystal molecules under voltage application are regulated, without giving rubbing treatment to oriented films, to tilt in directions by protrusions and slits which are provided on surfaces of the substrates has been developed. The MVA system has succeeded in improving the viewing angle characteristic to a great extent.

[0007] The structure and function of an MVA system liquid crystal display device will be described below.

[0008] The MVA system is a system which performs orientation dividing of a vertical orientation type liquid crystal by providing elements in the forms of bank-shaped (linear) protrusions and slits on the substrates. As shown in FIG. 22, FIG. 23A, and FIG. 23B (a sectional view taken along the line I-I'), the elements 103 in the forms of the linear protrusions and slits are arranged alternately on an upper substrate 101 and a lower substrate 102. Thereby, liquid crystal domains in which orientation directions on both sides of the element 103 are approximately 180° different from each other are formed in regions without the element 103 (spaced interval parts). In this way, a suitable orientation dividing is realized. This MVA system has improved the viewing angle characteristic of the liquid crystal display device to a great extent.

[0009] Here, the 'linear (bank-shaped) protrusion' is made of dielectric material and formed on an electrode (for example, a pixel electrode, an opposed (a common) electrode, and so on) and the 'slit' is a concave portion formed

in a part of the electrode. Hereinafter, the same expressions in the specification of this patent application designate the above elements.

[0010] However, the conventional MVA system liquid crystal display device has a disadvantage that light transmittance of a panel is lower than that of a liquid crystal display device in a TN mode. One of the reasons will be described with reference to FIGS. 24 and 25.

[0011] FIGS. 24A and 24B show states of pixel observation when a conventional MVA panel used in general is in a white display state. FIGS. 25A and 25B show states of liquid crystal orientation.

[0012] As shown in FIG. 24A and FIG. 25B, it is seen that a line which appears dark (a dark line 105) exists in a part of a region near an edge of a pixel electrode 104. In this region, as shown in FIG. 24B (a sectional view taken along the line I-I') and FIG. 25A, the element 103 on the pixel electrode 104 regulates liquid crystal molecules to tilt in a right direction relative to the element 103 while a slanting electric field of the edge of the pixel electrode 104 regulates the liquid crystal molecules to tilt in a left direction. Therefore, liquid crystal orientation directions defined by them are substantially opposite to each other. As a result, the liquid crystal molecules in this region are oriented in the same direction as a polarizing axial direction, which optically causes the dark line to occur and therefore, lowers the transmittance.

[0013] As shown in FIG. 26A and FIG. 26B (a sectional view taken along the line I-I'), this problem is solvable by applying a method of newly providing a bank-shaped element 106 (an auxiliary bank method) on an opposed part to the edge of the pixel electrode. The newly provided element 106 is disposed along the edge of the pixel electrode. At this time, the element 106 regulates the liquid crystal molecules to be oriented in an opposite direction to the direction defined by the slanting electric field of the edge of the pixel electrode. Thereby, the liquid crystal orientation near the edge of the pixel electrode is caused to be substantially in the same orientation direction defined by the originally provided element 103.

[0014] FIGS. 27A and 27B show the position of the dark line within the pixel at this time.

[0015] In FIG. 27A and FIG. 27B, black circles and white circles show singular points of an orientation vector and a line connecting the black circles and the white circles shows the dark line. The dark line which conventionally enters inside the pixel stays on the newly provided element 106. Here, the distribution of the singular points and the dark lines on the whole pixel is shown in FIG. 28.

[0016] In this way, the light transmittance of the panel can be improved by approximately 10% compared with that in the conventional art. Here, the newly provided element 106 works in a manner in which it helps the liquid crystal orientation approximate to the original liquid crystal orientation control defined by the originally provided element 103. Therefore, the newly provided element 106 is hereinafter called an auxiliary bank.

[0017] However, it is found that a problem of partial unevenness in brightness within the panel, which is recognized as irregular display or nonuniformity in display bright-

ness, occurs when this method is applied. After investigation, it is found that this problem is caused by the following reason.

[0018] In order to drive the liquid crystal molecules, it is necessary to form a TFT element, bus line, and pixel electrode patterns on one of the substrates. These patterns are formed by a photolithography process. At present, resist exposure is performed with the surface within the panel being divided into regions (exposure by shots using stepper machines) in order to form fine patterns of approximately several microns at the minimum with the equal shapes and width all over the panel.

[0019] At this time, overlapping widths of the substrate and a photomask sometimes deviate a little between adjacent shots from each other. This deviation causes relative position of the edge of the pixel electrode and the auxiliary bank to vary from shot to shot. As described above, the liquid crystal orientation direction defined by the edge of the pixel electrode and the liquid crystal orientation direction defined by the auxiliary bank are opposite to each other. Therefore, when the relative position of the edge of the pixel electrode and the auxiliary bank varies, orientation control balance between them varies, which sometimes influences the liquid crystal orientation near the auxiliary bank. Particularly, when deviation in overlapping width of a TFT substrate and an opposed substrate (having the auxiliary bank) is large, this problem occurs distinctly.

[0020] A difference in states of the liquid crystal orientation (the dark line) caused by the variation of the relative position of the auxiliary bank and the edge of the pixel electrode is shown in FIGS. 29A and 29B. When the overlapping width of the auxiliary bank and the edge of the pixel electrode is wide (FIG. 29A), the dark line stays on the auxiliary bank. Meanwhile, when the overlapping width is narrow (FIG. 29B), the dark line gets inside the pixel. As a result, a difference in transmittance between both of the pixels is caused. In this way, brightness among each shot is caused to be different from each other, which is recognized as irregular display or nonuniformity in display brightness.

[0021] As a countermeasure for improving this problem, it can be thought of that the auxiliary bank is disposed further inside the edge of the pixel electrode than in the conventional art so that the effect of the auxiliary bank does not vary even with some degree of overlapping deviation. However, in this case, it is found that a dark region newly occurs as shown in FIG. 30 and the light transmittance of the panel is lowered.

[0022] So far, since the auxiliary bank and the bank on the pixel electrode are formed under the same condition, they also give the same influence to the orientation of the liquid crystal molecules. The bank on the pixel electrode regulates the liquid crystal molecules in the bank spaced interval part to tilt in a perpendicular direction relative to an extending direction of the bank. Here, when the auxiliary bank gets sufficiently inside the pixel electrode, the liquid crystal molecules in its vicinity also tilt in a perpendicular direction relative to an extending direction of the bank (half-tone dot meshing parts in FIG. 28). Since this direction is substantially equal to the polarizing axial direction of a polarizing plate, the light transmittance of the panel is lowered.

[0023] Furthermore, it is proposed that the auxiliary bank is made lower in height than the bank on the pixel electrode.

However, this necessitates banks different in height to be formed on the same substrate and consequently a process becomes complicated.

[0024] From FIGS. 26A and 26B, and FIG. 28, it is apparent that ideally, the liquid crystal orientation near the auxiliary bank is in a direction of 45° relative to the auxiliary bank and in the perpendicular direction relative to the bank on the pixel electrode and the dark line stays on the auxiliary bank and does not get inside the pixel electrode. However, in the present structure, the various problems as described above occur and it is very difficult to stably realize the ideal orientation state.

[0025] As described above, when the MVA system is applied, the viewing angle characteristic is greatly improved. On the contrary, the slanting electric field which occurs near the edge of the pixel electrode has a big influence and promotes a so-called dark lines or a part of schlieren pattern to be formed. Even when the auxiliary bank is provided in order to cope with this problem, the influence by the deviation in mask overlapping at the time of patterning sometimes arises, and therefore, it is difficult to obtain an even liquid crystal orientation state.

SUMMARY OF THE INVENTION

[0026] It is an object of the present invention to prevent an occurrence of irregular display or nonuniformity in display brightness and greatly improve light transmittance of a panel and thereby realize a liquid crystal display device with high reliability by suppressing orientation abnormality within a pixel region for display which is caused by a slanting electric field occurring inside the pixel region for display and in its vicinity and controlling liquid crystal orientation in a stable and ideal state.

[0027] The present invention relates to a liquid crystal display device in which a first substrate having a pixel electrode and an active element and a second substrate having an opposed electrode, which have a liquid crystal layer interposed therebetween with each of the electrodes thereof facing each other.

[0028] A liquid crystal display device according to the first aspect of the present invention is characterized in that when a direction of an orientation regulating force given to liquid crystal molecules of the liquid crystal layer within a region of the pixel electrode is taken as a first direction and a direction of an orientation regulating force due to an edge of the pixel electrode on the first substrate given to the liquid crystal molecules near the edge is taken as a second direction, an orientation control element giving an orientation regulating force in a third direction which counteracts the orientation regulation force in the second direction is locally provided in a part near the edge.

[0029] A liquid crystal display device according to the second aspect of the present invention is characterized in that an orientation control element giving an orientation regulating force to the liquid crystal molecules near the edge of the pixel electrode on the first substrate is locally provided near the edge of the pixel electrode on the first substrate so that the liquid crystal molecules including those near the edge are oriented in substantially the same direction when voltage is being applied between the pixel electrode and the opposed electrode.

[0030] Specifically, in the first and second aspects, it is appropriate that the orientation control element is constituted by a plurality of fine slits formed in the pixel electrode in an oblique direction relative to an extending direction of the edge.

[0031] It is also appropriate that the orientation control element is constituted by a plurality of fine protrusions formed on the pixel electrode in the oblique direction relative to the extending direction of the edge.

[0032] In this case, at least a part of the fine slits or the fine protrusions are preferably formed to have different shapes and/or spaced intervals and/or length of arrangement from others.

[0033] In the first and second aspects, each of the corresponding orientation control elements is formed near the edge of the pixel electrode on the first substrate on which the pixel electrode is also formed. This makes it possible to almost completely eliminate an adverse effect of deviation in pasting width of the two substrates and greatly widen a manufacturing margin and sufficiently cope with an abrupt disorder of manufacturing apparatuses.

[0034] A liquid crystal display device according to the third aspect of the present invention is characterized in that a first orientation control element extending in a nonparallel direction relative to the extending direction of the edge of the pixel electrode and a second orientation control element extending in a parallel direction relative to the extending direction of the edge are provided on at least one of the first substrate and the second substrate, and the first orientation control element has a wider width than the second orientation control element.

[0035] A liquid crystal display device according to the fourth aspect of the present invention is characterized in that a first orientation control element extending in the non-perpendicular direction and the nonparallel direction relative to the extending direction of the edge of the pixel electrode and a second orientation control element extending in the parallel direction relative to the extending direction of the edge are provided on at least one of the first substrate and the second substrate, and the liquid crystal molecules of the liquid crystal layer on the second orientation control element are oriented in a non-vertical direction relative to the substrate when no voltage is being applied between the pixel electrode and the opposed electrode.

[0036] A liquid crystal display device according to the fifth aspect of the present invention is characterized in that a first orientation control element extending in the non-perpendicular direction and the nonparallel direction relative to the extending direction of the edge of the pixel electrode and a second orientation control element extending in the parallel direction relative to the extending direction of the edge are provided on at least one of the first substrate and the second substrate, and at least a part of the liquid crystal molecules of the liquid crystal layer on the second orientation control element are oriented in a vertical direction relative to the substrate when voltage is being applied between the pixel electrode and the opposed electrode.

[0037] A liquid crystal display device according to the sixth aspect of the present invention is characterized in that a first orientation control element extending in the non-perpendicular direction and the nonparallel direction relative

to the extending direction of the edge of the pixel electrode and a second orientation control element extending in the parallel direction relative to the extending direction of the edge are provided on at least one of the first substrate and the second substrate, and the second orientation control element is composed of an assembly of shapes having directivity in a direction of a substrate's plane surface.

[0038] Specifically, in the third to the sixth aspects, it is appropriate that the first orientation control element and/or the second orientation control element is constituted by slits or protrusions formed on the pixel electrode or the opposed electrode.

[0039] In the third aspect, the first orientation control element is wider in width than the second orientation control element so that the strength of orientation control defined by the second orientation control element becomes weaker than an orientation control force defined by the first orientation control element on the pixel electrode. This makes it possible to stably realize an ideal state in which the liquid crystal molecules are oriented in a direction of approximately 45° relative to the second orientation control element and in a perpendicular direction relative to the first orientation control element on the pixel electrode.

[0040] In the fourth aspect, when no voltage is being applied, the liquid crystal molecules on the second orientation control element is non-vertically oriented and is oriented in the same direction as the orientation direction of the liquid crystal molecules which causes a dark line to occur under voltage application, that is, a parallel direction to an extending direction of the second orientation control element. Consequently, when voltage is being applied, the dark line occurs stably only on the second orientation control element, the orientation on which is made to be non-vertical in advance.

[0041] In the fifth aspect, the liquid crystal molecules on the second orientation control element are in vertical orientation under voltage application. One of the causes for strengthening the slanting (oblique) electric field of the pixel electrode, which is one of the factors causing unevenness among each shot at the time of patterning, is an influence of an electric field of an adjacent bus line. In this aspect, a region in which the liquid crystal orientation does not change (remains in the vertical orientation) is provided between the bus line and the pixel electrode. This makes it possible to eliminate the influence given to the liquid crystal orientation on the pixel electrode by the bus line. Therefore, the slanting electric field of the edge of the pixel electrode can be weakened and the unevenness among each shot is prevented from occurring.

[0042] In the sixth aspect, the structure having directivity is provided as the second orientation control element. The directivity is in the same direction as the orientation direction of the liquid crystal molecules which causes the dark line to occur under voltage application, that is, a parallel direction to the extending direction of the second orientation control element. Thereby, the dark line occurs stably only on the second orientation control element having the directivity under voltage application. This makes it possible to eliminate the adverse effect caused by the occurrence of the dark line at the inside but only at the edge and realize an actually high light transmittance of the panel.

[0043] The present invention also relates to a liquid crystal orientation method of a liquid crystal layer in the liquid

crystal display device. According to the method, the liquid crystal molecules are oriented in accordance with the first to the sixth aspects.

BRIEF DESCRIPTION OF THE DRAWINGS

[0044] **FIG. 1** is a sectional view schematically showing the structure of a liquid crystal display device according to the present invention;

[0045] **FIGS. 2A to 2C** show states near a pixel of a liquid crystal display device according to the first embodiment of the present invention;

[0046] **FIGS. 3A to 3C** show states when orientation regulating forces are given to liquid crystal molecules in first to third directions;

[0047] **FIG. 4** is a plane view showing a state near a pixel of a liquid crystal display device according to the second embodiment of the present invention;

[0048] **FIG. 5** is a graph showing a transmittance-voltage (T-V) characteristic of the liquid crystal display device according to the second embodiment;

[0049] **FIGS. 6A to 6F** are micrographs showing liquid crystal orientation states;

[0050] **FIG. 7** shows micrographs of liquid crystal orientation states;

[0051] **FIG. 8** is a plane view showing a state near a pixel in modification 1 of the liquid crystal display device according to the second embodiment;

[0052] **FIG. 9** is a plane view showing a state near a pixel in modification 2 of the liquid crystal display device according to the second embodiment;

[0053] **FIG. 10** is a plane view showing a state near a pixel in modification 3 of the liquid crystal display device according to the second embodiment;

[0054] **FIG. 11** shows various effects and features in the first and second embodiments and comparative examples thereof;

[0055] **FIG. 12** shows various effects and features in the first and second embodiments and comparative examples thereof;

[0056] **FIG. 13** is a plane view showing a state near a pixel of a liquid crystal display device according to the third embodiment of the present invention;

[0057] **FIGS. 14A and 14B** are schematic views showing states near a pixel in a liquid crystal display device according to the fourth embodiment of the present invention;

[0058] **FIGS. 15A and 15B** show states of liquid crystal orientation;

[0059] **FIGS. 16A and 16B** are schematic views showing states near a pixel in a modification of the liquid crystal display device according to the fourth embodiment;

[0060] **FIGS. 17A and 17B** are schematic views showing states of liquid crystal orientation;

[0061] **FIGS. 18A and 18B** are schematic views showing states near a pixel in a liquid crystal display device according to the fifth embodiment of the present invention;

[0062] **FIGS. 19A and 19B** are schematic views showing states near a pixel in a liquid crystal display device according to the sixth embodiment of the present invention;

[0063] **FIGS. 20A and 20B** are schematic views showing states near a pixel in another example of the liquid crystal display device according to the sixth embodiment;

[0064] **FIGS. 21A and 21B** are schematic views showing states near a pixel in a liquid crystal display device according to the seventh embodiment of the present invention;

[0065] **FIG. 22** is a plane view showing a state near a pixel in a conventional liquid crystal display device according to an MVA system;

[0066] **FIGS. 23A and 23B** are sectional views showing states when a bank-shaped pattern is provided in a conventional liquid crystal display device;

[0067] **FIGS. 24A and 24B** show states when the bank-shaped pattern is provided in the conventional liquid crystal display device;

[0068] **FIGS. 25A and 25B** are schematic views showing liquid crystal orientation;

[0069] **FIGS. 26A and 26B** are sectional views showing states when the bank-shaped pattern and an auxiliary bank are provided in the conventional liquid crystal display device;

[0070] **FIGS. 27A and 27B** are plane views showing states near the pixel in the conventional liquid crystal display device according to the MVA system;

[0071] **FIG. 28** is a plane view showing distribution of singular points and dark lines on a whole pixel;

[0072] **FIGS. 29A and 29B** are plane views showing overlapping states of the auxiliary bank and a pixel edge; and

[0073] **FIG. 30** is a plane view showing an overlapping state of the auxiliary bank and the pixel edge.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0074] Hereinafter, preferred embodiments of the present invention will be described in detail with reference to drawings.

[0075] (First Embodiment)

[0076] **FIG. 1** is a schematic sectional view showing a main structure of a liquid crystal display device according to the first embodiment of the present invention.

[0077] The liquid crystal display device, which is based on a so-called MVA system, is composed of a pair of transparent glass substrates **11, 12** facing each other with a predetermined spaced interval being provided therebetween and a liquid crystal layer **13** interposed between the transparent glass substrates **11, 12**.

[0078] On one of the transparent glass substrates **11**, pixel electrodes **15** and not-shown thin film transistors (TFT), which are formed by a thin film semiconductor technique using a thin semiconductor film such as an amorphous silicon film or a polycrystalline silicon film and work as active elements, are formed with an insulating layer **14** being

provided between them and the substrate **11**. A transparent oriented film **16a** is formed to cover the pixel electrodes **15**. On the other transparent glass substrate **12**, a color filter **17**, a common electrode (an opposed electrode) **18**, and an oriented film **16b** are laminated in sequence generally. The glass substrates **11**, **12** are fixed in a manner in which the oriented films **16a**, **16b** are pressed against each other to hold the liquid crystal layer **13** therebetween. Outside the substrates **11**, **12**, polarizers **19**, **20** are provided respectively. The pixel electrodes **15** are formed with active matrixes (TFT matrixes) and, in the example in **FIG. 1**, data bus lines **21** to which drain electrodes of the TFTs are connected are shown. Moreover, gate bus lines, though not shown, to which gate electrodes of the TFTs are connected are also formed.

[0079] As shown in **FIG. 2A**, on a surface of the transparent glass substrate **12** as a CF substrate, a bank-shaped pattern **22**, which is an orientation control element extending in an oblique direction relative to an edge of the pixel electrode **15** on the opposed transparent glass substrate **11**, is formed on the common electrode (under the oriented film). Thereby, predetermined division, for example, four divided orientation, is performed to each pixel of the liquid crystal layer **13**.

[0080] Meanwhile, as shown in **FIG. 2A** and **FIG. 2B**, on a surface of the transparent glass substrate **11** as a TFT substrate, a slit pattern **23**, which is an orientation control element extending in the oblique direction in this case relative to the edge of the pixel electrode **15**, is formed in the pixel electrode **15** to extend in a substantially parallel direction to an extending direction of the bank-shaped pattern **22**. Furthermore, a hollow **24** is locally formed as an orientation control element in a part other than the pixel electrode **15** in the vicinity of the edge of the pixel electrode **15**.

[0081] When an auxiliary bank is formed on the CF substrate as in a conventional art, a margin for pasting the substrates is only approximately $\pm 3 \mu\text{m}$. This gives only a minimum margin even when a pasting apparatus for substrates with high precision is utilized and enables manufacturing only when perfect control of process conditions is realized. Therefore, there is always a risk that a large amount of unevenness among each shot may occur to a panel even when a manufacturing apparatus gets into a bad condition only a little. This problem is basically caused because the auxiliary bank for controlling the orientation of a pixel electrode edge portion is not provided on a pixel electrode side but on an opposed substrate side. According to this embodiment, the hollow **24** as the orientation control element of the edge of the pixel electrode **15** is provided in the transparent glass substrate **11** on which the pixel electrode **15** is formed so that almost no influence is given by deviation in pasting.

[0082] Therefore, according to this embodiment, it is possible to provide a liquid crystal display device which is capable of realizing high contrast by utilizing the MVA system, securing high reliability by realizing an excellent viewing characteristic, and achieving more uniform distribution of brightness. At the same time, a liquid crystal display device is provided which is capable of greatly widening a manufacturing margin and sufficiently coping with an abrupt disorder of the manufacturing apparatus.

[0083] As described above, to form the hollow **24** as the orientation control element of the edge on the surface of the transparent glass substrate **11** on which the pixel electrode **15** is formed means, in other words, to provide in a part of a pixel region for display near the edge an orientation control factor which gives an orientation disturbing force in a third direction different from a first direction of a liquid crystal orientation regulating force given by the bank-shaped pattern **22** and the slit pattern **23** within the pixel region for display and a second direction of a liquid crystal orientation regulating force given by a slanting electric field occurring near the edge of the pixel electrode. As a result, the manufacturing margin is increased.

[0084] A principle of providing the orientation control factor is shown in **FIGS. 3A** to **3C** in general.

[0085] Conventionally, a dark line occurs due to orientation abnormality near the edge of the pixel electrode (**FIG. 3A**). But, in contrast, the influence of the orientation abnormality due to the slanting electric field is eliminated by giving to liquid crystal molecules the orientation regulating force in the third direction (**FIG. 3B**) which makes a bigger angle $\phi 2$ with the second direction than an angle $\phi 1$ made by the first and second directions (**FIG. 3C**). The angle $\phi 1$ and the angle $\phi 2$ can be equal.

[0086] [Specific Example of Structure]

[0087] As shown in **FIGS. 2A** to **2C**, the hollow **24** is formed in a part near the edge of the pixel electrode (corresponding to a part where the conventional auxiliary bank is formed). The hollow **24** is formed to be approximately $0.5 \mu\text{m}$ in depth by patterning a SiN insulating film on the side of the transparent glass substrate **11** as the TFT substrate. The liquid crystal molecules at the edge of the pixel electrode have a pretilt angle in an opposite direction to the direction of the electric field, being influenced by the hollow **24**. This prevents the dark line from occurring as in a conventional case in which the auxiliary bank is provided.

[0088] As explained above, according to this embodiment, the orientation abnormality within the pixel region for display caused by the slanting electric field which occurs near the pixel edge and in its vicinity is suppressed and the liquid crystal orientation is controlled to be in a stable and ideal state. Thereby, irregular display or ununiformity in display brightness is prevented from occurring and the light transmittance of the panel is greatly improved. This makes it possible to realize a liquid crystal display device with high reliability.

[0089] Incidentally, instead of the orientation control element, or preferably, in addition to the orientation control element, a Cs electrode may be provided along the edge of the pixel electrode. The Cs electrode has the same electric potential as that of the opposed substrate side so that liquid crystal molecules in the part where the Cs electrode is provided do not tilt. Therefore, providing the Cs electrode makes it possible to shield the influence of the electric field from the bus line (electric field intensity does not easily fluctuate near the edge of the pixel electrode) so that stable orientation can be constantly obtained.

[0090] (Second Embodiment)

[0091] The second embodiment of the present invention will be described below. Here, a liquid crystal display device

based on the MVA system will be described like in the first embodiment. But the orientation control element formed near the pixel electrode **15** on the TFT substrate side has a different form.

[0092] Like in the first embodiment schematically shown in **FIG. 1**, this liquid crystal display device is composed of a pair of transparent glass substrates **11, 12** facing each other with a predetermined spaced interval being provided therebetween and the liquid crystal layer **13** interposed between the transparent glass substrates **11, 12**. On the transparent glass substrate **11**, the pixel electrodes **15**, data bus lines **21**, a gate bus line (not shown), and so on are formed. On the transparent glass substrate **12**, the color filter **17**, the common electrode **18**, and so on are formed.

[0093] In the liquid crystal display device, as shown in **FIG. 4**, the bank-shaped pattern **22**, which is the orientation control element extending in an oblique direction relative to the edge of the pixel electrode **15** on the opposed transparent glass substrate **11**, is formed on the surface of the transparent glass substrate **12** as the CF substrate. Thereby, predetermined division, for example, the four divided orientation, is performed on each pixel of the liquid crystal layer **13**.

[0094] Meanwhile, on the surface of the transparent glass substrate **11** as the TFT substrate, the slit pattern **23**, which is the orientation control element extending in the oblique direction relative to the edge of the pixel electrode **15**, is formed on the pixel electrode **15** to extend substantially in parallel to an extending direction of the bank-shaped pattern **22**. Furthermore, near the edge of the pixel electrode **15**, fine slit patterns **25** (concave portions in the pixel electrode **15**) are formed locally in an oblique direction relative to the extending direction of the edge (for example, 45°) to constitute an orientation control element.

[0095] According to this embodiment, forming in the pixel electrode **15** the fine slit patterns **25** as the orientation control element of the edge of the pixel electrode **15** makes it possible to eliminate almost all the influences by deviation in pasting.

[0096] Therefore, according to this embodiment, it is possible to provide a liquid crystal display device which is capable of realizing high contrast by utilizing the MVA system and securing high reliability by realizing an excellent viewing characteristic. At the same time, a liquid crystal display device is provided which is capable of widening the manufacturing margin to a great extent and sufficiently coping with the abrupt disorder of the manufacturing apparatus.

[0097] A transmittance-voltage characteristic (a T-V characteristic) when this embodiment is actually applied is shown in **FIG. 5**, and **FIGS. 6A to 6F**. It is apparent that the orientation near the edge of the pixel electrode is made in good order by the fine slit patterns **25** without the conventional auxiliary bank being provided. With sufficient voltage being applied, the effect of the fine slit patterns **25** fully works to improve the transmittance to the same level as that when the auxiliary bank is provided.

[0098] [Specific Example of Structure]

[0099] As shown in **FIG. 4**, cuts of the fine slit patterns **25** are formed in the pixel electrode **15** near the edge of the pixel electrode. It has been found that forming the fine slit

patterns **25** causes the liquid crystal molecules to tilt in a parallel direction to an extending direction of the fine slit patterns **25** under voltage application. This effect is utilized near the edge. It is apparent from **FIGS. 6A to 6F** that the disorder of the liquid crystal orientation is suppressed near the edge.

[0100] **FIG. 7** shows a difference in states of the orientation depending on the depth of the cuts of the fine slit patterns **25**. In utilizing the fine slit patterns **25**, more effect is obtained when the slit depth of the patterns is made sufficiently long.

[0101] Moreover, according to this embodiment, since the liquid crystal orientation near the edge is made in good order by cleverly planning distribution of the electric field, not much effect is obtained at low voltage but as the higher voltage is applied, the more effect is obtained. As shown in **FIG. 5**, display chromaticity of a panel with the auxiliary bank becomes white at applied voltage of 5.3V while that of a panel without the auxiliary bank becomes white at applied voltage of 6.3V. With sufficient voltage being applied, the transmittance equal to or higher than that when the auxiliary bank is utilized is obtained. In this embodiment, the fine slit patterns **25** are also formed by patterning a part of the pixel electrode **15** so that no influence by the deviation in pasting of the two substrates is given to the relative position between the pixel electrode and the edge and therefore, great increase in a pasting margin is realized.

[0102] As explained above, according to this embodiment, the orientation abnormality within the pixel region for display, which is caused by the slanting electric field occurring outside the pixel region for display and in its vicinity, is further suppressed and the liquid crystal orientation is controlled to be in a stable and ideal state. As a result, irregular display or ununiformity in display brightness is prevented from occurring and the light transmittance of the panel and brightness uniformity are greatly enhanced. This makes it possible to realize a liquid crystal display device with high reliability.

[0103] Modifications

[0104] Modifications of the second embodiment will be described below.

[0105] In the modifications, at least a part of the fine slit patterns **25** in the liquid crystal display device according to the second embodiment are formed to have different shapes and/or be arranged at different spaced intervals. Modifications 1 to 3 will be described below in order as specific examples.

[0106] (Modification 1)

[0107] Here, as shown in **FIG. 8**, each of the fine slit patterns **25** is different in length from each other and the orientation regulating force in the third direction is adjusted freely. Incidentally, each of the fine slit patterns **25** is also different in length in the example shown in **FIG. 4**. In this case, however, they are formed to match the form of the pixel electrode **15** near the edge. Meanwhile, in this example, the length of each of the slit patterns **25** is defined independently from the shape of the pixel electrode **15** near the edge.

[0108] (Modification 2)

[0109] Here, as shown in FIG. 9, each of the fine slit patterns 25 is different from each other in length, width, and a spaced interval between adjacent fine slit patterns 25. Consequently, the orientation regulating force in the third direction can be adjusted more delicately at a desired strength.

[0110] (Modification 3)

[0111] Here, as shown in FIG. 10, each of the fine slit patterns 25 has a tapered shape to have directivity. This makes it possible to strongly determine a tilting direction defined by the orientation regulating force in the third direction.

[0112] The first and second embodiments have been described above. Various effects and features of the examples and comparative examples of structure are summarized in FIG. 11 and FIG. 12.

[0113] Note that ① shows the conventional structure with the auxiliary bank being provided on the CF substrate, ② the conventional structure without the auxiliary bank, ③ the structure with the auxiliary bank being provided to extend in a different direction, ④ the structure with the hollow 24 in the first embodiment being provided, and ⑤ the structure with the fine slit-patterns 25 in the second embodiment being provided, respectively.

[0114] As is apparent from the drawings, the liquid crystal display devices having the structures in the first and second embodiments are capable of realizing high transmittance and securing a misalignment margin without sacrificing the transmittance, which is not realized in the comparative examples. Particularly, the structure in the second embodiment shows the most distinguished effect.

[0115] (Third Embodiment)

[0116] The third embodiment of the present invention will be described below. Here, a liquid crystal display device based on the MVA system like in the second embodiment will be described. But, an orientation control element provided near the edge of the pixel electrode is different from that in the second embodiment.

[0117] In the liquid crystal display device according to this embodiment, as shown in FIG. 13, on the surface of the transparent glass substrate 11 as the TFT substrate, the slit pattern 23, which is the orientation control element extending in the oblique direction relative to the edge of the pixel electrode 15 (indicated by the arrow A), is formed in the pixel electrode 15 to extend substantially in parallel to the extending direction of the bank-shaped pattern 22 on the transparent glass substrate 12. Furthermore, near the edge of the pixel electrode 15, fine linear protrusion patterns 26 are formed locally as an orientation control element in the oblique direction relative to the extending direction of the edge (for example, 45°).

[0118] According to this embodiment, forming the fine protrusion patterns 26, which constitute an orientation control element of the edge of the pixel electrode 15, on the pixel electrode 15 makes it possible to eliminate almost all the influence of the deviation in pasting.

[0119] Therefore, according to this embodiment, it is possible to provide a liquid crystal display device which is

capable of realizing high contrast by utilizing the MVA system and securing high reliability by realizing an excellent viewing characteristic. At the same time, a liquid crystal display device is provided which is capable of widening a manufacturing margin to a greater extent than in the first embodiment and sufficiently coping with an abrupt disorder of the manufacturing apparatus.

[0120] Incidentally, it is also appropriate in this embodiment like in the modification examples of the second embodiment that each of the fine protrusion patterns 26 is made different in length, width, and spaced intervals from adjacent fine protrusion patterns 26 so that the orientation regulating force in the third direction is adjusted delicately at a desired strength.

[0121] (Fourth Embodiment)

[0122] The fourth embodiment of the present invention will be described below. Here, a liquid crystal display device based on the MVA system like in the first embodiment will be described. But, an orientation control element provided near the edge of the pixel electrode is different.

[0123] Like in the first embodiment schematically shown in FIG. 1, this liquid crystal display device is composed of a pair of transparent glass substrates 11, 12 facing each other with a predetermined spaced interval being provided therebetween and the liquid crystal layer 13 interposed between the transparent glass substrates 11, 12. On the transparent glass substrate 11, the pixel electrodes 15, the data bus lines 21, the gate bus line (not shown), and so on are formed. On the transparent glass substrate 12, the color filter 17, the common electrode 18, and so on are formed.

[0124] In the liquid crystal display device, as shown in FIG. 14A, on the surface of the transparent glass substrate 11 as the TFT substrate, the slit pattern 23, which is the orientation control element extending in the oblique direction relative to the edge of the pixel electrode 15, is formed in the pixel electrode 15.

[0125] Meanwhile, on the surface of the transparent glass substrate 12 as the CF substrate, a slit pattern 31, which is an orientation control element extending in the oblique direction relative to the edge of the pixel electrode 15 on the opposed transparent glass substrate 11, is formed in the common electrode to extend substantially in parallel to the extending direction of the slit pattern 23. Thereby, predetermined division is performed on each pixel of the liquid crystal layer 13. For example, the four divided orientation is performed when parts of pixel are arranged in one pixel, as in FIG. 22.

[0126] Moreover, on the surface of the transparent glass substrate 12, a slit pattern 32 is integrally formed with the slit pattern 31 along the edge of the pixel electrode 15 to branch off in an oblique direction from the slit pattern 31 as shown in FIG. 14A and FIG. 14B (sectional views taken along the I-I' line and II-II' line). The slit pattern 32 is formed to be smaller in width than the slit pattern 31.

[0127] As a result, an orientation control defined by the slit pattern 32 is weaker in strength than the orientation control defined by the slit pattern 23 in the pixel electrode 15 as shown in FIG. 15A and FIG. 15B. At this time, the liquid crystal orientation defined by the slit pattern 32 is oriented to deviate from a perpendicular direction relative to the extending direction of the slit pattern 23. In this way, an

ideal state in which the liquid crystal molecules are oriented in the direction of approximately 45° relative to the slit pattern **32** and in the perpendicular direction relative to the slit pattern **23** in the pixel electrode **15** is stably realized.

[0128] [Specific Example of Structure]

[0129] As shown in **FIGS. 14A and 14B**, the slit pattern **23** for controlling the liquid crystal orientation is formed in the pixel electrode **15** on the transparent glass substrate (the TFT substrate) **11** having the pixel electrodes, the active element (TFT), the data bus lines, the gate bus line, and so on. On the transparent glass substrate (the CF substrate) **12** having the common electrode and so on, the slit pattern **31** for controlling the liquid crystal orientation and the slit pattern **32** for auxiliary control provided along the edge of the pixel electrode are formed in the common electrode. The slit pattern **32** on the CF substrate is smaller in width than the slit pattern **31** which is arranged to extend in a nonparallel direction and in a non-vertical direction relative to the edge.

[0130] A TFT substrate with a 15-inch type screen and a pixel number of 1024×768 (XGA) is utilized. A pixel pitch is 297 μm. The slit pattern **23** on the TFT substrate is formed to extend in the direction of approximately 45° relative to the edge of the pixel electrode. The slit width thereof is 10 μm. As for the slit patterns on the CF substrate, the slit pattern **31** is formed to extend in the direction of 45° relative to the edge of the pixel electrode and the slit pattern **32** is formed along the edge of the pixel electrode. The slit pattern **31** is 10 μm in width and the slit pattern **32** is 5 μm in width. An overlapping margin of the slit pattern **32** and the pixel electrode is 5 μm.

[0131] Oriented films are formed and coated over the surfaces of the substrates thus fabricated. Here, the substrates are spin-coated with oriented film material thereon, pre-baked at 80° C. for one minute (using a hotplate), and thereafter, subjected to permanent baking at 180° C. for 60 minutes (using a clean oven). The substrates on which the oriented films are formed in this way are pasted with each other in a manner in which the slit patterns deviate from each other by a half pitch to fabricate an empty cell. A cell gap is 4 μm and a distance of each spaced interval part between each slit pattern is 25 μm. To the empty cell thus fabricated, liquid crystal material is injected and after various processes the liquid crystal display device is completed.

[0132] As explained above, according to this embodiment, the orientation abnormality within the pixel region for display caused by the slanting electric field which occurs outside the pixel region for display and in its vicinity is suppressed and the liquid crystal orientation is controlled to be in a stable and ideal state. Thereby, irregular display or nonuniformity in display brightness is prevented from occurring and the light transmittance of the panel is greatly improved. This makes it possible to realize a liquid crystal display device, with high reliability.

[0133] Modification

[0134] A modification of the fourth embodiment will be described below.

[0135] In this modification, bank-shaped patterns instead of the slit patterns are formed as orientation control elements

on the CF substrate in the liquid crystal display device according to the fourth embodiment.

[0136] In the liquid crystal display device, as shown in **FIG. 16A**, the slit pattern **23**, which is the orientation control element extending in the oblique direction relative to the edge of the pixel electrode **15**, is formed in the pixel electrode **15** on the surface of the transparent glass substrate **11** as the TFT substrate.

[0137] Incidentally, in this case, a bank-shaped pattern, which is a linear protrusion, may be formed instead of the slit pattern **23** in the same position where the slit pattern **23** is formed.

[0138] Meanwhile, on the surface of the transparent glass substrate **12** as the CF substrate, a bank-shaped (linear protrusion) pattern **41**, which is an orientation control element extending in the oblique direction relative to the edge of the pixel electrode **15** on the opposed transparent glass substrate **11**, is formed on the common electrode to extend substantially in parallel to the extending direction of the slit pattern **23**. Consequently, predetermined division, for example, the four divided orientation, is performed on each pixel of the liquid crystal layer **13**.

[0139] Moreover, on the surface of the transparent glass substrate **12**, a bank-shaped pattern **42** is integrally formed with the bank-shaped pattern **41** along the edge of the pixel electrode **15** to branch off in an oblique direction from the bank-shaped pattern **41** as shown in **FIG. 16A** and **FIG. 16B** (sectional views taken along the I-I' line and II-II' line). The bank-shaped pattern **42** is formed to be smaller in width than the bank-shaped pattern **41**.

[0140] As a result, orientation control defined by the bank-shaped pattern **42** is weaker in strength than the orientation control defined by the slit pattern **23** in the pixel electrode **15** as shown in **FIG. 17A** and **FIG. 17B**. At this time, the liquid crystal orientation defined by the bank-shaped pattern **42** is oriented to deviate from a perpendicular direction relative to the extending direction of the slit pattern **23**. Thus, an ideal state in which the liquid crystal molecules are oriented in the direction of approximately 45° relative to the bank-shaped pattern **42** and in the perpendicular direction relative to the slit pattern **23** in the pixel electrode **15** can be stably realized.

[0141] [Specific Example of Structure]

[0142] The structure of this example is the same as the specific structure in the fourth embodiment except in the following point.

[0143] As shown in **FIGS. 16A and 16B**, the bank-shaped patterns are formed on the CF substrate side. Two types of the bank-shaped patterns are provided. One of them extends in the direction of 45° relative to the edge of the pixel electrode **15** (the bank-shaped pattern **41**) and the other one extends along the edge of the pixel electrode **15** (the bank-shaped pattern **42**). They are different in width. The bank-shaped pattern **41** is 10 μm in width and the bank-shaped pattern **42** is 3 μm in width. An overlapping width of the bank-shaped pattern **42** and the pixel electrode **15** is 5 μm.

[0144] A photosensitive acrylic resin PC-335 (manufactured by JSR) is used for material for the bank-shaped patterns. The bank-shaped patterns are formed in a manner

in which the substrate is spin-coated with the resin thereon, baked at 90° C. for 20 minutes (using a clean oven), selectively irradiated with ultraviolet rays using a photo-mask, developed with an organic alkali type developing solution (TMAHO 0.2 wt % aqueous solution), and baked at 200° C. for 60 minutes (using the clean oven). The CF substrate on which the bank-shaped patterns are formed is subjected to ashing treatment, and thereafter, a vertically oriented film is coated thereon. The ashing treatment is performed in an oxygen plasma atmosphere with electric power of 500 W being applied for approximately one minute.

[0145] As explained above, according to this modification, the orientation abnormality within the pixel region for display caused by the slanting electric field which occurs outside the pixel region for display and in its vicinity is suppressed and the liquid crystal orientation is controlled to be in a stable and ideal state. Consequently, irregular display or nonuniformity in display brightness is prevented from occurring and the light transmittance of the panel is greatly enhanced. This makes it possible to realize a liquid crystal display device with high reliability.

[0146] Note that characteristics of the fourth embodiment and its modification example are that the orientation control elements are changed in their widths and shapes. Therefore, other conditions such as the overlapping width with the edge of the pixel electrode 15 is not restrictive of the present invention.

[0147] (Fifth Embodiment)

[0148] The fifth embodiment of the present invention will be described below. Here, a liquid crystal display device based on the MVA system like in the fourth embodiment will be described. But, an orientation control given near the edge of the pixel electrode is performed in a different way.

[0149] Like in the first embodiment schematically shown in FIG. 1, this liquid crystal display device is composed of a pair of transparent glass substrates 11, 12 facing each other with a predetermined spaced interval being provided therebetween and the liquid crystal layer 13 interposed between the transparent glass substrates 11, 12. On the transparent glass substrate 11, the pixel electrode 15, the data bus lines 21, the gate bus line (not shown), and so on are formed. On the transparent glass substrate 12, the color filter 17, the common electrode 18, and so on are formed.

[0150] In the liquid crystal display device, as shown in FIG. 18A, the slit pattern 23, which is the orientation control element extending in the oblique direction relative to the edge of the pixel electrode 15, is formed in the pixel electrode 15 on the surface of the transparent glass substrate 11 as the TFT substrate.

[0151] Incidentally, in this case, a bank-shaped pattern, which is a linear protrusion, may be formed instead of the slit pattern 23 in the same position where the slit pattern 23 is formed.

[0152] Meanwhile, on the surface of the transparent glass substrate 12 as the CF substrate, the bank-shaped (linear protrusion) pattern 41, which is the orientation control element extending in the oblique direction relative to the edge of the pixel electrode 15 on the opposed transparent glass substrate 11, is formed on the common electrode to

extend substantially in parallel to the slit pattern 23. Thereby, predetermined division, for example, the four divided orientation, is performed on each pixel of the liquid crystal layer 13.

[0153] Moreover, on the surface of the transparent glass substrate 12, the bank-shaped pattern (an auxiliary bank) 42 is integrally formed with the bank-shaped pattern 41 along the edge of the pixel electrode 15 to branch off in the oblique direction from the bank-shaped pattern 41 as shown in FIG. 18A and FIG. 18B (sectional views taken along the I-I' line and the II-II' line). The liquid crystal molecules of the liquid crystal layer 13 on the bank-shaped pattern 42 are non-vertically oriented when no voltage is being applied between the pixel electrode 15 of the TFT substrate and the common electrode 18 of the CF substrate.

[0154] Incidentally, in this case, slit patterns, which are linear protrusions, may be provided instead of the bank-shaped patterns 41, 42 in the same positions where the bank-shaped patterns 41, 42 are formed.

[0155] Here, the liquid crystal orientation direction is the same as an orientation direction of the liquid crystal molecules which causes the dark line to occur under voltage application, that is, a parallel direction to the extending direction of the bank-shaped pattern 42. Thus, the dark line occurs stably only on the bank-shaped pattern 42 on which the liquid crystal molecules are non-vertically oriented in advance. Consequently, an actual adverse effect due to an occurrence of the dark line is eliminated.

[0156] [Specific Example of Structure]

[0157] The structure of this example is the same as the specific structure in the fourth embodiment except in the following point.

[0158] As shown in FIGS. 18A and 18B, the liquid crystal molecules on the bank-shaped pattern 42 disposed along the edge of the pixel electrode 15 are non-vertically oriented. The non-vertical orientation is realized by repelling the oriented film coated on the bank-shaped pattern 42 with the ashing treatment not being applied selectively only on the bank-shaped pattern 42. The bank-shaped pattern 42 is 10 μm in width. The overlapping margin of the bank-shaped pattern 42 and the pixel electrode 15 is 4 μm.

[0159] Note that the characteristic of this embodiment is that the liquid crystal orientation on the bank-shaped pattern 42 is made non-vertical. Therefore, other conditions such as the overlapping width with the edge of the pixel electrode 15 are not restrictive of the present invention.

[0160] As explained above, according to this embodiment, the orientation abnormality within the pixel region for display caused by the slanting electric field which occurs outside the pixel region for display and in its vicinity is suppressed and the liquid crystal orientation is controlled to be in a stable and ideal state. Thereby, irregular display or nonuniformity in display brightness is prevented from occurring and the light transmittance of the panel is enhanced to a great extent. This makes it possible to realize a liquid crystal display device with high reliability.

[0161] (Sixth Embodiment)

[0162] The sixth embodiment of the present invention will be described below. Here, a liquid crystal display device

based on the MVA system will be described like in the fourth embodiment but the orientation control provided near the edge of the pixel electrode is performed in a different way.

[0163] Like in the first embodiment schematically shown in FIG. 1, this liquid crystal display device is composed of a pair of transparent glass substrates 11, 12 facing each other with a predetermined spaced interval being provided therebetween and the liquid crystal layer 13 interposed between the transparent glass substrates 11, 12. On the transparent glass substrate 11, the pixel electrodes 15, the data bus lines 21, the gate bus line (not shown), and so on are formed. On the transparent glass substrate 12, the color filter 17, the common electrode 18, and so on are formed.

[0164] In the liquid crystal display device, as shown in FIG. 19A, the slit pattern 23, which is the orientation control element extending in the oblique direction relative to the edge of the pixel electrode 15, is formed in the pixel electrode 15 on the surface of the transparent glass substrate 11 as the TFT substrate.

[0165] Incidentally, in this case, a bank-shaped pattern, which is a linear protrusion, may be formed instead of the slit pattern 23 in the same position where the slit pattern 23 is formed.

[0166] Meanwhile, on the surface of the transparent glass substrate 12 as the CF substrate, the bank-shaped (linear protrusion) pattern 41, which is the orientation control element extending in the oblique direction relative to the edge of the pixel electrode 15 on the opposed transparent glass substrate 11, is formed on the common electrode to extend substantially in parallel to the extending direction of the slit pattern 23. Thereby, predetermined division, for example, the four divided orientation, is performed on each pixel of the liquid crystal layer 13.

[0167] Moreover, on the surface of the transparent glass substrate 12, as shown in FIG. 19A and FIG. 19B (a sectional view taken along the I-I' line), a bank-shaped pattern (an auxiliary bank) 43, which is an assembly of protrusions having shapes with directivity along the edge of the pixel electrode 15, a triangle-shaped section here, and being tapered toward an opposite side of the bank-shaped pattern 41, is integrally formed with the bank-shaped pattern 41 to branch off in the oblique direction from the bank-shaped pattern 41.

[0168] Incidentally, in this case, slit patterns may be provided instead of the bank-shaped patterns 41, 43 in the same positions where the bank-shaped patterns 41, 43 are formed.

[0169] Here, the direction of the directivity defined by the bank-shaped pattern 43 is the same as the orientation direction of the liquid crystal molecules which causes the dark line to occur under voltage application, that is, a parallel direction to the extending direction of the bank-shaped pattern 43. Thereby, under voltage application, the dark line occurs stably only on the bank-shaped pattern 43 which has the directivity. Consequently, an actual adverse effect due to an occurrence of the dark line is eliminated and an actually high light transmittance of the panel can be realized.

[0170] [Specific Example of Structure]

[0171] The structure of this example is the same as the specific structure in the fourth embodiment except in the following point.

[0172] As shown in FIGS. 19A and 19B, the bank-shaped pattern 43 which is disposed along the edge of the pixel electrode 15 is shaped to have the directivity in a parallel direction to the substrate's plane surface. An isosceles triangle-shaped section is used as the shape with the directivity. The base of the triangle is 5 μm and the height is 9 μm . The triangles (four in this embodiment) are arranged being connected with each other. An overlapping margin of the bank-shaped pattern 43 and the pixel electrode 15 is 4 μm .

[0173] The bank-shaped pattern 43 having the directivity needs to be arranged to have directivity toward an outer direction from the bank-shaped pattern 41 which extends in the direction of 45° relative to the edge of the adjacent pixel electrode 15. This arrangement makes it possible to realize orientation control by which the dark line is allowed to occur stably on the position of the bank-shaped pattern 43.

[0174] Note that the characteristic of this embodiment is that the bank-shaped pattern along the edge of the pixel electrode has the directivity. Therefore, other conditions such as the overlapping width with the edge are not restrictive of the present invention.

[0175] Incidentally, as shown in FIG. 20A and FIG. 20B (a sectional view taken along the line I-I'), the bank-shaped pattern 43 having the directivity may be disposed not on the CF substrate but on the TFT substrate. Furthermore, it is also appropriate that the bank-shaped pattern 43 is disposed on both of the substrates. In this case, the bank-shaped pattern 43 has a triangle-shaped section and in contrast to the case in FIG. 19A, is tapered toward the bank-shaped pattern 41.

[0176] (Seventh Embodiment)

[0177] The seventh embodiment of the present invention will be described below. Here, a liquid crystal display device based on the MVA system like in the fourth embodiment will be described. But, an orientation control provided near the edge of the pixel electrode is performed in a different way.

[0178] Like in the first embodiment schematically shown in FIG. 1, this liquid crystal display device is composed of a pair of transparent glass substrates 11, 12 facing each other with a predetermined spaced interval being provided therebetween and the liquid crystal layer 13 interposed between the transparent glass substrates 11, 12. On the transparent glass substrate 11, the pixel electrodes 15, the data bus lines 21, the gate bus line (not shown), and so on are formed. On the transparent glass substrate 12, the color filter 17, the common electrode 18, and so on are formed.

[0179] In the liquid crystal display device, as shown in FIG. 21A, the slit pattern 23, which is the orientation control element extending in the oblique direction relative to the edge of the pixel electrode 15, is formed in the pixel electrode 15 on the surface of the transparent glass substrate 11 as the TFT substrate.

[0180] Incidentally, in this case, a bank-shaped pattern, which is a linear protrusion, may be formed instead of the slit pattern 23 in the same position where the slit pattern 23 is formed.

[0181] Meanwhile, on the surface of the transparent glass substrate 12 as the CF substrate, the slit pattern 31, which is the orientation control element extending in the oblique direction relative to the edge of the pixel electrode 15 on the opposed transparent glass substrate 11, is formed in the

common electrode to extend substantially in parallel to the extending direction of the slit pattern **23**. Thereby, predetermined division, for example, the four divided orientation, is performed on each pixel of the liquid crystal layer **13**.

[0182] Moreover, on the surface of the transparent glass substrate **12**, the slit pattern **44** is integrally formed with the slit pattern **31** along the edge of the pixel electrode **15** to branch off in the oblique direction from the slit pattern **31** as shown in **FIG. 21A** and **FIG. 21B**.

[0183] Incidentally, in this case, bank-shaped patterns, which are linear protrusions, may be provided instead of the slit patterns **31**, **44** in the same positions where the slit patterns **31**, **44** are formed.

[0184] Here, at least a part of the liquid crystal molecules of the liquid crystal layer **13** on the slit pattern **44** are vertically oriented when voltage is being applied between the pixel electrode **15** and the common electrode **18**. Specifically, no pixel electrode **15** exists at least on a part of a place facing the slit pattern **44** on the CF substrate.

[0185] One of the causes which strengthen the slanting electric field of the pixel electrode **15**, which is one factor of causing unevenness among each shot at the time of patterning, is an influence from an electric field of an adjacent data bus line. In this embodiment, a region in which the liquid crystal orientation does not change (remains in the vertical direction) is provided between the data bus line **21** and the pixel electrode **15** so that the influence given to the liquid crystal orientation on the pixel electrode **15** by the bus line can be eliminated. As a result, the slanting electric field of the edge of the pixel electrode **15** can be weakened and the unevenness among each shot can be prevented from occurring.

[0186] [Specific Example of Structure]

[0187] The structure of this example is the same as the specific structure in the fourth embodiment except in the following point.

[0188] As shown in **FIGS. 21A and 21B**, the slit pattern **31**, which is disposed to extend in the direction of 45° relative to the edge of the pixel electrode **15**, and the slit pattern **44**, which is disposed to extend along the edge of the pixel electrode **15**, are both 10 μm in width and an overlapping width of the data bus line **21** and the slit pattern **44** is 2 μm .

[0189] The distance between the pixel electrode **15** and the adjacent data bus line **21** is 10 μm . This means that a region of 8 μm with no electrode exists between the pixel electrode **15** and the data bus line **21**. Consequently, with no electrode existing in the region, the liquid crystal molecules maintain their vertical orientation state in this region even when voltage is being applied to the electrodes in their vicinity.

[0190] Moreover, when an insulating film is selectively formed in the region without any electrode existing therein, thickness of a cell in this region is made thinner than that in other regions. Thereby, the vertical orientation state can be more stably realized.

[0191] Note that the characteristic of this embodiment is that the liquid crystal molecules between the pixel electrode and the bus line are maintained in the vertical orientation

state under voltage application. Therefore, other conditions such as an overlapping width with the pixel edge is not restrictive of this invention.

[0192] As explained above, according to this embodiment, the orientation abnormality within the pixel region for display caused by the slanting electric field which occurs outside the pixel region for display and in its vicinity is suppressed and the liquid crystal orientation is controlled to be in a stable and ideal state. Thereby, irregular display or ununiformity in display brightness is prevented from occurring and the light transmittance of the panel is greatly enhanced. This makes it possible to realize a liquid crystal display device with high reliability.

[0193] According to the present invention, the orientation abnormality within the pixel region for display caused by the slanting electric field which occurs outside the pixel region for display and in its vicinity is suppressed and the liquid crystal orientation is controlled to be in a stable and ideal state. Thereby, irregular display or ununiformity in display brightness is prevented from occurring and the light transmittance of the panel is greatly enhanced. This makes it possible to realize a liquid crystal display device with high reliability.

What is claimed is:

1. A liquid crystal display device comprising:

- a first substrate having thereon a pixel electrode and an active element;
- a second substrate having thereon an opposed electrode; and
- a liquid crystal layer interposed between said first and second substrates with said electrodes facing each other,

wherein when a direction of an orientation regulating force given to liquid crystal molecules of said liquid crystal layer within a region of said pixel electrode is taken as a first direction and a direction of an orientation regulating force due to an edge of said pixel electrode on said first substrate given to said liquid crystal molecules near said edge is taken as a second direction, an orientation control element giving an orientation regulating force in a third direction which counteracts said orientation regulation force in said second direction is locally provided in a part near said edge.

2. The device according to claim 1, wherein said orientation control element is constituted by a plurality of fine slits formed in said pixel electrode in an oblique direction relative to an extending direction of said edge or a plurality of fine protrusions formed on said pixel electrode in a oblique direction relative to an extending direction of said edge.

3. The device according to claim 2, wherein at least a part of said fine slits or-said fine protrusions are different in shape and/or spaced interval of arrangement from each other;

4. The device according to claim 1, wherein said orientation control element is a hollow formed in a part other than said pixel electrode.

5. The device according to claim 1, wherein said orientation control element is formed so that an angle ϕ 2 made by

said second and third directions is bigger than an angle $\phi 1$ made by said first and second directions when said angle $\phi 1$ is obtuse.

6. The device according to claim 1, wherein a dielectric anisotropy of said liquid crystal molecules of said liquid crystal layer is negative.

7. The device according to claim 1, wherein another orientation control element regulating said liquid crystal molecules of said liquid crystal layer to be oriented in said first direction is provided on said second substrate.

8. A liquid crystal display device comprising:

a first substrate having thereon a pixel electrode and an active element;

a second substrate having thereon an opposed electrode; and

a liquid crystal layer interposed between said first and second substrates with said electrodes facing each other,

wherein an orientation control element giving an orientation regulating force to liquid crystal molecules near an edge of said pixel electrode on said first substrate is locally provided near said edge on said first substrate so that said liquid crystal molecules including those near said edge are oriented in substantially the same direction, when difference in orientation direction among said liquid crystal molecules adjacent to each other near said edge is caused by an orientation regulating force given by said edge of said pixel electrode to said liquid crystal molecules of said liquid crystal layer when voltage is being applied between said pixel and opposed electrodes.

9. The device according to claim 8, wherein said orientation control element is constituted by a plurality of fine slits formed in said pixel electrode in an oblique direction relative to an extending direction of said edge or a plurality of fine protrusions formed on said pixel electrode in an oblique direction relative to an extending direction of said edge.

10. The device according to claim 9, wherein at least a part of said fine slits or said fine protrusions are different in shape and/or spaced interval of arrangement from each other;

11. The device according to claim 8, wherein said orientation control element is a hollow formed in a part other than said pixel electrode.

12. The device according to claim 8, wherein a dielectric anisotropy of said liquid crystal molecules of said liquid crystal layer is negative.

13. A liquid crystal display device comprising:

a first substrate having thereon a pixel electrode and an active element;

a second substrate having thereon an opposed electrode; and

a liquid crystal layer interposed between said first and second substrates with said electrodes facing each other,

wherein a first orientation control element extending in a nonparallel direction relative to an extending direction of an edge of said pixel electrode and a second orientation control element extending in a parallel direction

relative to an extending direction of said edge are provided on at least one of said first and second substrates, and

said first orientation control element is larger in width than said second orientation control element.

14. The device according to claim 13, wherein at least one of said first and second orientation control elements is a slit formed in said pixel electrode or said opposed electrode.

15. The device according to claim 13, wherein at least one of said first and second orientation control elements is a protrusion formed on said pixel electrode or said opposed electrode.

16. The device according to claim 13, wherein a dielectric anisotropy of said liquid crystal molecules of said liquid crystal layer is negative.

17. A liquid crystal display device comprising:

a first substrate having thereon a pixel electrode and an active element;

a second substrate having thereon an opposed electrode; and

a liquid crystal layer interposed between said first and second substrates with said electrodes facing each other,

wherein a first orientation control element extending in a nonparallel direction relative to an extending direction of an edge of said pixel electrode and a second orientation control element extending in a parallel direction relative to an extending direction of said edge are provided on at least one of said first and second substrates, and

liquid crystal molecules of said liquid crystal layer on said second orientation control element are non-vertically oriented relative to said substrate when no voltage is being applied between said pixel and opposed electrodes.

18. The device according to claim 17, wherein said liquid crystal molecules of said liquid crystal layer on said second orientation control element are oriented in substantially the same direction as an extending direction of said second orientation control element.

19. The device according to claim 17, wherein at least one of said first and second orientation control elements is a slit formed in said pixel electrode or said opposed electrode.

20. The device according to claim 17, wherein at least one of said first and second orientation control elements is a protrusion formed on said pixel electrode or said opposed electrode.

21. The device according to claim 17, wherein a dielectric anisotropy of said liquid crystal molecules of said liquid crystal layer is negative.

22. A liquid crystal display device comprising:

a first substrate having thereon a pixel electrode and an active element;

a second substrate having thereon an opposed electrode; and

a liquid crystal layer interposed between said first and second substrates with said electrodes facing each other,

wherein a first orientation control element extending in a nonparallel direction relative to an extending direction of an edge of said pixel electrode and a second orientation control element extending in a parallel direction relative to an extending direction of said edge are provided on at least one of said first and second substrates, and

at least a part of liquid crystal molecules of said liquid crystal layer on said second orientation control element are oriented in a vertical direction relative to said substrate when voltage is being applied between said pixel and opposed electrodes.

23. The device according to claim 22, wherein said second orientation control element is provided on said second substrate, and said pixel electrode does not exist on at least a part of a place on said first substrate opposed to said second orientation control element.

24. The device according to claim 22, wherein at least one of said first and second orientation control elements is a slit formed in said pixel electrode in an oblique direction relative to an extending direction of said edge.

25. The device according to claim 22, wherein at least one of said first and second orientation control elements is a protrusion formed on said pixel electrode in an oblique direction relative to an extending direction of said edge.

26. The device according to claim 22, wherein a dielectric anisotropy of said liquid crystal molecules of said liquid crystal layer is negative.

27. A liquid crystal display device comprising:

a first substrate having thereon a pixel electrode and an active element;

a second substrate having thereon an opposed electrode; and

a liquid crystal layer interposed between said first and second substrates with said electrodes facing each other,

wherein a first orientation control element extending in a nonparallel direction relative to an extending direction of an edge of said pixel electrode and a second orientation control element extending in a parallel direction relative to an extending direction of said edge are provided on at least one of said first and second substrates, and

said second orientation control element is constituted by an assembly of shapes having directivity in a direction of the substrate's plane surface.

28. The device according to claim 27, wherein said second orientation control element is formed to extend in an outer

direction from said first orientation control element which is adjacent to said second orientation control element on the same substrate.

29. The device according to claim 27, wherein at least one of said first and second orientation control elements is a slit formed in said pixel electrode or said opposed electrode.

30. The device according to claim 27, wherein at least one of said first and second orientation control elements is a protrusion formed on said pixel electrode or said opposed electrode.

31. The device according to claim 27, wherein a dielectric anisotropy of said liquid crystal molecules of said liquid crystal layer is negative.

32. A liquid crystal orientation method of liquid crystal molecules of a liquid crystal layer in a liquid crystal display device comprising a first substrate having thereon a pixel electrode and an active element, a second substrate having thereon an opposed electrode, and said liquid crystal layer interposed between said first and second substrates with said electrodes facing each other, said method comprising the step of:

giving an orientation regulating force to a part near an edge of said pixel electrode on said first substrate in a third direction which is different from a first direction of an orientation regulating force given to said liquid crystal molecules of said liquid crystal layer within a region of said pixel electrode and a second direction of an orientation regulating force given due to said edge of said pixel electrode on said first substrate to said liquid crystal molecules near said edge.

33. A liquid crystal orientation method of liquid crystal molecules of a liquid crystal layer in a liquid crystal display device comprising a first substrate having thereon a pixel electrode and an active element, a second substrate having thereon an opposed electrode, and said liquid crystal layer interposed between said first and second substrates with said electrodes facing each other, said method comprising the step of:

giving an orientation regulating force to said liquid crystal molecules near an edge of said pixel electrode on said first substrate so that said liquid crystal molecules including those near said edge are oriented in substantially the same direction, when difference in orientation direction among said liquid crystal molecules adjacent to each other near said edge is caused by an orientation regulating force given to said liquid crystal molecules of said liquid crystal layer due to said edge of said pixel electrode when voltage is being applied between said pixel and opposed electrodes.

* * * * *

专利名称(译)	液晶显示装置和液晶取向方法		
公开(公告)号	US20040061821A1	公开(公告)日	2004-04-01
申请号	US10/664729	申请日	2003-09-18
[标]申请(专利权)人(译)	富士通株式会社 富士通显示技术股份有限公司		
申请(专利权)人(译)	FUJITSU LIMITED 富士通显示器科技股份有限公司		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	TAKEDA ARIHIRO KATAOKA SHINGO KAMADA TSUYOSHI UEDA KAZUYA SASAKI TAKAHIRO		
发明人	TAKEDA, ARIHIRO KATAOKA, SHINGO KAMADA, TSUYOSHI UEDA, KAZUYA SASAKI, TAKAHIRO		
IPC分类号	G02F1/1337 G02F1/1333 G02F1/1343 G02F1/139 G09F9/30		
CPC分类号	G02F1/133707 G02F2001/133757 G02F1/1393		
优先权	2001029814 2001-02-06 JP		
其他公开文献	US7180569		
外部链接	Espacenet USPTO		

摘要(译)

在像素电极中形成狭缝图案，该狭缝图案是在TFT基板的表面上相对于像素电极的边缘在倾斜方向上延伸的取向控制元件，以在与像素电极的延伸方向基本平行的方向上延伸。银行形图案。此外，作为取向控制元件，除了像素电极之外，在像素电极的边缘附近的部分中局部地形成细缝图案（像素电极中的凹部），以在相对于像素电极的延伸方向的倾斜方向上延伸。边缘。

