



US006683595B2

(12) **United States Patent**
Ikeda

(10) **Patent No.:** **US 6,683,595 B2**
(45) **Date of Patent:** **Jan. 27, 2004**

(54) **LIQUID CRYSTAL DISPLAY APPARATUS AND DRIVING METHOD**

6,151,075 A * 11/2000 Shin et al. 348/459
6,344,839 B1 * 2/2002 Denda et al. 345/88
6,473,077 B1 * 10/2002 Takenaka et al. 345/209

(75) Inventor: **Hiroyuki Ikeda**, Kanagawa (JP)

* cited by examiner

(73) Assignee: **Sony Corporation**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 255 days.

Primary Examiner—Lun-Yi Lao

(74) *Attorney, Agent, or Firm*—Ronald P. Kananen; Rader Fishman & Grauer

(21) Appl. No.: **09/816,213**

(22) Filed: **Mar. 26, 2001**

(65) **Prior Publication Data**

US 2001/0052886 A1 Dec. 20, 2001

(30) **Foreign Application Priority Data**

Mar. 29, 2000 (JP) P2000-090283

(51) **Int. Cl.**⁷ **G09G 3/36**

(52) **U.S. Cl.** **345/95; 345/92; 345/210**

(58) **Field of Search** 345/87-104, 673, 345/698, 208-210; 348/441, 445, 448, 449, 454

(57) **ABSTRACT**

An object of the invention is to improve moving-picture quality of an active matrix type liquid crystal display apparatus. The apparatus comprises liquid crystal pixels disposed in matrix configuration, a line drive circuit sequentially scanning each line of the pixels at every frame repeating with a predetermined frequency, and a column drive circuit writing image signal into the pixels in sync with the sequential scanning. The frame is divided into a preceding and following sub-frame. The line drive circuit scans sequentially for the preceding and following sub-frame. The column drive circuit writes image signal originally assigned to a frame into the pixels for the preceding sub-frame, and then writes an image signal for adjusting image quality into the pixels for the following sub-frame. The image signal for adjusting image quality is obtained by operating the image signal assigned to the frame and an image signal assigned to the next frame.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,473,381 A * 12/1995 Lee 348/441

6 Claims, 10 Drawing Sheets

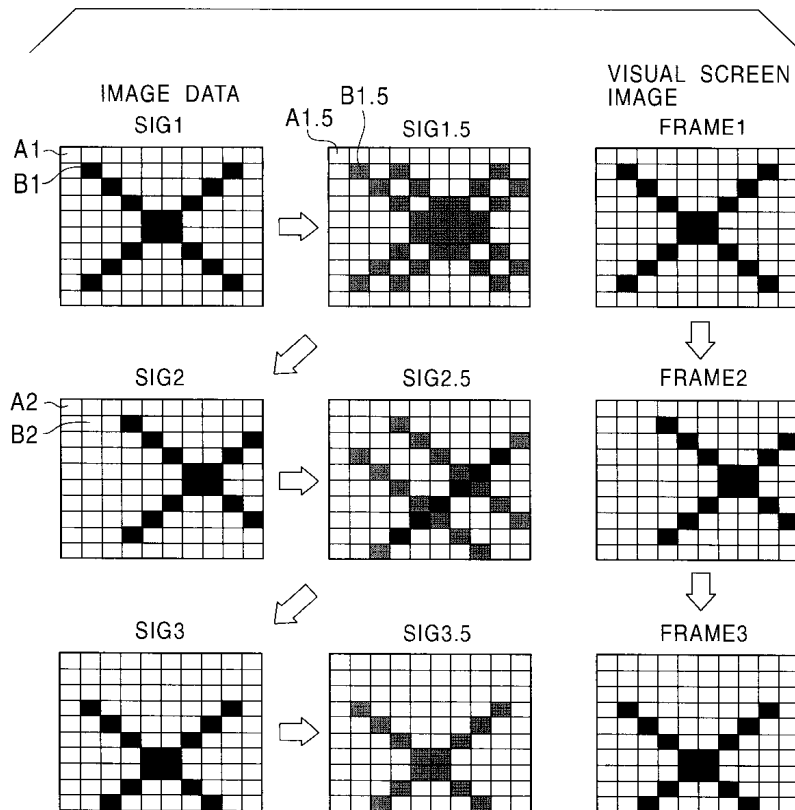


FIG. 1A

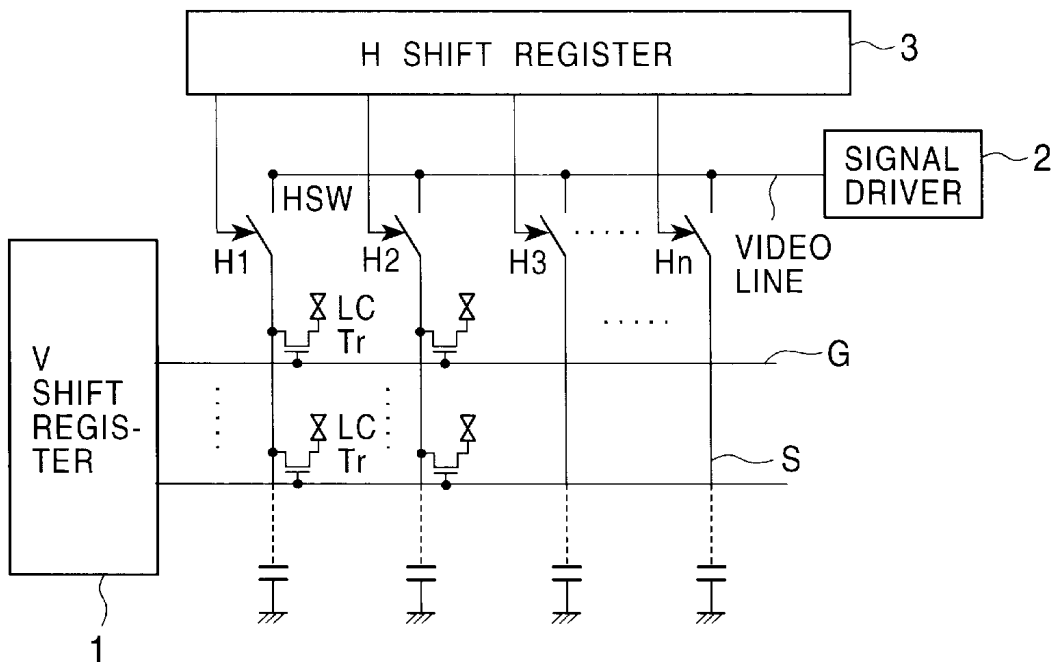


FIG. 1B

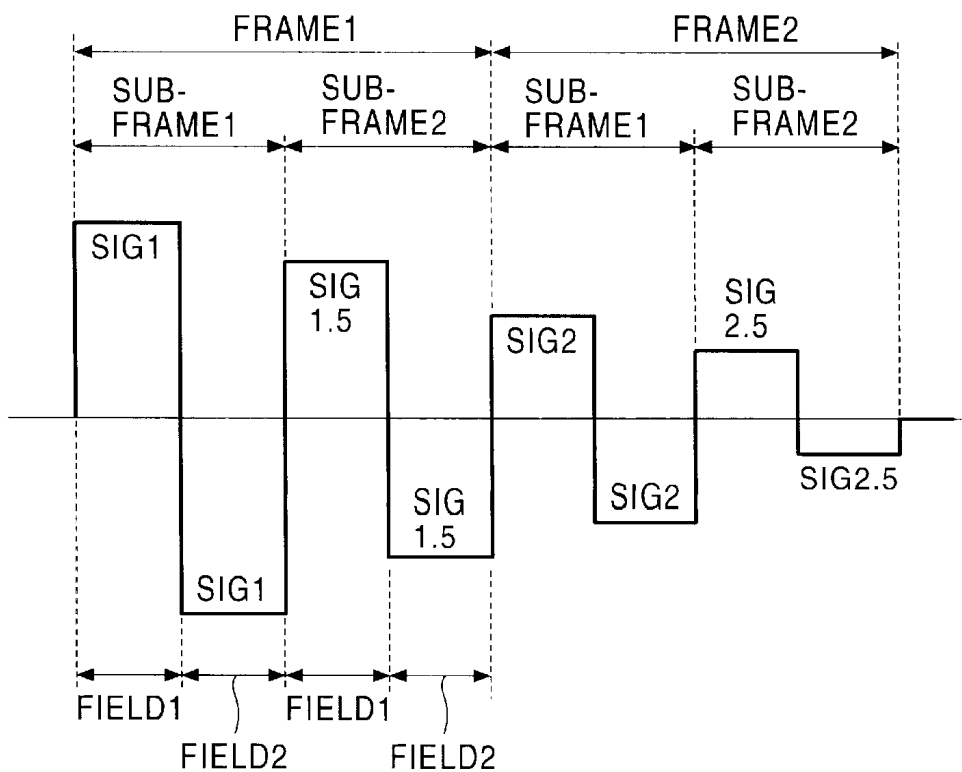


FIG. 2

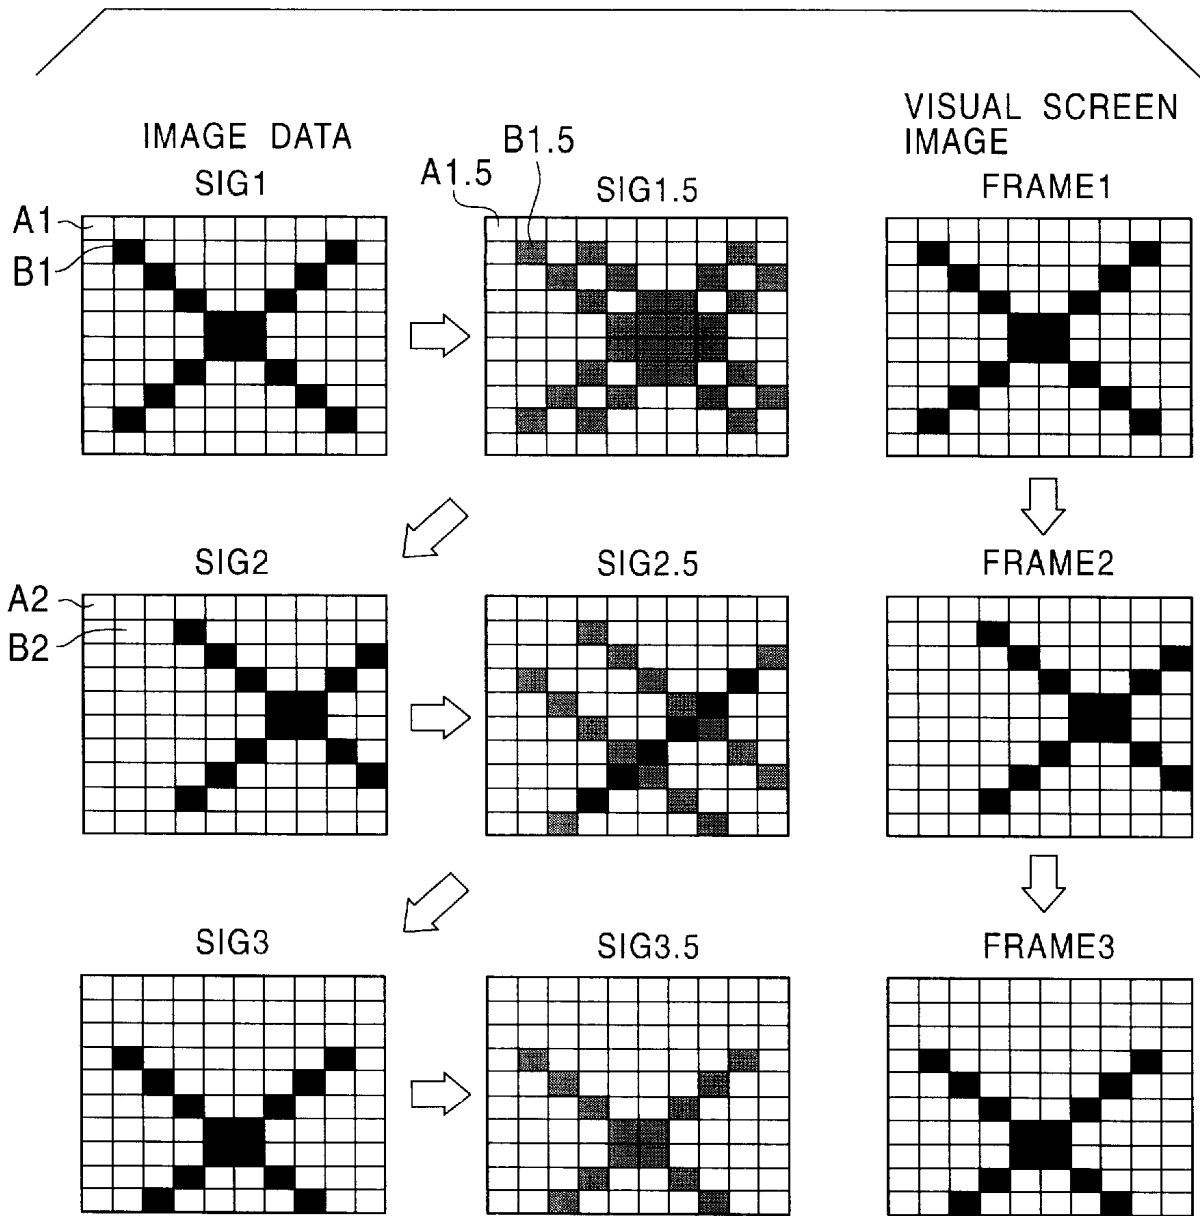


FIG. 3A

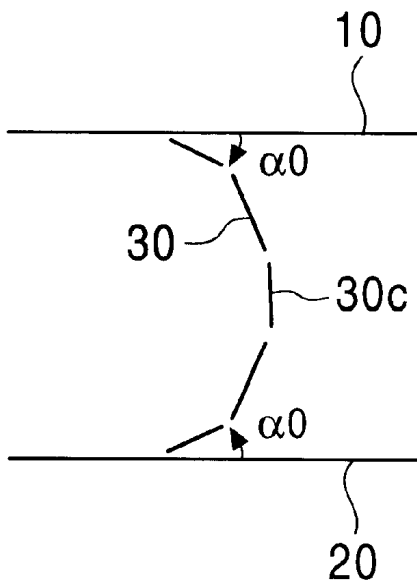


FIG. 3B

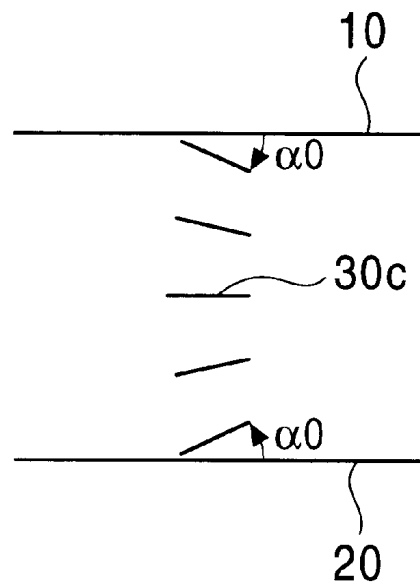


FIG. 4

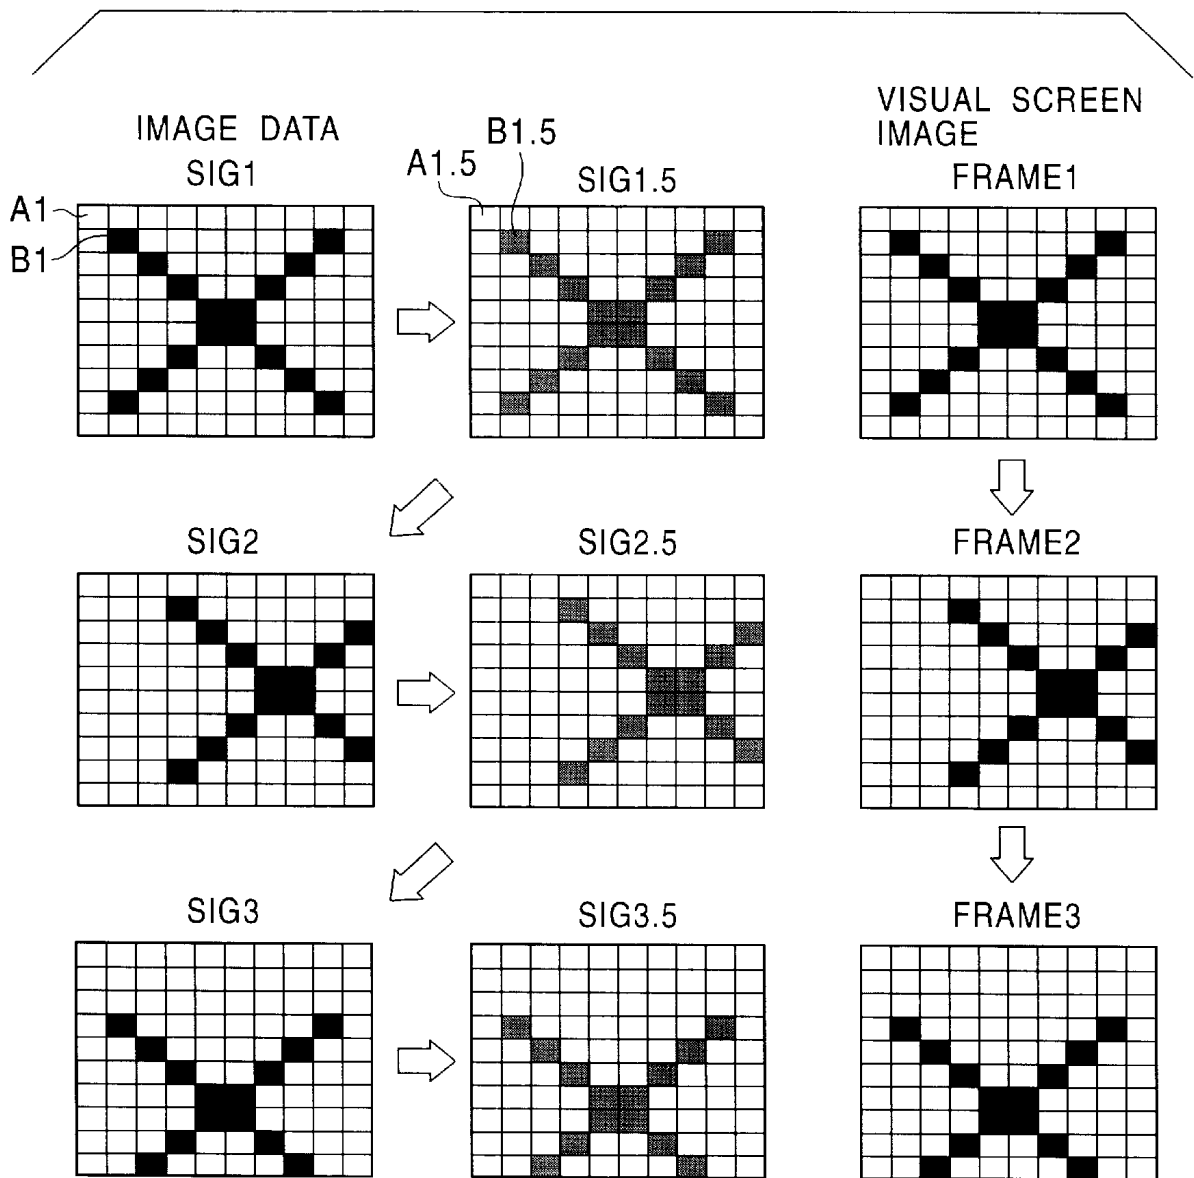


FIG. 5

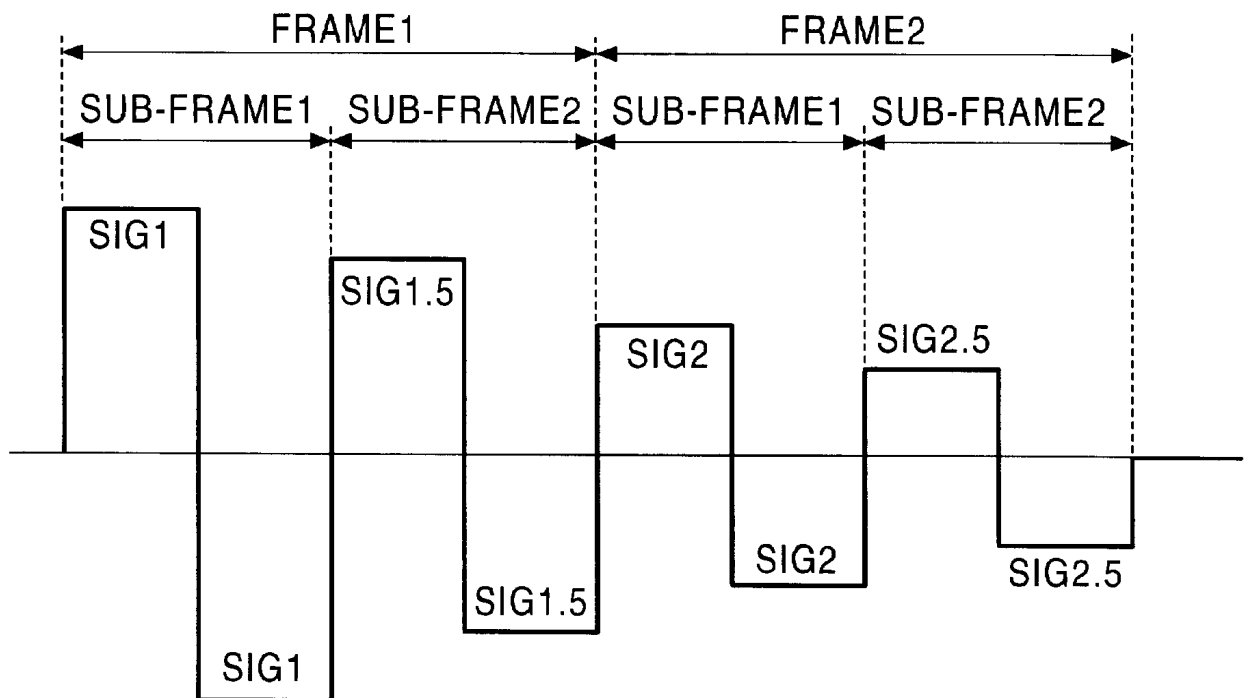


FIG. 6

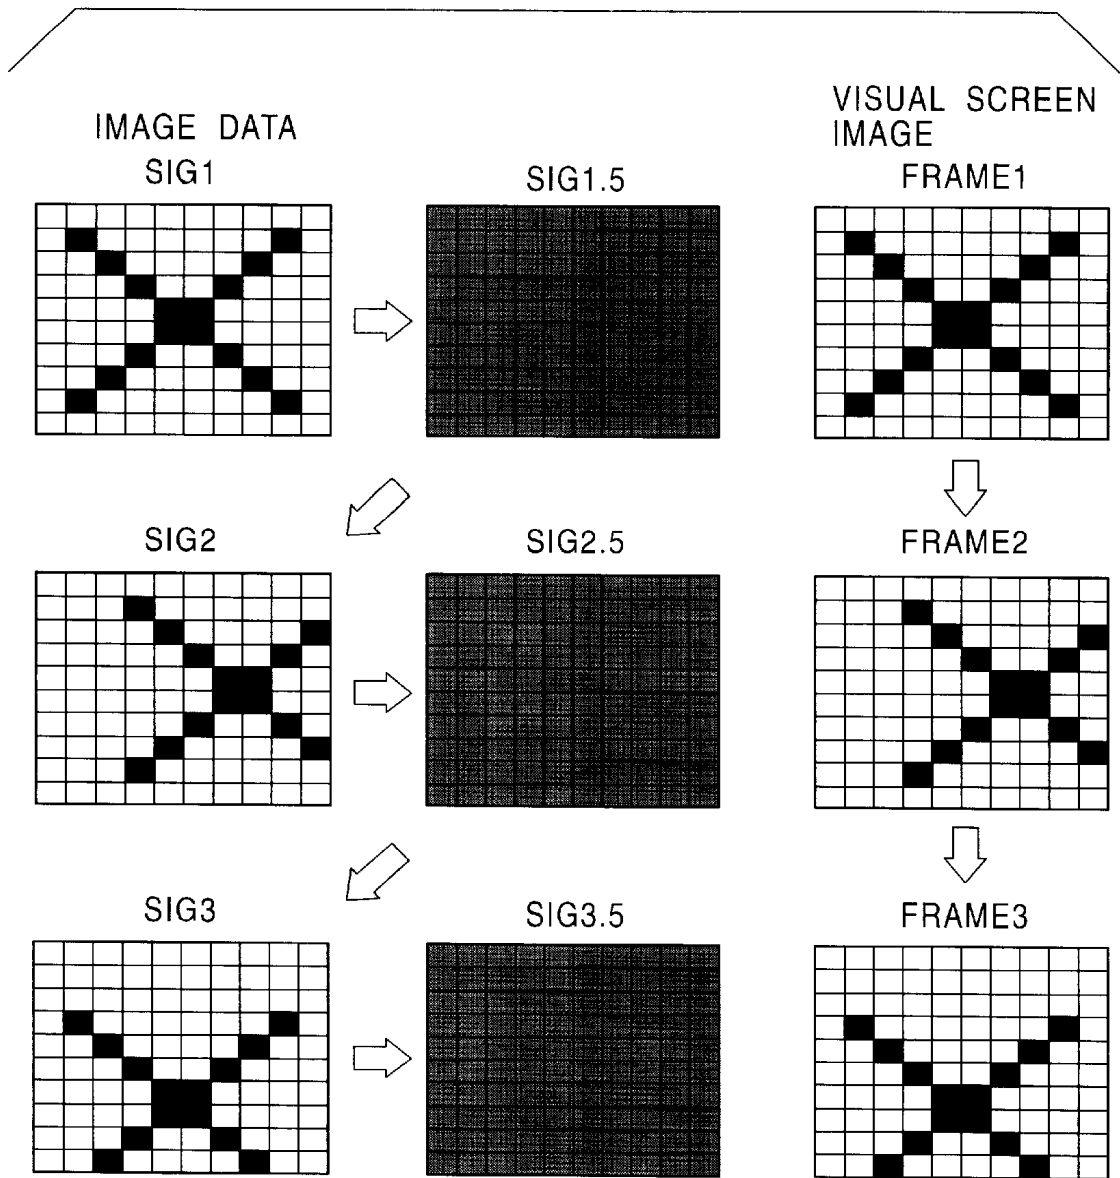


FIG. 7

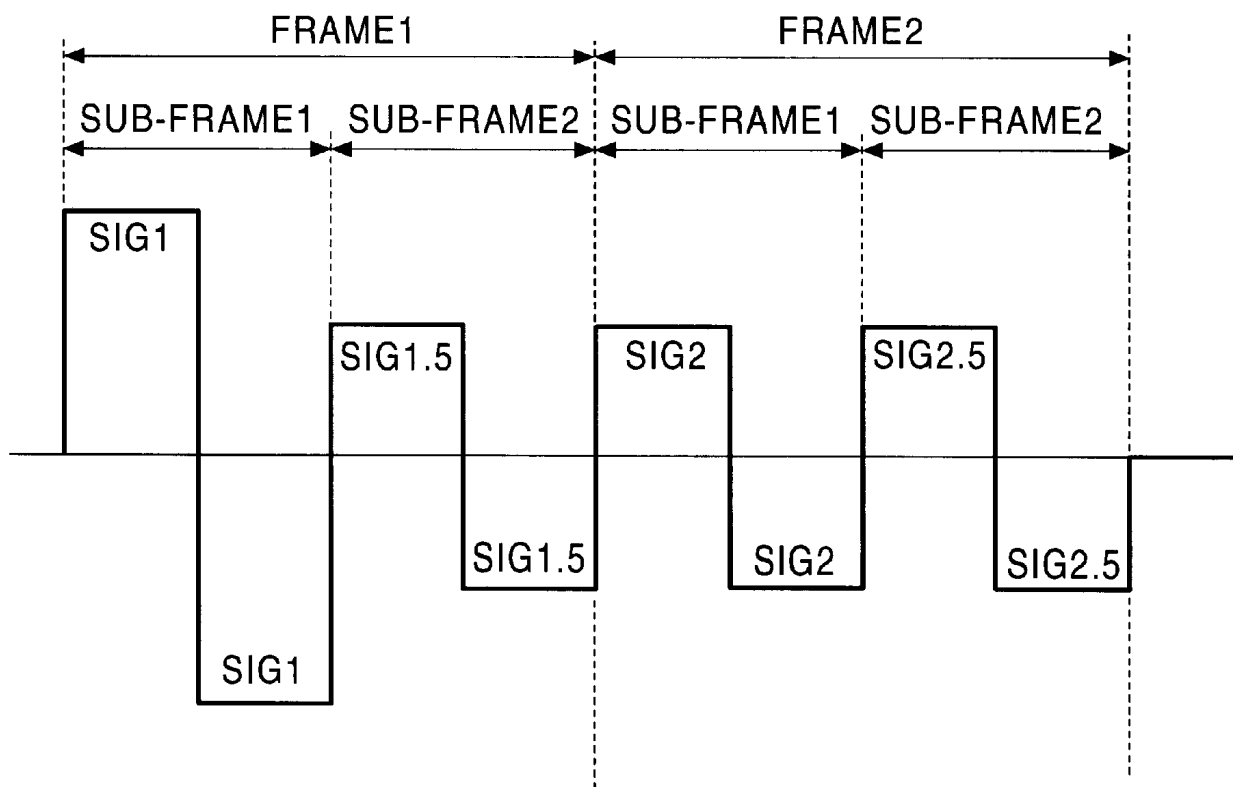


FIG. 8
RELATED ART

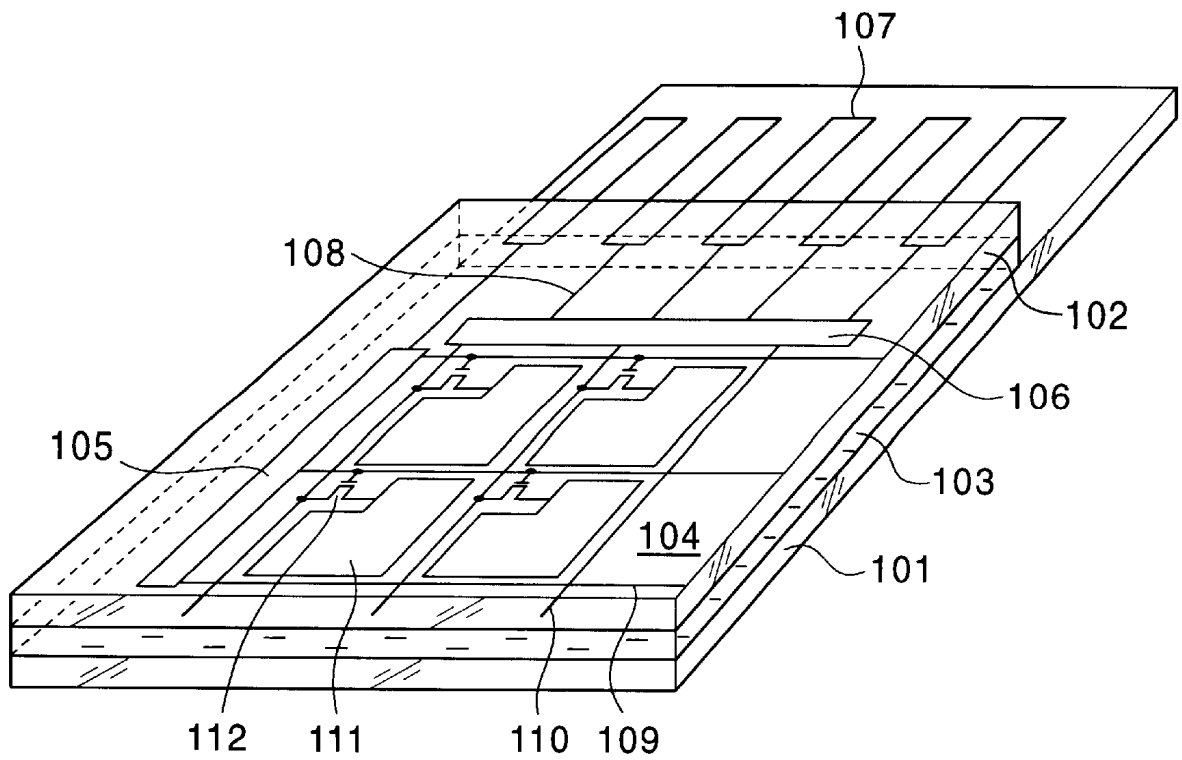


FIG. 9

RELATED ART


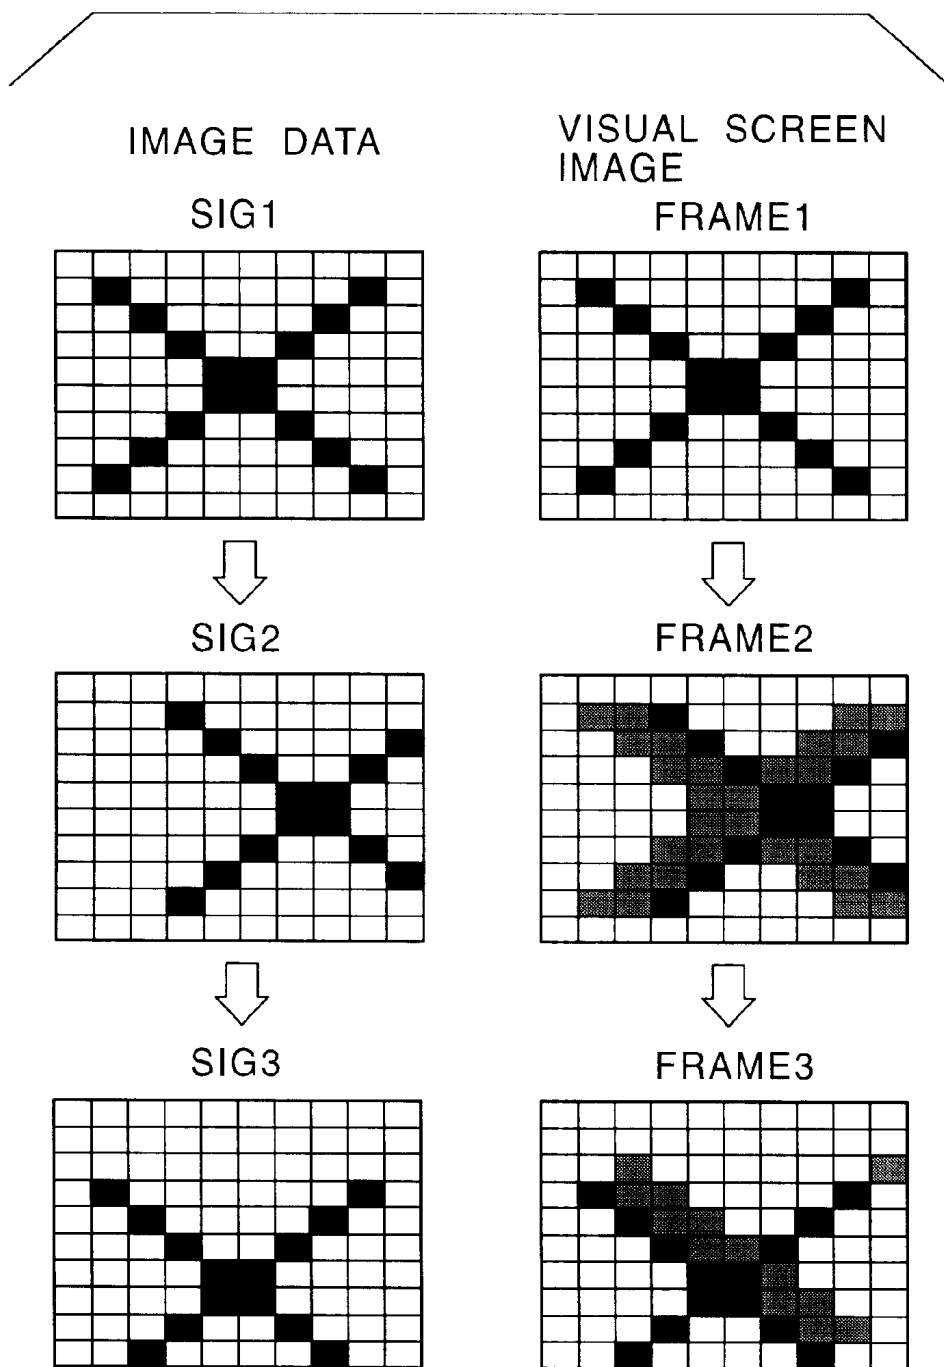


FIG. 10
RELATED ART

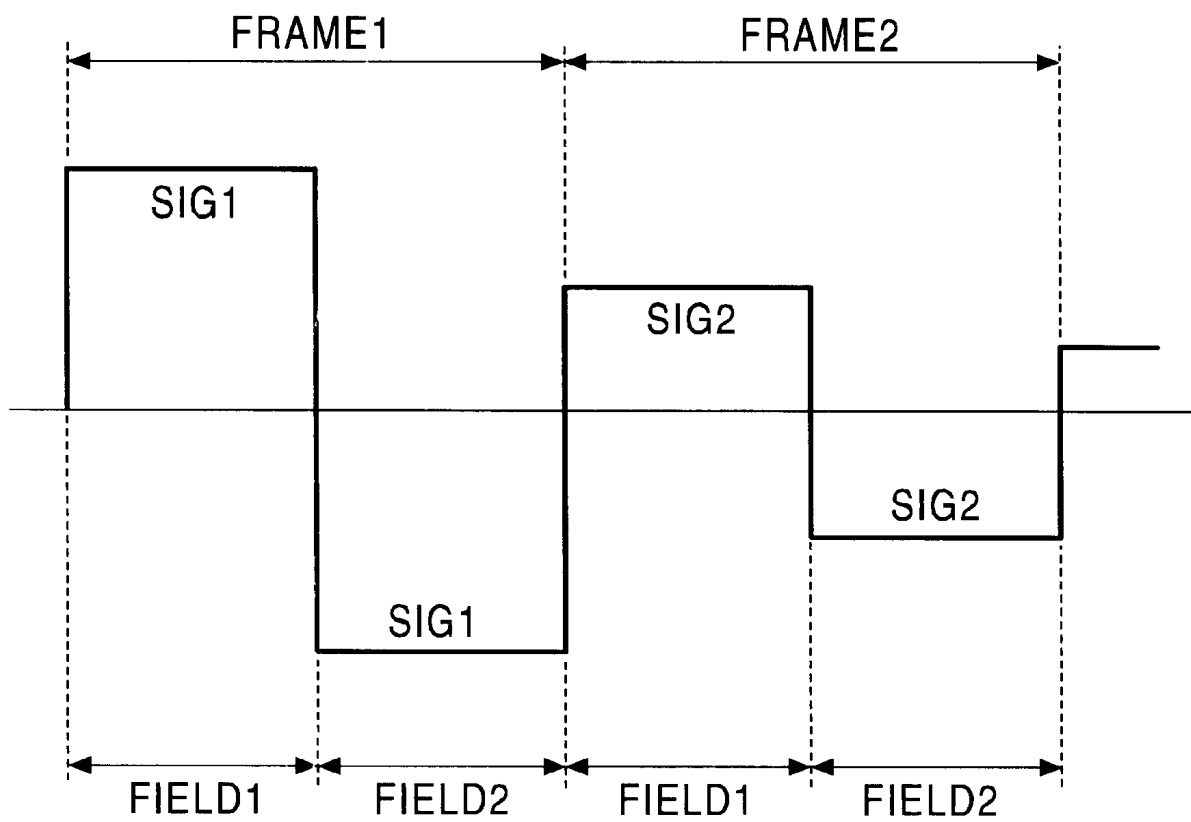

LIQUID CRYSTAL DISPLAY APPARATUS AND DRIVING METHOD

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an active matrix type of liquid crystal display apparatus and its driving method. In particular, the present invention relates to a driving technique to improve quality of moving picture image.

2. Description of the Related art

FIG. 8 is a perspective figure showing a configuration of the active matrix type liquid crystal display apparatus of the related art. As shown in FIG. 8, the display apparatus of the related art has a panel structure comprising a pair of insulator substrates 101, 102 and liquid crystal 103 held in between those two substrates. A pixel array unit 104 and a drive circuit unit are fabricated and integrated on the insulator substrate 101 disposed at the lower side. The drive circuit unit consists of a line drive circuit 105 and a column drive circuit 106. A terminal unit 107 for an external connection is fabricated on an upper part of peripheral area of the insulator substrate 101. The terminal unit 107 is connected to the line drive circuit 105 and the column drive circuit 106 via wiring 108. Gate wiring 109 in a line form and signal wiring 110 in a column form are fabricated in the pixel array unit 104. A pixel electrode 111 and a thin film transistor (TFT) 112 for driving the pixel electrode 111 are fabricated at an intersection of the gate wiring 109 and the signal wiring 110. A gate electrode of the thin film transistor 112 is connected to a corresponding gate wiring 109, a drain region to a corresponding pixel electrode 111, and a source region to a corresponding signal wiring 110. The gate wiring 109 is connected to the line drive circuit 105, and the signal wiring 110 is connected to the column drive circuit 106.

Due to technical advancement on devices, process and fabrication, the active matrix type liquid crystal display (LCD) apparatus with a size up to a twenty inch class may be realized now. And brighter and fine picture quality is being developed. Furthermore, improvements are also made on problems relating to narrow viewing angle of the liquid crystal display (LCD), which is considered as one of drawbacks in the LCD, by implementing technologies such as switching of liquid crystal molecules with an electric field along a substrate plane direction (so called in-plane switching), combining of a liquid crystal alignment direction division and a vertical alignment (so called multiple vertical alignment), or using of a phase shift correction film. The problems related to the viewing angle are such that the viewing angle of the LCD in which more than a reasonable contrast can be obtained is narrower than that of CRT, and an negative-positive inversion may be occurred locally for a gray scale image display. Furthermore, according to advancements of production technologies, it enables to cut cost of the LCD considerably and even a twenty inch class LCD television is coming into practical use. With these technologies mentioned above, a superior quality of the LCD has become comparable and superior to that of the CRT as far as a still picture image concern.

However, some drawbacks of the LCD are left to be solved. One is an image quality of moving picture. That is the LCD may not be able to generate clear outlines of moving pictures and the moving pictures displayed on the LCD screen may be smear. For example, for an extreme case, a trailing tail image of pitched ball may be appear on the LCD screen during a baseball game broadcasting. Such

an extreme case is now being resolved due to a technical advancement on liquid crystal material. Quantitatively, a total period (i.e. response time) of a rise time for horizontally oriented liquid crystal molecules to be risen with a certain electric field and a fall time for the risen liquid crystal molecule to go back to the original orientation with null electric field is reduced to as short as about 30 msec due to technical improvement. Presently, liquid crystal molecules are driven to rise or fall at the beginning of every 33.3 msec frame period for the LCD with a 30 Hz frame frequency. In other words, the response characteristic of the LCD has been improved so much as that the liquid crystal molecules can be driven to follow the frame frequency without any difficulties.

However, the problem on clarity of the moving picture outlines remains unsolved. This problem may not be improved even by further development of liquid crystal material with a shorter response time nor the orientation technology. An underlying cause of the problem is based on a fundamental principle of the active matrix type LCD, and reported in improving the Moving-Image Quality of TFT-LCDs at the International Display Research Conference (IDRC), 1997.

FIG. 9 is a schematic view illustrating the problem of moving image quality of a active matrix type LCD of the related art. Image data for each frame is shown at the left hand side of FIG. 9, and visual picture appear on a display screen (hereafter, called visual screen image) is shown at the right hand side of FIG. 9. An image data SIG1 at a frame 1 shows, for example, an alphabetical character of X. The next frame (frame 2) also shows the same character X except a slight shift toward right hand side. The bottom frame (frame 3) also shows the character X shifting toward a bottom-left direction. On the other hand, residual images (shadows) may be appeared in visual screen image, which actually recognized by human eyes, when the frame changes from the frame 1 to the frame 2 and the frame 2 to the frame 3. Because of these shadows, the problem of the active matrix type LCD of the related art on the capability of moving image generation with clear outlines is left unsolved.

FIG. 10 is a waveform diagram schematically showing a driving method of the active matrix type LCD of the related art shown in FIG. 9. In general, the LCD is driven in an AC mode. Accordingly, each frame (for example frame 1) is divided into a field 1 and a field 2, and the LCD is an interlace driven. In the frame 1, image data SIG1 is written into liquid crystal pixels for a period of the field 1 and the field 2. In the next frame (frame 2), image data SIG2 is similarly written into the liquid crystal pixels for a period of the field 1 and the field 2. The image data written into each liquid crystal pixel is kept during the frame pertain in the active matrix type driving method. When the frame is changed to the next frame, the image data is re-written instantaneously. Namely, the image data is suddenly switched between the frame 1 and the frame 2, whereby causing the residual image phenomenon. Human eyes recognize the residual image at switching of the frames in which, for example, the liquid crystal pixel write-in the white at the frame 1 is switched to the black at the frame 2.

Brightness of image shown on the CRT screen attenuates in an order of microsecond. In contrast, a fundamental principle of display method for the LCD is to keep the same display image for an entire frame. The LCD displays the same image until the switching of the frames starts. This will be added to the residual image phenomenon of human eyes described above. Accordingly, the residual image may be still recognized even after the frame has been changed

despite of ultimate advancement in the response characteristics of the liquid crystal material. That is the fundamental problem on the moving image quality of the active matrix type LCD.

To solve the problem, utilization of "OBC mode" technique is suggested by the report mentioned above to improve the moving image quality. The OBC mode technique is a technology for cutting the residual image recognized by the human eyes with assumption of the liquid crystal response time of about 5 msec. For example, in the transmission type LCD, a back light is blinked within single frame so as to display an image at the former part of the frame and tune the back light off at the latter part whereby inducing phenomenon similar to the fast attenuation of the CRT brightness. However, there are some drawback in the technique. For one thing, the contrast of the LCD is decreased since the blinking of the back light causes decrease of an average luminosity and darken the screen. Furthermore, a power consumption and production cost will increase due to the intermittent drive of the back light. Furthermore, the technique can not be applied to a reflection type LCD which is widely used in the present days. Some improvements are reported in AN ovel Wide-viewing-Angle Motion-Picture LCD Society of International Display, 1998 regarding problems on the back light power consumption and its application to the reflection type LCD. However, the report did not provide solutions of the problems on brightness and contrast of the LCD.

SUMMARY OF THE INVENTION

The present invention is carried out by taking into account the above mentioned problems relating to the conventional technology. An object of the present invention is to provide an active matrix type liquid crystal display apparatus capable of improving image quality of motion picture displayed thereon. The followings are provided to attain the object of the present invention. According to an embodiment of the present invention, there is provided a driving method of a liquid crystal display apparatus including a plurality of liquid crystal pixels disposed in an row-column matrix configuration, a line drive circuit sequentially scanning each line of the liquid crystal pixels at every frame repeating with a predetermined frequency, and a column drive circuit writing image signal into the liquid crystal pixels in sync with the sequential scanning, comprising the steps of dividing the every frame into a preceding sub-frame and a following sub-frame, performing the sequential scanning for the preceding sub-frame and performing the sequential scanning again for the following sub-frame, and writing an image signal originally assigned to a frame pertain into the liquid crystal pixels in sync with the sequential scanning for the preceding sub-frame and writing an image signal for adjusting image quality into the liquid crystal pixels in sync with the sequential scanning for the following sub-frame. The image signal for adjusting image quality is obtained by operating the image signal originally assigned to the frame pertain and an image signal assigned to a frame following the frame pertain. Alternatively, an image signal for adjusting image quality, which may be obtained by averaging the image signal originally assigned to a frame pertain and an image signal assigned to a frame following the frame pertain, is written into the liquid crystal pixels. Furthermore, the image signals may be written into liquid crystal pixels having a response characteristic of 10 msec or less.

Furthermore, according to an embodiment of the present invention, there is provided a driving method of a liquid crystal display apparatus including a plurality of liquid

configuration, a line drive circuit sequentially scanning each line of the liquid crystal pixels at every frame repeating with a predetermined frequency, and a column drive circuit writing image signal into the liquid crystal pixels in sync with the sequential scanning, comprising the steps of dividing the every frame into a preceding sub-frame and a following sub-frame, performing the sequential scanning for the preceding sub-frame and performing the sequential scanning again for said following sub-frame, and writing an image signal originally assigned to a frame pertain into the liquid crystal pixels in sync with the sequential scanning for the preceding sub-frame and writing an image signal for adjusting image quality into the liquid crystal pixels in sync with the sequential scanning for the following sub-frame. The image signal for adjusting image quality is obtained by performing an reduction operation on the image signal originally assigned to a frame pertain. Alternatively, an image signal for adjusting image quality, which may be obtained by reducing the image signal originally assigned to a frame pertain by half, may be written into the liquid crystal pixels. Furthermore, the image signals may be written into liquid crystal pixels having a response characteristic of 10 msec or less.

Furthermore, according to an embodiment of the present invention, there is provided a driving method of a liquid crystal display apparatus including a plurality of liquid crystal pixels disposed in an row-column matrix configuration, a line drive circuit sequentially scanning each line of the liquid crystal pixels at every frame repeating with a predetermined frequency, and a column drive circuit writing image signal into the liquid crystal pixels in sync with the sequential scanning, comprising the steps of dividing the every frame into a preceding sub-frame and a following sub-frame, performing the sequential scanning for the preceding sub-frame and performing the sequential scanning again for the following sub-frame, and writing an image signal originally assigned to a frame pertain into the liquid crystal pixels in sync with the sequential scanning for the preceding sub-frame and writing an image signal for adjusting image quality into the liquid crystal pixels in sync with the sequential scanning for the following sub-frame. The image signal for adjusting image quality is set to an image signal representative of a predetermined halftone level. Alternatively, the image signals may be written into liquid crystal pixels having a response characteristic of 10 msec or less.

According to an embodiment of the present invention, a frame is divided into a preceding sub-frame and a following sub-frame. In the preceding sub-frame, an image signal originally assigned to a frame pertain is written into the liquid crystal pixels. In the following sub-frame, an image signal for adjusting image quality, which is different from the image signal originally assigned to the frame pertain, is written into the liquid crystal pixels. The image signal for adjusting image quality is introduced so as to cut the residual image phenomenon occurred at an instant of switching a frame to the next frame.

According to an embodiment of the present invention, the image signal for adjusting image quality is obtained by using image data relating to a frame pertain and/or a frame next to the frame pertain. Accordingly, required brightness may be obtained since an image signal representative of black display is not used for the image signal for adjusting image quality during the following sub-frame.

Furthermore, according to an embodiment of the present invention, there is provided a driving method of a liquid crystal display apparatus including a plurality of liquid

5

crystal pixels disposed in an row-column matrix configuration, a line drive circuit scanning lines of said liquid crystal pixels at every frame, and a column drive circuit writing image data into said liquid crystal pixels in sync with said line scanning, comprising the steps of dividing said every frame into a plurality of sub-frames, performing said line scanning for every sub-frame, and writing an image data originally assigned to a frame pertain into said liquid crystal pixels in sync with said line scanning for one of said sub-frames of said frame pertain, and writing an image data for adjusting image quality into said liquid crystal pixels in sync with said line scanning for a sub-frame other than said one of said sub-frames, said image data for adjusting image quality being obtained by operating at least using said image signal originally assigned to said frame pertain.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

FIG. 1A is a schematic block diagram of a liquid crystal display apparatus in accordance with the present invention;

FIG. 1B is a schematic waveform diagram of a liquid crystal display apparatus driving method in accordance with the present invention;

FIG. 2 is a schematic diagram of a liquid crystal display apparatus driving method in accordance with a preferred embodiment of the present invention;

FIGS. 3A and 3B are a schematic illustration of a liquid crystal display apparatus driving method in accordance with a preferred embodiment of the present invention;

FIG. 4 is a schematic diagram of a liquid crystal display apparatus driving method in accordance with another preferred embodiment of the present invention;

FIG. 5 is a schematic waveform diagram of a liquid crystal display apparatus driving method in accordance with another preferred embodiment of the present invention;

FIG. 6 is a schematic diagram of a liquid crystal display apparatus driving method in accordance with still another preferred embodiment of the present invention;

FIG. 7 is a schematic waveform diagram of a liquid crystal display apparatus driving method in accordance with still another preferred embodiment of the present invention;

FIG. 8 is a perspective diagram of a liquid crystal display apparatus of the related art;

FIG. 9 is a schematic diagram of a liquid crystal display apparatus driving method of the related art; and

FIG. 10 is a schematic waveform diagram of a liquid crystal display apparatus driving method of the related art.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIGS. 1A and 1B are a schematic diagram of a liquid crystal display apparatus and a schematic waveform diagram of a liquid crystal display apparatus driving method respectively, in accordance with an embodiment of the present invention. As shown in FIG. 1A, the liquid crystal display apparatus comprises liquid crystal pixels (LC) disposed in a row-column manner (matrix configuration), a line drive circuit (V shift register 1 comprising thin film transistors (TFTs)) sequentially scanning each of the lines of the liquid crystal pixels LCs at every repeating frame with a predetermined frequency, and a column drive circuit (signal

6

driver 2 and H shift register 3 comprising TFTs) writing image signal into the liquid crystal pixel LC in sync with the sequential scanning. The image signal indicates image data to be written onto liquid crystal pixels comprising a screen of the liquid crystal display apparatus. The liquid crystal display apparatus with an active matrix type in accordance with the present embodiment comprises gate lines G (e.g. consist of molybdenum (Mo)) disposed in rows, signal lines S (e.g. consist of Aluminum (Al)) disposed in columns, and the liquid crystal pixels LC disposed at intersections of both gate and signal lines whereby arrayed in a row-column matrix manner. The liquid crystal pixel LC is driven by a thin film transistor Tr (for example, consist of polycrystalline silicon). The V shift register 1 scans each gate line G sequentially from the first line to the last line at every frame period. Accordingly, a set of the liquid crystal pixels LCs disposed in the same single line are selected at single horizontal period (1H period). The H shift register 3 sequentially samples image signal for every signal line S during an 1H period, and writes data of the image signal into the set of the liquid crystal pixels LCs disposed in the selected single line pixel by pixel. The pixel-by-pixel write-in operation is repeated from the first to the last line whereby the image signals for one frame is written into all the liquid crystal pixels LCs disposed on the screen. Concretely, each signal line S is connected to a video line via a horizontal switch HSW, and receives image signal from the signal driver 2. The H shift register 3 sequentially outputs horizontal sampling pulses H1, H2, H3 Hn, and controls ON-OFF action of the horizontal switch HSW.

Referring to FIG. 1B, the driving method of the liquid crystal display apparatus in accordance with the present embodiment will now be explained. The V shift register 1 divides a frame into a preceding sub-frame and a following sub-frame. The V shift register 1 executes the sequential scanning process on the preceding sub-frame, and then repeats the sequential scanning process on the following sub-frame. For example, as shown in FIG. 1B, a frame 1 is divided into the preceding sub-frame 1 and the following sub-frame 2. The first sequential scanning process is executed on the sub-frame 1 followed by the second sequential scanning process executed on the following sub-frame 2. Similarly, the next frame 2 is also divided into a sub-frame 1 and a sub-frame 2. And the line sequential scanning process is executed on each of the sub-frames. Every sub-frame is divided into a field 1 and a field 2, and an interlace driving process is executed in a similar way as that of a conventional driving method. In the present embodiment, the frame is divided into two sub-frames. Alternatively, the frame may be divided into three sub-frames or more, in accordance with the present invention. The H shift register 3 writes a regular image signal SIG1, which is originally assigned to the instant frame 1, into the liquid crystal pixels in sync with the line sequential scanning process for the preceding sub-frame 1, and writes an image signal SIG1.5 into the liquid crystal pixels in sync with the line sequential scanning process for the following sub-frame 2. The image signal SIG1.5 is for adjusting image quality, and obtained by operating an image signal SIG2 assigned for the frame 2 and the image signal SIG1 originally assigned for the instant frame 1. The image signal SIG1, SIG1.5, SIG2 or the like are generated by the signal driver 2, and transmitted to the liquid crystal pixels via the video line. Peripheral circuits such as the V shift register 1, the H shift register 3, the signal driver 2 may be integrally fabricated on the substrate on which the liquid crystal pixels are fabricated, or fabricated as separate IC parts and connected with the substrate on which the liquid

crystal pixels are fabricated. Alternatively, a semi-conducting substrate may be employed as the substrate in the present invention while an insulating substrate is employed as the substrate in the present embodiment. In the present embodiment, the signal driver 2 generates the image signal SIG1.5 for adjusting image quality obtained by averaging the regular image signal SIG1 originally assigned to the instant frame 1 and the image signal SIG2 assigned to the next frame 2. Then, the signal driver 2 writes the image signal SIG1.5 into the liquid crystal pixels. The driving method described above may be realized by doubling a scanning speed of the V shift register 1 and the H shift register 3 in comparison with a conventional technology. Furthermore, the present embodiment may be realized by having a frame memory to store image signal information for single screen (single frame) so as to enable the operation with image signals of a frame and the next frame to obtain the image signal for adjusting image quality.

FIG. 2 is a schematic diagram illustrating the driving method shown in FIGS. 1A and 1B. In the figure, the left hand side column of the schematic illustrations show bit map image data of SIG1–SIG3 originally assigned to the frames 1–3, respectively. To help understanding of the following description of the present embodiment, the same format of bit map data as that of the example shown in FIG. 9 is used here. The right hand side column of the schematic illustrations show visual screen images which may be actually recognized by human eyes at frames 1–3, respectively. Comparing to the related art shown in FIG. 9, it is clear that no residual image phenomenon is observed in the present embodiment. It is because that the image signals for adjusting image quality SIG1.5, SIG2.5, SIG3.5 are inserted in the following sub-frame of the each frame to cut the residual image, as shown in the middle column of schematic illustrations in FIG. 2. For example, the image data SIG1 is written in the preceding sub-frame of the frame 1, and the image data SIG2 is written in the preceding sub-frame of the frame 2. The averaged image data SIG1.5 is written in the following sub-frame of the frame 1 which is in the middle of the frame 1 and frame 2. Referring to liquid crystal pixel A disposed in the upper left corner of the screen, which data is designated as data A1 in the frame 1 and data A2 in the frame 2, data A1.5 written in the following sub-frame in the frame 1 is set to an average of the data A1 and A2. In the instant example, the data A1 and A2 are in a white level and then the data 1.5 is set to the white level. In other words, if image data of the pixel did not change from the frame 1 to the frame 2, the same image data is written in the following sub-frame of the frame 1. Accordingly, image quality of still-picture is as good as the conventional one since a part of the screen with still-picture images remains unchanged. Referring to a pixel B in the lower right of the pixel A, image data of the pixel B changes from a black level (B1) at the frame 1 to a white level (B2) at the frame 2. Accordingly, image data SIG1.5 written in the pixel B at the following sub-frame of the frame 1 is set to a gray level which is an average level of B1 and B2. In the way described above, the residual image phenomenon recognized by the human eyes are alleviated or eliminated by inserting the image data correlated to both the instant frame and the next frame. In the instant example shown in FIG. 2, the explanation is made for a normally white mode operation. Alternatively, the present invention may also be applicable to a normally black mode operation. Furthermore, the present invention may be applied to both a transmission type and a reflection type of the liquid crystal display apparatus. When the present invention is employed to the transmission type liquid crystal

display apparatus, not only the moving-picture image characteristic recognized by the human eyes is improved but also no deterioration of the brightness may be introduced since display of the white is remained the same. Furthermore, no contrast deterioration may be introduced since a part of the display where no electric potential of the image signal is changed. Such a part of the display may be, for example, a black displaying part of the moving-picture image as long as the black display is remained the same.

The liquid crystal of the present invention is required to have a response characteristic fast enough to accommodate a driving scheme of the present invention in which single frame period is divided into a plurality of the sub-frames and each of the sub-frames is scanned separately. Accordingly, the liquid crystal with the response characteristic 10 msec or less is used in the embodiment shown in FIG. 1. More specifically, as shown in FIGS. 3A and 3B, a liquid crystal display panel of an OCB mode (Optically Compensated Bifringence mode) is used. As shown in FIG. 3A, in the OCB mode, liquid crystal molecules 30 disposed in between a pair of electrodes 10, 20 facing each other have a configuration in which the liquid crystal molecules are not twisted, pre-tilt angles of the liquid crystal molecules at the electrode surfaces are $+0$ and -0 respectively, and a liquid crystal molecule 30c at the center layer of the liquid crystal layer is aligned normal to the electrode surface. This configuration is called a bent orientation, and the upper half and the lower half of the liquid crystal layer constantly have configurations symmetric to each others. The OCB mode is realized when a constant voltage is applied on the electrodes 10, 20. When there is no voltage applied on the electrodes 10, 20, the liquid crystal molecule 30c at the center of the liquid crystal layer is aligned parallel to the electrode surfaces as shown in FIG. 3B. This configuration is so called a spray orientation. In the OCB mode, a symmetric optical characteristic may be realized even for a slant view angle since the liquid crystal orientation is a symmetric with respect to the liquid crystal layer as described above. Furthermore, a display characteristic independent of a view angle may be realized by compensating with a biaxial phase plate. Furthermore, liquid crystal in the OCB mode has a fast response characteristic in comparison with that of nematic liquid crystal such as TN and STN using twisted orientations since the liquid crystal in the OCB mode uses the bent orientation which is characterized as having a short response time for an electric field perturbation.

FIG. 4 is a schematic diagram illustrating an example of driving method of a liquid crystal display apparatus in accordance with another embodiment of the present invention. To help understanding of the instant embodiment, the same schematic format is used as the previous embodiment described with FIG. 2. Namely, the left hand side column of the schematics illustrates bit map data representative of image data SIG1–SIG3 which are written in the preceding sub-frames of the frames 1–3, respectively. The right hand side column illustrates visual screen images recognizable by human eyes in the frames 1–3 in which the residual images are alleviated. The center column of the schematics shows bit map data representative of image data SIG1.5, SIG2.5 and SIG3.5 which are inserted in the following sub-frames of the frames 1–3, respectively. In the present embodiment, an image signal for the display quality adjustment is calculated by a reduction operation on an image signal assigned to a frame pertain, and written into the liquid crystal pixels. For example, referring to a pixel A at the upper left corner of the screen, image data A1 of the pixel A in the frame 1 is set to white (null potential). Accordingly, image data A1.5

written into the pixel A in the following sub-frame is also white (null potential) since the image data A1.5 is obtained by reducing the image data A1 with a predetermined reduction rate and the image data A1 is set to zero value. Referring to a pixel B disposed at lower right of the pixel A, image data B1 of the pixel B in the frame 1 is set to black corresponding to the maximum potential level. The image data B1 is reduced by the predetermined rate so as to obtain image data B1.5 to be written into the pixel B in the following sub-frame of the frame 1. For example, the image data B1.5 of gray level is obtained by reducing the black level by half. The reduction rate of 0.5–0.75 may be set for most of cases. Accordingly, image data obtained by reducing image data of a frame pertain with a predetermined reduction rate may be inserted into the following sub-frame of the frame pertain so as to alleviate the residual image phenomenon.

FIG. 5 is a schematic waveform diagram for the embodiment described with FIG. 4. A regular image signal SIG1 is written in the preceding sub-frame 1 of the frame 1 for a period of two fields. Here, the regular image signal is, for example, image signal directly in correspondence with image data inputted from outside for display on a screen. The image signal SIG1.5, which is calculated by reducing the image signal SIG1 with the predetermined rate, is written in the following sub-frame 2 for a period of two fields. Similarly, in the next frame 2, the regular image signal SIG2 is written into the pixels during the preceding sub-frame 1, and the image signal SIG2.5, which is obtained, for example, by reducing the regular image signal SIG2 by half, is written into the pixels during the following sub-frame 2.

FIG. 6 is an schematic diagram illustrating an example of driving method of a liquid crystal display apparatus in accordance with another embodiment of the present invention. To help understanding of the instant embodiment, the same schematic format is used as the previous embodiments described with FIGS. 2 and 4. In the present embodiment, the regular image data is written into the liquid crystal pixels in the preceding sub-frame of every frame while the image signal for the display quality adjustment with the same halftone level is written into all of the liquid crystal pixels in the following sub-frame of every frame. In contrast to the previous embodiments with FIGS. 2 and 4, no field memory is required in the driving method of the present embodiment since no operation of the image signal is executed. The example shown in FIG. 6 is in the normally white mode. Alternatively, the present embodiment may be applied to the normally black mode. It is more effective to write image data of black into all the pixels of the screen during the following sub-frame of every frame to eliminate the residual image phenomenon among frames. However, a time-average brightness of the screen may not be enough in some cases when the black image data is written. Accordingly, the same halftone level is written into all of the liquid crystal pixels during the following sub-frame of every frame in the present embodiment, and the black level is not used.

FIG. 7 is a schematic waveform diagram for the embodiment described with FIG. 6. The regular image signal SIG1 is written in the preceding sub-frame 1 of the frame 1 for a period of two fields. The image signal SIG1.5, which is representative of the same predetermined halftone signal voltage, is written into all the liquid crystal pixels in the following sub-frame 2. Similarly, in the next frame 2, the regular image signal SIG2 is written during the preceding sub-frame 1, and the image signal SIG2.5 for the image quality adjustment representative of the halftone is written into all the pixels during the following sub-frame 2.

Accordingly, the present invention enables to improve image quality of moving-picture of the active matrix type

liquid crystal display apparatus by dividing single frame into a plurality of sub-frames and writing another image signal into sub-frame different from the first sub-frame of a frame. The another image signal may be obtained by operating a potential value of an image signal in a frame pertain and/or a potential value of an image signal in the next frame. Alternatively, a particular halftone potential value may be used as the another image signal, and the same halftone potential value may be written into all the liquid crystal pixels of the screen. Particularly, superior display quality may be realized without deteriorating moving-picture image contrast nor averaged brightness when the another image signal to be inserted is obtained through the operation using image signals of the instant frame and the next frame.

What is claimed is:

1. A driving method of a liquid crystal display apparatus including a plurality of liquid crystal pixels disposed in an row-column matrix configuration, a line drive circuit sequentially scanning each line of said liquid crystal pixels at every frame repeating with a predetermined frequency, and a column drive circuit writing image signal into said liquid crystal pixels in sync with said sequential scanning, comprising the steps of:

dividing said every frame into a preceding sub-frame and a following sub-frame,

performing said sequential scanning for said preceding sub-frame, and performing said sequential scanning again for said following sub-frame, and

writing an image signal originally assigned to a frame pertain into said liquid crystal pixels in sync with said sequential scanning for said preceding sub-frame, and writing an image signal for adjusting image quality into said liquid crystal pixels in sync with said sequential scanning for said following sub-frame, said image signal for adjusting image quality being obtained by operating said image signal originally assigned to said frame pertain and an image signal assigned to a frame following said frame pertain.

2. A driving method of a liquid crystal display apparatus according to claim 1, wherein:

said image signal for adjusting image quality, which is obtained by averaging said image signal originally assigned to a frame pertain and an image signal assigned to a frame following said frame pertain, is written into said liquid crystal pixels.

3. A driving method of a liquid crystal display apparatus according to claim 1, wherein:

said image signals are written into said liquid crystal pixels having a response characteristic of 10 msec or less.

4. A liquid crystal display apparatus including a plurality of liquid crystal pixels disposed in an row-column matrix configuration, a line drive circuit sequentially scanning each line of said liquid crystal pixels at every frame repeating with a predetermined frequency, and a column drive circuit writing image signal into said liquid crystal pixels in sync with said sequential scanning, wherein:

said every frame is divided into a preceding sub-frame and a following sub-frame,

said line drive circuit performs said sequential scanning for said preceding sub-frame, and performs said sequential scanning again for said following sub-frame, and

said column drive circuit writes an image signal originally assigned to a frame pertain into said liquid crystal pixels in sync with said sequential scanning for said

11

preceding sub-frame, and writes an image signal for adjusting image quality into said liquid crystal pixels in sync with said sequential scanning for said following sub-frame, said image signal for adjusting image quality being obtained by operating said image signal originally assigned to said frame pertain and an image signal assigned to a frame following said frame pertain.

5
5. A liquid crystal display apparatus according to claim **4**, wherein:

said column drive circuit writes said image signal for adjusting image quality into said liquid crystal pixels,

12

said image signal for adjusting image quality being obtained by averaging said image signal originally assigned to a frame pertain and an image signal assigned to a frame following said frame pertain.

6. A liquid crystal display apparatus according to claim **4**, wherein:

said liquid crystal pixels have a response characteristic of 10 msec or less for an image signal to be written.

* * * * *

专利名称(译)	液晶显示装置和驱动方法		
公开(公告)号	US6683595	公开(公告)日	2004-01-27
申请号	US09/816213	申请日	2001-03-26
[标]申请(专利权)人(译)	索尼公司		
申请(专利权)人(译)	索尼公司		
当前申请(专利权)人(译)	索尼公司		
[标]发明人	IKEDA HIROYUKI		
发明人	IKEDA, HIROYUKI		
IPC分类号	G02F1/133 G02F1/13 G09G3/36 G09G3/20 G09F9/35 G09F9/30 H04N5/66		
CPC分类号	G09G3/3648 G09G2300/0491 G09G2320/0257 G09G2320/0261		
优先权	2000090283 2000-03-29 JP		
其他公开文献	US20010052886A1		
外部链接	Espacenet USPTO		

摘要(译)

本发明的一个目的是改善有源矩阵型液晶显示装置的运动图像质量。该装置包括以矩阵配置设置的液晶像素，在以预定频率重复的每一帧顺序扫描每行像素的行驱动电路，以及与顺序扫描同步地将图像信号写入像素的列驱动电路。帧被分成前后子帧。线驱动电路顺序扫描前后子帧。列驱动电路将最初分配给帧的图像信号写入前一个子帧的像素，然后将用于调整图像质量的图像信号写入后续子帧的像素中。通过操作分配给帧的图像信号和分配给下一帧的图像信号来获得用于调整图像质量的图像信号。

