



(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2004/0046724 A1**

**Woo et al.** (43) **Pub. Date: Mar. 11, 2004**

(54) **SIGNAL DRIVING CIRCUIT OF LIQUID CRYSTAL DISPLAY DEVICE AND DRIVING METHOD THEREOF**

(30) **Foreign Application Priority Data**

Sep. 6, 2002 (KR)..... 53763/2002

(75) Inventors: **You Tack Woo**, Daegu-si (KR);  
**Kyeong Kun Jang**, Gyeongsangbuk-do (KR)

**Publication Classification**

(51) **Int. Cl.<sup>7</sup>** ..... **G09G 3/36**

(52) **U.S. Cl.** ..... **345/87**

Correspondence Address:  
**MORGAN LEWIS & BOCKIUS LLP**  
1111 PENNSYLVANIA AVENUE NW  
WASHINGTON, DC 20004 (US)

(57) **ABSTRACT**

A signal driving circuit of a liquid crystal display device includes a column driver for converting video data input into analog signals and applying said analog signals to pixels of a liquid crystal panel, a gamma voltage circuit for applying a plurality of signal voltages to the column driver and an external voltage supplying unit for generating and adjusting signal voltages and a common voltage applied to the gamma voltage circuit and the common electrode, respectively.

(73) Assignee: **LG.Philips LCD Co., Ltd and a PTO**

(21) Appl. No.: **10/650,992**

(22) Filed: **Aug. 29, 2003**

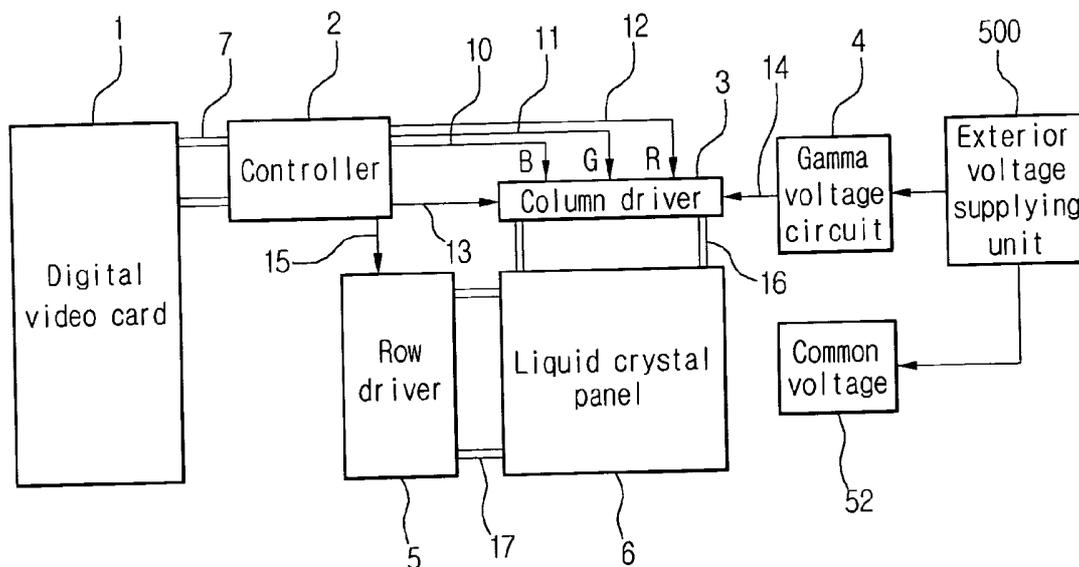


Fig.1  
Related Art

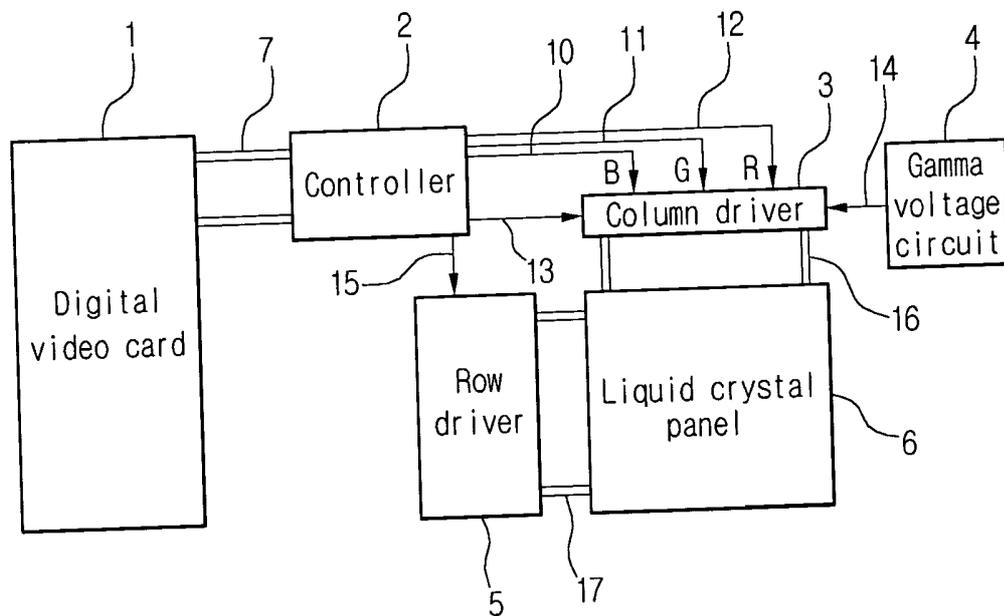


Fig.2  
Related Art

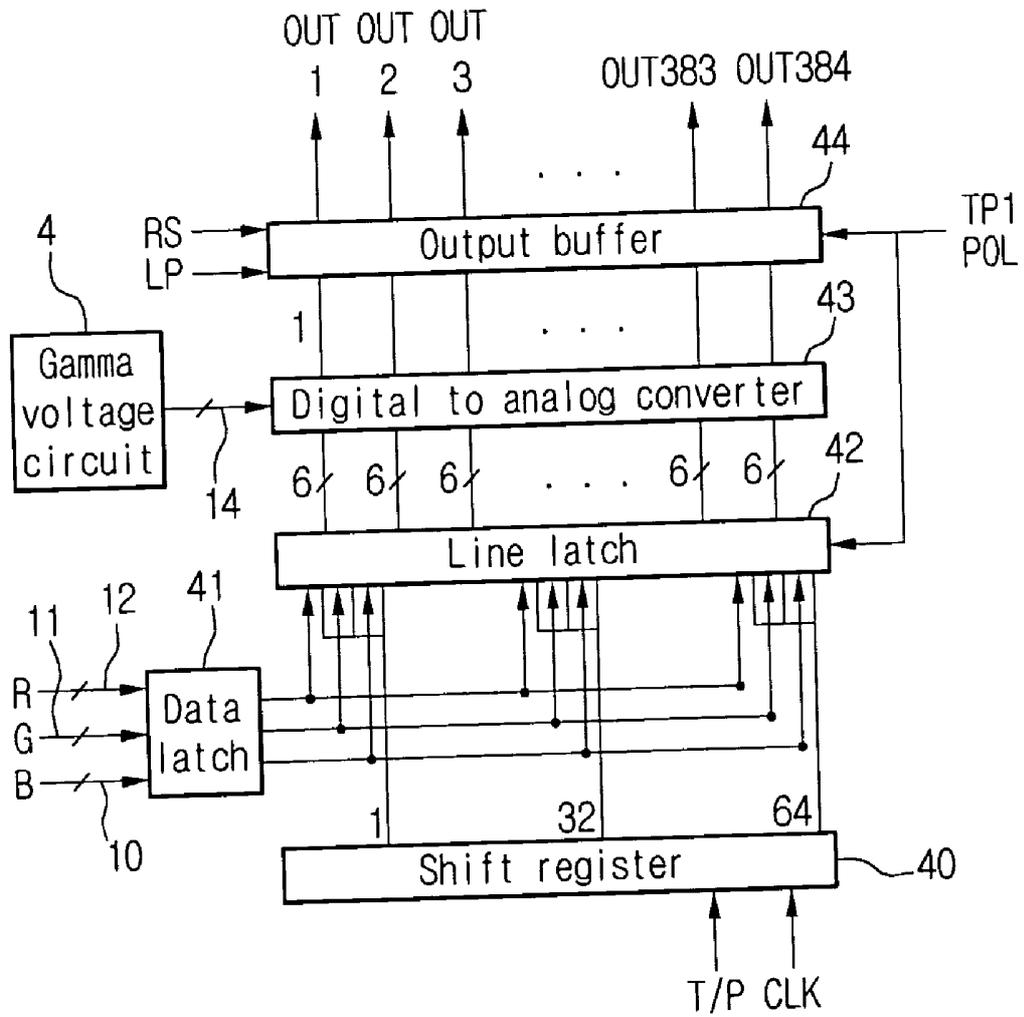




Fig.4  
Related Art

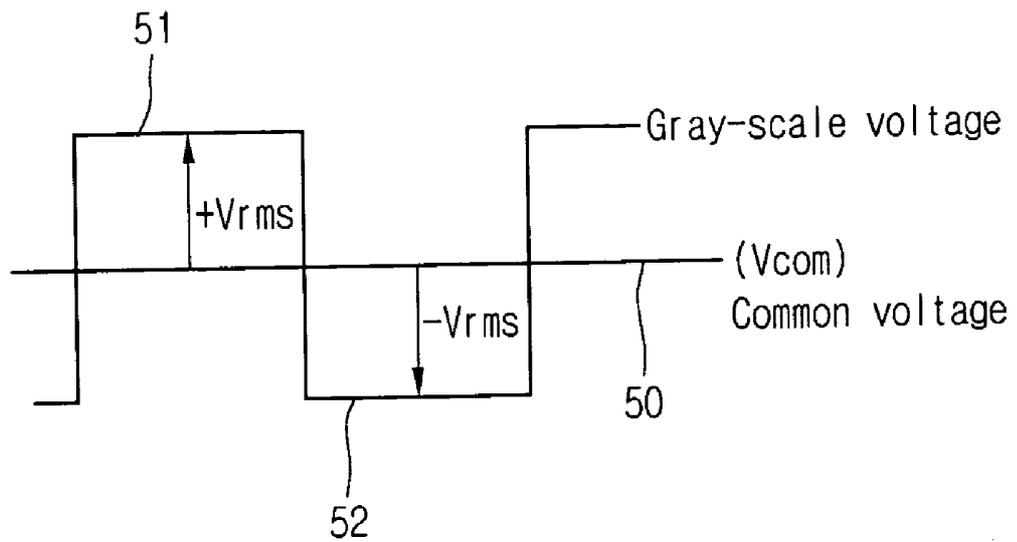




Fig.6


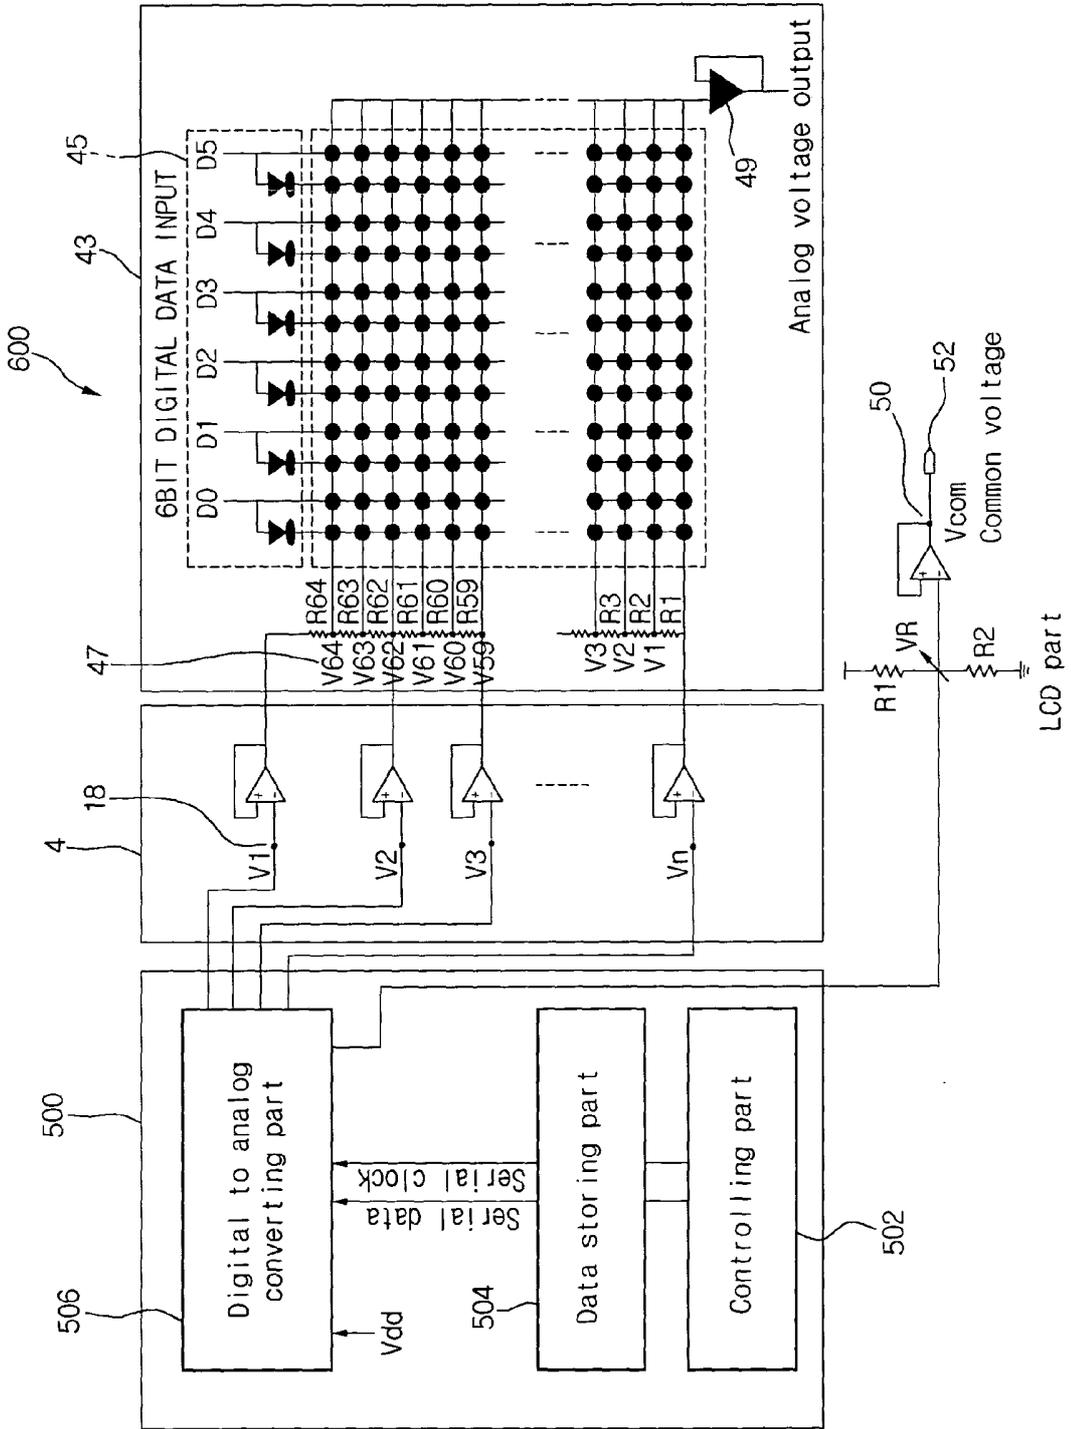


Fig.7

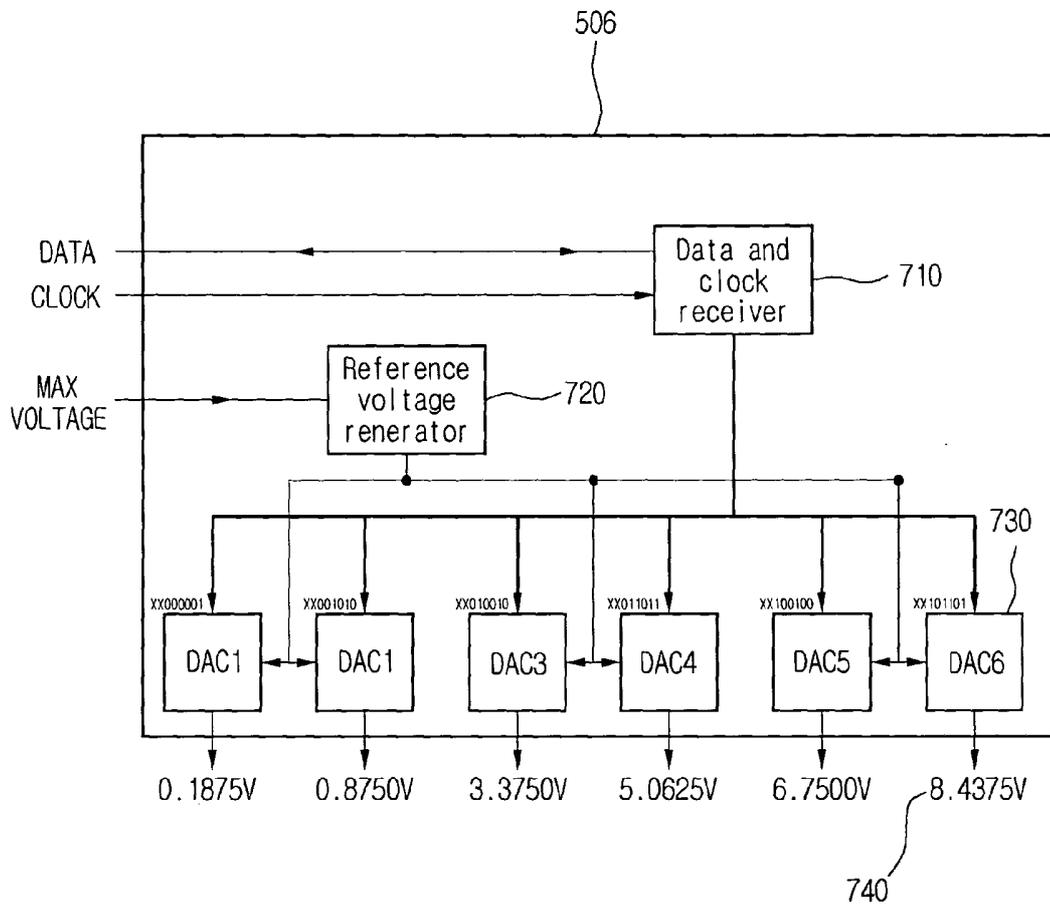

**SIGNAL DRIVING CIRCUIT OF LIQUID CRYSTAL  
DISPLAY DEVICE AND DRIVING METHOD  
THEREOF**

[0001] The present invention claims the benefit of Korean Patent Application No. 2002-53763 filed in Korea on Sep. 6, 2003, which is hereby incorporated by reference.

**BACKGROUND OF THE INVENTION**

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display device, and more particularly, to a signal driving circuit of a liquid crystal display device and a driving method thereof being arranged.

[0004] 2. Discussion of the Related Art

[0005] A liquid crystal display (LCD) device is widely used to display various images including still images and moving images. The picture quality of an LCD device has greatly improved due to the development of technology for processing fine pixels and to the use of new liquid crystal materials. An LCD device has the characteristics light weight, a slim profile and low power consumption. An LCD device has a wide range of applications that are still broadening. An LCD device is typically composed of a liquid crystal panel, which includes a pair of substrates, one of them being at least made of a transparent glass, and a liquid crystal layer interposed between the two substrates. An LCD device can be classified into two types of devices, a passive matrix-typed LCD device and an active matrix-typed LCD device depending on the structure and driving method of the LCD device.

[0006] The passive matrix-typed LCD device has the advantages of easy fabrication and simple driving method, but has the disadvantages of high power consumption with little driving capability and a large number of scan lines. The active matrix-typed LCD device has the advantages of allowing the fabrication of a high quality device since it is structured to have a thin film transistor (TFT) in every pixel within the pixel region such that each pixel can be independently driven. By using a thin film transistor in each pixel, an active matrix-typed LCD device effectively displays moving images.

[0007] FIG. 1 is a block diagram of a related art active matrix-typed LCD device. As shown in FIG. 1, the related art active matrix-typed LCD device includes a column driver 3 for supplying the image data, which is input from an external video card 1, to a liquid crystal panel 6. The active matrix-typed LCD device also includes a gamma voltage circuit 4 for supplying signal voltages to the column driver 3, a row driver 5 for supplying scanning signals for controlling the switching operation of the thin film transistors in the liquid crystal panel 6, and a controller 2 for controlling the column driver 3 and the row driver 5. Normally, the liquid crystal panel 6 is of an XGA level (1024×768 pixels) of resolution that includes 1024×3 (RGB) of source lines. Therefore, in an LCD device having a XGA level of resolution, eight column drivers 3 (384×8=3072) are employed, each having an output terminal of 384 channels and four row drivers 5, each having an output terminal of 200 channels.

[0008] The analog video data supplied from the digital video card 1, installed in the body of a computer, is supplied

to the column driver 3 through the operation of the controller 2. In the alternative, the analog image signal input from a computer is converted into digital video data through an interface module installed in a liquid crystal monitor, and then, is input into an LCD device. The row driver 5 applies one scanning pulse every frame to each scanning line, and the timing of the pulse is normally sequentially applied from the top of the liquid crystal panel 6 to the bottom of the liquid crystal panel 6. The column driver 3 applies liquid crystal driving voltages corresponding to the pixels in one line, while a scanning pulse is applied to the pixels. In other words, the column driver 3 is for applying signal voltages to each signal line.

[0009] The thin film transistor connected to the scanning line in the selected pixel is turned "on" when a scanning pulse is applied to the gate electrode of the thin film transistor. Then, the liquid crystal driving voltage passes from the signal line through the drain and the source of the thin film transistor, and is applied to the pixel electrode so as to charge a pixel capacitor. By repeating this operation for each pixel, the image data voltages corresponding to the image signal for each of the pixels for the entire panel are applied in a frame. Further, if the image data voltages are applied to the pixels in only one direction when driving the pixel array, it is necessary to periodically invert the image data voltages applied to the panel to prevent the overheating of the liquid crystal in the pixels due to one-directionally flow of voltage across a substantial portion of the liquid crystal layer for an extended length of time.

[0010] The period for changing the direction of the signal voltage, that is, a normal direction to an inverse direction or vice versa, is one field. There are several kinds of methods, such as a field inversion method of changing the voltage polarity of all the pixels in the panel in a field, a line inversion method of alternately changing the voltage polarity of the pixels in a line connected to a scanning line, and a dot inversion method of alternately changing the voltage polarity of each pixel. In all of these cases, the voltage direction should be alternately inverted such that the direction of the pixel voltage (the voltage applied to the pixel electrode from the drain of the thin film transistor) is a normal (+) direction or an inverse (-) direction with respect to the common voltage (Vcom).

[0011] FIG. 2 is a detailed block diagram of the column driver depicted in FIG. 1. As shown in FIG. 2, a data latch 41 latches video data 10, 11, 12 input into a pixel. In the case of the LCD device receiving odd number and even number video data, the data latch 41 latches the input video data in the unit of two pixels. A shift register 40 sequentially generates latch enable signals for storing the video data into the line latch in synchronization with external clock signals. The line latch 42 sequentially stores the input video data in synchronization with the latch enable signal. The line latch 42 includes first and second registers (not shown), each having one line size (the number of the source lines connected to one column driver is 384×6 bits in this example). If the video data of one line is stored in the first register, the line latch 42 moves the video data of one line stored in the first register to the second register at the same time. Then, the line latch 42 sequentially stores the video data of another line into the first register.

[0012] A digital to analog converter 43 of FIG. 2 receives a plurality of signal voltages from a gamma voltage circuit

4. Then, the digital to analog converter **43** selects at least one or two signal voltages of the plurality of signal voltages input corresponding to each video data from the second register of the line latch. Then, the digital to analog converter **43** divides the selected signal voltage corresponding to the video data, and outputs through each source line of an output buffer **44** as analog image signals. Although not depicted in **FIG. 2**, a constant common voltage is input into a common electrode in addition to the pixel voltages input to the pixel electrodes through the source lines. The voltage difference between the pixel voltage and the common voltage across the liquid crystal layer determines a gray level of the displayed image of the pixel.

[0013] **FIG. 3** is a representation of the structure of a digital to analog converter inside the conventional gamma voltage circuit and the column driver. The gamma voltage circuit and the digital to analog converter of **FIG. 3** are the same as those in **FIG. 2**, and like numerals will be used to refer to like elements. As shown in **FIG. 3**, the digital to analog converter **43** includes a resistance network for distributing the signal voltages **18**, which are selected to correspond to the video data **45**, into interior gray-scale voltages. The signal voltages **18** can be adjusted from the outside. The gray-scale voltages **47** between each tap point are automatically determined by the resistance network inside the digital to analog converter.

[0014] The digital video data **45** input into the column driver (not shown) is input into the digital to analog converter **43** through the data latch and the line latch. A plurality of signal voltages **18** output from the gamma voltage circuit **4** are input into the digital to analog converter **43**. The plurality of signal voltages **18** are distributed into a plurality of gray-scale voltages **47** by the resistance network inside the digital to analog converter **43**. Each value of the digital video data **45** input as above and the signal voltages **18** supplied by the gamma voltage circuit **4** are distributed into the gray-scale voltages **47** by the resistance network. The distributed gray-scale voltages **47** are output through each signal line, that is, source line as analog image signal through an output buffer **49** corresponding to the video data **45**.

[0015] The signal voltages **18** output from the gamma voltage circuit **4** are input as positive (+) voltage and negative (-) voltage with respect to the common voltage (Vcom) **50**, and are again distributed into a plurality of gray-scale voltages **47** by the resistance network inside the digital to analog converter **43**. The gray-scale voltages **47** can be realized differently according to the signal voltages **18** distributed by the external fixed resistance, but are fixed in hardware so that a user cannot change.

[0016] The column driver selects one gray-scale voltage **47** of the plurality of gray-scale voltages **47** distributed from the fixed signal voltages **18** supplied by the gamma voltage circuit **4**, and corresponding to the input digital video data **45**, and then, applies the selected gray-scale voltage to each signal line connected to pixels for liquid crystal cells. The common voltage **50** supplied to the common electrode is individually fixed and applied independently from the gamma voltage circuit **4**. However, there is a need to adjust the gray-scale voltage **47** externally of the signal driving circuit such that a user can vary the gradation or the brightness of an LCD device, and nowadays, this need is commercially realized in LCD devices.

[0017] **FIG. 4** is a graphical representation of the output of gray-scale voltages with respect to a common voltage. As shown in **FIG. 4**, one gray-scale voltage is arbitrarily selected, and its level of the voltage is illustrated. When a pixel is selected by the row driver, the specific pixel is charged with the one of the gray-scale voltages. When the pixel is selected at the initial time of one horizontal period, the gray-scale voltage is a positive (+) voltage **51** above a common voltage. A negative (-) gray-scale voltage **52** is applied to the selected pixel during the next horizontal period such that its absolute value corresponds to the absolute value of the positive (+) voltage applied to the selected pixel during the previous horizontal period. Therefore, the voltage, which is applied to each pixel, is changed into the gray-scale voltage and alternately changed between the levels of a normal (+) voltage and an inverse (-) voltage. Thus, an alternating current is applied to each pixel. Further, the common voltage (Vcom) **50** can be a direct voltage or an alternating voltage, and the level of each gray-scale voltage is determined with respect to the common voltage **50**.

[0018] When the absolute values of the normal (+) gray-scale voltage **51** and the inverse (-) gray-scale voltage **52** are different, that is, each level of the gray-scale voltages is not equal to each other with respect to the center of the common voltage **50**, the LCD device can be damaged or heated. Further, the characteristics of the pixels can be changed so as to cause a flickering phenomenon or image sticking phenomenon to occur. Therefore, the gray-scale voltages should be maintained symmetric with respect to the center of the common voltage, which is difficult in actual applications. For example, a user needs to adjust the gray-scale by an external control of the common voltage in order to vary the gray-scale or the brightness of an LCD device. However, changing the common voltage causes the absolute values of the normal (+) gray-scale voltage **51** and the inverse (-) gray-scale voltage **52** to be different such that the gray-scale voltages are not symmetrical with respect to the center of the common voltage **50**, which causes the problems of image flickering or image sticking.

#### SUMMARY OF THE INVENTION

[0019] Accordingly, the present invention is directed to a signal driving circuit of a liquid crystal display device, and a driving method thereof that substantially obviate one or more problems due to limitations and disadvantages of the related art.

[0020] An object of the present invention is to provide a signal driving circuit of a liquid crystal display device, and a driving method thereof, in which gray-scale voltages are adjusted by an external system in varying the gray-scale and the brightness of an LCD device.

[0021] Another object is to symmetrically maintain the levels of positive (+) and negative (-) gray-scale voltages with respect to the common voltage such that the image quality of the LCD device is improved.

[0022] Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be

realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0023] To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, a signal driving circuit of a liquid crystal display device includes a column driver for converting video data input into analog signals and applying said analog signals to pixels of a liquid crystal panel, a gamma voltage circuit for applying a plurality of signal voltages to the column driver and an external voltage supplying unit for generating and adjusting signal voltages and a common voltage applied to the gamma voltage circuit and the common electrode, respectively.

[0024] In another aspect, a signal driving circuit of a liquid crystal display device includes an external system for adjusting gray-scale voltages of the liquid crystal display device, wherein a common voltage is adjusted by the external system such that the absolute values of a normal (+) gray-scale voltage and an inverse (-) gray-scale voltage are the same with respect to the center voltage of the common voltage and to compensate for the absolute values of the gray-scale voltages levels that are different due to a variation of the gray-scale voltages.

[0025] In another aspect, a method of driving signals of a liquid crystal display device in which gray-scale voltages of the liquid crystal display device are adjusted by an external system, the method includes the steps of selecting digital data such that the absolute values of a normal (+) gray-scale voltage and an inverse (-) gray-scale voltage are the same with respect to the center voltage of a common voltage to compensate for changes in absolute values of the gray-scale voltages levels due to variations in the gray-scale voltages and converting the selected digital data into an analog voltage that is input into a common electrode.

[0026] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory, and are intended to provide further explanation of the invention as claimed.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0027] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention.

[0028] FIG. 1 is a block diagram of a related art active matrix-typed LCD device.

[0029] FIG. 2 is a detailed block diagram of a column driver depicted in FIG. 1.

[0030] FIG. 3 is a representation of the structure of a digital to analog converter inside a conventional gamma voltage circuit and the column driver.

[0031] FIG. 4 is a graphical representation of the output of gray-scale voltages with respect to a common voltage.

[0032] FIG. 5 is a block diagram of an active matrix-typed LCD device of an embodiment of the present invention.

[0033] FIG. 6 is a representation of the structure of a signal driving circuit of the active matrix-typed LCD device in accordance with an embodiment of the present invention.

[0034] FIG. 7 is a block diagram of a digital to analog converting part of an external voltage supplying unit of an embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

[0035] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0036] FIG. 5 is a block diagram of an active matrix-typed LCD device of an embodiment of the present invention. Like numerals will be used to refer to like elements in the related art active matrix-typed LCD device. As shown in FIG. 5, the structure of the active matrix-type LCD device of an embodiment of the present invention includes an external voltage supplying unit 500 for supplying signal voltages input to a gamma voltage circuit 4. The external voltage supplying unit 500 supplies a plurality of signal voltages to the gamma voltage circuit 4, and also supplies a common voltage to a common electrode 52. Further, the external voltage supplying unit 500 provides a function to adjust the signal voltages and the common voltage therein prior to supplying the voltages to respective units so as to vary the gray-scale and the brightness of the LCD device. As a result, the external voltage supplying unit 500 provides the advantages of minimizing the occurrence of the flickering and the image sticking.

[0037] FIG. 6 is a representation of the structure of a signal driving circuit of the active matrix-typed LCD device in accordance with an embodiment of the present invention. FIG. 6 illustrates a gamma voltage circuit 4 and digital to analog converter 43 having like numbers to like elements that were described with regard to FIG. 3. A signal driving circuit 600 of the LCD device includes a column driver (not shown) for converting a video data 45 input from the outside into analog signals and supplying to pixel electrodes of a liquid crystal panel. The gamma voltage circuit 4 of the driving circuit 600 supplies a plurality of signal voltages 18 to the column driver, which convert the video data 45 into analog signals. The external voltage supplying unit 500 generates signal voltages 18 and a common voltage 50. More particularly, the external voltage supplying unit 500 adjusts the signal voltages 18 and a common voltage 50 before being applied to the gamma voltage circuit 4 and the common electrode 52 respectively.

[0038] In FIG. 6, only inside the column driver is illustrated. The structure and operation of the column driver for embodiments of the present invention is the same as discussed with regard to the related art column driver in FIG. 2. Further, the video data 45 input into the column driver is composed of n bits, and the video data 45 input into the digital to analog converter 43 inside the column driver is also composed of n bits. For the convenience of description herein, FIG. 6 illustrates an example of only six (6) bits.

[0039] The signal voltages 18 input into the column driver through the gamma voltage circuit 4 are distributed into a

plurality of gray-scale voltages **47** by a resistance network inside the column driver. The video data **45** input into the column driver selects one of the distributed gray-scale voltages **47**, and outputs the selected gray-scale voltage **47** to a source line to supply a pixel within the liquid crystal cell. The distributed number of gray-scale voltages **47** is determined according to the number of bits in the input video data **45**. As shown in **FIG. 6**, if 6-bit video data **45** is input, the gray-scale voltages **47** are distributed into sixty four (64) levels. In another example if 8-bit video data **45** is input, the gray-scale voltages **47** are distributed into two hundred fifty six (256) levels.

**[0040]** In the related art signal driving circuit, the number and levels of gray-scale voltages are generated from the signal voltages input from the outside, which are determined according to a resistance network inside the column driver. Since the resistance network inside the column driver has a fixed value, the values of the gray-scale voltages are also fixed and cannot be changed arbitrarily by a user. Therefore, according to this embodiment of the present invention, the signal driving circuit further includes an external voltage supplying unit **500** to vary the gray-scale and the brightness of the LCD device so that the signal voltages **18** can be adjusted via an external control and the gray-scale voltages **47** can be varied. Also, the common voltage (Vcom) **52** can be adjusted in order to prevent flickering and image sticking due to the variance of the gray-scale voltages **47**.

**[0041]** The external voltage supplying unit **500** includes a data storing part **504** for storing a plurality of signal voltage data, a controlling part **502** for selecting and outputting a signal voltage data stored in the data storing part **504**, and a digital to analog converting part **506** for converting the signal voltage data output from the data storing part **504** into analog voltages that are output to the gamma voltage circuit **4** or the common electrode **52**. The data storing part **504** stores a plurality of signal voltage data, which can be the experimentally-determined digital data by applying compatible apparatus, and many different and discrete data can be stored therein. The data storing part **504**, having a plurality of signal voltage data stored therein, is controlled by the controlling part **502**, and the controlling part **502** is an element for performing a command as selected by a user. Thus, if a user wishes to change the characteristics of the signal voltages **18** (that is, to vary the gray-scale voltages **47**), the controlling part **502** commands to display the signal voltage data stored in the data storing part **504** on a screen, to select and to send some signal voltage data among the above data to the digital to analog converting part **506**. Through the above process, a user can control the gray-scale voltages **47** and the common voltage **52** by a simple operation using input controls to the system.

**[0042]** The data storing part **504** sends the data to the digital to analog converting part **506** as serial data, and the digital to analog converting part **506** converts the data into n analog voltages, that is, n signal voltages **18**, and outputs them to the gamma voltage circuit through a buffer. In addition, the digital to analog converting part **506** can convert the data into an analog voltage and output to the common electrode through the buffer. The converted analog voltage output to the common electrode **52** is a common voltage **50**. The converted analog voltages output to the gamma voltage circuit **4** are a conversion from some selected signal voltage data into a plurality of analog voltages.

**[0043]** The signal voltages **18** are input into the gamma voltage circuit **4** through the digital to analog converting part

**506** to vary the gray-scale or the brightness of the LCD device as described above, and the analog voltages input into the common electrode **52** through the digital to analog converting part **506** prevent the flickering or image sticking generated by the variation of the gray-scale voltages **47**. The signal voltage data, which is selected to vary the common voltage **52**, needs to be selected such that the absolute value of the positive (+) and negative (-) gray-scale voltages **47** is the same in order to compensate the variation of the gray-scale voltages **47** and/or the difference of the absolute value of the positive (+) and negative (-) gray-scale voltages **47**. Further, the selection of some digital data, that is, signal voltage data is made every time when the absolute values of positive (+) and negative (-) gray-scale voltages with respect to the common voltage are not the same after the adjustment of the gray-scale voltage, and accordingly, the common voltage is also adjusted.

**[0044]** **FIG. 7** is a block diagram of a digital to analog converting part of an external voltage supplying unit of an embodiment of the present invention. As shown in **FIG. 7**, the digital to analog converting part **506** includes a data and clock receiver **710**, a reference voltage generator **720**, and a digital to analog converter (DAC) **730**. The digital to analog converter (DAC) **730** in **FIG. 7** has six (6) channels, but it is just one exemplary embodiment. The number of the channels is not limited to six.

**[0045]** The operation of the digital to analog converting part **506** will now be described in reference to **FIG. 7**. If the data from the data storing part (not shown) is supplied to the digital to analog converting part **506**, the data is received by the data and the clock receiver **710**. Then, the digital to analog converter **730** having subaddress outputs a plurality of DC voltages **740** corresponding to subaddress data from the transmitted data by using the voltage of the reference voltage generator **720**. As described above, the selected digital data is converted and output as the plurality of the analog DC voltages **740**, and input into the gamma voltage circuit so that adjusted gray-scale voltages, which are different from the previous gray-scale voltages, can be supplied.

**[0046]** To adjust the common voltage, the digital to analog converting part **506** can also be used as it is, but only one digital to analog converter **730** is used in this case. The signal voltage data, being selected to adjust the common voltage, needs to be selected such that the absolute values of the positive (+) and negative (-) gray-scale voltages are the same to avoid that the absolute values of the gray-scale voltages are different due to the variation of the gray-scale voltages **47**. Thus, the data is converted into analog voltages through one digital to analog converter inside the digital to analog converting part **506**, and applied into the common electrode as common voltage. Therefore, the absolute values of the adjusted positive (+) and negative (-) gray-scale voltages become equal with respect to the converted analog voltage so that the flickering and image sticking phenomenon are removed. Further, the analog voltage generated by the digital to analog converter is not limited to DC voltage, and it could be alternately-changed one between two values of positive (+) and negative (-) voltages according to the characteristics of an LCD device being used.

**[0047]** As described above, in the signal driving circuit in embodiments of the present invention, the common voltage can be adjusted by an external system to compensate for the changes in the absolute values of the positive (+) and negative (-) gray-scale voltages with respect to the common

voltage due to the variance of the gray-scale voltages, and the external system corresponds to the external voltage supplying unit as described above. As described above, according to the signal driving circuit of the LCD device and the driving method thereof of the present invention, the gray-scale voltages are adjusted by an external system in varying the gray-scale and the brightness of an LCD device, and the common voltage can be also adjusted by the external system so as to minimize the occurrence of the flickering phenomenon and the image sticking phenomenon of the images in the LCD device. Further, a user can externally adjust the gray-scale voltages and the common voltage precisely by a simple operation.

[0048] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A signal driving circuit of a liquid crystal display device comprising:

a column driver for converting video data input into analog signals and applying said analog signals to pixels of a liquid crystal panel;

a gamma voltage circuit for applying a plurality of signal voltages to the column driver; and

an external voltage supplying unit for generating and adjusting signal voltages and a common voltage applied to the gamma voltage circuit and the common electrode, respectively.

2. The signal driving circuit of a liquid crystal display device of claim 1, wherein the signal voltages, which are input to the column driver through the gamma voltage circuit, are distributed into a plurality of gray-scale voltages by a resistance network inside the column driver, and the gray-scale voltages are varied according to the adjustment of the signal voltages.

3. The signal driving circuit of a liquid crystal display device of claim 1, wherein the external voltage supplying unit comprises:

a data storing part for storing a plurality of signal voltage data;

a controlling part for selecting and outputting a signal voltage data stored in the data storing part; and

a digital to analog converting part for converting the signal voltage data output from the data storing part into analog voltages, and outputting the converted analog voltages to the gamma voltage circuit or the common electrode.

4. The signal driving circuit of a liquid crystal display device of claim 3, wherein the plurality of signal voltage data are a plurality of digital data experimentally determined to be adaptable for various compatible apparatus.

5. The signal driving circuit of a liquid crystal display device of claim 3, wherein the converted analog voltage output into the common electrode is a common voltage.

6. The signal driving circuit of a liquid crystal display device of claim 3, wherein the converted analog voltages

output into the gamma voltage circuit are a plurality of analog voltages converted from the selected signal voltage data.

7. The signal driving circuit of a liquid crystal display device of claim 2, wherein the common voltage is adjusted such that the absolute values of a normal (+) gray-scale voltage and an inverse (-) gray-scale voltage are the same with respect to the center voltage of the common voltage.

8. A signal driving circuit of a liquid crystal display device comprising an external system for adjusting gray-scale voltages of the liquid crystal display device, wherein a common voltage is adjusted by the external system such that the absolute values of a normal (+) gray-scale voltage and an inverse (-) gray-scale voltage are the same with respect to the center voltage of the common voltage and to compensate for the absolute values of the gray-scale voltages levels that are different due to a variation of the gray-scale voltages.

9. The signal driving circuit of a liquid crystal display device of claim 8, wherein the external system comprises:

a data storing part for storing a plurality of signal voltage data;

a controlling part for selecting a signal voltage data stored in the data storing part and to output a signal voltage data output; and

a digital to analog converting part for converting the signal voltage data output into analog voltages, and outputting the converted analog voltages to a gamma voltage circuit or a common electrode.

10. A method of driving signals of a liquid crystal display device in which gray-scale voltages of the liquid crystal display device are adjusted by an external system, the method comprising the steps of:

selecting digital data such that the absolute values of a normal (+) gray-scale voltage and an inverse (-) gray-scale voltage are the same with respect to the center voltage of a common voltage to compensate for changes in absolute values of the gray-scale voltages levels due to variations in the gray-scale voltages; and

converting the selected digital data into an analog voltage that is input into a common electrode.

11. The driving method of claim 10, wherein the step of selecting digital data is performed every time the absolute values of the normal (+) gray-scale voltage and the inverse (-) gray-scale voltage are different with respect to the common voltage by adjusting the gray-scale voltages.

12. The driving method of claim 10, wherein the digital data is one of a plurality of digital data which are experimentally determined to be adaptable for various compatible apparatus, and stored into the external system.

13. The driving method of claim 10, wherein the voltage, which is converted into analog voltage from the selected digital data and input to the common electrode, is the common voltage.

14. The driving method of claim 10, wherein the conversion of the selected digital data into analog voltage, and the input to the common electrode are performed by the external system for adjusting the gray-scale voltages.

\* \* \* \* \*

专利名称(译)	液晶显示装置的信号驱动电路及其驱动方法		
公开(公告)号	<a href="#">US20040046724A1</a>	公开(公告)日	2004-03-11
申请号	US10/650992	申请日	2003-08-29
[标]申请(专利权)人(译)	LG飞利浦LCD和PTO		
申请(专利权)人(译)	乐金飞利浦科技股份有限、LTD和PTO		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	WOO YOU TACK JANG KYEONG KUN		
发明人	WOO, YOU TACK JANG, KYEONG KUN		
IPC分类号	G02F1/133 G09G3/36		
CPC分类号	G09G3/3614 G09G3/3688 G09G2310/027 G09G2320/0247 G09G3/3685 G09G2320/0606 G09G2320/0626 G09G2320/0673 G09G2320/0276		
优先权	1020020053763 2002-09-06 KR		
其他公开文献	US8581820		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

液晶显示装置的信号驱动电路包括：列驱动器，用于将输入的视频数据转换为模拟信号并将所述模拟信号施加到液晶面板的像素；伽马电压电路，用于将多个信号电压施加到列驱动器外部电压提供单元，用于分别产生和调节施加到伽马电压电路和公共电极的信号电压和公共电压。

