



US007911433B2

(12) **United States Patent**
Keeney et al.

(10) **Patent No.:** **US 7,911,433 B2**
(45) **Date of Patent:** **Mar. 22, 2011**

(54) **METHODS AND APPARATUS FOR
REPAIRING INOPERATIVE PIXELS IN A
DISPLAY**

(75) Inventors: **Richard A. Keeney**, Prior Lake, MN
(US); **Farhad Nourbakhsh**, Apple
Valley, MN (US); **Anthony Clark**,
Eagan, MN (US)

(73) Assignee: **Electronics for Imaging, Inc.**, Foster
City, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 830 days.

(21) Appl. No.: **11/842,691**

(22) Filed: **Aug. 21, 2007**

(65) **Prior Publication Data**

US 2007/0279424 A1 Dec. 6, 2007

Related U.S. Application Data

(63) Continuation of application No. 09/748,623, filed on
Dec. 22, 2000, now Pat. No. 7,280,090.

(51) **Int. Cl.**
G09G 3/36 (2006.01)
G01R 31/02 (2006.01)

(52) **U.S. Cl.** **345/93; 345/98; 324/770**

(58) **Field of Classification Search** 345/90,
345/93, 98-100, 206, 531; 324/770, 537,
324/527, 765; 438/690, 4, 98, 598, 707,
438/720; 257/59, 292; 349/73, 74
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,676,761 A 6/1987 Poujois
4,825,201 A 4/1989 Watanabe

4,890,097 A * 12/1989 Yamashita et al. 345/93
5,043,655 A 8/1991 Anholm et al.
5,173,792 A 12/1992 Matsueda
5,175,504 A 12/1992 Henley
5,235,272 A 8/1993 Henley
5,260,818 A 11/1993 Wu
5,274,224 A 12/1993 Poujois
5,434,686 A 7/1995 Kanemori et al.
5,459,410 A 10/1995 Henley
5,546,207 A 8/1996 Kim
5,648,826 A 7/1997 Song et al.
5,659,374 A 8/1997 Gale et al.
5,691,786 A 11/1997 Nakai

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0375233 6/1990

OTHER PUBLICATIONS

Patent Abstract of Japan, Abstract of Japanese Patent Publication No.
06308532, Nov. 4, 1994, 1995:2, Mar. 31, 1995.

(Continued)

Primary Examiner — Amr Awad


Assistant Examiner — Liliana Cerullo

(74) *Attorney, Agent, or Firm* — Michael A. Glenn; Glenn
Patent Group

(57) **ABSTRACT**

Methods and apparatus for repairing inoperative pixels in a display are provided. In particular, the present invention provides methods and apparatus for improving the effective yield rates of displays, such as liquid crystal micro-displays, by disconnecting inoperative pixels from their defective drive circuitry and tying such pixels to the working drive circuit of a nearby pixel. A display can be repaired without the need to provide redundant drive circuitry underneath each pixel.

9 Claims, 6 Drawing Sheets

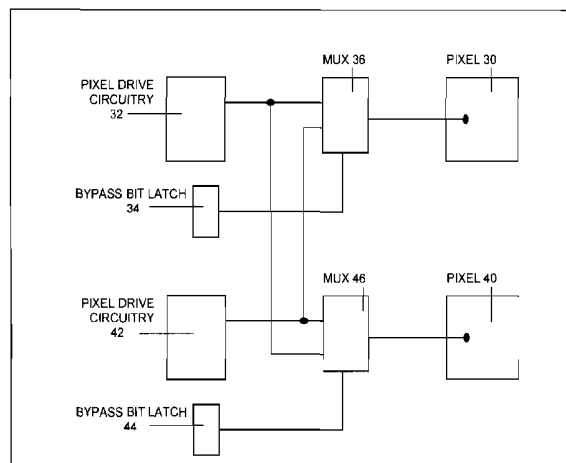

US 7,911,433 B2

Page 2

U.S. PATENT DOCUMENTS

5,744,821 A 4/1998 Song
5,926,156 A 7/1999 Katoh et al.
5,945,984 A 8/1999 Kuwashiro
5,969,779 A 10/1999 Kim
5,976,978 A 11/1999 Salisbury
6,005,649 A 12/1999 Krusius et al.
6,100,948 A 8/2000 Kim et al.
6,147,667 A 11/2000 Yamazaki
6,205,239 B1 3/2001 Lin et al.
6,256,076 B1 7/2001 Bae et al.
6,259,424 B1 7/2001 Kurogane
6,313,889 B1 11/2001 Song et al.

6,339,417 B1 * 1/2002 Quanrud 345/98
6,392,427 B1 5/2002 Yang
6,518,945 B1 2/2003 Pinkham
6,618,115 B1 9/2003 Hiroki
6,816,143 B1 11/2004 Lambert

OTHER PUBLICATIONS

Patent Abstracts of Japan, Abstract of Japanese Patent Publication
No. 09005786, Jan. 10, 1997, 1997:5, May 30, 1997.

Patent Abstracts of Japan, Abstract of Japanese Patent Publication
No. 09054340, Feb. 25, 1997, 1997:6, Jun. 30, 1997.

* cited by examiner

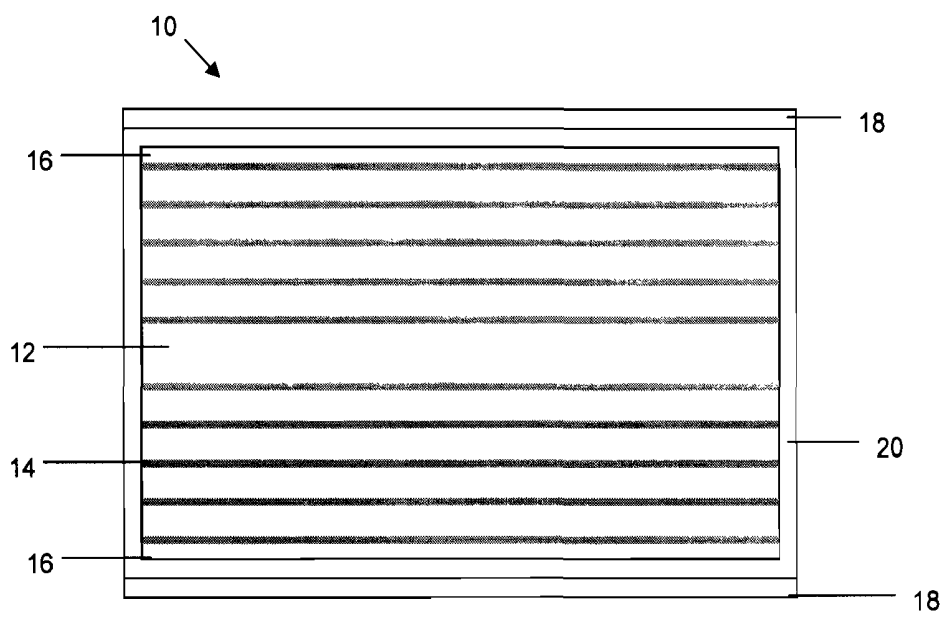


FIG. 1

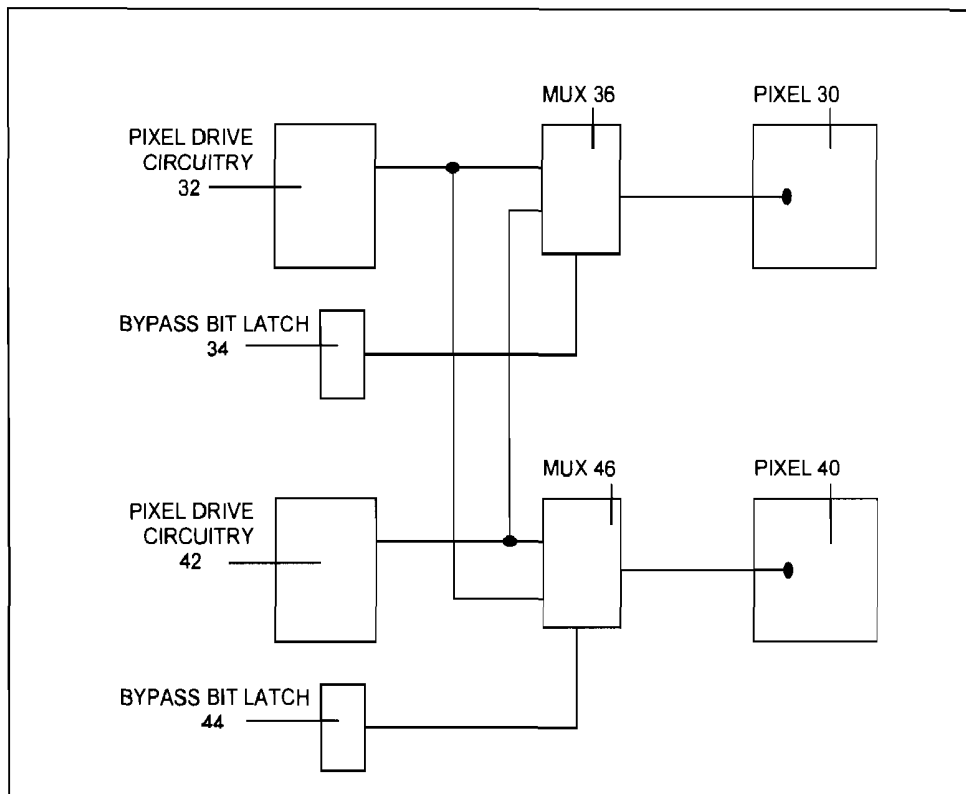


FIG. 2

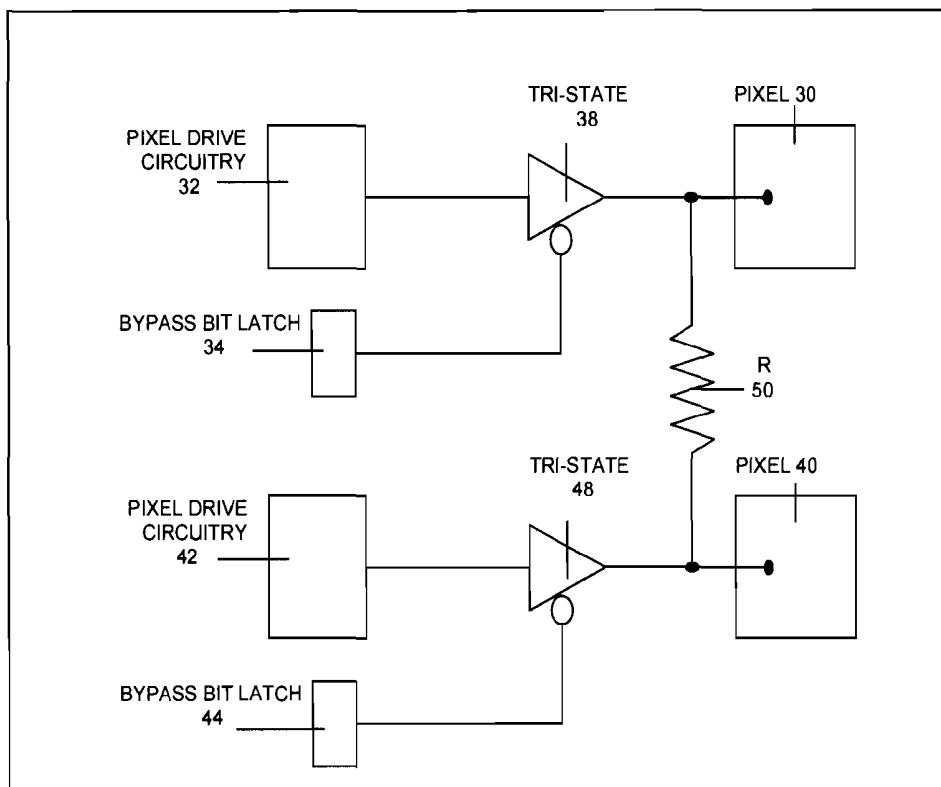


FIG. 3

VIA CUT BY LASER TO DISCONNECT PIXEL FROM DEFECTIVE DRIVE CIRCUIT

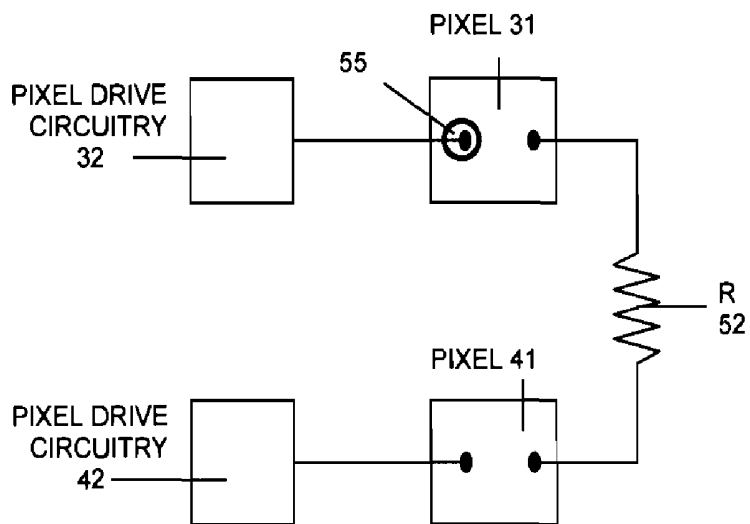


FIG. 4

VIA CUT BY LASER TO DISCONNECT PIXEL FROM DEFECTIVE DRIVE CIRCUIT



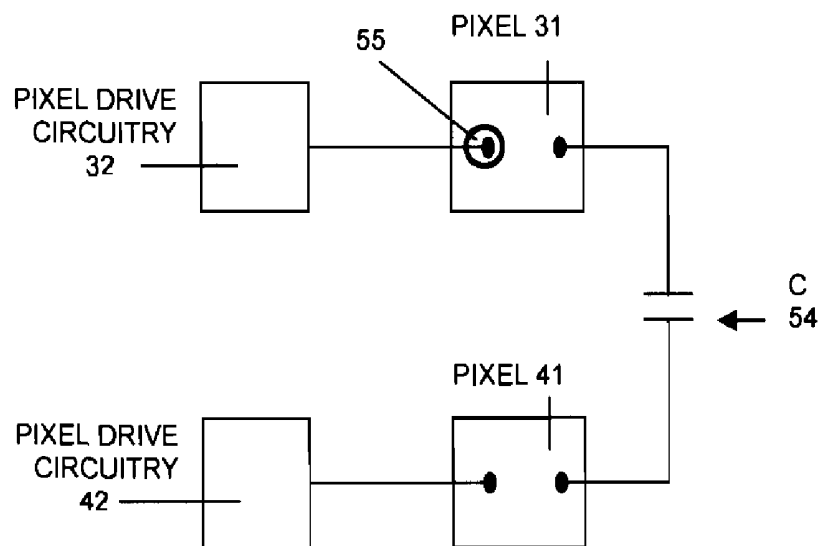


FIG. 5


SINGLE-PIXEL (1 X 1).

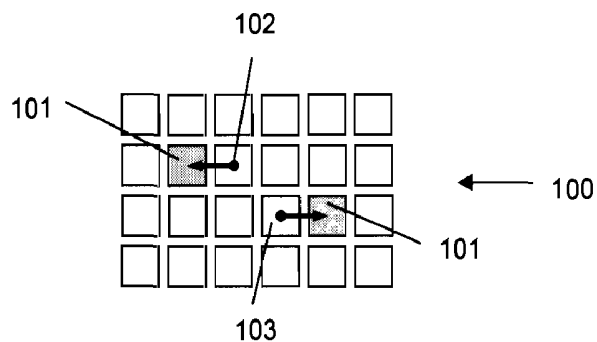

4-PIXEL GROUP (2 X 2).

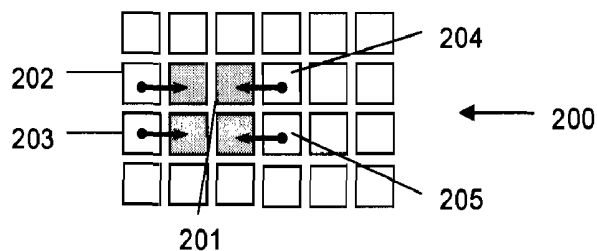

8-PIXEL GROUP (4 X 2).

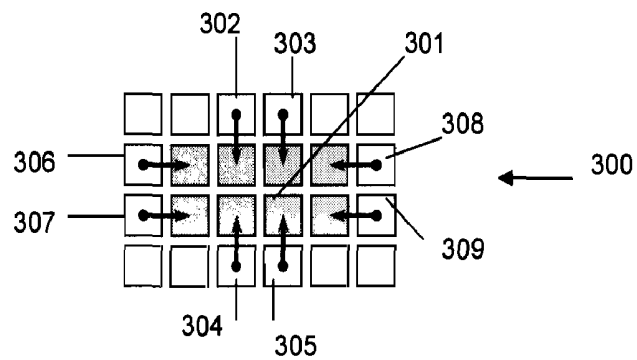

16-PIXEL GROUP (4 X 4).

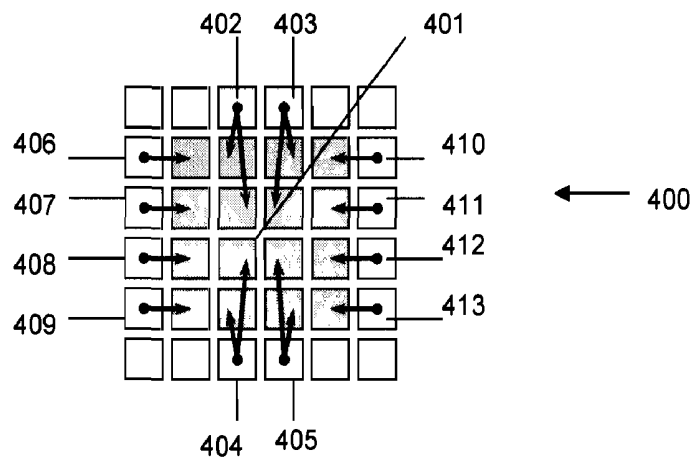


FIG. 6

METHODS AND APPARATUS FOR REPAIRING INOPERATIVE PIXELS IN A DISPLAY

REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 09/748,623, filed 22 Dec. 2000, now U.S. Pat. No. 7,280,090.

BACKGROUND

The present invention provides methods and apparatus for repairing inoperative pixels in a display. In particular, the present invention provides methods and apparatus for improving the effective yield rates of displays, such as liquid crystal micro-displays, by disconnecting inoperative pixels from their defective drive circuitry and tying such pixels to the working drive circuit of a nearby pixel.

Manufacturing of displays, such as liquid crystal (LC) micro-displays, with very large numbers of pixels is hampered by low yield rates due to the large area of semiconductor material (e.g., Complementary Metal Oxide Semiconductor (CMOS)) required for each device. Nevertheless, displays can actually tolerate a certain level of various types of defects and still be considered acceptable. Additionally, there are various techniques that have been developed and successfully applied to other display technologies that can reduce the visibility of some types of defects and dramatically increase the yield of acceptable displays.

For example, on a device size suitable to hold 8 million pixels (approximately 32×58 mm), without any repair strategy, the yield of "perfect" display devices is estimated at less than 2% (assumed defect rate of 0.2/cm²).

Defects in the microelectronic circuitry can cause a variety of types of malfunctions in the resulting display, such as:

Stuck-On Pixel	These pixels are always on. In a three-chip RGB (red, green, blue) system, they would be visible as a constant red, green, or blue dot in the display. Such stuck-on pixels are much more visible in dark areas of the display than bright areas.
Stuck-Off Pixel	These pixels are always off. In a three-chip RGB system, they would be visible as a constant cyan, magenta, or yellow dot in the display. Such stuck-off pixels are much more visible in the bright areas of the display than the dark areas.
Stuck-Intermediate	Some pixels can get stuck in an intermediate state. Depending on the intended color of the pixel and the surrounding area of the display, they will sometimes appear as red, green, or blue, and at other times will appear as the complement of the color channel affected.
Partial Response	Some pixels may have a portion of their circuitry affected such that they partially respond to the intended color. Perhaps they are of reduced intensity or contrast, but they still track the intended value to some degree.
Defective Clump	A significant portion of the circuitry in the visible area may be shared between clumps of pixels. A defect in this area may effect the entire clump of pixels and may take any of the above forms.
Dead Column/Row	Defects in signals generated by the drive circuitry which are fed to every pixel in a column or row will manifest themselves in the entire column or row. The manifestation may take a variety of forms.

Although a display having any of the foregoing defects may still be useable, all such defects are significant enough that once noticed, the user will be unhappy. The only excep-

tion being perhaps a few isolated stuck-off pixels in the display used for the blue channel, due to the low contrast sensitivity of human vision to blue light.

A previously known method for dealing with such defects is to provide redundant circuitry in the display that can be selected to drive a pixel or column of pixels in the event of a defect in the primary circuitry. As it is already difficult to fit all required circuitry in the space available in such micro-displays, the inclusion of redundant circuitry becomes problematic.

It would be advantageous to provide a method of repairing inoperative pixels in a display without requiring redundant circuitry in order to increase the yield rate of such displays.

The methods and apparatus of the present invention provide the aforementioned and other advantages.

SUMMARY

The present invention provides methods and apparatus for repairing inoperative pixels in a display. In particular, the present invention provides methods and apparatus for improving the effective yield rates of displays, such as liquid crystal micro-displays, by disconnecting inoperative pixels from their defective drive circuitry and connecting such pixels to the working drive circuit of a nearby pixel.

The "repaired" pixel will then display the same value as the nearby pixel that it is connected to. However, since in most images, neighboring pixels are highly likely to be displaying similar values, the resulting slight error in the image is very well below acceptable limits for almost all applications. Most viewers find it difficult to detect such an artifact at all even when it is pointed out to them. As the display resolution goes higher, this type of repair becomes even more difficult to detect.

In an illustrated embodiment of the present invention, an electronic display is provided which is capable of repairing inoperative pixels. The display comprises a plurality of pixels with drive circuitry for controlling the pixels. Means for disconnecting an inoperative pixel from its defective drive circuitry are provided. The inoperative pixel is then provided with a connection to a working drive circuit of a nearby pixel.

The means for connecting the inoperative pixel to a working drive circuit may comprise additional circuitry associated with each pixel in the display. This additional circuitry connects the inoperative pixel to the working drive circuit of a nearby pixel.

In one embodiment, the additional circuitry may comprise a bypass bit latch. When the bypass bit is set, the defective drive circuitry is bypassed and the inoperative pixel is driven from the working drive circuit of a nearby pixel. The bypass bit may be loaded from an external memory after the display is turned on. In addition, multiplexing circuitry associated with the bypass bit latch may be provided.

Alternatively, the additional circuitry may further comprise a tri-state transistor associated with each pixel connected to the bypass bit latch and a resistor coupling neighboring pixels. When the bypass bit is set, the transistor is switched to bypass the defective drive circuitry so that the inoperative pixel is driven from the working drive circuit of a nearby pixel through the resistor.

In a further embodiment, the additional circuitry may comprise a resistive connection between neighboring pixel metal layers. The defective drive circuitry can be disconnected from the inoperative by severing a via connecting the defective drive circuitry to the inoperative pixel, such that the inoperative pixel is driven by a nearby pixel through the resistive connection.

Alternatively, the additional circuitry may comprise a capacitive connection between neighboring pixel metal layers. The defective drive circuitry can be disconnected from the inoperative pixel by severing a via connecting the defective drive circuitry to the inoperative pixel, such that the inoperative pixel is driven by a nearby pixel through the capacitive connection.

The via may be severed, for example, by laser ablation, melting or ablation of a fusible link by passing sufficient current through it, selective chemical etching using a photoresist or other selection means, melting or ablation with an electron beam, melting or ablation with a focused microwave or other electromagnetic beam, electro-ionic erosion, physical cutting or removal of the metal using a sharp or abrasive implement or probe, or by any other suitable technique.

The pixels may be repaired individually or in groups (i.e., groups of up to 8 adjacent inoperative pixels may be repaired without significantly impacting the quality of the display).

In a further embodiment, the display may also comprise test circuitry to identify the defective drive circuitry.

The pixel drive circuitry associated with each pixel may be located adjacent to each pixel or located separately from each pixel.

The display may be a liquid crystal micro-display or a similar display device.

BRIEF DESCRIPTION OF THE DRAWINGS

Features of the present invention can be more clearly understood from the following detailed description considered in conjunction with the following drawings, in which the same reference numerals denote the same elements throughout, and in which:

FIG. 1 illustrates an embodiment of a liquid crystal micro-display assembly in accordance with the present invention;

FIG. 2 shows a schematic representation of an embodiment of repair circuitry in accordance with the present invention;

FIG. 3 shows a schematic representation of a further embodiment of repair circuitry in accordance with the present invention;

FIG. 4 shows an alternate embodiment of repair circuitry in accordance with the present invention;

FIG. 5 shows another alternate embodiment of repair circuitry in accordance with the present invention; and

FIG. 6 shows examples of various pixel repair configurations.

DETAILED DESCRIPTION

The present invention relates to methods and apparatus for repairing inoperative pixels in a display. In particular, the present invention provides methods and apparatus for improving the effective yield rates of displays, such as liquid crystal micro-displays, by disconnecting inoperative pixels from their defective drive circuitry and connecting such pixels to the working drive circuit of a nearby pixel.

The invention is particularly adapted for use with a traditional reflective liquid crystal on complimentary metal oxide semiconductor (FLC-on-CMOS) micro-display assembly with the LC material being placed on top of a CMOS control chip. Pads on the top layer of the CMOS chip provide both electrical control of the LC material as well as the optical mirror for the light.

Such a display may have 8.3 million pixels arranged as 3840 pixels by 2160 pixels. The pixels may be on a 15 μm pitch. The size of the active area of this exemplary display is thus 57.6 $\times$ 32.4 mm. Additional control circuitry and frame

buffer memory (e.g., Dynamic Random Access Memory (DRAM)) along the two long sides of the circuit may be 61.4 $\times$ 3 mm. Input/output (I/O) pads and an LCD seal ring would add another couple few millimeters to the overall dimensions of the chip, but these areas would be relatively immune from the very small defects typical of the CMOS process. The invention is also applicable to displays of varying sizes and types.

A significant amount of functionality in the circuitry under each pixel is desired. The basic modulation for each pixel may be, for example, a 10-bit counter running on a chirped clock to produce a log or gamma-corrected response. Generation of the pulse timing required by the LC material is also required under each pixel. Diagnostic capabilities may be included to verify correct operation of the control circuit for each pixel. Finally, an additional 10 bits of storage may be desired to allow loading of the data for a next frame to be distributed over the entire frame time.

Fitting this circuitry in the available space has proven challenging and drives the design towards a larger pixel pitch compared to existing designs. The smallest feasible CMOS feature sizes are also utilized. Even still, for the desired complex pixel control functionality, typical prior art redundant repair circuitry is problematic to provide in the available space.

FIG. 1 illustrates the arrangement of a liquid crystal-micro display in accordance with the present invention. Display area 10 is divided into several sections due to the differing impacts that defects in each section will have on the display yield. Pixel drive and repair circuitry 12 covers the majority of the device area (e.g., the pixel drive circuitry comprises 92% of the active area or approximately 17.2 cm² and the pixel repair circuitry comprises 4% of the active area or approximately 0.07 cm²). By providing the repair mechanisms described herein, most types of defects in this circuitry can be tolerated and still result in acceptable devices.

Signal distribution buffer circuitry 14 may comprise 4% of the active area of the display or approximately 0.07 cm². Signals in the display are routed to every pixel in a column. Distribution buffer circuitry 14 will be required to fan these signals out over the large number of loads and distances and still meet timing requirements. Defects in these buffers will render large portions of the display inoperable and render the display unusable.

Column signal generation logic (1.2 cm²) and Buffer DRAM (1.8 cm²) are provided at 16. Column signal generation logic generates the signals for each column. Defects in this area are highly likely to render the entire display unusable since the error is likely to impact a large area of the display such as an entire column or more. Buffer DRAM is similar to conventional DRAM. If yield is a problem in this area, traditional DRAM techniques of including spare rows and columns can be employed.

Input/output (I/O) pads 18 are provided. These features typically do not contribute to low yield. Cover Glass Glue-Down Area 20 also consumes a portion of the wafer, but typically does not have any features that would contribute to low yield.

In an illustrated embodiment of the present invention as shown in FIG. 1, an electronic display 10 is provided which is capable of repairing inoperative pixels. The display comprises a plurality of pixels with drive circuitry 12 for controlling the pixels. Means for disconnecting an inoperative pixel from its defective drive circuitry are provided. The inoperative pixel is then provided with a connection to a working drive circuit of a nearby pixel.

Using the drive circuitry **12** of a neighboring pixel to drive an otherwise inoperative pixel will result in the two pixels displaying the same intensity. Visual artifacts will typically be visible in the case of high contrast textures and edges moving across the two tied-together pixels at a slow rate.

The means for connecting the inoperative pixel to a working drive circuit may comprise additional circuitry associated with each pixel in the display that connects the inoperative pixel to the working drive circuit of a nearby pixel. The additional circuitry may comprise discrete or integrated circuitry.

In one embodiment as shown in FIG. 2, the additional circuitry may comprise bypass bit latches **34**, **44** which can select the source of the drive signal for pixels **30**, **40**. When a bypass bit is set, the defective drive circuitry is bypassed and the inoperative pixel is driven from the working drive circuit of a nearby pixel. The bypass bit may be loaded from an external memory after the display is turned on. For example, in FIG. 2, assume that pixel **30** is inoperative due to defective drive circuitry **32**. After the display is turned on, bypass bit **34** associated with the inoperative pixel **30** is set such that defective drive circuitry **32** is bypassed and inoperative pixel **30** is driven by working drive circuitry **42** of a nearby pixel **40**. In addition, multiplexing circuitry **36**, **46** associated with bypass bit latches **34**, **44** may be provided. An advantage of such an arrangement is that testing and repair can be accomplished at any time in the manufacturing process, even after assembly of the LCD.

As shown in FIG. 3, the additional circuitry may alternatively comprise tri-state transistors **38**, **48** associated with each respective pixel **30**, **40**. Transistors **38**, **48** are connected to respective bypass bit latches **34**, **44** and resistor **50** couples neighboring pixels **30**, **40**. Resistor **50** may be any suitable resistor, such as a discrete resistor, an integrated circuit resistor fabricated in metal, polysilicon, or any other suitable resistive material. As an example, assume that pixel **30** is inoperative due to defective drive circuitry **32**. When bypass bit **34** is set, the transistor **38** is switched to bypass defective drive circuitry **32** so that inoperative pixel **30** is driven from working drive circuit **42** of nearby pixel **40** through the resistor **50**. An advantage of such an arrangement is that testing and repair can be accomplished at any time in the manufacturing process, even after assembly of the LCD.

In a further embodiment as shown in FIG. 4, the additional circuitry may comprise a resistor **52** coupled between pixel metal layers of nearby pixels **31**, **41**. Resistor **52** may comprise a discrete or integrated circuit resistor fabricated in metal, polysilicon, or any other suitable resistive material. Assuming that pixel **31** is inoperative due to defective drive circuitry **32**, defective drive circuitry **32** can be disconnected from the inoperative pixel **31** by severing a via **55** connecting defective drive circuitry **32** to inoperative pixel **31**, such that inoperative pixel **31** is driven by a nearby pixel **41** through the resistor **52**. Because the pixel drive waveform typically consists of pulses of very low duty cycle, resistor **52** typically will not contribute significantly to the power dissipation of the device.

Additionally, since the current flowing for each pixel typically is very small, resistor **52** typically will be sufficient to drive the pixel **31** with essentially the same waveform as pixel **41**.

As shown in FIG. 5, the additional circuitry may alternatively comprise a capacitor **54** coupled between pixel metal layers of nearby pixels **31**, **41**. Assuming pixel **31** is inoperative due to defective drive circuitry **32**, the defective drive circuitry **32** can be disconnected from the inoperative pixel by severing a via **55** connecting the defective drive circuitry **32** to

the inoperative pixel **31**, such that the inoperative pixel **31** is driven by a nearby pixel **41** through the capacitor **54**. Capacitor **54** may be formed from a pixel metal layer normally used for light-blocking or may comprise any other suitable capacitive connection.

The via **55** may be severed, for example, by laser ablation, melting or ablation of a fusible link by passing sufficient current through it, selective chemical etching using a photo-resist or other selection means, melting or ablation with an electron beam, melting or ablation with a focused microwave or other electromagnetic beam, electro-ionic erosion, physical cutting or removal of the metal using a sharp or abrasive implement or probe, or by any other suitable technique. The via **55** may comprise a fuseable link between the drive circuitry and the pixel, and the link may be "blown", e.g., by applying a suitable short circuit voltage across the link, or by any other suitable technique.

The pixels may be repaired individually or in groups. In one embodiment of the invention, the amount of circuitry per pixel is reduced by sharing the bypass bit latch amongst a group of pixels. If the drive circuit for any pixel in the group fails, the bypass bit is set for that group, and each pixel in the group is then driven by the circuitry of a nearby pixel. The drive circuit used for each repaired pixel may be different or the same for each pixel in the group. Even though some working pixels are bypassed in the group, the overall quality of the display is still improved by removing the stuck-ON or stuck-OFF defect(s). Groups may be any size depending on the demands of the application, but typically groups larger than 8 pixels begin to have diminishing returns in terms of space saved in relation to quality of the repair.

FIG. 6 shows examples of various pixel repair configurations, including examples of individual pixel repair and examples of various pixel repair groupings. In the repair example **100**, the defective pixels **101** may be driven by an adjacent pixel located either to the left or the right of the defective pixel (e.g., pixels **102** and **103**). In repair example **200**, a 4 pixel group (2x2) of defective pixels is repaired by driving the defective pixels **201** using the drive circuitry of pixels located to the left (**202**, **203**) or the right (**204**, **205**) of the 4 pixel group. In repair example **300**, an 8 pixel group (4x2) of defective pixels **301** is repaired using pixels located above (**302**, **303**), below (**304**, **305**), to the left (**306**, **307**) and to the right (**308**, **309**). In repair example **400**, a 16 pixel group (4x4) of defective pixels **401** is repaired using pixels above (**402**, **403**), below (**404**, **405**), to the left (**406**, **407**, **408**, **409**), and to the right (**410**, **411**, **412**, **413**). Pixels **402**, **403**, **404**, and **405** are shown as driving a respective adjacent pixel as well as a respective pixel located in the interior of the 4x4 defective pixel block **401**. It will be appreciated that any of the other pixels (**406-413**) can be used to drive an adjacent pixel and an interior pixel.

The repair examples shown in FIG. 6 are illustrative examples, and it will be appreciated that a defective pixel may be driven by any of the adjacent pixels (including for example, pixels located above, below, or diagonally from the defective pixels). Further, it will be appreciated that defective pixels may be repaired by connecting the defective pixels to the drive circuitry of non-adjacent pixels (as shown, for example, in repair example **400**).

In a further embodiment, the display may also comprise test circuitry to identify the defective drive circuitry. For example, all the pixels in a row may be tested in parallel using wired-OR and wired-AND circuitry. Rows with an inoperative pixel will then be subject to an additional series of tests to identify the exact pixel in the row that is inoperative.

7

The pixel drive circuitry associated with each pixel may be located adjacent to each pixel or located separately from each pixel. Moving the drive circuitry for each pixel so it is not necessarily physically located under the pixel that it drives allows for nearby repair partner pixels with non-adjacent drive circuitry. Depending on the size of defects that may occur, the drive circuitry for repair partners can be located one, two, or more pixels away from the pixels that they drive. Since the total number of defects typically is small, the probability of two independent defects damaging any given pair of repair partner pixels becomes negligible.

The display may be a liquid crystal micro-display or other suitable displays that comprise integrated circuit manufacturing techniques.

It should now be appreciated that the present invention provides an improved method and apparatus for repairing inoperative pixels in a display. In particular, the invention provides an improved method and apparatus for repairing defective pixels in a liquid crystal micro-display without the need to provide redundant drive circuitry underneath each pixel.

Although the invention has been described in connection with various preferred embodiments, it should be appreciated that numerous adaptations and modifications can be made thereto without departing from the scope of the invention as set forth in the claims. In particular, the invention is not limited to liquid crystal micro displays, and can be used in connection with the many different types of display technology.

The invention claimed is:

1. A display comprising:

a plurality of pixel drive circuits, each pixel drive circuit electrically connected to a corresponding pixel;
means for disconnecting the electrical connection between a defective pixel drive circuit and an inoperative pixel;
and

8

a means for electrically connecting the inoperative pixel to a working pixel drive circuit of a nearby pixel by means of a bypass bit latch, such that the defective pixel drive circuit is bypassed and the inoperative pixel is driven from the working pixel drive circuit of the nearby pixel, the nearby pixel comprising one of an adjacent pixel or a non-adjacent pixel.

2. The display of claim 1, wherein the bypass bit latch comprises a bypass bit that is loaded from an external memory after the display is turned on.

3. The display of claim 1, further comprising multiplexing circuitry associated with the connecting means.

4. The display of claim 1, wherein the bypass bit latch comprises a bypass bit, and wherein the display further comprises:

a tri-state transistor associated with each pixel connected to the bypass bit latch; and

a resistor coupling neighboring pixels;

such that when the bypass bit is set, the transistor is switched to bypass the defective pixel drive circuit so that the inoperative pixel is driven from the working pixel drive circuit of a nearby pixel through the resistor.

5. The display of claim 1, wherein defects of the inoperative pixels are mitigated in groups.

6. The display of claim 1, further comprising test circuitry to identify the defective pixel drive circuit.

7. The display of claim 1, wherein the pixel drive circuitry associated with each pixel is located separately from each pixel.

8. The display of claim 1, wherein the defective pixel drive circuit is identified after the display is assembled.

9. The display of claim 1, wherein the inoperative pixel is identified via an optical inspection of the display after assembly of the display.

* * * * *

专利名称(译)	用于修复显示器中的不工作像素的方法和装置		
公开(公告)号	US7911433	公开(公告)日	2011-03-22
申请号	US11/842691	申请日	2007-08-21
[标]申请(专利权)人(译)	KEENEY理查德 NOURBAKSHSH法哈德 CLARK ANTHONY		
申请(专利权)人(译)	KEENEY理查德 NOURBAKSHSH法哈德 CLARK ANTHONY		
当前申请(专利权)人(译)	电子成像, INC.		
[标]发明人	KEENEY RICHARD A NOURBAKSHSH FARHAD CLARK ANTHONY		
发明人	KEENEY, RICHARD A. NOURBAKSHSH, FARHAD CLARK, ANTHONY		
IPC分类号	G09G3/36 G01R31/02 G02F1/1362		
CPC分类号	G02F1/136259 G02F1/136277		
其他公开文献	US20070279424A1		
外部链接	Espacenet USPTO		

摘要(译)

提供了用于修复显示器中的不工作像素的方法和装置。特别地, 本发明提供了通过将不工作的像素与其有缺陷的驱动电路断开并将这些像素连接到附近像素的工作驱动电路来提高显示器(例如液晶微显示器)的有效产率的方法和装置。可以修复显示器而无需在每个像素下方提供冗余驱动电路。

