



US007649591B2

(12) **United States Patent**  
**Lee et al.**

(10) **Patent No.:** **US 7,649,591 B2**  
(45) **Date of Patent:** **Jan. 19, 2010**

(54) **OPTICAL MEMBER, METHOD OF FABRICATING THE SAME AND LIQUID CRYSTAL DISPLAY APPARATUS HAVING THE SAME**

(75) Inventors: **Jeong-Hwan Lee**, Suwon-si (KR); **Jae-Ho Jung**, Giheung-eup-Yongin-si (KR); **Sang-Hyuck Yoon**, Seoul (KR); **Jong-Dae Park**, Seoul (KR); **Kyu-Seok Kim**, Yongin-si (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.**, Gyeonggi-do (KR)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 71 days.

(21) Appl. No.: **12/117,536**

(22) Filed: **May 8, 2008**

(65) **Prior Publication Data**

US 2008/0212331 A1 Sep. 4, 2008

**Related U.S. Application Data**

(63) Continuation of application No. 10/454,282, filed on Jun. 3, 2003, now Pat. No. 7,375,779.

(30) **Foreign Application Priority Data**

Oct. 5, 2002 (KR) ..... 10-2002-0060804

(51) **Int. Cl.**  
**G02F 1/1335** (2006.01)

(52) **U.S. Cl.** ..... **349/65**

(58) **Field of Classification Search** ..... 349/64-65  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

4,002,426 A 1/1977 Chenevey et al.

4,130,408 A	12/1978	Crossland et al.
5,377,084 A	12/1994	Kojima et al.
5,757,449 A	5/1998	Nishizaki et al.
6,002,464 A	12/1999	Fujisawa et al.
6,268,631 B1	7/2001	Fukada et al.
6,552,763 B1	4/2003	Kouya
6,741,303 B1	5/2004	Okabe
6,759,182 B2	7/2004	Ikedo et al.
6,771,335 B2	8/2004	Kimura et al.
2002/0033915 A1	3/2002	Masaki et al.
2002/0181111 A1	12/2002	Okabe et al.
2003/0002158 A1	1/2003	Masaki et al.
2003/0214717 A1	11/2003	Kaminsky et al.

**FOREIGN PATENT DOCUMENTS**

JP	05-196808	8/1993
JP	05-281539 A	10/1993
JP	09-113709 A	5/1997
JP	11-095013 A	4/1999
JP	2002-062592 A	2/2002
JP	2002-080621 A	3/2002
KR	1020000055299	9/2000

*Primary Examiner*—David Nelms

*Assistant Examiner*—Phu Vu

(74) *Attorney, Agent, or Firm*—Innovation Counsel LLP

(57) **ABSTRACT**

In an LCD apparatus having an optical member, the optical member has a base body having a light incident surface and a light emitting surface faced the light incident surface. A first resin layer is formed on the light emitting surface and a light diffusing pattern is uniformly formed on the first resin layer so as to diffuse a first light and emit a second light. Accordingly, the LCD apparatus can improve display quality and can be fabricated in low-cost manufacture. Also, since the light diffusing pattern is formed with a curable material, the light diffusing pattern can have various shapes and superior reproducibility.

**16 Claims, 12 Drawing Sheets**

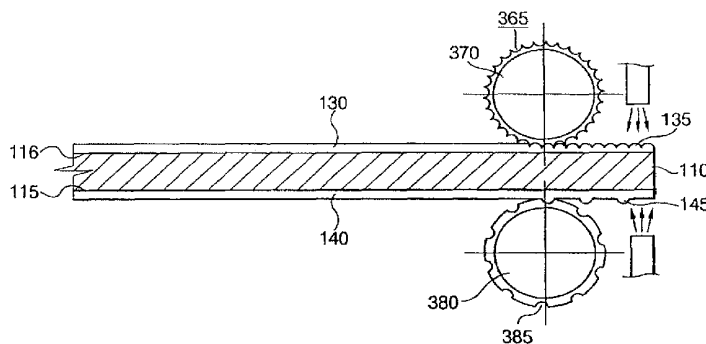


FIG. 1

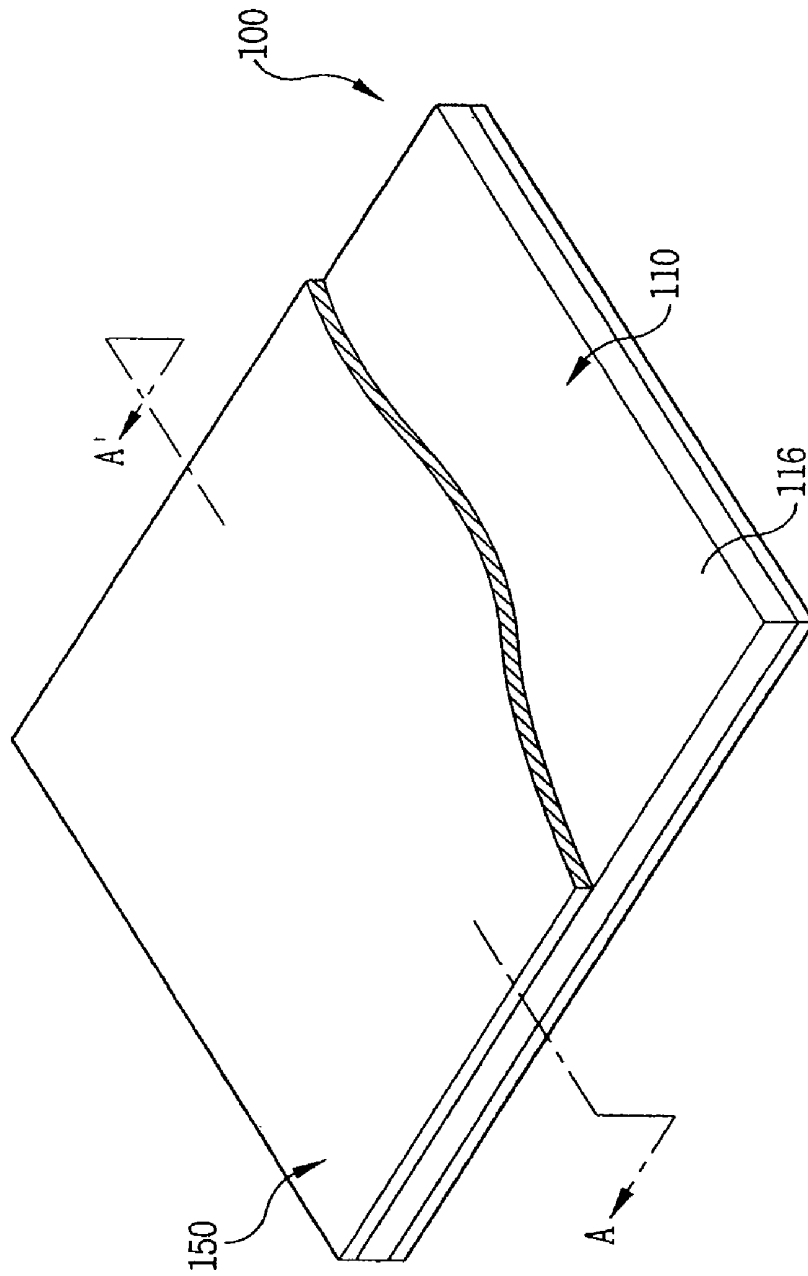


FIG. 2A

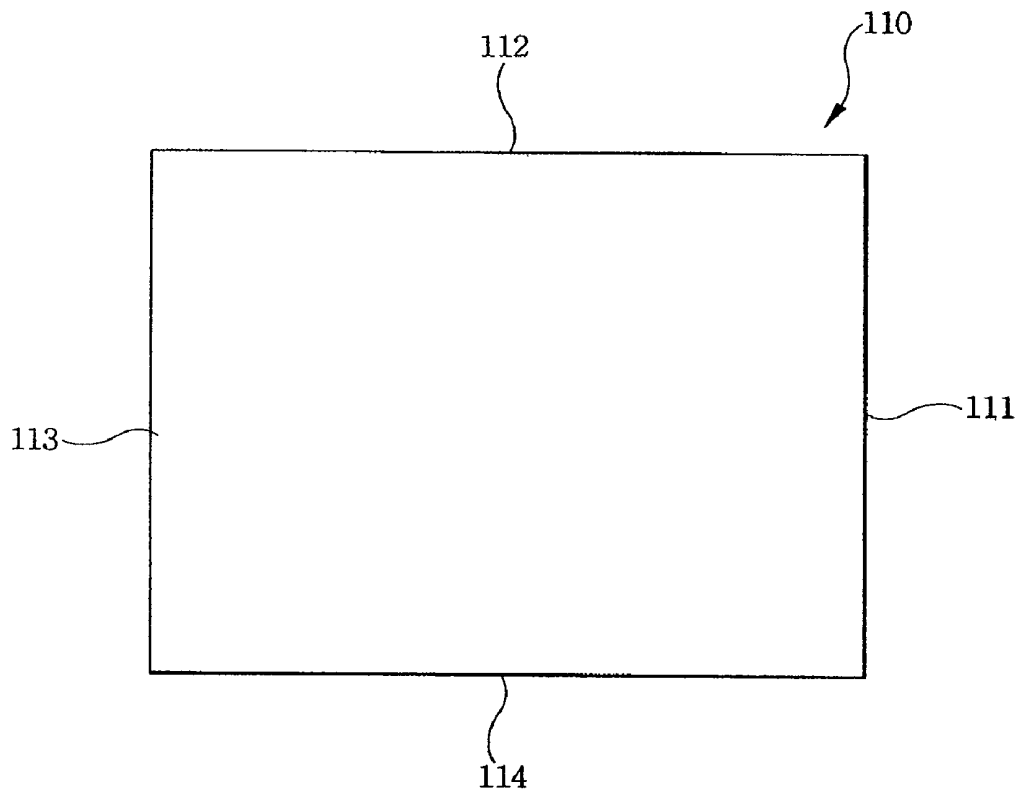


FIG. 2B

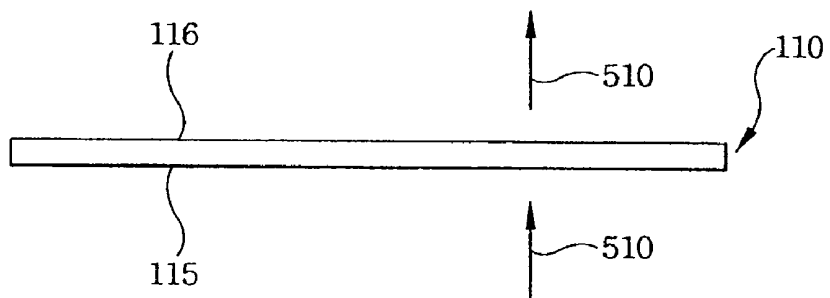


FIG. 3A

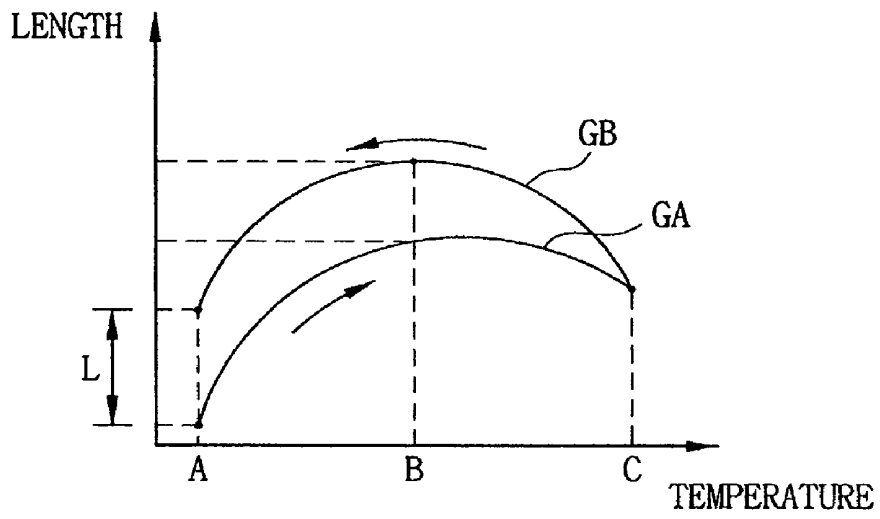


FIG. 3B

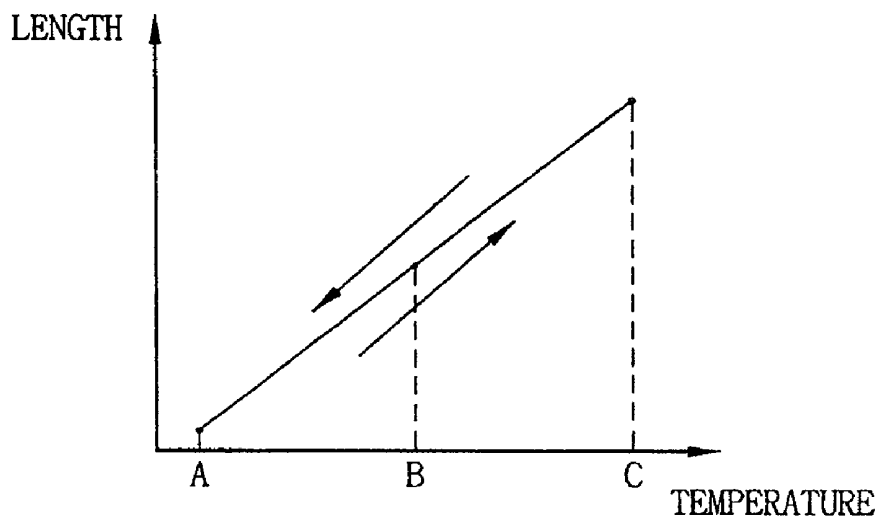


FIG. 4

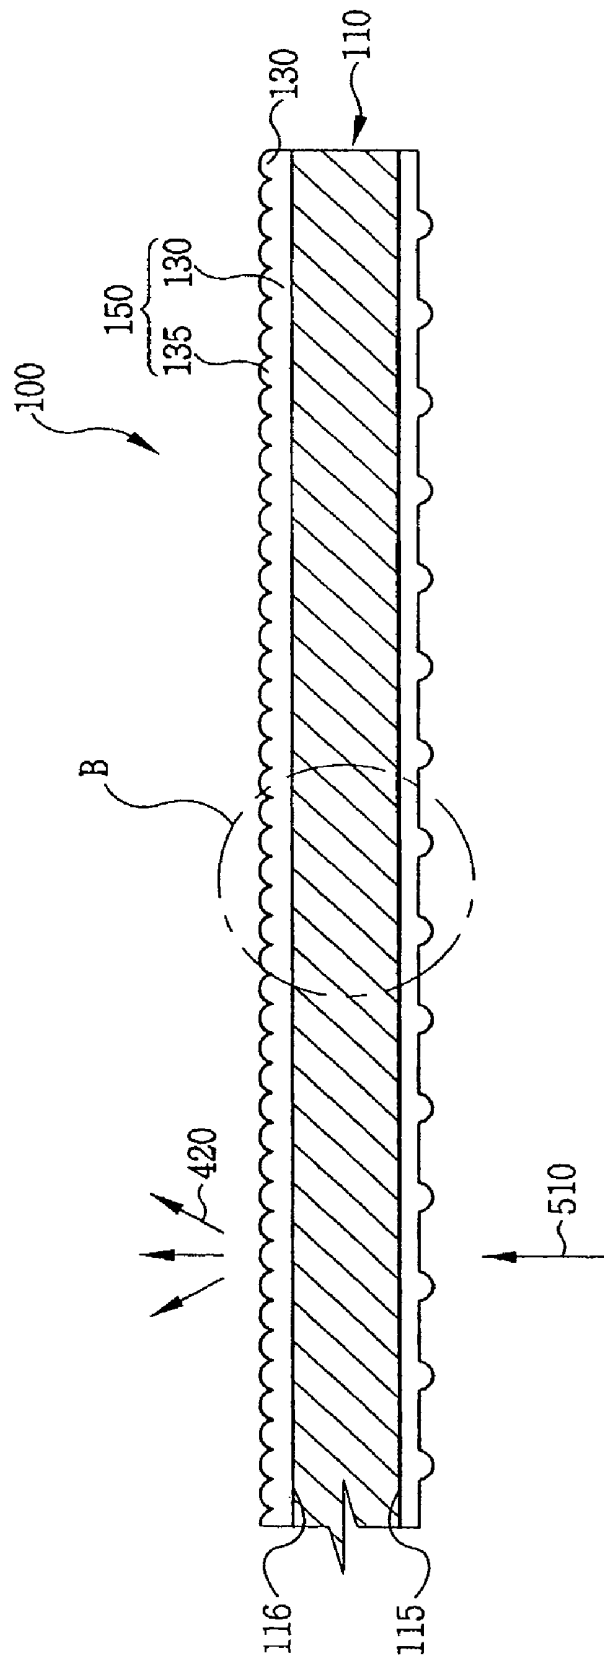


FIG. 5

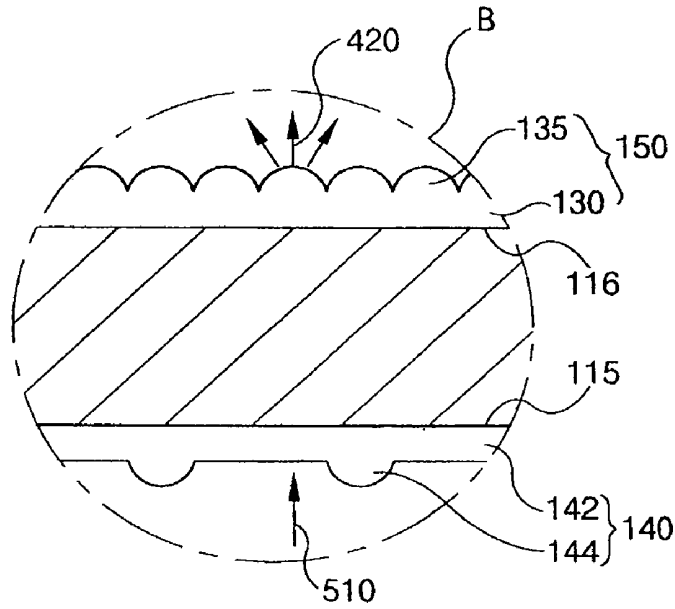


FIG. 6

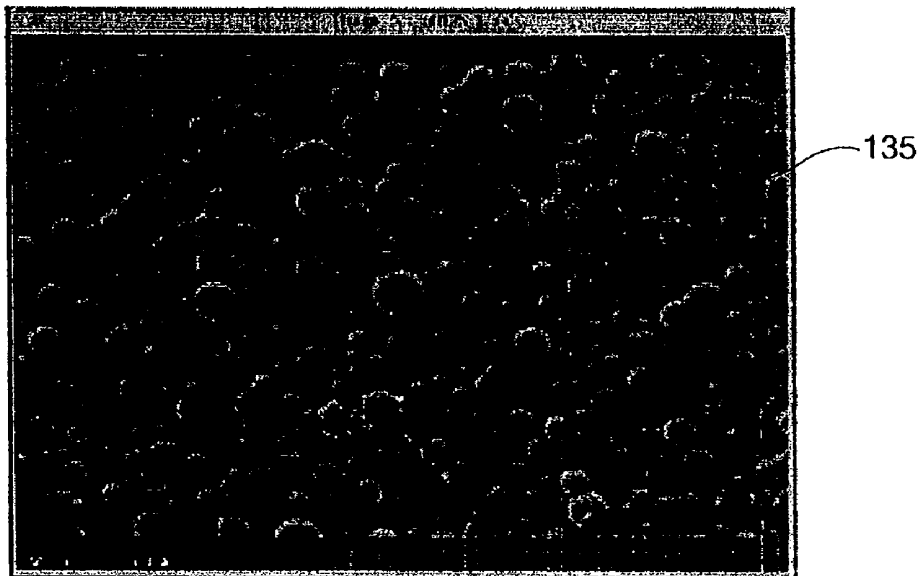


FIG. 7A

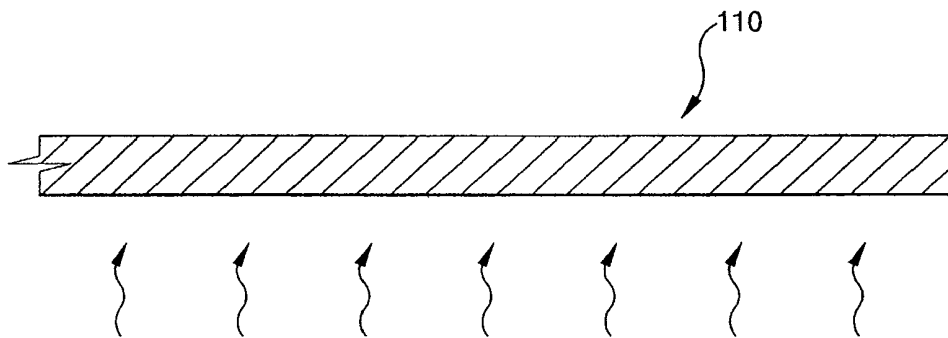


FIG. 7B

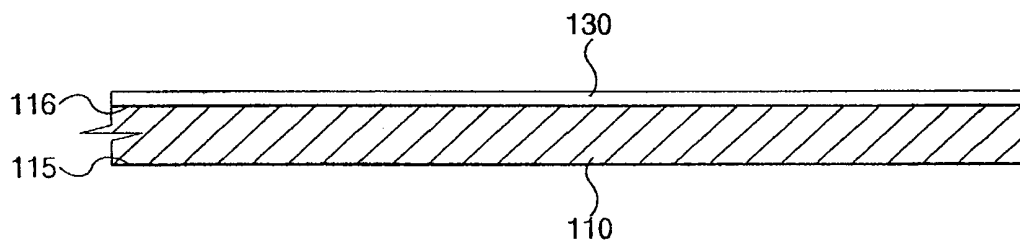


FIG. 7C

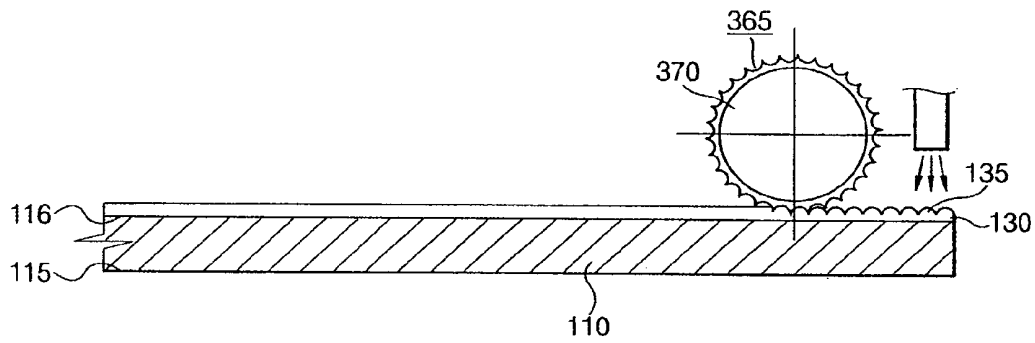


FIG. 7D

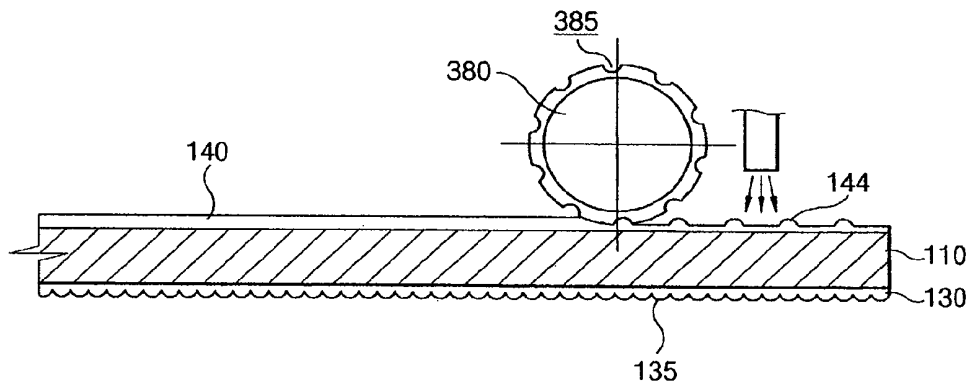


FIG. 8A

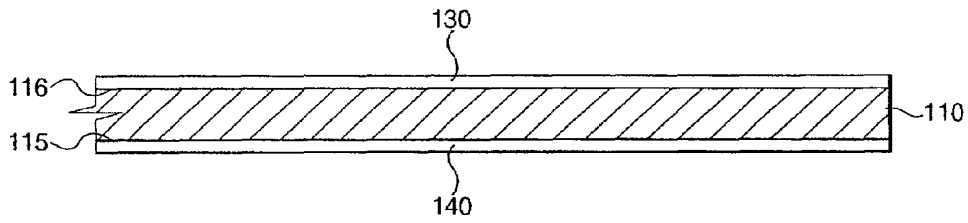


FIG. 8B

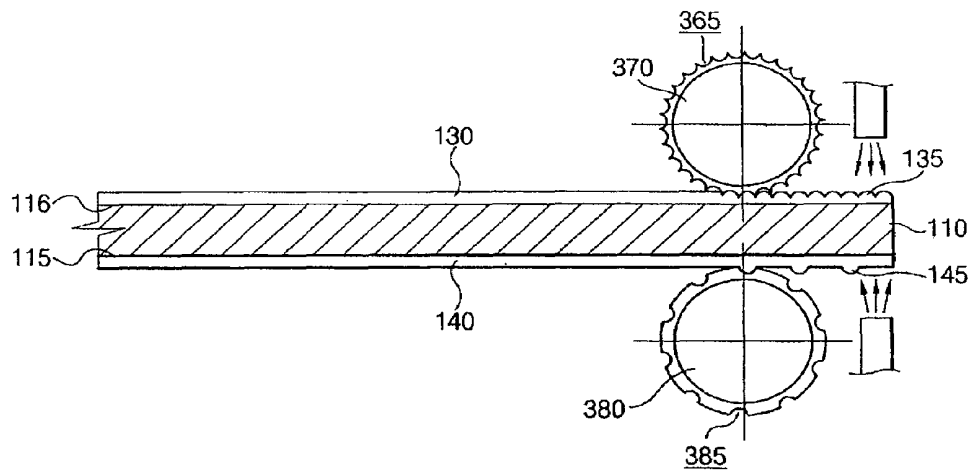


FIG. 8C

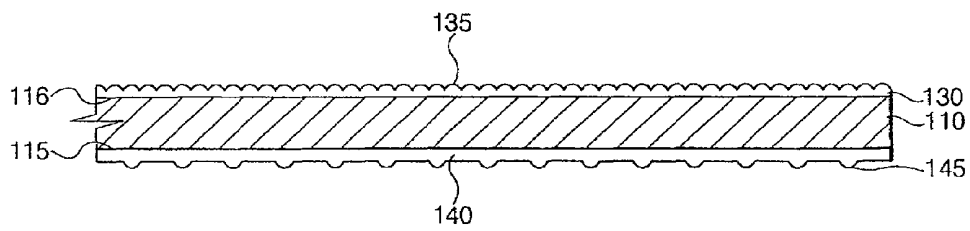


FIG. 9A

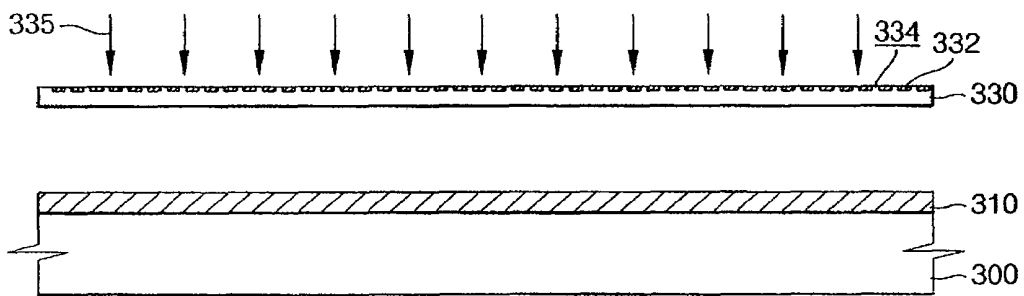


FIG. 9B

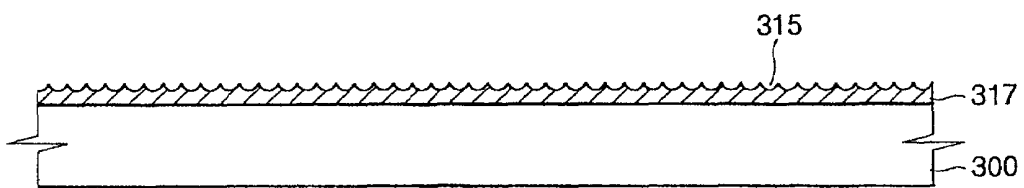


FIG. 9C

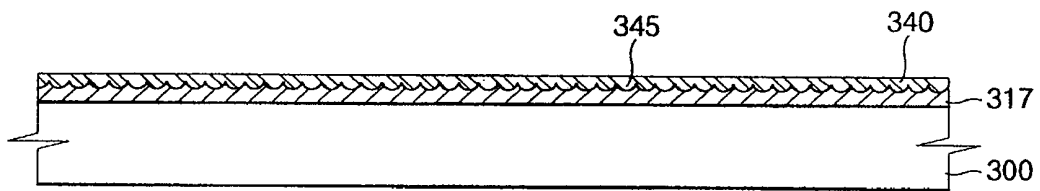


FIG. 9D

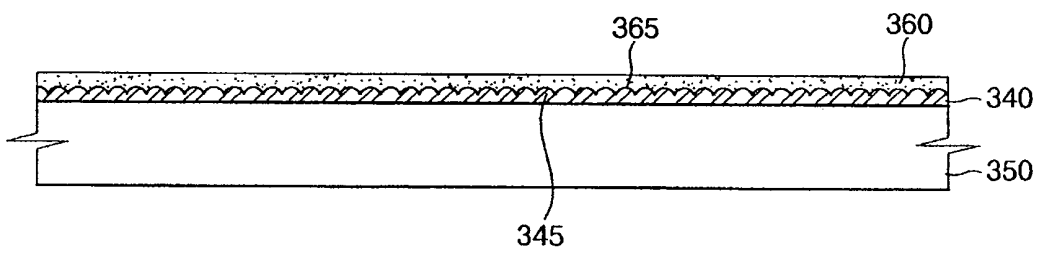


FIG. 9E


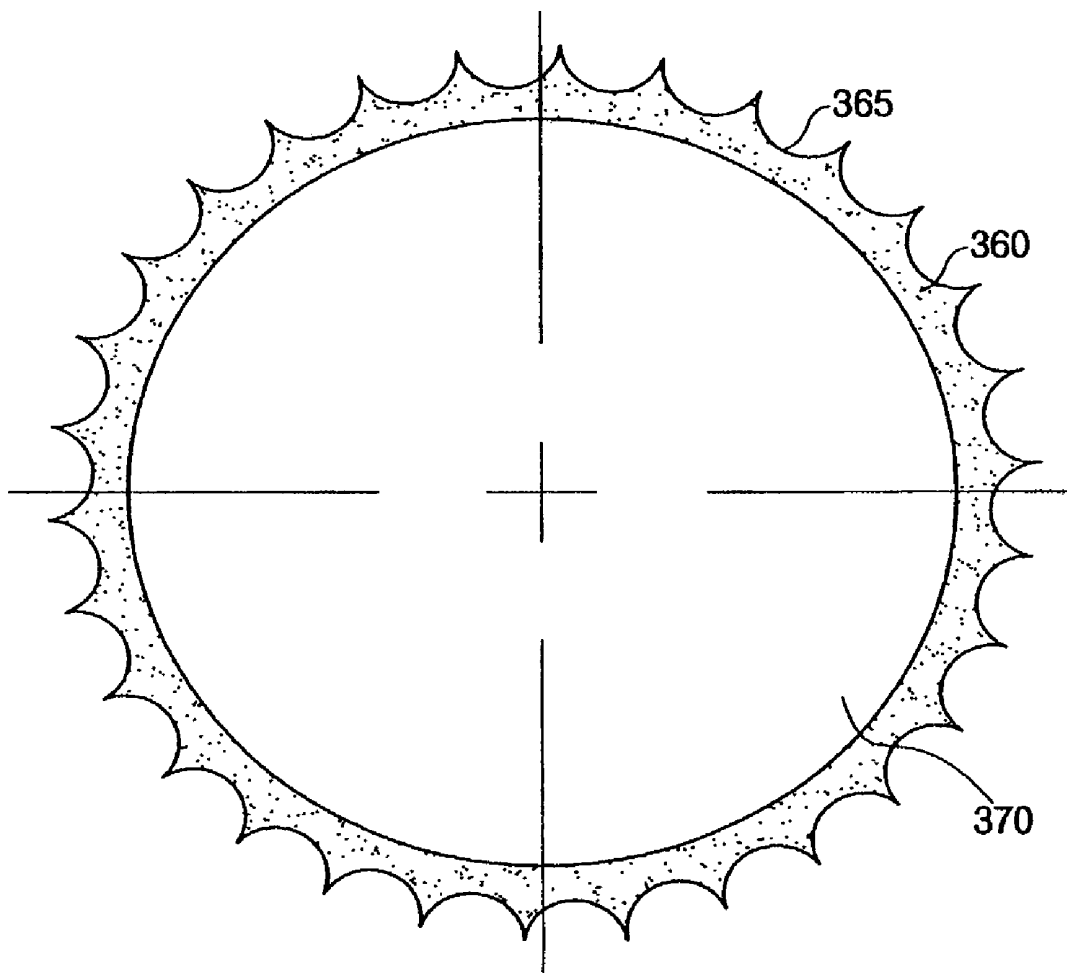


FIG. 10

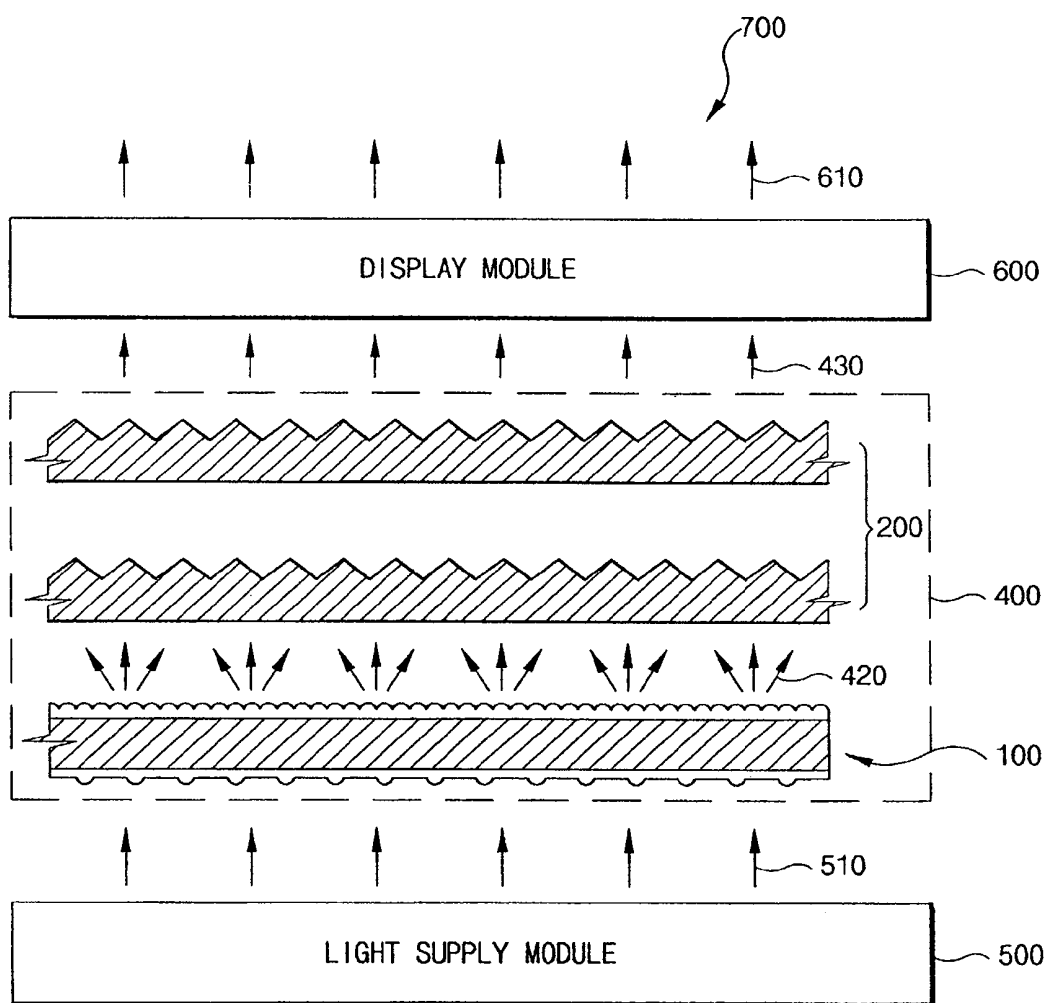

**OPTICAL MEMBER, METHOD OF  
FABRICATING THE SAME AND LIQUID  
CRYSTAL DISPLAY APPARATUS HAVING  
THE SAME**

CROSS-REFERENCE TO RELATED  
APPLICATIONS

This application is a Continuation of U.S. patent application Ser. No. 10/454,282 filed on Jun. 3, 2003, now U.S. Pat. No. 7,375,779, which relies for priority upon Korean Patent Application No. 10-2002-60804, filed on Oct. 5, 2002, the contents of which are incorporated herein by reference in its entirety.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an optical member, a method of fabricating the same and an LCD (Liquid Crystal Display) apparatus having the same, and more particularly to an optical member that has high display quality and may be manufactured at a low-cost, a method of fabricating the same and an LCD apparatus having the same.

2. Description of the Related Art

In general, an LCD apparatus displays an image using a liquid crystal. A liquid crystal applied to an LCD apparatus has electrical property, for example, such as an arrangement is varied according to an electric field applied thereto and optical property, for example, such as light transmittance is varied according to the arrangement of the liquid crystal.

In order to display an image using a liquid crystal, an LCD apparatus includes a light supply module for generating light and a display module for changing the light emitted from the light supply module into image light having image information.

The LCD apparatus further includes a module for changing a light distribution of the light emitted from the light supply module or improving brightness of the light emitted from the light supply module. The module is disposed between the light supply module and the display module.

In detail, the module includes a light guide plate, a diffusion sheet and a prism sheet. The light guide plate changes the light distribution of a line light source emitted from the light supply module into a light distribution of a surface light source. The diffusion sheet is disposed on the light guide plate and allows the light emitted from the light guide plate to have a uniform brightness distribution. The diffusion sheet includes beads distributed on a transparent substrate so as to scatter or diffuse the light emitted from the light guide plate.

However, beads may be nonuniformly distributed on the diffusion sheet since beads are very minute. In case that beads are nonuniformly distributed, the brightness distribution of the light emitted from the diffusion sheet is not uniform, thereby deteriorating display quality of LCD apparatus.

BRIEF SUMMARY OF THE INVENTION

The present invention provides an optical member for generating light having a uniform brightness distribution.

Also, the present invention provides a method of fabricating the above optical member.

Also, the present invention provides an LCD apparatus having the above optical member.

In one aspect of the invention, an optical member includes a base body and a light diffusing layer formed on the base body.

The base body has a light incident surface for receiving a first light and a light emitting surface for emitting the first light, which faces the light incident surface. The light diffusing layer has a first resin layer disposed on the light emitting surface and a light diffusing pattern disposed on the first resin layer so as to diffuse the first light emitted from the light emitting surface and to emit a second light.

In another aspect of the invention, in a method of fabricating an optical member, a first resin layer is formed on a light emitting surface of a base body having a light incident surface for receiving a first light and the light emitting surface for emitting the first light, which faces the light incident surface. A light diffusing pattern having a hemispherical shape is formed on the first resin layer so as to diffuse the first light emitted from the light emitting surface and to emit a second light, the light diffusing pattern having a hemispherical shape. The first resin layer is cured through a curing process.

In further aspect of the invention, an LCD apparatus includes a light supply module for generating a first light, an optical member for diffusing the first light and emitting a second light and an LCD panel assembly for displaying an image using the second light.

The optical member includes a base body having a light incident surface for receiving the first light and a light emitting surface facing the light incident surface, a first resin layer formed on the light emitting surface, and a light diffusing layer having a light diffusing pattern formed on the first resin layer, for diffusing the first light emitted from the light emitting surface and emitting a second light.

According to the present invention, the light diffusing pattern formed on the optical member changes a light having a nonuniform brightness distribution into a light having a uniform brightness distribution. Thus, the LCD apparatus having the optical member can improve display quality and can be fabricated at a low-cost since the optical member does not need beads.

Also, since the light diffusing pattern is formed with a curable material, the light diffusing pattern can have various shapes and superior reproducibility.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other advantages of the present invention will become readily apparent by reference to the following detailed description when considered in conjunction with the accompanying drawings wherein:

FIG. 1 is a perspective view showing an optical member according to an exemplary embodiment of the present invention;

FIGS. 2A and 2B are views showing a base body shown in FIG. 1;

FIGS. 3A and 3B are graphs showing heat properties of a base body shown in FIG. 1;

FIG. 4 is a cross-sectional view taken along the lines A-A' for showing an optical member shown in FIG. 1;

FIG. 5 is a partially enlarged view showing a portion "B" in FIG. 4;

FIG. 6 is a scanning-electron-microscopy (SEM) specimen showing a light diffusing pattern according to an exemplary embodiment of the present invention;

FIGS. 7A to 7D are views for illustrating a method of fabricating an optical member according to an exemplary embodiment of the present invention;

FIGS. 8A to 8C are views for illustrating a method of fabricating an optical member according to another exemplary embodiment of the present invention;

FIGS. 9A to 9E are views for illustrating a method of manufacturing a roller according to an exemplary embodiment of the present invention; and

FIG. 10 is a schematic view showing an LCD apparatus according to an exemplary embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 is a perspective view showing an optical member according to an exemplary embodiment of the present invention.

Referring to FIG. 1, an optical member 100 includes an optical sheet that changes light having a nonuniform brightness distribution into light having a uniform brightness distribution. For this purpose, the optical member 100 includes a base body 110 and a light diffusing layer 150.

The base body 110 has a shape of a rectangular plate or a rectangular sheet having a length longer than a width thereof and comprises polyester having a high light transmittance.

FIG. 2A is a plan view showing the base body 110 shown in FIG. 1, and FIG. 2B is a sectional view showing the base body 110 shown in FIG. 1.

Referring to FIGS. 2A and 2B, the base body 110 includes a first surface 111, a second surface 112, a third surface 113, a fourth surface 114, a light incident surface 115 and a light emitting surface 116.

Particularly, the first and second surfaces 111 and 112 face the third and fourth surfaces 113 and 114, respectively, and the light incident surface 115 faces the light emitting surface 116. The first to fourth surfaces 111, 112, 113 and 114 are connected between the light incident surface 115 and the light emitting surface 116. The base body 110 has high light transmittance so as to emit a first light 510 that is incident through the light incident surface 115 without changing optical properties of the first light 510.

The base body 110 may have various shapes in association with an installation position of a light source (not shown) that emits the first light 510. The base body 110 may be deformed by heat generated from the light source (not shown) and the heat generated from the light source (not shown) may cause wrinkle on the base body 110. As a result, the base body 110 wrinkled by the heat deteriorates display quality of the LCD apparatus.

FIGS. 3A and 3B are graphs showing heat properties of the base body 110 shown in FIG. 1.

In FIG. 3A, a graph GA represents a length variation of the base body 110 while the base body 110 is heated and a graph GB represents a length variation of the base body 110 while the base body 110 is cooled.

As shown in FIG. 3A, when the base body 110 is successively heated from temperature "A" to temperature "B", the base body 110 is expanded along the graph GA as represented in quadratic curve. The base body 110 is successively expanded while the temperature "A" reaches the temperature "B" and contracted while the temperature "B" reaches temperature "C" even though the temperature "B" rises to the temperature "C", so the expanded length of the base body 110 is longest at the temperature "B".

When the base body 110 is successively cooled from the temperature "C" to the temperature "A", the base body 110 has a length different from a length before the base body 110 is heated. The difference between the expanded length and the contracted length of the base body 110 is as shown in reference numeral "L" of FIG. 3A. This means that the base body 110 is permanently deformed when the temperature applied to the base body 110 exceeds a specified temperature.

Recently, a length of lamp applied to an LCD apparatus and a light amount thereof gradually increases according to a scaled-up size of the LCD apparatus. As a result, a heat amount generated from the lamp increases, so that the base body 110 applied to the LCD apparatus may be wrinkled due to the increased heat amount generated from the lamp.

Referring to FIG. 3B, when the heat-treated base body 110 is successively heated from the temperature "A" to the temperature "C", the base body 110 is expanded in proportion to the temperature raised from the temperature "A" to the temperature "C". On the contrary, when the heat-treated base body 110 is cooled from the temperature "C" to the temperature "A", the length of the base body 110 returns to an initial state before the base body 110 is heated. That is, the expanded length of the base body 110 is identical to the contracted length of the base body 110.

The heat-treated base body 110 that comprises polyester does not wrinkle by the heat generated from the lamp, thereby preventing the deterioration of display quality of the LCD apparatus. As shown in FIG. 1, the light diffusing layer 150 is disposed on the heat-treated base body 110.

FIG. 4 is a cross-sectional view taken along the lines A-A for showing an optical member shown in FIG. 1, and FIG. 5 is a partially enlarged view showing a portion "B" shown in FIG. 4.

Referring to FIGS. 4 and 5, the light diffusing layer 150 is disposed on the light emitting surface 116 of the base body 110. The light diffusing layer 150 includes a first resin layer 130 and a light diffusing pattern 135.

The first resin layer 130 may be comprised of a curable material that is gradually cured in accordance with the passage of time or rapidly cured under a specified condition.

In this exemplary embodiment, the first resin layer 130 is rapidly cured under the specified condition. That is, the first resin layer 130 is cured by exposure to ultraviolet rays, so the first resin layer 130 includes an ultraviolet-curable material.

Also, an expansion ratio and a contraction ratio of the first resin layer 130 are identical to those of the heat-treated base body 110 as described above. If the expansion ratio and contraction ratio of the first resin layer 130 are not identical to those of the heat-treated base body 110, the first resin layer 130 attached on the heat-treated base body 110 may be cracked or torn while the heat-treated base body 110 is expanded or contracted by the heat generated from the lamp.

FIG. 6 is a scanning-electron-microscopy (SEM) specimen showing a light diffusing pattern according to an exemplary embodiment of the present invention.

Referring to FIG. 6, the light diffusing pattern 135 is formed on a surface of the first resin layer 130 by using a stamp method.

The light diffusing pattern 135 has a hemispherical shape uniformly formed on the surface of the first resin layer 130. The first light 510 passing through the base body 110 reaches the light diffusing pattern 135 and is diffused while passing through a spherical surface of the light diffusing pattern 135. Hereinafter, the first light 510 diffused by the light diffusing pattern 135 is defined as a second light 420.

In this exemplary embodiment, with consideration for using the stamp method so as to form the light diffusing pattern 135, the light diffusing pattern 135 may have various shapes, for example, such as a convex pyramid, a concave hemisphere or a concave pyramid.

As shown in FIG. 5, the optical member 100 further includes a layer 140 having a second resin layer 142 disposed on the light incident surface 115 and a protrusion 144 disposed on the second resin layer 142 so as to prevent the

second resin layer **142** from making contact with a member adjacent to the optical member **100**.

The second resin layer **142** is comprised of the curable material that is gradually cured in accordance with the passage of time or rapidly cured under the specified condition. In this exemplary embodiment, the second resin layer **142** includes the ultraviolet-curable material so as to be cured by exposure to ultraviolet rays.

Also, an expansion ratio and a contraction ratio of the second resin layer **142** are identical to those of the heat-treated base body **110**. If the expansion ratio and contraction ratio of the second resin layer **142** are not identical to those of the heat-treated base body **110**, the second resin layer **142** attached on the heat-treated base body **110** may be cracked or torn while the heat-treated base body **110** is expanded or contracted by the heat generated from the lamp.

Furthermore, an expansion ratio and a contraction ratio of the second resin layer **142** are identical to those of the first resin layer **130**. If the expansion ratio and contraction ratio of the second resin layer **142** are not identical to those of the first resin layer **130**, the base body **110** may be bent due to differences of the expansion and contraction ratios between the first and second resin layers **130** and **142** while the base body **110** is expanded or contracted.

The protrusion **144** is formed on a surface of the second resin layer **142** in a matrix configuration and protruded from the surface of the second resin layer **142**. The protrusion **144** may have various shapes, for example, such as a hemispherical shape and a polygonal shape since the protrusion **144** is formed using the stamp method.

Hereinafter, a method of fabricating the optical member according to an exemplary embodiment of the present invention will be illustrated with reference to the accompanying drawings.

FIGS. **7A** to **7D** are views for illustrating a method of fabricating an optical member according to an exemplary embodiment of the present invention.

Referring to FIG. **7A**, the base body **110** is selectively heat-treated according to a material contained into the base body **110** before forming the first resin layer **130** (see FIG. **7B**) thereon. That is, the heat treatment with respect to the base body **110** is selectively performed when the expansion ratio and the contraction ratio are not identical to each other.

Referring to FIG. **7B**, the first resin layer **130** is formed on the light emitting surface **116** of the base body **110** in a thin film. In this exemplary embodiment, the first resin layer **130** includes the curable material cured by exposure to the ultraviolet rays.

Referring to FIG. **7C**, a first roller **370**, on which a first transfer pattern **130** having a hemispherical shape that is reversed with respect to the light diffusing pattern **135** (see FIG. **4**) is formed, is disposed on the first resin layer **130**. The first roller **370** is rolled along the surface of the first resin layer **130** so as to form the light diffusing pattern **135** on the first resin layer **130**. After the light diffusing pattern **135** is formed on the first resin layer **130** by rolling the first roller **370**, the first resin layer **130** and the light diffusing pattern **135** formed on the first resin layer are exposed to the ultraviolet rays, thereby curing the first resin layer **130** and the light diffusing pattern **135**.

Referring to FIG. **7D**, after curing the first resin layer **130** and the light diffusing pattern **135**, the second resin layer **140** having the curable material cured by exposure to the ultraviolet rays is formed on the light incident surface **115** of the base body **110**. A second roller **380**, on which a second transfer pattern **385** having a reversed shape with respect to the protrusion **144** is formed, is disposed on the second resin layer **140**. The second roller **380** is rolled along the surface of the second resin layer **140** so as to form the protrusion **144** on the surface of the second resin layer **140**, thereby preventing

the base body **110** from making contact with a member adjacent to the base body **110**, for example, such as a light guide plate (not shown). The second resin layer **140** and the protrusion **144** are cured by exposure to the ultraviolet rays.

FIGS. **8A** to **8C** are views for illustrating a method of fabricating an optical member according to another exemplary embodiment of the present invention.

Referring to FIG. **8A**, a first resin layer **130** is formed on a light emitting surface **116** of a base body **110** and a second resin layer **140** is formed on a light incident surface **115**. In this exemplary embodiment, the first and second resin layers **130** and **140** include a curable material cured by exposure to an ultraviolet rays.

Referring to FIGS. **8B** and **8C**, a first roller **370** is disposed on the first resin layer **130** and a second roller **380** is disposed on the second resin layer **140**.

The first roller **370** includes a first transfer pattern **375** which is closely formed on the first roller **370** and the second roller **380** includes a second transfer pattern **385** which is separated from each other in a predetermined distance. The first and second transfer patterns **375** and **385** has a hemispherical shape that is reversed with respect to a light diffusing pattern **135** and a protrusion **145**, respectively (see FIG. **8C**).

The first roller **370** is rolled along a surface of the first resin layer **130** so as to form the light diffusing pattern **135** on the first resin layer **130** and the second roller **380** is rolled along a surface of the second resin layer **140** so as to form the protrusion **145** on the second resin layer **140**, respectively. The light diffusing pattern **135** and the protrusion **145** may be formed by transferring the base body **110** to be passed between the first and second rollers **370** and **380**.

After the light diffusing pattern **135** and the protrusion **145** are formed on the first and second resin layers **130** and **140**, respectively, the first resin layer **130** and the second resin layer **140** are exposed to the ultraviolet rays, so the first resin layer **130** on which the light diffusing pattern **135** is formed and the second resin layer **140** on which the protrusion **145** is formed are cured.

Hereinafter, a method of fabricating a roller according to an exemplary embodiment of the present invention will be described with reference to the accompanying drawings.

FIGS. **9A** to **9E** are views for illustrating a method of manufacturing a roller according to an exemplary embodiment of the present invention.

Referring to FIG. **9A**, a first photoresist layer **310** is coated on a first substrate **300** by using a spin coating method.

Then, a pattern mask **330** is aligned with the first photoresist layer **310**. The pattern mask **330** includes a chrome layer **332** that is partially opened corresponding to positions on which a light diffusing pattern (not shown) is formed. A light **335** is provided to the pattern mask **330** aligned with the first photoresist layer **310**.

The light **335** provided to the pattern mask **330** is supplied to the first photoresist layer **310** passing through the opening portion **334** of the chrome layer **332** so as to partially expose the first photoresist layer **310**.

Referring to FIG. **9B**, partially exposed portions of the first photoresist layer **310** by the light **335** supplied through the pattern mask **330** is removed through a developing process, thereby forming a second photoresist layer **317** on which a first pattern **315** having size identical to and shape that is reversed with respect to that of the light diffusing pattern **135** is formed.

Referring to FIG. **9C**, a metal layer **340** is formed on the second photoresist layer **317** by using a sputtering method, on which the first pattern **315** is formed. The metal layer **340** has a second pattern **345** having size and shape identical to those

of the light diffusing pattern **135** by means of the first pattern **315** of the second photoresist layer **317**.

The second photoresist layer **317** formed under the metal layer **340** is removed through an ashing process and the metal layer **340** is separated from the second photoresist layer **317**.

The separated metal layer **340** is attached on a second substrate **350** as shown in FIG. 9D and a synthetic resin layer **360** is coated over the second pattern **345** of the metal layer **340**. In this exemplary embodiment, the synthetic resin layer **360** is preferably coated over the second pattern **345** without a void space between the synthetic resin layer **360** and the second pattern **345** of the metal layer **340**.

By coating the synthetic resin layer **360** over the second pattern **345** of the metal layer **340**, a third pattern **365** is formed on the synthetic resin layer **360**. The third pattern **365** has a reversed shape with respect to the light diffusing pattern **135** and is named as a transfer pattern hereinafter.

Referring to FIG. 9E, the synthetic resin layer **360**, on which the transfer pattern **365** is formed, is attached along an outer surface of the first roller **370**. The light diffusing pattern **135** of the first resin layer **130** according to the exemplary embodiment of the present invention is formed by using the first roller **370** having the transfer pattern **365**.

FIG. 10 is a schematic view showing an LCD apparatus according to an exemplary embodiment of the present invention.

Referring to FIG. 10, an LCD apparatus **700** includes a light supply module **500**, a light adjusting module **400** and a display module **600**.

The light supply module **500** includes at least one CCFL (Cold Cathode Fluorescent Lamp) so as to emit the first light **510** needed to display the image. The first light **510** emitted from the light supply module **500** is supplied to the light adjusting module **400**.

The light adjusting module **400** includes at least two optical members **100** and **200**.

In this exemplary embodiment, the light adjusting module **400** includes a diffusing sheet **100** and a prism sheet **200**. The diffusing sheet **100** changes a brightness distribution of the first light **510** so as to emit the second light **420** having a uniform brightness distribution. The prism sheet **200** receives the second light **420** provided from the diffusing sheet **100** and changes directions of the second light **420** so as to emit a third light **430**. The diffusing sheet **100** has a same structure as the optical sheet (see FIG. 4) and is fabricated through a same process as the optical sheet (see FIGS. 7A to 7D), so a method of fabricating the diffusing sheet **100** will be omitted in detail.

The display module **600** receives the third light **430** provided from the prism sheet **200** and emits an image light **610** having image information.

In this exemplary embodiment, the display module **600** is an LCD panel that displays the image information using a liquid crystal. The LCD panel may have various shapes so as to display the image information using the liquid crystal.

Although the exemplary embodiments of the present invention have been described, it is understood that the present invention should not be limited to these exemplary embodiments but various changes and modifications can be made by one ordinary skilled in the art within the spirit and scope of the present invention as hereinafter claimed.

What is claimed is:

1. An optical member comprising:

a base body having a light incident surface for receiving a first light and a light emitting surface for emitting the first light;

a light diffusing layer including a first resin layer making direct contact with the light emitting surface and a light

diffusing pattern disposed on the first resin layer so as to diffuse the first light emitted from the light emitting surface, the light diffusing pattern having a substantially hemispherical shape;

a second resin layer disposed on the light incident surface; and

a layer having a protrusion disposed on the second resin layer so as to prevent the second resin layer from making contact with an adjacent member.

2. The optical member of claim 1, wherein the base body is heat-treated so as to prevent wrinkling of the base body.

3. The optical member of claim 2, wherein a thermal expansion ratio of the base body while the base body is heat-treated is identical to a thermal contraction ratio of the base body while the base body is cooled.

4. The optical member of claim 1, wherein the first resin layer comprises an ultraviolet-curable material.

5. The optical member of claim 1, wherein the base body comprises a thermal expansion ratio and a thermal contraction ratio identical to those of the first resin layer.

6. The optical member of claim 1, wherein the second resin layer comprises an ultraviolet-curable material.

7. The optical member of claim 1, wherein the base body comprises a thermal expansion ratio and a thermal contraction ratio identical to those of the second resin layer.

8. An LCD apparatus comprising:

a light supplying module for generating a first light;

an optical member comprising:

a base body having a light incident surface for receiving the first light and a light emitting surface for emitting the first light, the base body being substantially free of particles; and

a light diffusing layer having a first resin layer disposed on the light emitting surface and a light diffusing pattern disposed on the first resin layer so as to diffuse the first light emitted from the light emitting surface and to emit a second light, the light diffusing pattern having a substantially hemispherical shape, wherein the light diffusing layer is substantially free of particles and makes direct contact with the base body; and

an LCD panel displaying an image using the second light.

9. The LCD apparatus of claim 8, wherein the base body is heat-treated so as to prevent wrinkling of the base body.

10. The LCD apparatus of claim 9, wherein a thermal expansion ratio of the base body while the base body is heat-treated is identical to a thermal contraction ratio of the base body while the base body is cooled.

11. The LCD apparatus of claim 8, wherein the first resin layer comprises an ultraviolet-curable material.

12. The LCD apparatus of claim 8, wherein the base body comprises a thermal expansion ratio and a thermal contraction ratio identical to those of the first resin layer.

13. The LCD apparatus of claim 8, wherein the optical member further comprises a second resin layer disposed on the light incident surface and a layer having a plurality of protrusions disposed on the second resin layer so as to prevent the second resin layer from making contact with an adjacent member.

14. The LCD apparatus of claim 13, wherein the second resin layer comprises an ultraviolet-curable material.

15. The LCD apparatus of claim 13, wherein the base body comprises a thermal expansion ratio and a thermal contraction ratio identical to those of the second resin layer.

16. The LCD apparatus of claim 13, wherein the protrusions of the protrusion pattern are separated from each other.

专利名称(译)	光学构件，其制造方法和具有该光学构件的液晶显示装置		
公开(公告)号	<a href="#">US7649591</a>	公开(公告)日	2010-01-19
申请号	US12/117536	申请日	2008-05-08
[标]申请(专利权)人(译)	李贞焕 郑在HO 尹相赫 朴钟DAE 金圭SEOK		
申请(专利权)人(译)	李贞焕 郑在HO 尹相-赫 朴钟DAE 金圭硕		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	LEE JEONG HWAN JUNG JAE HO YOON SANG HYUCK PARK JONG DAE KIM KYU SEOK		
发明人	LEE, JEONG-HWAN JUNG, JAE-HO YOON, SANG-HYUCK PARK, JONG-DAE KIM, KYU-SEOK		
IPC分类号	G02F1/1335 G02B5/02 F21V8/00 G02F1/13357		
CPC分类号	G02B6/0065 G02B6/0051		
审查员(译)	内尔姆斯, DAVID		
优先权	1020020060804 2002-10-05 KR		
其他公开文献	US20080212331A1		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

#### 摘要(译)

在具有光学构件的LCD装置中，光学构件具有基体，该基体具有光入射表面和面向光入射表面的发光表面。在发光表面上形成第一树脂层，并且在第一树脂层上均匀地形成光漫射图案，以漫射第一光并发射第二光。因此，LCD装置可以改善显示质量并且可以以低成本制造来制造。而且，由于光漫射图案由可固化材料形成，所以光漫射图案可以具有各种形状和优异的再现性。

